Nama : **Teuku Ardhi Firmansyah Al Ghozali**

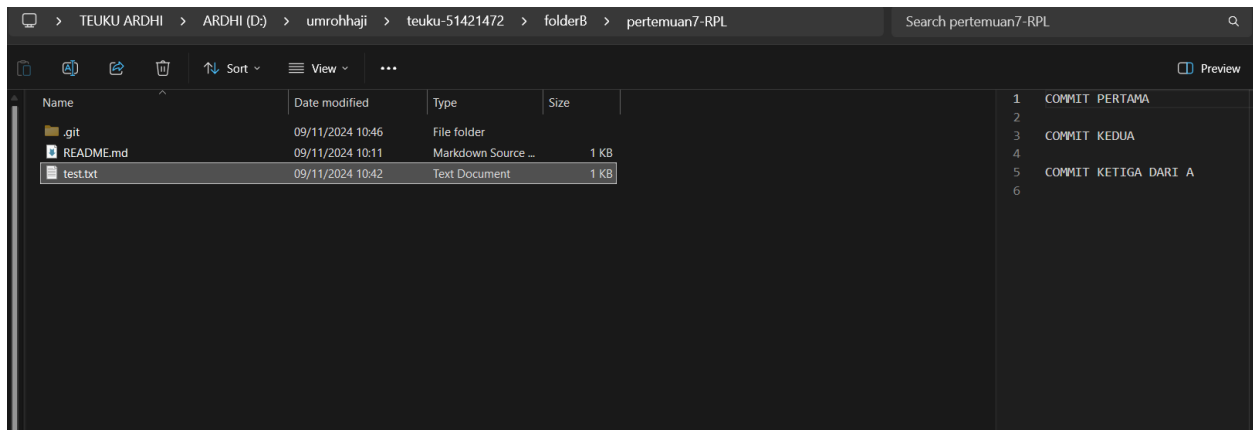**NPM** : **51421472**

Kelas : **4IA28**

Pertemuan : **Ke-7**

FOLDER A
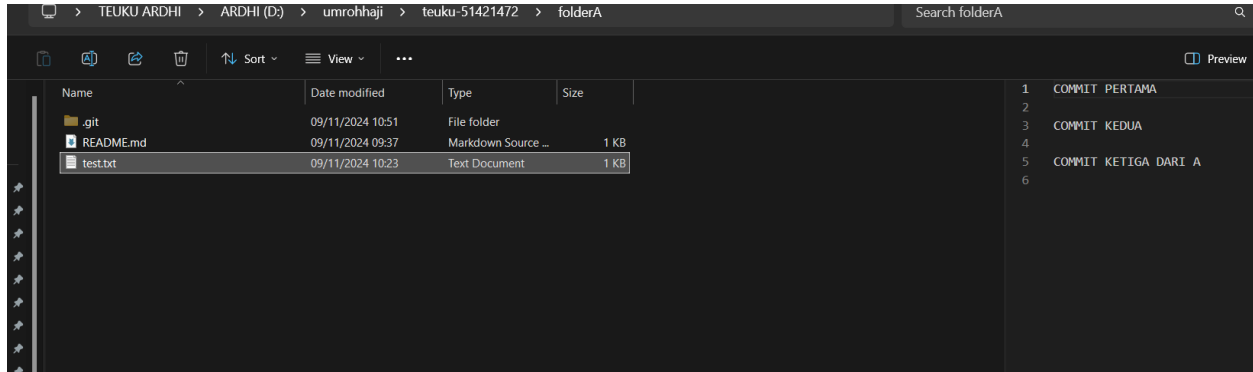
FOLDER B

GITBASH A


```
MINGW64:/d/umrohhaji/teuku-51421472/folderA                    —    □    ✕

Teuku@TEUKU MINGW64 /d/umrohhaji/teuku-51421472/folderA (folderB)
$ git branch
* folderB
  main

Teuku@TEUKU MINGW64 /d/umrohhaji/teuku-51421472/folderA (folderB)
$ git checkout main
Switched to branch 'main'
Your branch is up to date with 'origin/main'.

Teuku@TEUKU MINGW64 /d/umrohhaji/teuku-51421472/folderA (main)
$ git tag -a v1.0.0 -m "versi 1 baru"

Teuku@TEUKU MINGW64 /d/umrohhaji/teuku-51421472/folderA (main)
$ git push origin v1.0.0
Enumerating objects: 1, done.
Counting objects: 100% (1/1), done.
Writing objects: 100% (1/1), 166 bytes | 166.00 KiB/s, done.
Total 1 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/WeissDhi/pertemuan7-RPL.git
 * [new tag]         v1.0.0 -> v1.0.0

Teuku@TEUKU MINGW64 /d/umrohhaji/teuku-51421472/folderA (main)
$
```

GITBASH B


```
MINGW64:/d/umrohhaji/teuku-51421472/folderB/pertemuan7-RPL           —    □    ✕

Teuku@TEUKU MINGW64 /d/umrohhaji/teuku-51421472/folderB/pertemuan7-RPL (folderB)
$ git push origin folderB
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: Create a pull request for 'folderB' on GitHub by visiting:
remote:         https://github.com/WeissDhi/pertemuan7-RPL/pull/new/folderB
remote:
To https://github.com/WeissDhi/pertemuan7-RPL.git
 * [new branch]      folderB -> folderB

Teuku@TEUKU MINGW64 /d/umrohhaji/teuku-51421472/folderB/pertemuan7-RPL (folderB)
$ git push
fatal: The current branch folderB has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin folderB

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.


Teuku@TEUKU MINGW64 /d/umrohhaji/teuku-51421472/folderB/pertemuan7-RPL (folderB)
$
```

GITHUB main

GITHUB branch FolderB

GITHUB TAG