

A Brain-Friendly Guide

Head First jQuery

Quickly
implement
complex
HTML forms




Add interactivity to
your web pages in just
a few lines of code

Build web apps
without pesky
browser plug-ins



Write your
own custom
jQuery
functions



Put animation
and Ajax to use in
your web pages

O'REILLY®

Ryan Benedetti &
Ronan Cranley


Head First jQuery

Rich Web Interface/JavaScript

What will you learn from this book?

Ever wished there were a jQuery book that doesn't assume you also know JavaScript right out of the gate? Have you heard that jQuery can help you add interactivity to your websites and apps, but don't know where to start?

Head First jQuery is your express ticket to engaging, interactive websites that look and feel like real *applications*.

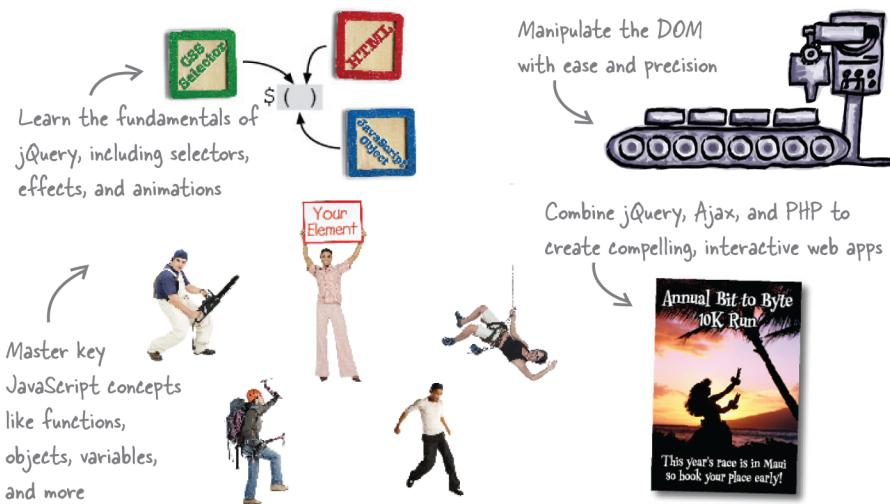

What's so special about this book?

We think your time is too valuable to waste struggling with new concepts. Using the latest research in cognitive science and learning theory to craft a multisensory learning experience, *Head First jQuery* uses a visually rich format designed for the way your brain works, not a text-heavy approach that puts you to sleep.

US \$39.99 CAN \$41.99
ISBN: 978-1-449-39321-2



twitter.com/headfirstlabs
facebook.com/HeadFirst

O'REILLY®
oreilly.com
headfirstlabs.com

“jQuery makes doing amazing things with JavaScript so easy it feels like cheating. This book demonstrates how to solve real-world problems quickly. As a bonus, you'll learn key aspects of JavaScript, how to set up a web development environment, and some PHP/MySQL. This is a solid book.”

— Jim Doran
Software engineer at Johns Hopkins University

“Unlike those abstruse programming books filled with technical jargon, *Head First jQuery* guides beginners through the steps to create their first jQuery pages in a fun and understandable way.”

— Lindsey Skouras
Attorney and self-taught programmer

Advance Praise for *Head First jQuery*

“jQuery makes doing amazing things with JavaScript so easy it feels like cheating. This book demonstrates how to solve real-world problems quickly. As a bonus, you’ll learn key aspects of JavaScript, how to set up a web development environment, and some PHP/MySQL. This is a solid book.”

— **Jim Doran, software engineer at Johns Hopkins University**

“Unlike those abstruse programming books filled with technical jargon, *Head First jQuery* guides beginners through the steps to create their first jQuery pages in a fun and understandable way.”

— **Lindsey Skouras, attorney and self-taught programmer**

“Ryan Benedetti and Ronan Cranley have taken a potentially intimidating stew of technologies (jQuery, DOM, Ajax, HTML5, CSS) and broken them down into approachable concepts that actually make learning the material fun.”

— **Bill Mietelski, software engineer**

“JavaScript has reemerged as a programming language of some merit due in no small part to a collection of best-of-breed add-on libraries, of which jQuery is a key player. *Head First jQuery* provides the modern web developer with a focused heads-up and hands-on treatment to this key JavaScript technology.”

— **Paul Barry, author and lecturer on computing at the Institute of Technology, Carlow**

Praise for other *Head First* books

“*Head First Object-Oriented Analysis and Design* is a refreshing look at subject of OOAD. What sets this book apart is its focus on learning. The authors have made the content of OOAD accessible, usable for the practitioner.”

— **Ivar Jacobson, Ivar Jacobson Consulting**

“I just finished reading HF OOA&D and I loved it! The thing I liked most about this book was its focus on why we do OOA&D—to write great software!”

— **Kyle Brown, Distinguished Engineer, IBM**

“Hidden behind the funny pictures and crazy fonts is a serious, intelligent, extremely well-crafted presentation of OO Analysis and Design. As I read the book, I felt like I was looking over the shoulder of an expert designer who was explaining to me what issues were important at each step, and why.”

— **Edward Sciore, Associate Professor, Computer Science Department, Boston College**

“All in all, *Head First Software Development* is a great resource for anyone wanting to formalize their programming skills in a way that constantly engages the reader on many different levels.”

— **Andy Hudson, Linux Format**

“If you’re a new software developer, *Head First Software Development* will get you started off on the right foot. And if you’re an experienced (read: long-time) developer, don’t be so quick to dismiss this....”

— **Thomas Duff, Duffbert’s Random Musings**

“There’s something in *Head First Java* for everyone. Visual learners, kinesthetic learners, everyone can learn from this book. Visual aids make things easier to remember, and the book is written in a very accessible style—very different from most Java manuals.... *Head First Java* is a valuable book. I can see the *Head First* books used in the classroom, whether in high schools or adult ed classes. And I will definitely be referring back to this book, and referring others to it as well.”

— **Warren Kelly, Blogcritics.org, March 2006**

“Rather than textbook-style learning, *Head First iPhone and iPad Development* brings a humorous, engaging, and even enjoyable approach to learning iOS development. With coverage of key technologies, including core data, and even crucial aspects such as interface design, the content is aptly chosen and top-notch. Where else could you witness a fireside chat between a UIWebView and UITextField!”

— **Sean Murphy, iOS designer and developer**

Praise for other *Head First* books

“Another nice thing about *Head First Java, Second Edition*, is that it whets the appetite for more. With later coverage of more advanced topics such as Swing and RMI, you just can’t wait to dive into those APIs and code that flawless, 100,000-line program on Java.net that will bring you fame and venture-capital fortune. There’s also a great deal of material, and even some best practices, on networking and threads—my own weak spot. In this case, I couldn’t help but crack up a little when the authors use a 1950s telephone operator—yeah, you got it, that lady with a beehive hairdo that manually hooks in patch lines—as an analogy for TCP/IP ports...you really should go to the bookstore and thumb through *Head First Java, Second Edition*. Even if you already know Java, you may pick up a thing or two. And if not, just thumbing through the pages is a great deal of fun.”

— **Robert Eckstein, Java.sun.com**

“Of course it’s not the range of material that makes *Head First Java* stand out, it’s the style and approach. This book is about as far removed from a computer science textbook or technical manual as you can get [with its] use of cartoons, quizzes, fridge magnets (yep, fridge magnets...). And, in place of the usual kind of reader exercises, you are asked to pretend to be the compiler and compile the code, or perhaps to piece some code together by filling in the blanks or...you get the picture.... The first edition of this book was one of our recommended titles for those new to Java and objects. This new edition doesn’t disappoint and rightfully steps into the shoes of its predecessor. If you are one of those people who falls asleep with a traditional computer book, then this one is likely to keep you awake and learning.”

— **TechBookReport.com**

“*Head First Web Design* is your ticket to mastering all of these complex topics, and understanding what’s really going on in the world of web design.... If you have not been baptized by fire in using something as involved as Dreamweaver, then this book will be a great way to learn good web design. ”

— **Robert Pritchett, MacCompanion**

“Is it possible to learn real web design from a book format? *Head First Web Design* is the key to designing user-friendly sites, from customer requirements to hand-drawn storyboards to online sites that work well. What sets this apart from other ‘how to build a website’ books is that it uses the latest research in cognitive science and learning to provide a visual learning experience rich in images and designed for how the brain works and learns best. The result is a powerful tribute to web design basics that any general-interest computer library will find an important key to success.”

— **Diane C. Donovan, California Bookwatch: The Computer Shelf**

“I definitely recommend *Head First Web Design* to all of my fellow programmers who want to get a grip on the more artistic side of the business. ”

— **Claron Twitchell, Utah Java User Group**


Other related books from O'Reilly

jQuery Cookbook
jQuery Pocket Reference
jQuery Mobile
JavaScript and jQuery: The Missing Manual

Other books in O'Reilly's Head First series

Head First C#
Head First Java
Head First Object-Oriented Analysis and Design (OOA&D)
Head First HTML with CSS and XHTML
Head First Design Patterns
Head First Servlets and JSP
Head First EJB
Head First SQL
Head First Software Development
Head First JavaScript
Head First Physics
Head First Statistics
Head First Ajax
Head First Rails
Head First Algebra
Head First PHP & MySQL
Head First PMP
Head First Web Design
Head First Networking
Head First iPhone and iPad Development

Head First jQuery

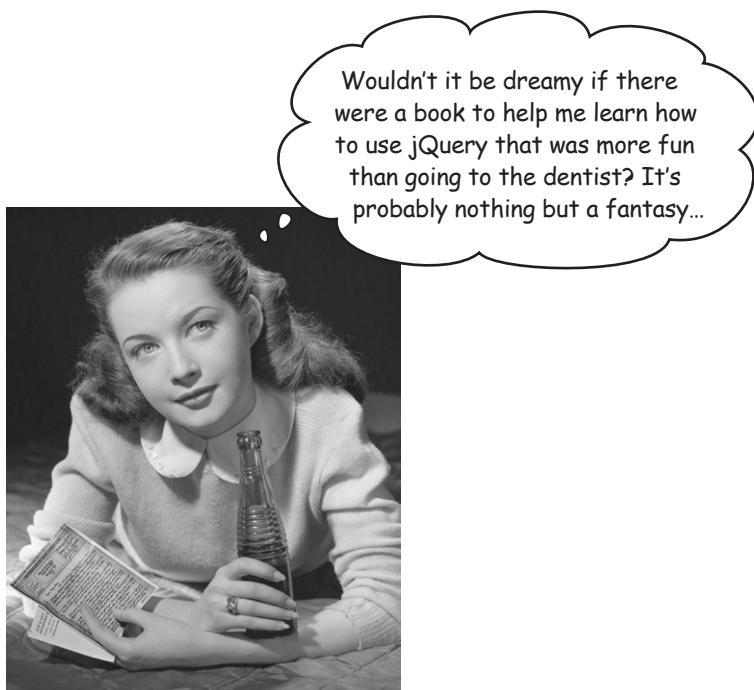

Wouldn't it be dreamy if there
were a book to help me learn how
to use jQuery that was more fun
than going to the dentist? It's
probably nothing but a fantasy...

Ryan Benedetti
Ronan Cranley

O'REILLY®

Beijing • Cambridge • Farnham • Köln • Sebastopol • Tokyo

Head First jQuery

by Ryan Benedetti and Ronan Cranley

Copyright © 2011 Ryan Benedetti and Ronan Cranley. All rights reserved.

Printed in the United States of America.

Published by O'Reilly Media, Inc., 1005 Gravenstein Highway North, Sebastopol, CA 95472.

O'Reilly Media books may be purchased for educational, business, or sales promotional use. Online editions are also available for most titles (<http://my.safaribooksonline.com>). For more information, contact our corporate/institutional sales department: (800) 998-9938 or corporate@oreilly.com.

Series Creators: Kathy Sierra, Bert Bates

Editor: Courtney Nash

Design Editor: Louise Barr

Cover Designer: Karen Montgomery

Production Editor: Teresa Elsey

Production Services: Rachel Monaghan

Indexing: Potomac Indexing, LLC

Page Viewers: Ronan: Caitlin and Bono; Ryan: Shonna, Josie, Vin, Rocky, and Munch

Printing History:

September 2011: First Edition.



The O'Reilly logo is a registered trademark of O'Reilly Media, Inc. The *Head First* series designations, *Head First jQuery*, and related trade dress are trademarks of O'Reilly Media, Inc.

Many of the designations used by manufacturers and sellers to distinguish their products are claimed as trademarks. Where those designations appear in this book, and O'Reilly Media, Inc., was aware of a trademark claim, the designations have been printed in caps or initial caps.

While every precaution has been taken in the preparation of this book, the publisher and the authors assume no responsibility for errors or omissions, or for damages resulting from the use of the information contained herein.

No cryptids were harmed in the making of this book.

ISBN: 978-1-449-39321-2

[M]

We dedicate this book to the JavaScript Jedi Masters: John Resig
(creator and lead developer of the jQuery library), Douglas
Crockford, David Flanagan, and Brandon Eich.

To my three miracles: Josie, Vin, and Shonna.

—Ryan

To Caitlin and Bono: Thank you for everything!

—Ronan

the authors

Ryan ↗



Ryan Benedetti holds a Master of Fine Arts degree in creative writing from the University of Montana and works as a web developer/multimedia specialist for the University of Portland. He works with jQuery, Flash, ActionScript, Adobe's Creative Suite, Liferay Portal, Apache's Jakarta Velocity Templating language, and Drupal.

For seven years, Ryan served as department head for Information Technology and Computer Engineering at Salish Kootenai College. Prior to that, he worked as editor and information systems specialist for a river, stream, and wetland research program in the School of Forestry at the University of Montana.

Ryan's poems have been published in *Cut Bank* and Andrei Codrescu's *Exquisite Corpse*. He spends his free hours painting, cartooning, playing blues harmonica, and practicing zazen. He spends his best moments with his daughter, his son, and his sweetheart, Shonna, in Portland, Oregon. He also digs hanging out with his animal compadres: Rocky, Munch, Fester, and Taz.



Ronan ↗

Ronan Cranley has worked for the University of Portland—going from web developer to senior web developer/systems manager to assistant director of web and admin systems—since moving from Dublin, Ireland, to Portland, Oregon, in 2006.

He earned his bachelor's degree in computer science from Dublin Institute of Technology, graduating with honors in 2003. In his college career, and in both his previous position in ESB International in Dublin and his current one for the University of Portland, Ronan has worked on an array of different projects in PHP, VB.NET, C#, and Java. These include, but are not limited to, a client-side GIS system, a homegrown content management system, a calendaring/scheduling system, and a jQuery/Google Maps mashup.

When he's not designing and building front-end web applications, he also serves as the SQL Server DBA for the university. In his spare time, Ronan spends many hours on the soccer field, on the golf course, hanging out with his wife, Caitlin, and their English bulldog, Bono, and sampling as much of the Pacific Northwest as he can.

Table of Contents (Summary)

Intro	xxiii
1 Getting Started with jQuery: <i>Web Page Action</i>	1
2 Selectors and Methods: <i>Grab and Go</i>	35
3 jQuery Events and Functions: <i>Making Things Happen on Your Page</i>	75
4 jQuery Web Page Manipulation: <i>Mod the DOM</i>	123
5 jQuery Effects and Animation: <i>A Little Glide in Your Stride</i>	175
6 jQuery and JavaScript: <i>LikejQuery, I Am Your Father!</i>	215
7 Custom Functions for Custom Effects: <i>What Have You Done for Me Lately?</i>	253
8 jQuery and Ajax: <i>Please Pass the Data</i>	291
9 Handling JSON Data: <i>Client, Meet Server</i>	325
10 jQuery UI: <i>Extreme Form Makeover</i>	371
11 jQuery and APIs: <i>Objects, Objects Everywhere</i>	411
i Leftovers: <i>The Top Ten Things (We Didn't Cover)</i>	447
ii Set Up a Development Environment: <i>Get Ready for the Big Times</i>	461

Table of Contents (the real thing)

Intro

Your brain on jQuery. Here you are trying to *learn* something, while here your *brain* is doing you a favor by making sure the learning doesn't *stick*. Your brain's thinking, "Better leave room for more important things, like which wild animals to avoid and whether naked snowboarding is a bad idea." So how do you trick your brain into thinking that your life depends on knowing jQuery?

Who is this book for?	xxiv
Metacognition: thinking about thinking	xxvii
Bend your brain into submission	xxix
Read me	xxx
The technical review team	xxxiv
Acknowledgments	xxxv

table of contents

getting started with jQuery

Web page action

1


You want more for your web pages.

You've got HTML and CSS under your belt and want to add scripting to your skill set, but you don't want to spend your life writing lines and lines of script. You need a scripting library that allows you to change web pages on the fly. And since we're wishing, can it play well with AJAX and PHP, too? Can it do in 3 lines of code what most client-side languages do in 15? Wishful thinking? No way! You need to meet jQuery.


jQuery ()



\$ ()

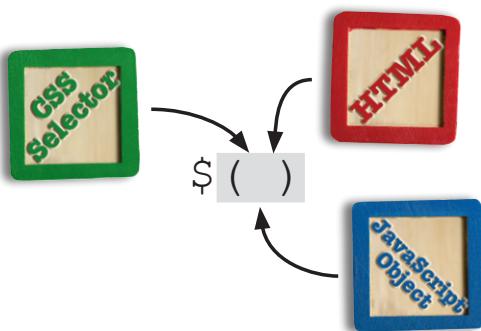

You want web page power	2
HTML and CSS are fine, but...	3
...you need the power of script	4
Enter jQuery (and JavaScript)!	5
Look into the browser	7
The hidden structure of a web page	8
jQuery makes the DOM less scary	9
How does <i>that</i> work?	11
jQuery selects elements the same way CSS does	13
Style, meet script	14
jQuery selectors at your service	15
jQuery in translation	16
Your first jQuery gig	20
Set up your HTML and CSS files	24
Slide on in...	26
May the fade be with you	27
You rescued the Furry Friends campaign	30
Your jQuery Toolbox	33

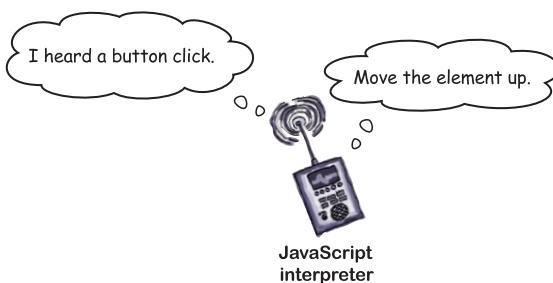


selectors and methods

2

Grab and go

jQuery helps you grab web page elements and do all kinds

of things with them. In this chapter, we'll dig into jQuery selectors and methods. With jQuery selectors, we can grab elements on our page, and with methods we can do stuff to those elements. Like a massive book of magic spells, the jQuery library lets us change tons of things on the fly. We can make images disappear and reappear out of thin air. We can select a certain piece of text and animate the change to its font size. So, on with the show—let's grab some web page elements and go!

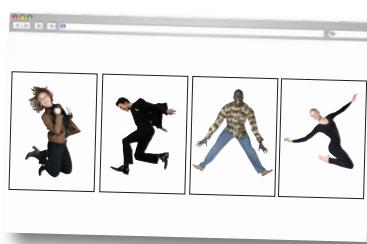

Jump for Joy needs your help	36
What are the project requirements?	37
Dig in with divs	39
A click event up close	42
Add the click method to your page	45
Get more specific	47
Classing up your elements	48
ID-entifying elements	49
Wire up your web page	52
Meanwhile, back to our list	55
Creating some storage space	56
Mix things up with concatenation	57
Meanwhile, back in the code...	58
Insert your message with append	59
Everything works great, but...	61
Give me \$(this) one	63
Put \$(this) to work	64
Good riddance with remove	66
Dig down with descendant selectors	67
Your turn to jump for joy	73
Your jQuery Toolbox	74

jQuery events and functions

Making things happen on your page


3

jQuery makes it easy to add action and interactivity to any web page.

In this chapter, we'll look at making your page react when people interact with it. Making your code run in response to user actions takes your website to a whole new level. We'll also look at building reusable functions so you can write the code once and use it multiple times.



```
var pts = 250;
```

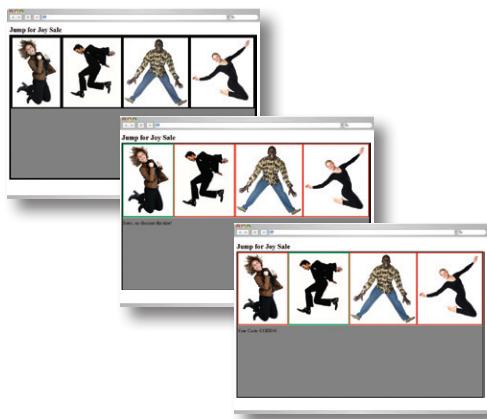

Your jQuery skillz are in demand again	76
The money man has a point...	77
Making your page eventful	79
Behind the scenes of an event listener	80
Binding an event	81
Triggering events	82
Removing an event	86
Going through the <code>motions</code> elements	90
Your project structure	96
Making things function-al	100
The nuts and bolts of a function	101
The anonymous function	102
Named functions as event handlers	103
Passing a variable to a function	106
Functions can return a value, too	107
Use conditional logic to make decisions	109
Jump for Joy needs even more help	113
Methods can change the CSS	115
Add a hover event	117
You're almost there...	119
Your jQuery Toolbox	122

jQuery web page manipulation

Mod the DOM

4

Just because the page is finished loading doesn't mean it has to keep the same structure.

Back in Chapter 1, we saw how the DOM gets built as the page loads to set up the page's structure. In this chapter, we'll look at how to move up and down through the DOM structure and work with element hierarchy and parent/child relationships to change the page structure on the fly using jQuery.



The Webville Eatery wants an interactive menu	124
Go vegetarian	125
Class up your elements	130
Button things up	133
What's next?	135
Swinging through the DOM tree	140
Traversal methods climb the DOM	141
Chain methods to climb farther	142
Variables can store elements, too	149
There's that dollar sign again...	150
Expand your storage options with arrays	151
Store elements in an array	152
Change out elements with replaceWith	154
How can replaceWith help?	155
Think ahead before using replaceWith	157
replaceWith doesn't work for every situation	158
Insert HTML content into the DOM	159
Use filter methods to narrow your selections (Part 1)	161
Use filter methods to narrow your selections (Part 2)	162
Bring the burger back	165
Where's the beef (er...meat)?	166
A meaty array	167
The each method loops through arrays	168
That's it...right?	171
Your jQuery Toolbox	174

jQuery effects and animation

5

A little glide in your stride

Making things happen on you page is all well and good,

but if you can't make it look cool, people won't want to use your site. That's where jQuery effects and animation come in. In this chapter, you'll learn how to make elements transition on your page over time, show or hide specific pieces of elements that are relevant, and shrink or grow an element on the page, all before your users' eyes. You'll also see how to schedule these animations so they happen at various intervals to give your page a very dynamic appearance.



DoodleStuff needs a web app 176

Do the Monster Mashup 177

Monster Mashup needs layout and positioning 178

A little more structure and style 181

Make the interface click 182

Make the lightning effect 187

How does jQuery animate elements? 188

Fade effects animate the CSS opacity property 189

Sliding is all about height 190

Put fade effects to work 192

Combine effects with method chains 193

Striking back with a timed function 194

Add the lightning functions to your script 197

DIY effects with animate 199

What can and can't be animated 200

animate changes style over time 202

From where to where *exactly*? 205

Absolute vs. relative element movement 206

Move stuff relatively with operator combinations 207

Add the animate functions to your script 209

Look, Ma, no Flash! 212

Your jQuery Toolbox 214



jQuery and JavaScript



Luke jQuery, I am your father!

6

jQuery can't do it all alone. Although it is a JavaScript library, unfortunately it can't do everything its parent language can do. In this chapter, we'll look at some of the features of JavaScript that you'll need to create really compelling sites, and how jQuery can use them to create custom lists and objects as well as loop through those lists and objects to make your life much easier.



Spicing up the Head First Lounge	216
Objects offer even smarter storage	218
Build your own objects	219
Create reusable objects with object constructors	220
Interacting with objects	221
Set up the page	222
The return of arrays	225
Accessing arrays	226
Add and update items in arrays	227
Perform an action over (and over, and over...)	229
Looking for the needle in a haystack	232
Decision making time...again!	239
Comparison and logical operators	240
Clearing things up with jQuery...	246
Add some extra excitement	250
Your jQuery/JavaScript Toolbox	252

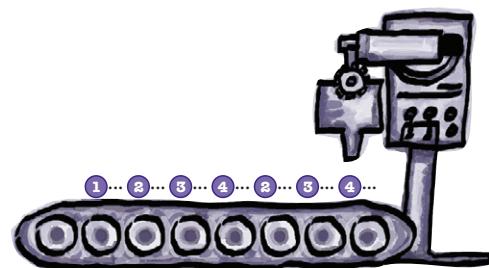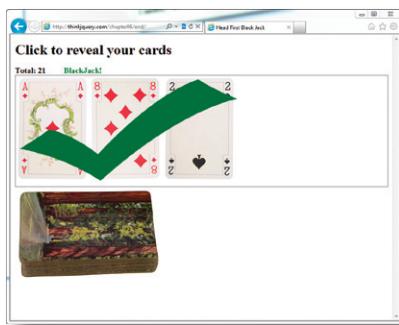

custom functions for custom effects

7

What have you done for me lately?

When you combine jQuery's custom effects with JavaScript functions you can make your code—and your web app—more efficient, more effective, and more *powerful*. In this chapter, you'll dig deeper into improving your jQuery effects by handling **browser events**, working with **timed functions**, and improving the **organization and reusability** of your custom JavaScript functions.



A storm is brewing	254
We've created a monster...function	255
Get control of timed effects with the window object	256
Respond to browser events with onblur and onfocus	259
Timer methods tell your functions <i>when</i> to run	263
Write the stopLightning and goLightning functions	266
Feature request for Monster Mashup	274
Let's get (more) random	275
You already know the current position...	276
...and the getRandom function too	276
Move relative to the current position	280
Monster Mashup v2 is a hit!	289
Your jQuery Toolbox	290



setTimeout()



setInterval()



delay()





jQuery and Ajax

Please pass the data

8

Using jQuery to do some cool CSS and DOM tricks is fun,

but soon you'll need to read information (or data) from a server and display it. You may even have to update small pieces of the page with the information from the server, without having to reload the page. Enter Ajax. Combined with jQuery and JavaScript, it can do just that. In this chapter, we'll learn how jQuery deals with making Ajax calls to the server and what it can do with the information returned.

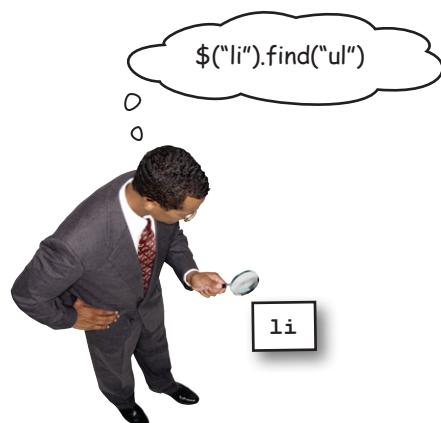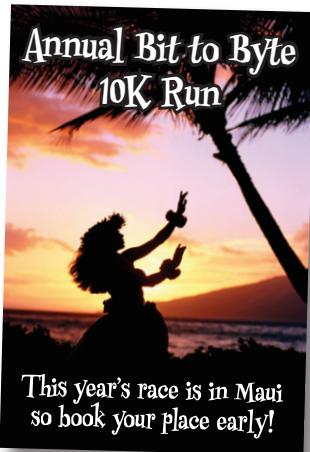

Bring the Bit to Byte race into this century	292
Looking at last year's page	293
Getting dynamic	296
OLD web, meet the NEW web	297
Understanding Ajax	298
What is Ajax?	298
The X factor	299
GETting data with the ajax method	304
Parsing XML data	306
Scheduling events on a page	310
Self-referencing functions	311
Getting more from your server	314
What time is it?	315
Turning off scheduled events on your page	320
Your jQuery/Ajax Toolbox	324



handling JSON data

Client, meet server

9

As useful as reading data from an XML file was, that won't always cut the mustard. A more efficient data interchange format (JavaScript Object Notation, aka JSON) will make it easier to get data from the server side. JSON is easier to generate and read than XML, too. Using jQuery, PHP, and SQL, you'll learn how to create a database to store information so you can retrieve it later, using JSON, and display it on the screen using jQuery. A true web application superpower!

```

1<?xml version="1.0" encoding="utf-8"?>
2<runners>
3  <runner>
4    <fname>Bob</fname>
5    <time>1:30</time>
6    <gender>m</gender>
7  </runner>
8  <runner>
9    <fname>Mary</fname>
10   <lname>Brown</lname>
11   <gender>f</gender>
12   <time>26:01</time>
13 </runner>
14 <runner>
15   <fname>Jenny</fname>
16   <lname>Pierce</lname>
17   <gender>f</gender>
18   <time>26:04</time>
19 </runner>
20 <runner>
21   <fname>Frank</fname>
22   <lname>Jones</lname>
23   <gender>m</gender>
24   <time>26:08</time>
25 </runner>
26 <runner>
27   <fname>Bob</fname>
28   <lname>Morgan</lname>
29   <gender>m</gender>
30 </runner>
31 <runner>
32   <firstname>Smit</firstname>
33   <gender>f</gender>
34 </runner>
35 <runner>
36   <fname>Ryan</fname>
37   <lname>Rice</lname>
38   <gender>m</gender>
39   <time>24</time>
40 </runner>
41 <runner>
42   <firstname>John</firstname>
43   <gender>m</gender>
44 </runner>
45 <runner>
46   <fname>Liam</fname>
47   <lname>O'Connor</lname>
48   <gender>m</gender>
49   <time>24</time>
50 </runner>
51 <runner>
52   <firstname>Ava</firstname>
53   <gender>f</gender>
54 </runner>
55 <runner>
56   <firstname>Noah</firstname>
57   <gender>m</gender>

```

Webville MegaCorp's Marketing Department doesn't know XML	326
XML errors break the page	327
Collect data from a web page	328
What to do with the data	331
Format the data before you send it	332
Send the data to the server	333
Store your data in a MySQL database	335
Create your database to store runner info	336
Anatomy of an insert statement	338
Use PHP to access the data	341
Handle POST data on the server	342
Connect to a database with PHP	343
Use select to read data from a database	345
Get data with PHP	347
JSON to the rescue!	350
jQuery + JSON = Awesome	351
A few PHP rules...	352
A few (more) PHP rules...	353
Format the output using PHP	354
Access data in the JSON object	361
Data sanitization and validation in PHP	364
Your jQuery/Ajax/PHP/MySQL Toolbox	369




jQuery UI

Extreme form makeover

The Web lives and dies by users and their data.

Collecting data from users is a big business and can be a time-consuming challenge for a web developer. You've seen how jQuery can help make Ajax, PHP, and MySQL web apps work more effectively. Now let's look at how jQuery can help us build the user interface for the forms that collect data from users. Along the way, you'll get a healthy dose of jQuery UI, the official user interface library for jQuery.

10

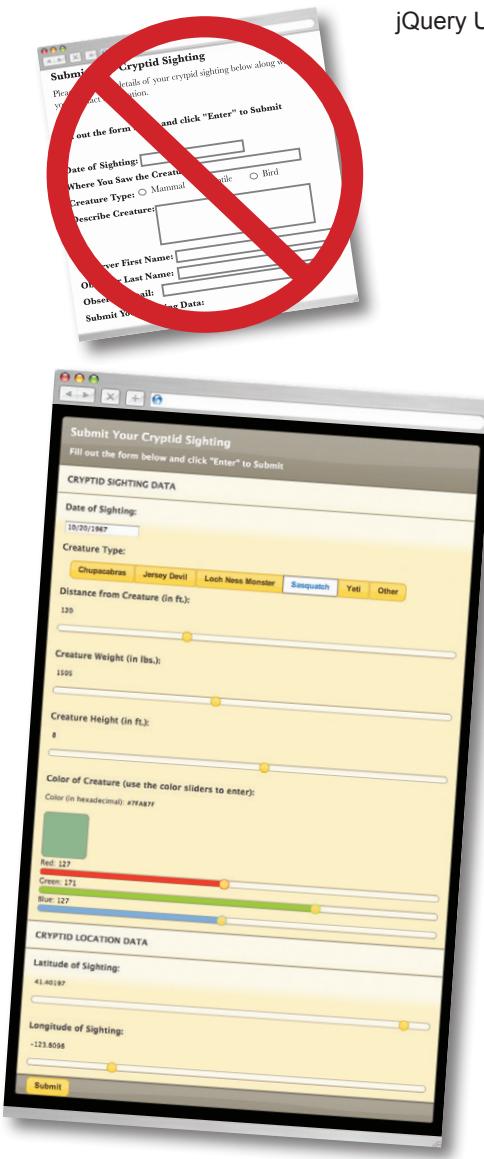

Cryptozoologists.org needs a makeover	372
Pimp your HTML form	373
Save coding headaches (and time) with jQuery UI	376
What's inside the jQuery UI package	380
Build a date picker into the sightings form	381
jQuery UI behind the scenes	382
Widgets have customizable options	383
Styling up your buttons	386
Control numerical entries with a slider	390
Computers mix color using red, green, and blue	399
Build the refreshSwatch function	402
One last little thing...	406
Your jQuery Toolbox	410




11


jQuery and APIs

Objects, objects everywhere

As talented a developer as you are, you can't do it all alone... We've seen how we can include jQuery plug-ins, like jQuery UI or the tabs navigation to help boost our jQuery app, without much effort. To take our applications to the next level, apply some of the really cool tools out there on the Internet, and use information provided by the big hitters—like Google, Twitter, or Yahoo!—we need something...more. Those companies, and many others, provide APIs (application programming interfaces) to their services so you can include them in your site. In this chapter, we'll look at some API basics and use a very common one: the Google Maps API.

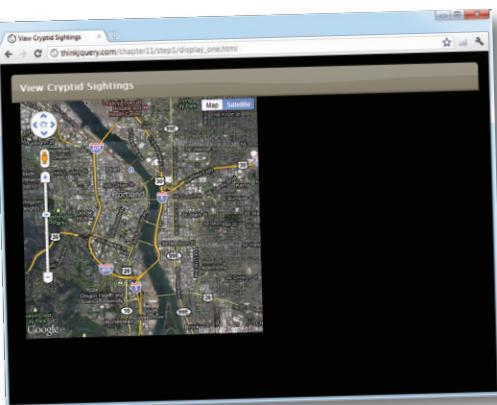

Where's Waldo Sasquatch?	412
The Google Maps API	414
APIs use objects	415
Include Google maps in your page	417
Getting JSON data with SQL and PHP	420
Points on a map are markers	424
Multicreature checklist	428
Listening for map events	438
You did it!	442
Your jQuery API Toolbox	445

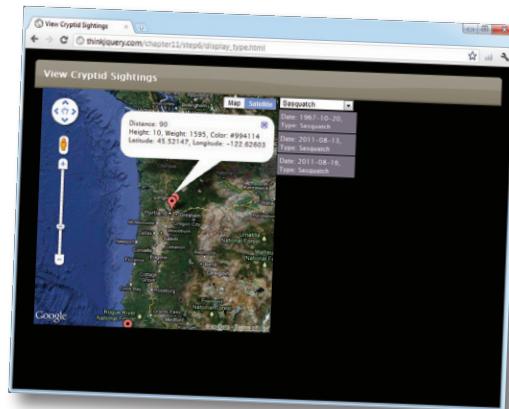

leftovers

The top ten things (we didn't cover)



Even after all that, there's still plenty we didn't get around to. There are lots of other jQuery and JavaScript goodies we didn't manage to squeeze into the book. It would be unfair not to tell you about them, so you can be more prepared for any other facet of jQuery you might encounter on your travels.

#1. Every single thing in the jQuery library	448
#2. jQuery CDNs	451
#3. The jQuery namespace: noConflict method	452
#4. Debugging your jQuery code	453
#5. Advanced animation: queues	454
#6. Form validation	455
#7. jQuery UI effects	456
#8. Creating your own jQuery plug-ins	457
#9. Advanced JavaScript: closures	458
#10. Templates	459

table of contents

set up a development environment

Get ready for the big times


You need a place to practice your newfound PHP skills without making your data vulnerable on the Web.

It's always a good idea to have a safe place to develop your PHP application before unleashing it on the world (wide web). This appendix contains instructions for installing a web server, MySQL, and PHP to give you a safe place to work and practice.

Create a PHP development environment	462
Find out what you have	462
Do you have a web server?	463
Do you have PHP? Which version?	463
Do you have MySQL? Which version?	464
Start with the web server	465
Apache installation...concluded	466
PHP installation	466
PHP installation steps	467
PHP installation steps...concluded	468
Installing MySQL	468
Steps to install MySQL on Windows	469
Enabling PHP on Mac OS X	474
Steps to install MySQL on Mac OS X	474

how to use this book

Intro

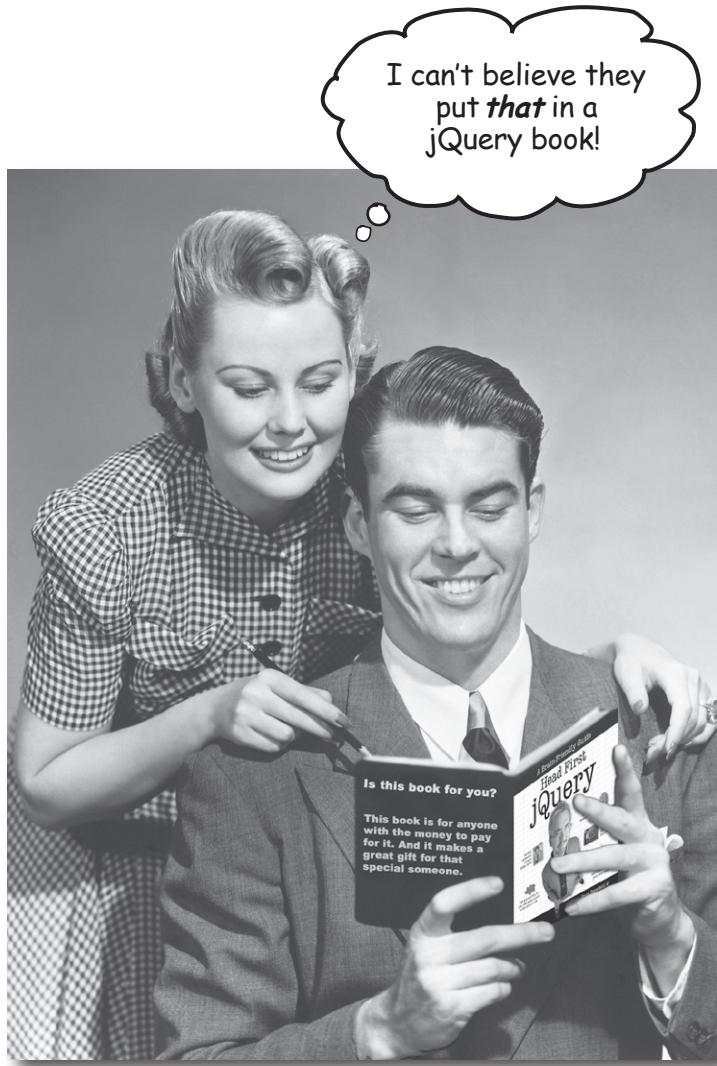

In this section, we answer the burning question:
"So why DID they put **that** in a jQuery book?"

how to use this book

Who is this book for?

If you can answer “yes” to all of these:

- ① Do you have previous web design or development experience?
- ② Do you want to **learn, understand, remember**, and **apply** important jQuery and JavaScript concepts so that you can make your web pages more interactive and exciting?
- ③ Do you prefer **stimulating dinner-party conversation** to **dry, dull, academic lectures**?

this book is for you.

It definitely helps if you've already got some scripting chops, too. Experience with JavaScript is helpful, but definitely not required.

Who should probably back away from this book?

If you can answer “yes” to any of these:

- ① Are you **completely new** to web development?
- ② Are you already developing web apps and looking for a **reference book** on jQuery?
- ③ Are you **afraid to try something different**? Would you rather have a root canal than mix stripes with plaid? Do you believe that a technical book can't be serious if Bigfoot is in it?

this book is not for you.

Check out Head First HTML with CSS & XHTML for an excellent introduction to web development, and then come back and join us in jQueryville.



[Note from Marketing: This book is for anyone with a credit card. Or cash. Cash is nice, too. —Ed]

We know what you're thinking.

“How can *this* be a serious jQuery development book?”

“What’s with all the graphics?”

“Can I actually *learn* it this way?”

And we know what your brain is thinking.

Your brain craves novelty. It’s always searching, scanning, *waiting* for something unusual. It was built that way, and it helps you stay alive.

So what does your brain do with all the routine, ordinary, normal things you encounter? Everything it *can* to stop them from interfering with the brain’s *real* job—recording things that *matter*. It doesn’t bother saving the boring things; they never make it past the “this is obviously not important” filter.

How does your brain *know* what’s important? Suppose you’re out for a day hike and a tiger jumps in front of you. What happens inside your head and body?

Neurons fire. Emotions crank up. *Chemicals surge*.

And that’s how your brain knows...

This must be important! Don’t forget it!

But imagine you’re at home or in a library. It’s a safe, warm, tiger-free zone. You’re studying. Getting ready for an exam. Or trying to learn some tough technical topic your boss thinks will take a week, 10 days at the most.

Just one problem. Your brain’s trying to do you a big favor. It’s trying to make sure that this *obviously* unimportant content doesn’t clutter up scarce resources. Resources that are better spent storing the really *big* things. Like tigers. Like the danger of fire. Like how you should never again snowboard in shorts.


And there’s no simple way to tell your brain, “Hey, brain, thank you very much, but no matter how dull this book is, and how little I’m registering on the emotional Richter scale right now, I really *do* want you to keep this stuff around.”



We think of a “Head First” reader as a learner.

So what does it take to *learn* something? First, you have to *get it*, and then make sure you don’t *forget it*. It’s not about pushing facts into your head. Based on the latest research in cognitive science, neurobiology, and educational psychology, *learning* takes a lot more than text on a page. We know what turns your brain on.

Some of the Head First learning principles:



Make it visual. Images are far more memorable than words alone, and make learning much more effective (up to 89% improvement in recall and transfer studies). It also makes things more understandable.

Put the words within or near the graphics they relate to, rather than on the bottom or on another page, and learners will be up to twice as likely to solve problems related to the content.

Also, the furry friend picture just pops up. Can you make it slide slower and sort of fade in as it does?

Use a conversational and personalized style.

In recent studies, students performed up to 40% better on post-learning tests if the content spoke directly to the reader, using a first-person, conversational style rather than taking a formal tone. Tell stories instead of lecturing. Use casual language. Don’t take yourself too seriously. Which would you pay more attention to: a stimulating dinner-party companion, or a lecture?



Get the learner to think more deeply. In other words, unless you actively flex your neurons, nothing much happens in your head. A reader has to be motivated, engaged, curious, and inspired to solve problems, draw conclusions, and generate new knowledge. And for that, you need challenges, exercises, thought-provoking questions, and activities that involve both sides of the brain and multiple senses.



Get—and keep—the reader’s attention. We’ve all had the “I really want to learn this, but I can’t stay awake past page one” experience. Your brain pays attention to things that are out of the ordinary, interesting, strange, eye-catching, unexpected. Learning a new, tough, technical topic doesn’t have to be boring. Your brain will learn much more quickly if it’s not.

Touch their emotions. We now know that your ability to remember something is largely dependent on its emotional content. You remember what you care about. You remember when you *feel* something. No, we’re not talking heart-wrenching stories about a boy and his dog. We’re talking emotions like surprise, curiosity, fun, “what the...?”, and the feeling of “I rule!” that comes when you solve a puzzle, learn something everybody else thinks is hard, or realize you know something that “I’m more technical than thou” Bob from Engineering doesn’t.

Metacognition: thinking about thinking

If you really want to learn, and you want to learn more quickly and more deeply, pay attention to how you pay attention. Think about how you think. Learn how you learn.

Most of us did not take courses on metacognition or learning theory when we were growing up. We were *expected* to learn, but rarely *taught* to learn.

But we assume that if you're holding this book, you really want to learn about jQuery. And you probably don't want to spend a lot of time. And since you're going to work with it more in the future, you need to *remember* what you read. And for that, you've got to *understand* it. To get the most from this book, or *any* book or learning experience, take responsibility for your brain. Your brain on *this* content.

The trick is to get your brain to see the new material you're learning as Really Important. Crucial to your well-being. As important as a tiger. Otherwise, you're in for a constant battle, with your brain doing its best to keep the new content from sticking.


So just how **DO** you get your brain to think that jQuery development is a hungry tiger?

There's the slow, tedious way, or the faster, more effective way. The slow way is about sheer repetition. You obviously know that you *are* able to learn and remember even the dullest of topics if you keep pounding the same thing into your brain. With enough repetition, your brain says, "This doesn't *feel* important to him, but he keeps looking at the same thing *over and over and over*, so I suppose it must be."

The faster way is to do **anything that increases brain activity**, especially different *types* of brain activity. The things on the previous page are a big part of the solution, and they're all things that have been proven to help your brain work in your favor. For example, studies show that putting words *within* the pictures they describe (as opposed to somewhere else in the page, like a caption or in the body text) causes your brain to try to make sense of how the words and picture relate, and this causes more neurons to fire. More neurons firing = more chances for your brain to *get* that this is something worth paying attention to, and possibly recording.

A conversational style helps because people tend to pay more attention when they perceive that they're in a conversation, since they're expected to follow along and hold up their end. The amazing thing is, your brain doesn't necessarily *care* that the "conversation" is between you and a book! On the other hand, if the writing style is formal and dry, your brain perceives it the same way you experience being lectured to while sitting in a roomful of passive attendees. No need to stay awake.

But pictures and conversational style are just the beginning.

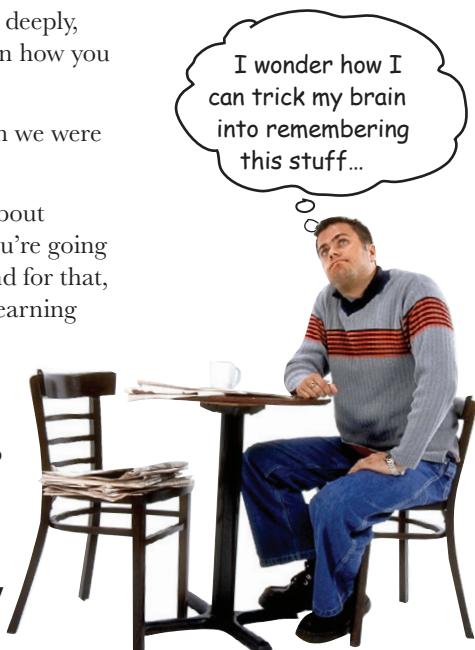

how to use this book

Here's what WE did:

We used **pictures**, because your brain is tuned for visuals, not text. As far as your brain's concerned, a picture really *is* worth a thousand words. And when text and pictures work together, we embedded the text *in* the pictures because your brain works more effectively when the text is *within* the thing the text refers to, as opposed to in a caption or buried in the text somewhere.

We used **redundancy**, saying the same thing in *different* ways and with different media types, and *multiple senses*, to increase the chance that the content gets coded into more than one area of your brain.

We used concepts and pictures in **unexpected** ways because your brain is tuned for novelty, and we used pictures and ideas with at least *some emotional content*, because your brain is tuned to pay attention to the biochemistry of emotions. That which causes you to *feel* something is more likely to be remembered, even if that feeling is nothing more than a little **humor, surprise, or interest**.

We used a personalized, **conversational style**, because your brain is tuned to pay more attention when it believes you're in a conversation than if it thinks you're passively listening to a presentation. Your brain does this even when you're *reading*.

We included loads of **activities**, because your brain is tuned to learn and remember more when you **do** things than when you *read* about things. And we made the exercises challenging-yet-doable, because that's what most people prefer.

We used **multiple learning styles**, because *you* might prefer step-by-step procedures, while someone else wants to understand the big picture first, and someone else just wants to see an example. But regardless of your own learning preference, *everyone* benefits from seeing the same content represented in multiple ways.

We include content for **both sides of your brain**, because the more of your brain you engage, the more likely you are to learn and remember, and the longer you can stay focused. Since working one side of the brain often means giving the other side a chance to rest, you can be more productive at learning for a longer period of time.

And we included **stories** and exercises that present **more than one point of view**, because your brain is tuned to learn more deeply when it's forced to make evaluations and judgments.

We included **challenges**, with exercises, and by asking **questions** that don't always have a straight answer, because your brain is tuned to learn and remember when it has to *work* at something. Think about it—you can't get your *body* in shape just by *watching* people at the gym. But we did our best to make sure that when you're working hard, it's on the *right* things. That **you're not spending one extra dendrite** processing a hard-to-understand example, or parsing difficult, jargon-laden, or overly terse text.

We used **people**. In stories, examples, pictures, etc., because, well, because *you're* a person. And your brain pays more attention to *people* than it does to *things*.




Variable




Array



Fireside Chats





Cut this out and stick it
on your refrigerator.

Here's what YOU can do to bend your brain into submission

So, we did our part. The rest is up to you. These tips are a starting point; listen to your brain and figure out what works for you and what doesn't. Try new things.

① Slow down. The more you understand, the less you have to memorize.

Don't just *read*. Stop and think. When the book asks you a question, don't just skip to the answer. Imagine that someone really *is* asking the question. The more deeply you force your brain to think, the better chance you have of learning and remembering.

② Do the exercises. Write your own notes.

We put them in, but if we did them for you, that would be like having someone else do your workouts for you. And don't just *look* at the exercises. **Use a pencil.** There's plenty of evidence that physical activity *while* learning can increase the learning.

③ Read the “There are No Dumb Questions.”

That means all of them. They're not optional sidebars—**they're part of the core content!** Don't skip them.

④ Make this the last thing you read before bed. Or at least the last challenging thing.

Part of the learning (especially the transfer to long-term memory) happens *after* you put the book down. Your brain needs time on its own, to do more processing. If you put in something new during that processing time, some of what you just learned will be lost.

⑤ Drink water. Lots of it.

Your brain works best in a nice bath of fluid. Dehydration (which can happen before you ever feel thirsty) decreases cognitive function.

⑥ Talk about it. Out loud.

Speaking activates a different part of the brain. If you're trying to understand something, or increase your chance of remembering it later, say it out loud. Better still, try to explain it out loud to someone else. You'll learn more quickly, and you might uncover ideas you hadn't known were there when you were reading about it.

⑦ Listen to your brain.

Pay attention to whether your brain is getting overloaded. If you find yourself starting to skim the surface or forget what you just read, it's time for a break. Once you go past a certain point, you won't learn faster by trying to shove more in, and you might even hurt the process.

⑧ Feel something!

Your brain needs to know that this *matters*. Get involved with the stories. Make up your own captions for the photos. Groaning over a bad joke is *still* better than feeling nothing at all.

⑨ Create something!

Apply this to your daily work; use what you are learning to make decisions on your projects. Just do something to get some experience beyond the exercises and activities in this book. All you need is a pencil and a problem to solve...a problem that might benefit from using the tools and techniques you're studying for the exam.

how to use this book

Read me

This is a learning experience, not a reference book. We deliberately stripped out everything that might get in the way of learning whatever it is we're working on at that point in the book. And the first time through, you need to begin at the beginning, because the book makes assumptions about what you've already seen and learned.

We expect you to know HTML and CSS.

If you don't know HTML and CSS, pick up a copy of *Head First HTML with CSS & XHTML* before starting this book. We will do some refreshers on CSS selectors, but don't expect to learn all of what you need to know about CSS here.

We don't expect you to know JavaScript.

We know, we know...this is a controversial opinion, but we feel that you can learn jQuery without knowing JavaScript first. You need to know some JavaScript to write jQuery, and we teach you all those important JavaScript concepts side-by-side with the jQuery code. We truly and deeply believe in the jQuery motto: Write Less. Do More.

We encourage you to use more than one browser with this book.

We encourage you to test your pages using at least three up-to-date browsers. This will give you experience in seeing the differences among browsers and in creating pages that work well in a variety of browsers.

This is not Head First Browser Dev Tools...

...but we expect you to know how to use them. We highly recommend Google Chrome, which you can download here: <http://www.google.com/chrome>. You can visit the following sites for more information on the following browsers and their dev tools:

Google Chrome	http://code.google.com/chrome/devtools/docs/overview.html
Firefox's Firebug	http://getfirebug.com/wiki/index.php/FAQ
Safari	http://www.apple.com/safari/features.html#developer
Internet Explorer 8	http://msdn.microsoft.com/en-us/library/dd565628(v=vs.85).aspx
Internet Explorer 9	http://msdn.microsoft.com/en-us/ie/aa740478
Opera's Dragonfly	http://www.opera.com/dragonfly/

We expect you to go beyond this book

The best thing you can do when you're learning something new is to join a learning community. We feel that the jQuery community is one of the best and most active communities in the world of technology. You can find out more here: <http://www.jquery.com>.

The activities are NOT optional.

The exercises and activities are not add-ons; they're part of the core content of the book. Some of them are to help with memory, some are for understanding, and some will help you apply what you've learned. **Don't skip the exercises.** Even crossword puzzles are important—they'll help get concepts into your brain. But more importantly, they're good for giving your brain a chance to think about the words and terms you've been learning in a different context.

The redundancy is intentional and important.

One distinct difference in a Head First book is that we want you to *really* get it. And we want you to finish the book remembering what you've learned. Most reference books don't have retention and recall as a goal, but this book is about *learning*, so you'll see some of the same concepts come up more than once.

The Brain Power exercises don't have answers.

For some of them, there is no right answer, and for others, part of the learning experience of the Brain Power activities is for you to decide if and when your answers are right. In some of the Brain Power exercises, you will find hints to point you in the right direction.

Software requirements

To write jQuery code, you need a text editor, a browser, a web server (it can be locally hosted on your personal desktop), and the jQuery library.

The text editors we recommend for Windows are PSPad, TextPad, or EditPlus (but you can use Notepad if you have to). The text editor we recommend for Mac is TextWrangler. If you're on a Linux system, you've got plenty of text editors built in, and we trust you don't need us to tell you about them.

If you are going to do web development, you need a web server. For the later chapters (9, 10, and 11), you need to go to the appendix on installing PHP, MySQL, and a web server (Apache or IIS) and follow the instructions. We recommend doing that now. No, seriously, head there now, follow the instructions, and come back to this page when you're done.

You'll also need a browser, and you'll need to use the Browser Developer tools. Please read the previous page. Learning how to use the JavaScript console in Google's Chrome Dev Tools is well worth the time. This is homework you need to do on your own.

Last of all, you need the jQuery library; turn the page and we'll show you where to get it.

how to use this book

Download jQuery

It's time to dive in. Head over to the jQuery website and download a copy to use throughout this book.

Step One:

Open your favorite browser and point it to this address: <http://www.jquery.com>.



Step Two:

Find the section labeled "Grab the Latest Version!" Then, select the checkbox next to "Production."

Step Three:


Click the "Download jQuery" button.



Step Four:

The next page you'll see will look something like this.

Save the page into a folder called *scripts* on your drive.

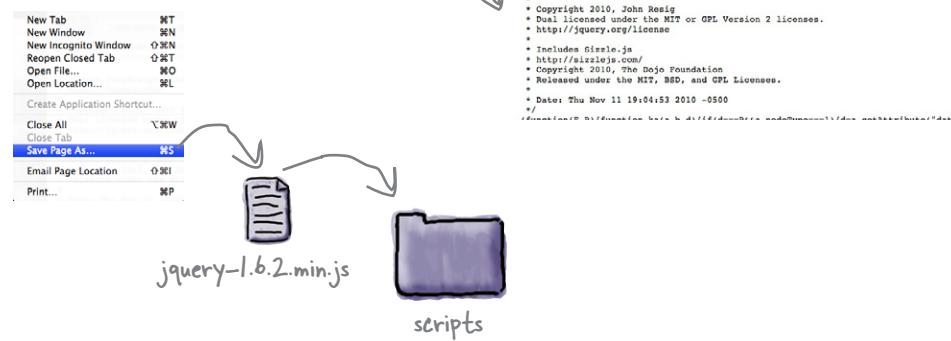


What's the difference between the Production and Development versions?


The **Production** version of jQuery is a minified version, intended for speed of execution on a web server. The **Development** version is intended for developers interested in exploring and extending the inner workings of the jQuery library. Get a copy of both if you're the type who likes to have a look inside the engine.

Folder setup

After downloading and unzipping the code for the book from Head First labs (<http://www.headfirstlabs.com/books/hfjquery>), you'll find that it's structured in folders organized by each chapter. Let's look at *ch03*, for example:

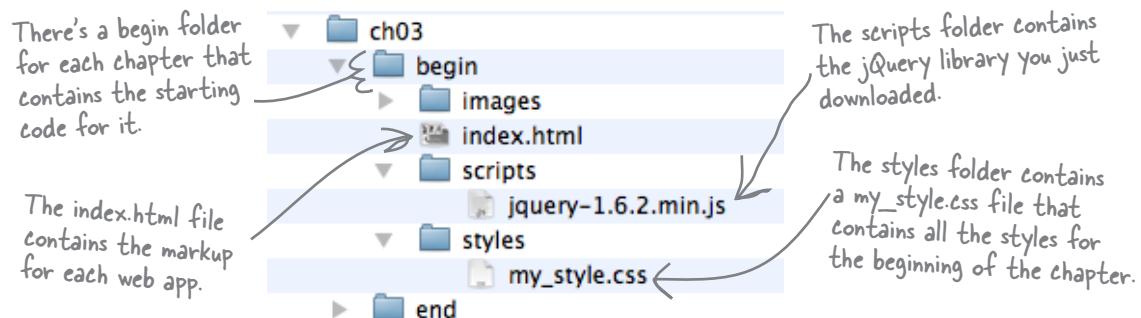

The *end* folder of every chapter contains the final code for that chapter. We encourage you to use the *end* folder only when you need it for reference.

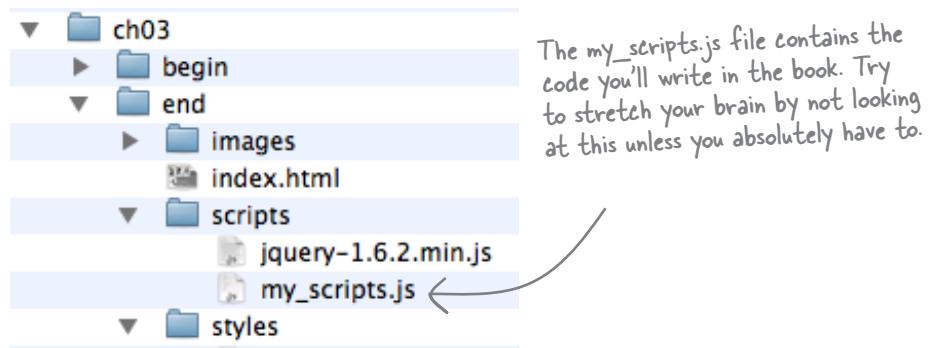

You can use the jQuery library in any of your own projects. For your convenience, we include the jQuery library in the code folder for the book, but you need to know where to get it for use in future projects and for when the jQuery library is updated. The jQuery folks update the library regularly.

the review team

The technical review team

Lindsey Skouras



Paul Barry



Bill Mietelski



Jim Doran



Jim Doran works as a software engineer at Johns Hopkins University in Baltimore, Maryland. He teaches JavaScript at the Community College of Baltimore County and speaks about jQuery at web conferences. When not doing these things, Jim blogs his art at <http://jimdoran.net> and skates in a coed roller derby league.

Bill Mietelski has been a technical reviewer of several Head First titles. He's currently a software engineer at a leading national academic medical center in the Chicagoland area, working on biostatistical research. When he's not collecting or shepherding data, you'll find him at a local golf course chasing a little white ball.

Lindsey Skouras is an attorney in the Washington, DC, area. She has been teaching herself how to code in her spare time by working her way through the Head First series. Her other interests include reading, crafting, visiting museums, and spending time with her husband and dogs.

Paul Barry lectures in computing at the Institute of Technology, Carlow, in Ireland. Paul is a contributing editor to *Linux Journal* magazine as well as a published technical author. He is also the author of *Head First Python* and coauthor of *Head First Programming*. When he gets time, Paul consults with SMEs and startups on software development projects.

Acknowledgments

Our editor:

Thanks (and congratulations!) to **Courtney Nash**, who pushed us to create the best book we possibly could. She has endured a huge portion of emails, questions, ramblings, and occasional crankiness. She stuck with us throughout this book and trusted us to trust our guts.



Courtney Nash ↗

The O'Reilly team:

Thanks to **Lou Barr** for the speedy, excellent, and magical work she did to shape this book up and make it look beautiful.



Lou Barr ↗

Thanks to **Laurie Petrycki** for giving us the green light. Ryan has fond memories of HF training in Boston and will never forget the cool, family-like atmosphere Laurie created there.

Thanks to **Karen Shaner**. Thanks to everyone on the tech review team.

Ryan will never forget the day he discovered the Head First series at the bookstore. Thanks to Kathy Sierra and Bert Bates for lighting up the neurons of geeks everywhere. Thanks to Bert for listening to us ramble, pulling us out of the closure quagmire, and keeping our objectives clear. ;)

Thanks to Tim O'Reilly for his vision in creating the best geek press ever!

Ronan's friends and family:

A special thanks to my wife, Caitlin, who helped make this book a reality through her fantastic design abilities and knowledge of all things Adobe. And for her patience—I couldn't have done this without you! A big thank you to everyone who supported both of us in this effort—my great neighbors, our fellow basement-dwelling colleagues at the University of Portland, my understanding soccer teams and golfing buddies. Thanks to my family back in Ireland for their support and encouragement. Most of all, thanks to Ryan Benedetti, my awesome coauthor, colleague, and friend. Thank you for taking me on this journey and giving me this opportunity. It's been quite the experience!

Ryan's friends and family:

Thank you to my daughter, Josie; my son, Vinny; and my fiancée, Shonna, who believed in me and supported me in so many ways on a daily basis throughout this book. *Ti amo, i miei tre miracoli.* I love each of you so much, my three miracles!

Thanks also to my Mom and Pops; my brother, Jeff; and my nieces, Claire and Quinn. Thanks to my fellow basement dwellers and the WAS team at University of Portland—namely, Jenny Walsh, Jacob Caniparoli, and the Tuesday morning tech team (you know who you are). Thanks to Caitlin Pierce-Cranley for her awesome design skills. Thanks to my pal, the Irish Ninja (aka Ronan Cranley), for bringing his excellent jQuery, JavaScript, and PHP coding skills; his sense of humor; and incredible work ethic to this book.

how to use this book

Safari® Books Online



Safari® Books Online is an on-demand digital library that lets you easily search over 7,500 technology and creative reference books and videos to find the answers you need quickly.

With a subscription, you can read any page and watch any video from our library online. Read books on your cell phone and mobile devices. Access new titles before they are available for print, and get exclusive access to manuscripts in development and post feedback for the authors. Copy and paste code samples, organize your favorites, download chapters, bookmark key sections, create notes, print out pages, and benefit from tons of other time-saving features.

O'Reilly Media has uploaded this book to the Safari Books Online service. To have full digital access to this book and others on similar topics from O'Reilly and other publishers, sign up for free at <http://my.safaribooksonline.com>.

1 getting started with jQuery



Web page action



Maybe there's something in here that will make my web pages more interactive.



You want more for your web pages. You've got HTML and CSS under your belt and want to add scripting to your skill set, but you don't want to spend your life writing lines and lines of script. You need a scripting library that allows you to change web pages on the fly. And since we're wishing, can it play well with AJAX and PHP, too? Can it do in 3 lines of code what most client-side languages do in 15? Wishful thinking? No way! You need to meet jQuery.

get *things* moving

You want web page power

You already know how to build great-looking web pages with clean, valid HTML and CSS. But static web pages just don't cut it anymore—people want a responsive web page. They want action, animation, interaction, and lots of cool effects.



Sharpen your pencil

Do you want to take control of your web pages and make them more useful for your visitors? Check all the options that apply from the list below:


- Dynamically add elements to the web page without reloading every time.
- Change menu items when users mouse over them.
- Alert your user when a form field is missing.
- Add motion and transitions to text and pictures.
- Load data from a server just when a user needs it.

HTML and CSS are fine, but...


Plain old HTML and CSS are good for giving your page structure and style. Once you have a rendered HTML page, it's there, but it's *static*.

What if you want to change how the page looks, or add or remove something from it? You either have to do some really crazy CSS gymnastics, or you simply have to load a new page. And that can get ugly fast. Why? Because all you're really doing with HTML and CSS is controlling how a page is displayed.

- 1 The browser requests a web page from a server when someone types a web address into the browser's URL bar.

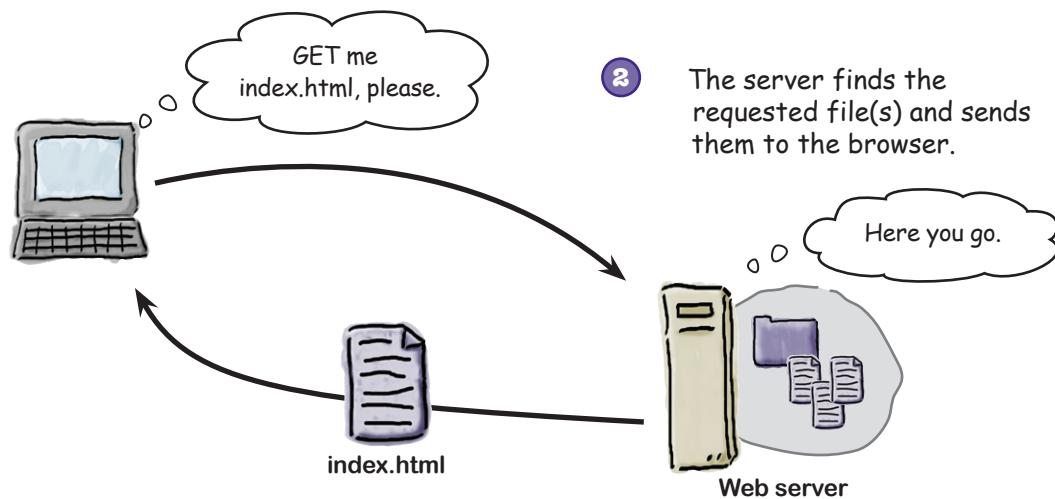


- 3 The browser displays a rendered HTML page based on the file sent from the server.

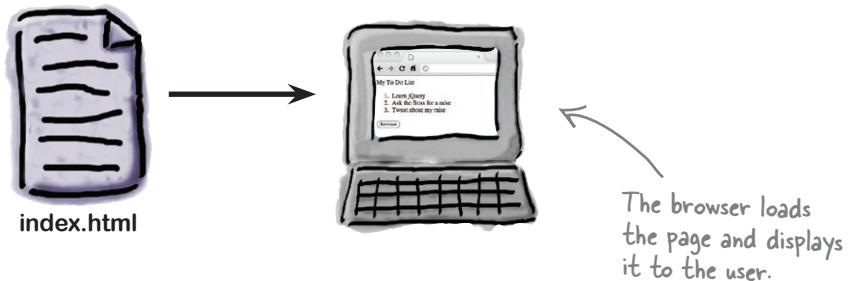

stick to the script

...you need the power of script

To change your web pages **on the fly**, without reloading, you need to talk to your browser. How do you pull that off? With an HTML tag known as <script>.

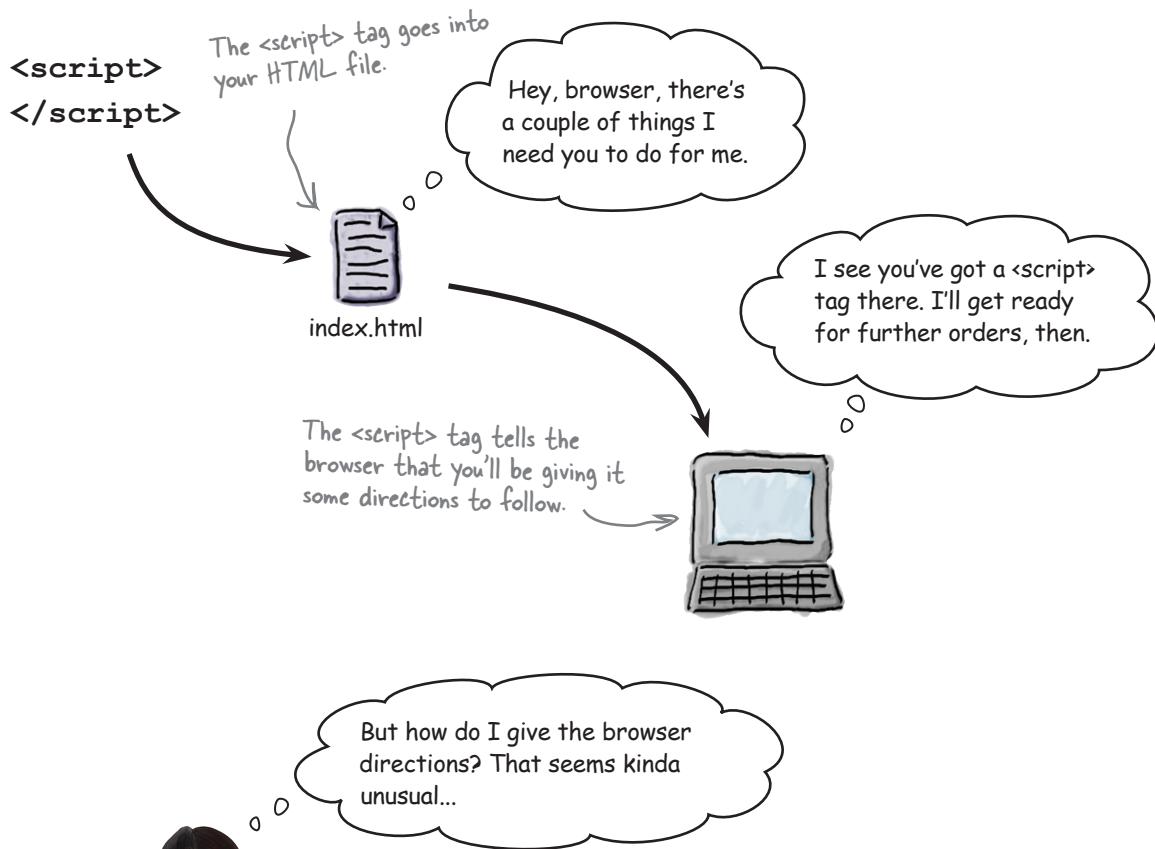

Great question. Remember that HTML is a markup language that handles document structure.

And cascading style sheets (CSS) control the **look and feel** and **position** of those elements. HTML and CSS control how a web page is built and displayed, but neither of them can add **behavior** to the web page. What we need for that is a **scripting language**. What we need is jQuery.

Enter jQuery (and JavaScript)!

The language we use to give the browser directions is JavaScript. Every browser comes with a built-in JavaScript interpreter that takes the directions you write in between the `<script>` tags and translates those directions into different kinds of action on the web page.



To give the interpreter directions, you ultimately need to speak JavaScript. But don't worry! This is where jQuery comes in. jQuery is a JavaScript **library** specialized for changing web page documents on the fly. Let's check some jQuery out.

jQuery is a JavaScript library specialized for changing web page documents on the fly.



Sharpen your pencil

The script below dynamically changes a web page. Read each line and think about what it might do based on what you already know about HTML and CSS. Then, write down what you think the code does. If you're not sure what a line does, it's perfectly OK to guess. We did one for you.

```
<script>
$(document).ready(function() {
    $("button").click(function() {
        $("h1").hide("slow");
        $("h2").show("fast");
        $("img").slideUp();
    });
});
</script>
```

When the web page document is ready, do what's below.

When the web page document is ready, do what's below.


sharpen solution

Sharpen your pencil Solution

The script below dynamically changes a web page. Read each line and think about what it might do based on what you already know about HTML and CSS. Then, write down what you think the code does. If you're not sure what a line does, it's perfectly OK to guess. Here's our solution.

```
<script>
$(document).ready(function() {
    $("button").click(function() {
        $("h1").hide("slow");
        $("h2").show("fast");
        $("img").slideUp();
    });
});
</script>
```

<i>When the web page document is ready, do what's below.</i>
<i>When any button element is clicked, do this stuff:</i>
<i>Make all h1 elements disappear slowly from the page.</i>
<i>Make all h2 elements show quickly on the page.</i>
<i>Make all img elements slide upward and disappear.</i>
<i>End the click function.</i>
<i>End the document ready function.</i>

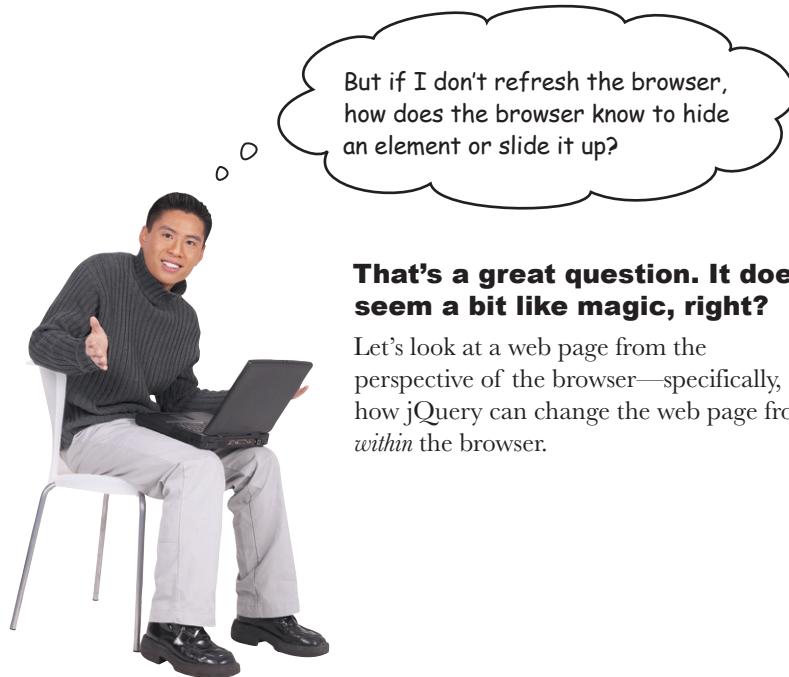


That's a great question. It does seem a bit like magic, right?

Let's look at a web page from the perspective of the browser—specifically, how jQuery can change the web page from *within* the browser.

Look into the browser


It's time to pull back the curtain to see what's really going on behind a web page as a browser displays it. Your browser uses the HTML Document Object Model (DOM) to build a page from simple HTML markup and CSS code into a clickable page complete with text, images, videos, and all the other great content we love to browse.

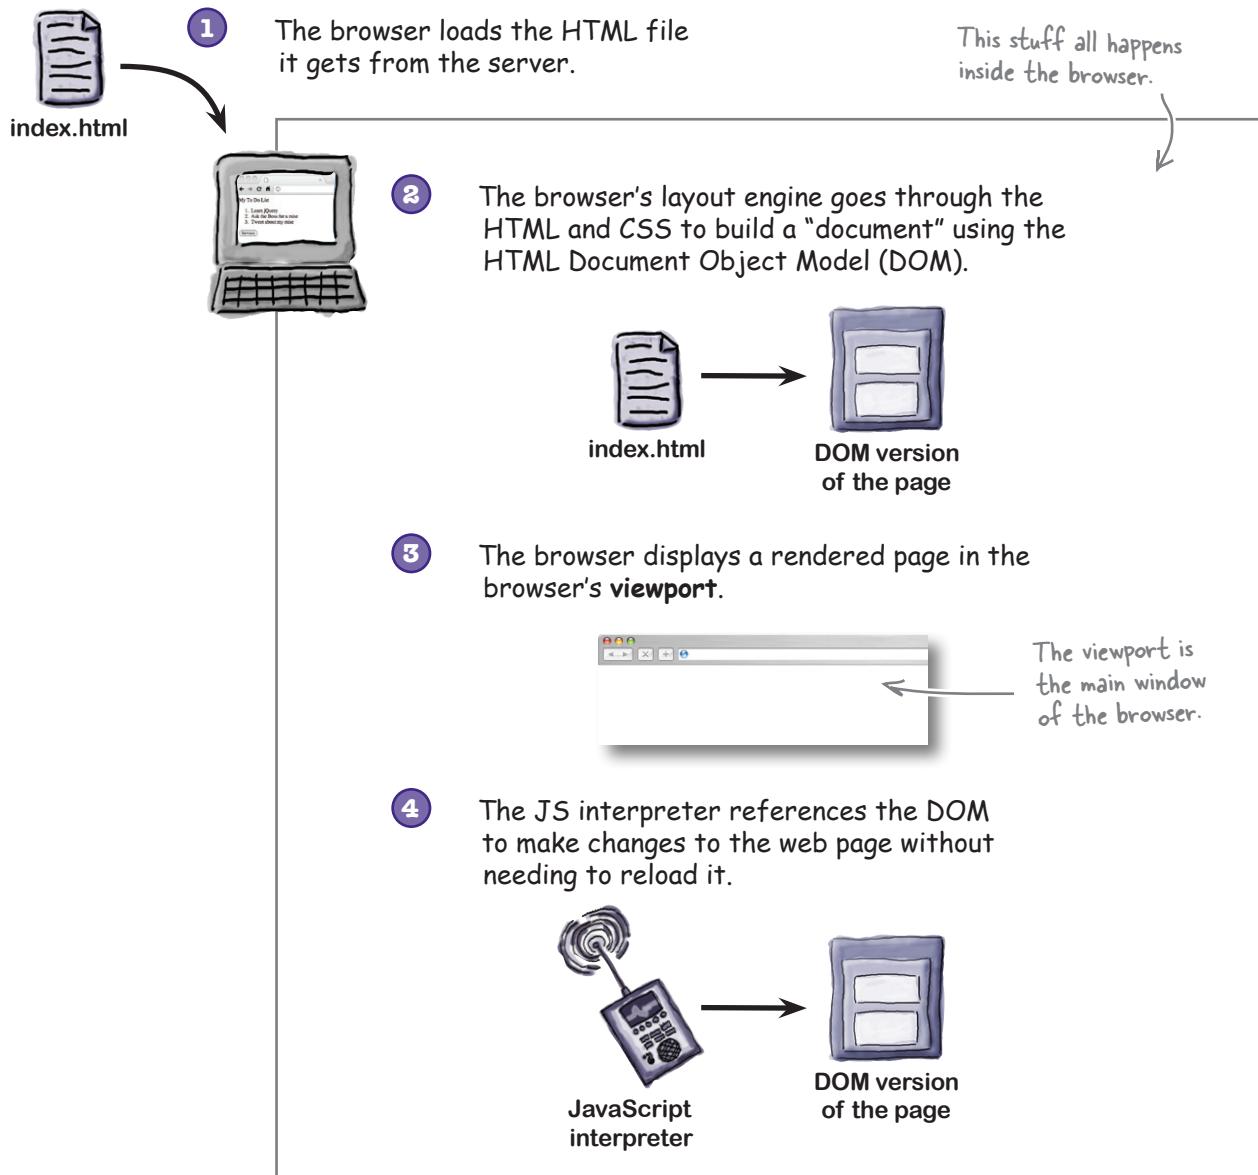

dem DOM bones

The hidden structure of a web page

Over the years, the DOM has helped HTML, CSS, and JavaScript work together more effectively. It provides a standardized skeleton that all modern browsers use to make browsing the Web more effective. Many people think of the DOM as being built like a tree: it has a *root* and *branches* with *nodes* at the end. Alternatively, you can think of it as an x-ray for how the page is built.

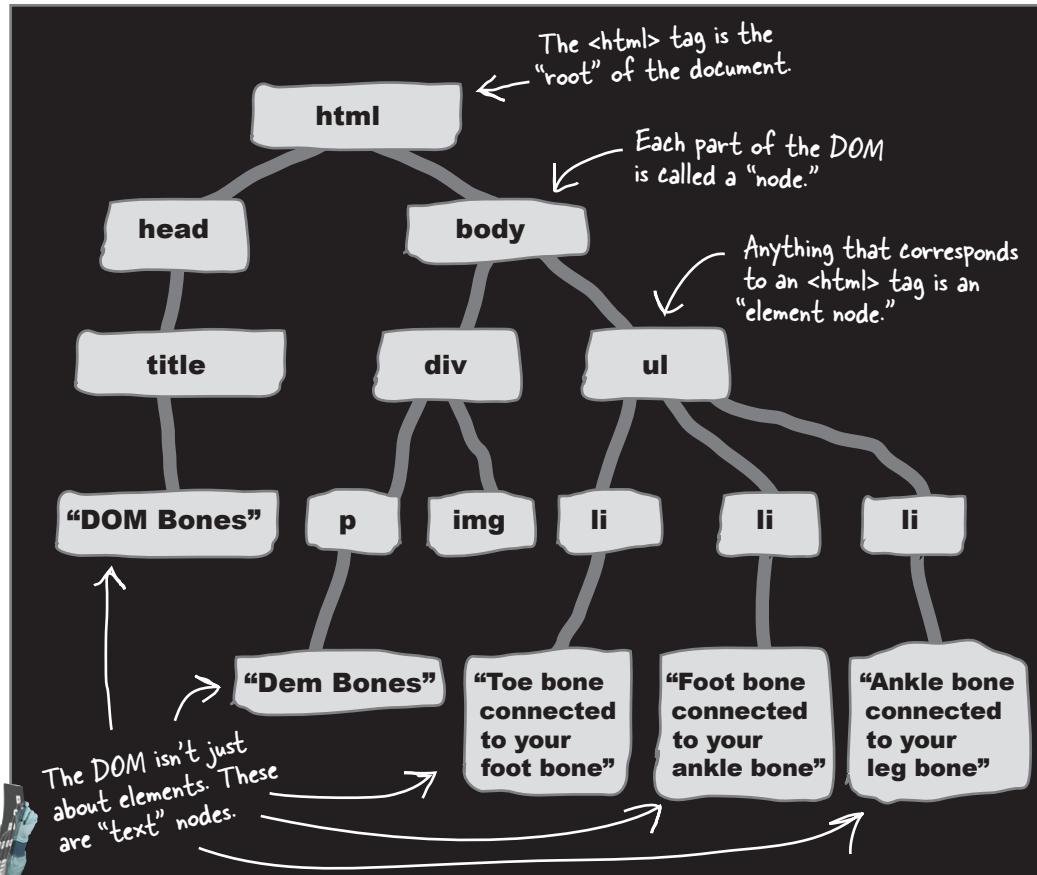

An x-ray tells a doctor what's going on with the body's hidden structure. Like an x-ray, the DOM shows us the hidden structure behind the page. But unlike an x-ray, JavaScript and jQuery use the DOM to *change the structure* on the page.

jQuery makes the DOM less scary

The DOM can seem complex and intimidating, but luckily for us, jQuery keeps it simple. Don't forget: jQuery *is* JavaScript, but a much more approachable version. When you want to control the DOM, jQuery makes it much easier. For instance, let's say we want to change the HTML inside of the **only** paragraph element on our page.

The raw JavaScript way

```
I'm talking to the document
(aka the big D in DOM).
↓
document.getElementsByTagName("p")
[0].innerHTML = "Change the page.";
```

Get me the zeroth element.

Set the HTML inside that element... ...to this stuff.

Get me all of the elements that have the tag name of "p."

The jQuery way

```
Grab me a
paragraph element.
↓
$("p").html("Change the page.");
```

Change the HTML of that element to what's in these parentheses.

jQuery uses a "selector engine," which means you can get at stuff with selectors just like CSS does.

Or let's say we want to change the HTML inside of **five** paragraph elements on our page:

```
Loop through the number of
elements I want to change.
↓
for (i = 0; i <= 4; i++)
{
    document.getElementsByTagName("p")
[i].innerHTML="Change the page"; ↑
}
Get me the element
we're looping over.
```

Because jQuery uses CSS selectors, we can say it the same way as above.

```
$("p").html("Change the page.");
```

One of jQuery's main strengths is that it allows you to work with the DOM without having to know every little thing about it. Underneath it all, JavaScript is doing the heavy lifting. Throughout this book, you'll learn to use JavaScript and jQuery together. In Chapter 6, we'll learn more about jQuery's relationship to JavaScript, and we'll beef up our JavaScript skills along the way. For now, when you need to work with the DOM, you'll use jQuery.

Let's take jQuery for a spin around DOM-ville, shall we?

ready bake code

Ready Bake Code

Enter the following code into a text editor. Then save it, open it in your browser, and try out each of the buttons. (It won't hurt to take a look at the code and try to figure out what it's doing while you're at it...)

```
<!DOCTYPE html>
<html><head> <title>jQuery goes to DOM-ville</title>
<style>
    #change_me {
        position: absolute;
        top: 100px;
        left: 400px;
        font: 24px arial; }

    #move_up #move_down #color #disappear {
        padding: 5px; }
</style>
<script src="scripts/jquery-1.6.2.min.js"></script>
</head>
<body>
    <button id="move_up">Move Up</button>
    <button id="move_down">Move Down</button>
    <button id="color">Change Color</button>
    <button id="disappear">Disappear/Re-appear</button>


    <div id="change_me">Make Me Do Stuff!</div>
    <script>
        $(document).ready(function() {
            $("#move_up").click( function() {
                $("#change_me").animate({top:30},200);
            }); //end move_up
            $("#move_down").click( function() {
                $("#change_me").animate({top:500},2000);
            }); //end move_down
            $("#color").click( function() {
                $("#change_me").css("color", "purple");
            }); //end color
            $("#disappear").click( function() {
                $("#change_me").toggle("slow");
            }); //end disappear
        }); //end doc ready
    </script>
</body>
</html>
```



index.html

How does that work?

Pretty nifty how jQuery can manipulate the page, isn't it? The important part to keep in mind is that **none of the original HTML and CSS changed** when you pressed each button. So how did jQuery do it? Check it out:

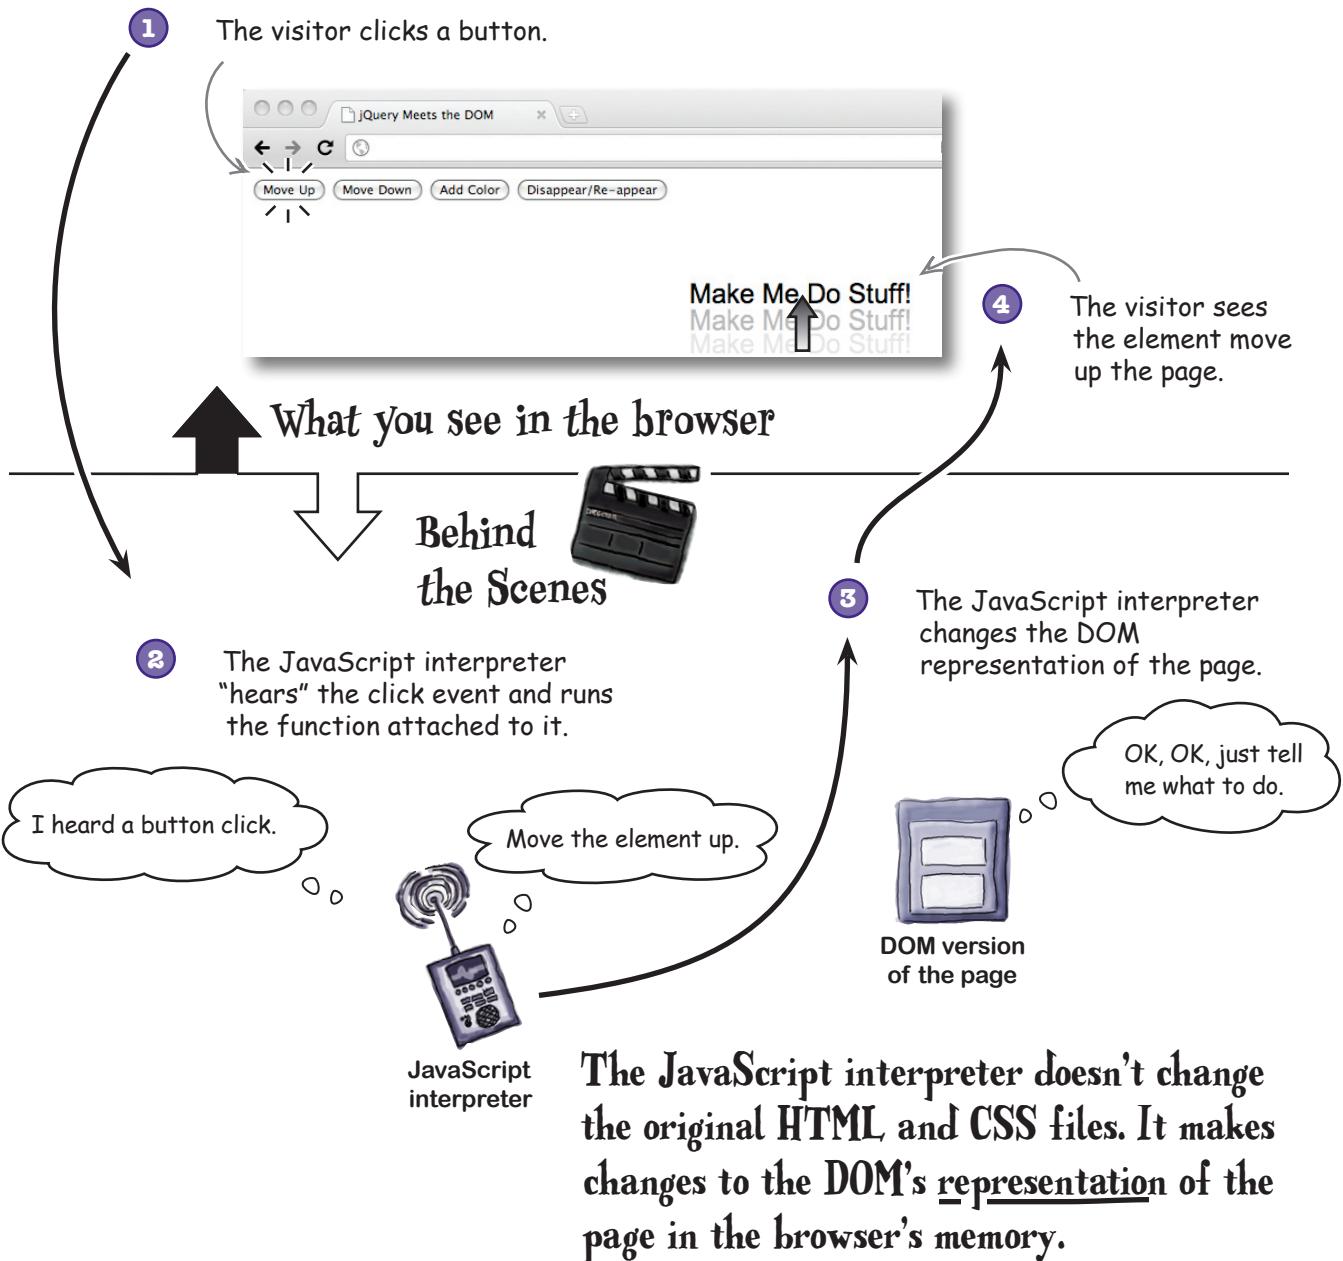

jquery functions




What's with all of those dollar signs in the code?

The dollar sign represents all of the cash you'll rake in with your newly acquired jQuery skills. Kidding, but it does bring home the bacon in the jQuery world.


Introducing the jQuery function (and shortcut)

The dollar sign with the parentheses is the shorter name of the **jQuery function**. This shortcut saves us from writing “`jQuery ()`” every time we want to call the jQuery function. The jQuery function is also often referred to as the **jQuery wrapper**.

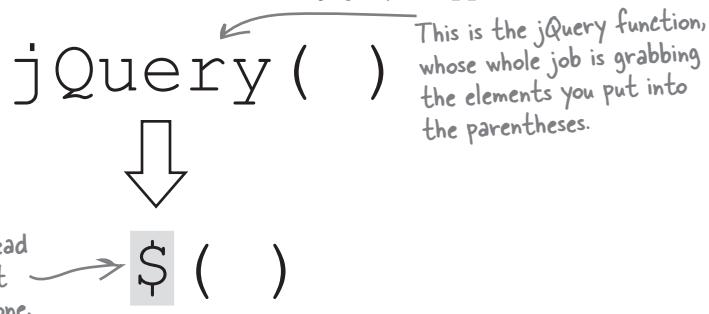


This is the jQuery shortcut. Instead of typing the six characters that make up “jQuery,” you just type one.

The short name and the long name point to the same thing: the big code block known as jQuery. Throughout this book, we’ll use the shortcut. Here are three different things you can put into the jQuery function.

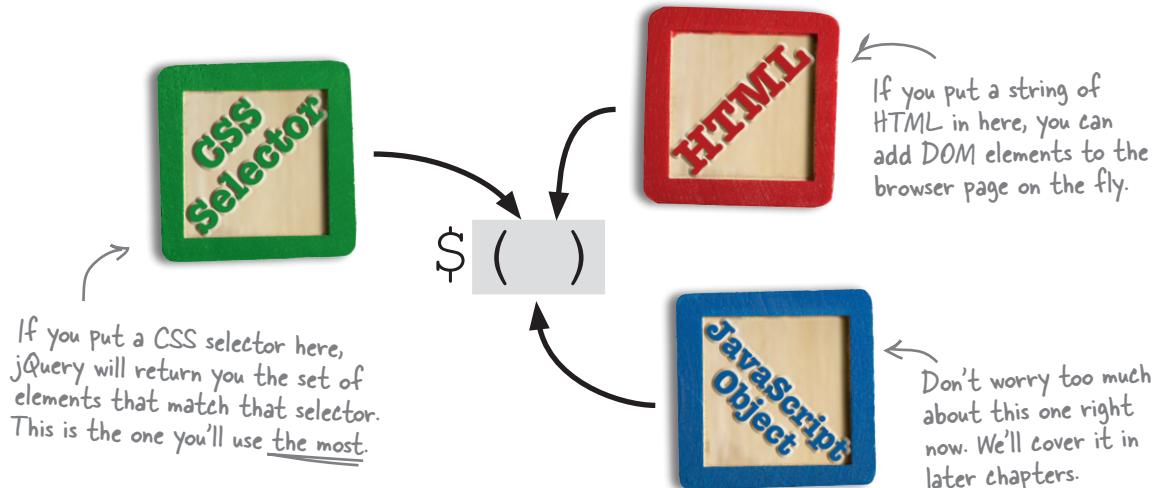

jQuery selects elements the same way CSS does

You already know more about jQuery than you realize. The main way you get at stuff with jQuery is to use **selectors**—the same selectors you've used with CSS. If you're a little fuzzy on CSS selectors, it's OK. Let's have a quick refresher.

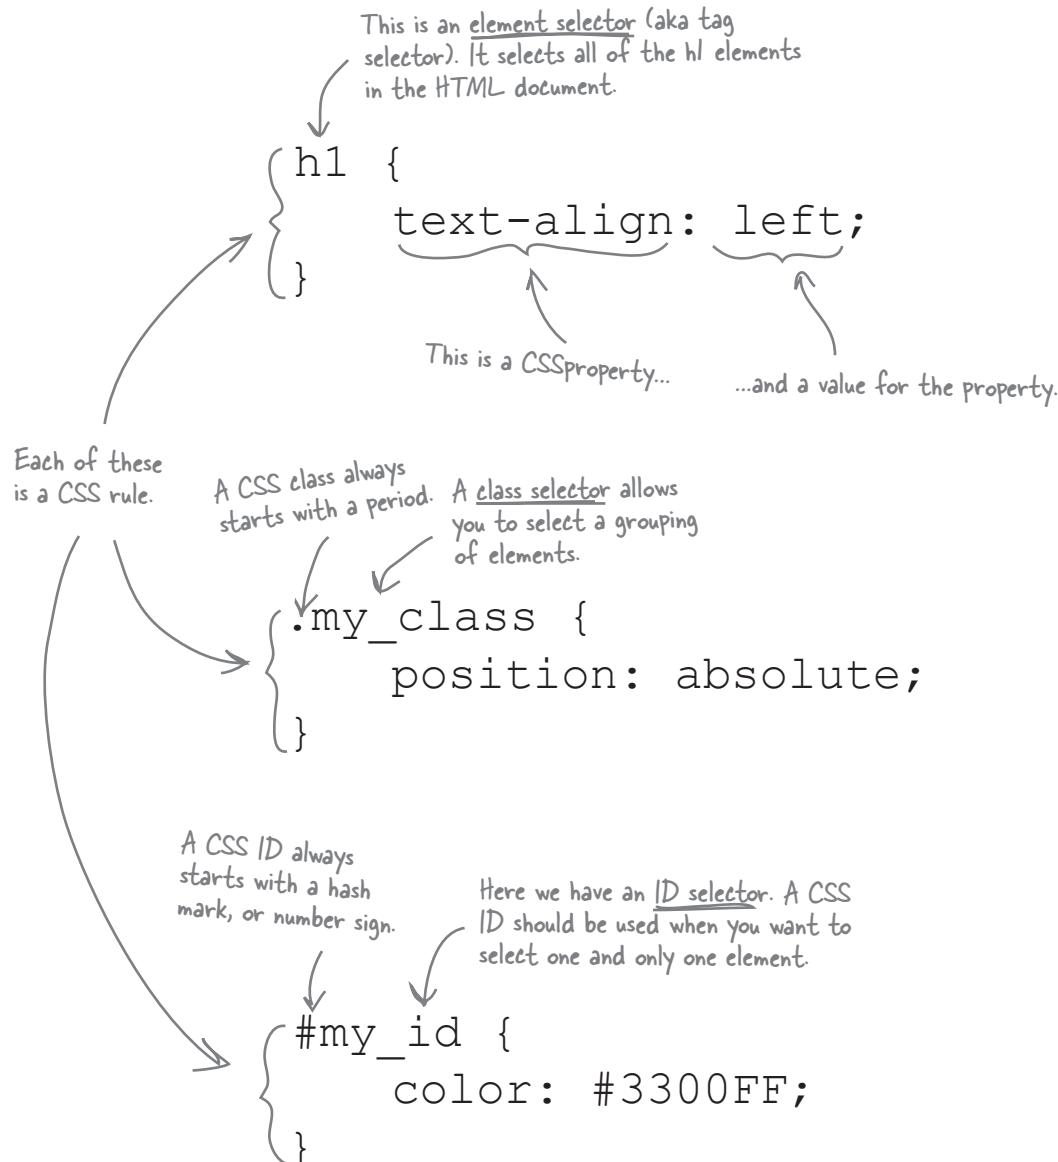

up your style quotient

Style, meet script

The great thing about jQuery is that it uses those same CSS selectors we use to style our page to ***manipulate elements*** on the page.

CSS selector

Element selector

```
h1 {
    text-align: left;
}
```

Class selector

```
.my_class{
    position: absolute;
}
```

ID selector

```
#my_id {
    color: #3300FF;
};
```

jQuery selector

jQuery element selector

```
$("h1").hide();
```

This hides all of the h1 elements on the page.

jQuery class selector

```
$(".my_class").slideUp();
```

Slides up all of the elements that are members of the CSS class my_class

jQuery ID selector

```
$("#my_id").fadeOut();
```


And this jQuery statement fades out an element that has a CSS ID of my_id until it's invisible.

CSS selectors select elements to add style to those elements; jQuery selectors select elements to add behavior to those elements.


You'll do more with combining selectors and methods in Chapter 2 and the rest of this book.

jQuery selectors at your service

As its name suggests, jQuery is all about *querying*. You ask for something with a selector, and the JavaScript interpreter asks the DOM to get it for you. If you ask for an element with nested elements, jQuery will give you the nested elements too. Let's take apart a jQuery selector a bit more to make sure we know how it works.

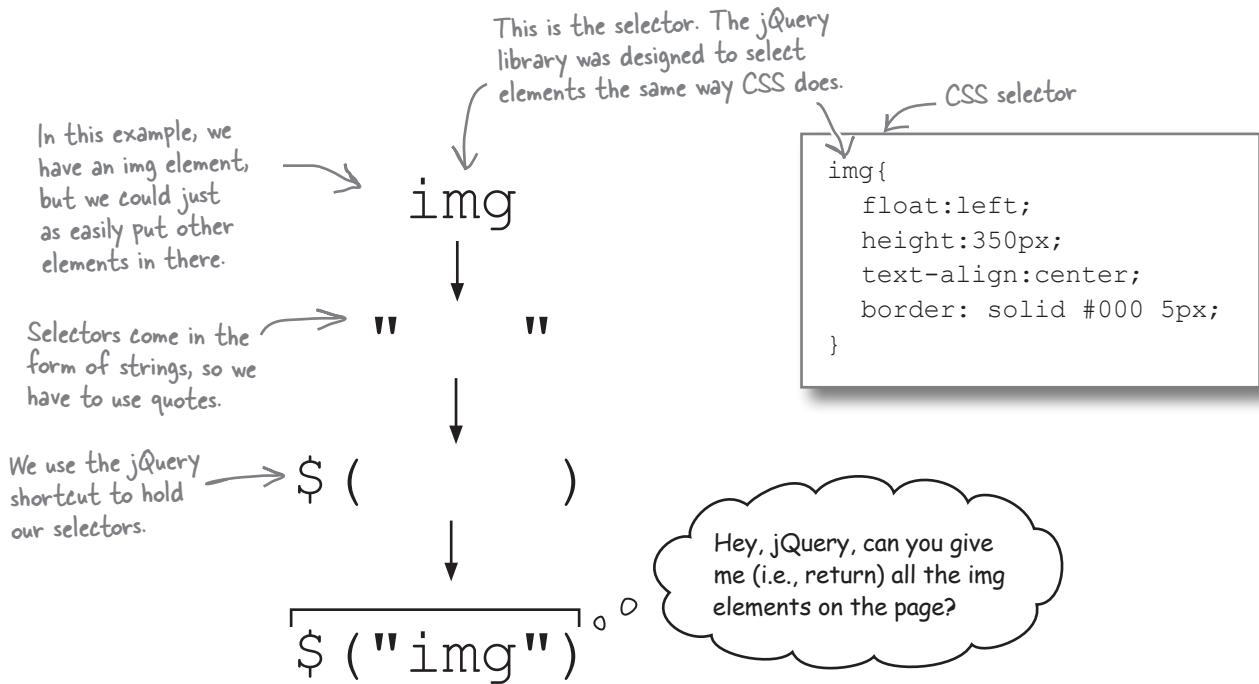

The "Query" part of jQuery is all about asking for elements via JavaScript...

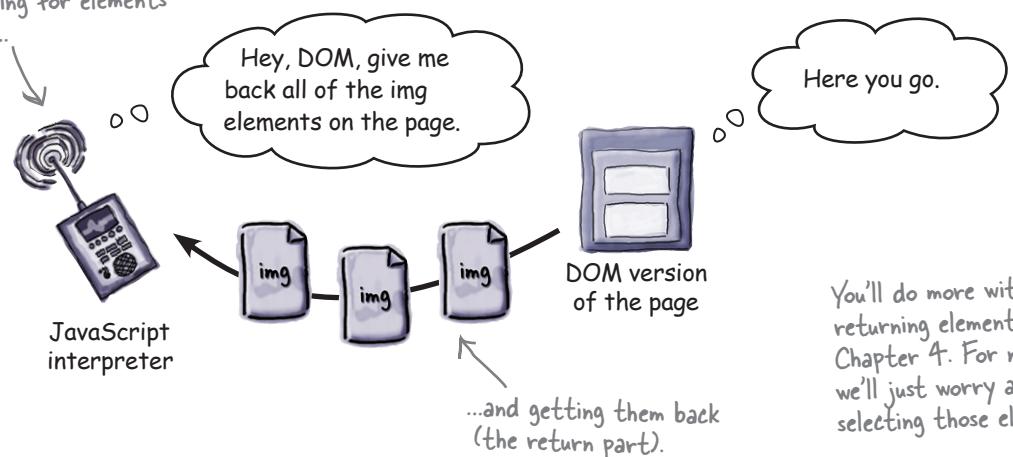

parlez-vous jquery?

jQuery in translation

To show you just how easy it is to learn jQuery, here's a little breakdown of a few jQuery phrases to use when travelling in DOM country.





BE the browser

Your job is to play the browser and circle the HTML elements (on the right) that the jQuery statement (on the left) will affect.

jQuery statement

```
$("p").hide();
```

<p>One morning, when Gregor Samsa woke from troubled dreams . . .</p>

<p>he found himself transformed in his bed into a horrible vermin.</p>

<p>He lay on his armour-like back, and if he lifted his head a little . . . </p>

```
$("span.Italian").toggle();
```

Nel Mezzo del cammin di nostra vita

In the middle of this road called "our life"

mi ritrovai per una selva oscura

```
$("p#mytext").show();
```

<p id="mytext">One morning, when Gregor Samsa woke from troubled dreams . . .</p>

<p id="mytext">he found himself transformed in his bed into a horrible vermin.</p>

<p>He lay on his armour-like back, and if he lifted his head a little . . . </p>



BE the browser Solution

Your job is to play the browser and circle the HTML elements (on the right) that the jQuery statement (on the left) will affect.

Here's our solution.

jQuery statement

```
$( "p" ).hide();
```

HTML elements

<p>One morning, when Gregor Samsa woke from troubled dreams . . . </p>

<p>he found himself transformed in his bed into a horrible vermin.</p>

<p>He lay on his armour-like back, and if he lifted his head a little . . . </p>

```
$( "span.Italian" ).toggle();
```

Nel Mezzo del cammin di nostra vita

In the middle of this road called "our life"

mi ritrovai per una selva oscura

```
$( "p#mytext" ).show();
```

<p id="mytext">One morning, when Gregor Samsa woke from troubled dreams . . . </p>

<p id="mytext">he found himself transformed in his bed into a horrible vermin.</p>

<p>He lay on his armour-like back, and if he lifted his head a little . . . </p>

there are no Dumb Questions

Q: So why create jQuery if all it does is use JavaScript? Isn't JavaScript enough on its own?

A: JavaScript is great for a lot of things—especially manipulating the DOM—but it's pretty complex stuff. DOM manipulation is by no means straightforward at the base level, and that's where jQuery comes in. It abstracts away a lot of the complexity involved in dealing with the DOM, and makes creating effects super easy. (It was created by John Resig; you can find out more about him here: <http://ejohn.org/about>.)

Q: What's this business with the dollar sign all about?

A: It's just a shortcut so you don't have to write "jQuery" over and over! But when you're working with other client-side languages, using `jQuery()` helps avoid naming conflicts.

Q: You've mentioned "client-side scripting" before, too. What's that again, exactly?

A: Web developers often refer to the web browser as a *client* because it consumes data from a (web) server. A client-side scripting language is one that can give directions to the browser behind the scenes, while a server-side language gives directions to the server. We'll cover this more in Chapters 8 and 9.

Q: Where did this whole DOM thing come from?

A: Good question. Web developers and designers were tired of inconsistencies across browsers and decided they needed a standard they could use to add behavior to and interact with web pages on any browser. The World Wide Web Consortium (aka W3C) worked to define the standard collaboratively with these various groups. You can find out more about that here: <http://w3.org/dom>.

Q: When I go to download jQuery, there's a production version and a developer version. What's the difference between the two?

A: The production version is *minified*, which means that a bunch of unnecessary characters and whitespace have been removed. It is optimized to run faster in a production environment, but it's kind of harder to see what's going on. The developer version is nicely spaced and much more readable. It's intended for anyone who wants to dig around in the jQuery code to change or even extend it (it is open source, after all!).

Your first jQuery gig

You just landed a job as the new web developer for the Webville Pet Rescue Foundation. The marketing team wants to kick off their annual fundraising campaign with a revamp of last year's "Help Our Furry Friends" web page. They gave you a screen shot from last year with details on what they want the page to do.

A cartoon illustration featuring a man with a green bandana and a woman with glasses. The man is standing behind a wireframe representation of a website page, while the woman stands to his right, holding a pen. Three thought bubbles originate from the man's head, containing text about improving the website's interactivity and visual effects.

We need to power up last year's page. Right now, the visitor clicks on a button and a picture pops up, but it doesn't stay on the page. We want the picture to appear when the user clicks and go away when they click again.

Josh from Marketing wants more interactivity.

And his manager wants richer visual effects.

Also, the furry friend picture just pops up. Can you make it slide slower and sort of fade in as it does?

The wireframe shows a header with the text "100% FURRY", a button labeled "Show Me the Furry Friend of the Day", and a note: "When the visitor clicks here...". Below the button is a dashed rectangular area with the instruction "...unhide this section and expand it to show the "Furry Friend of the Day.". A note below states: "NOTE: This should be done within the page (i.e., we don't want to link to another HTML page)."

Well, no one wants to let Marketing down on the first day—you don't want to be on their bad side! So let's see what we're working with here...



Sharpen your pencil

Before you figure out how to add jQuery functionality to the page, let's look at how the HTML and CSS are set up. We've given you the files for last year's campaign below. Next to the elements that you think you'll need, write what you'll have to do to provide the functionality that Marketing is looking for. We've filled in the first one for you.

```
<!DOCTYPE html><html> <head>
<title>Furry Friends Campaign: jQuery
Proof-of-Concept</title>
<link rel="stylesheet" type="text/
css" href="styles/my_style.css">
</head>
<body>
<div id="showfriend">
<a href="#">Our Furry Friends Need
Your Help

</a>
</div>
```



index.html

This anchor tag has "hover" and "active" states
set in the CSS. The user hovers over the link, and
the image appears.

```
a:link img, a:visited img {
display:none;
}

a:hover img, a:active img {
display:block;
}

a{
text-decoration:none;
color: #000;
}
```



my_style.css

sharpen solution**Solution**

Before you figure out how to add jQuery functionality to the page, let's look at how the HTML and CSS are set up. We've given you the files for last year's campaign below. Next to the elements that you think you'll need, write what you'll have to do to provide the functionality that Marketing is looking for. Here are our answers, but don't worry if yours aren't exactly the same as what we came up with.

```
<!DOCTYPE html><html> <head>
<title>Furry Friends Campaign: jQuery
Proof-of-Concept</title>
<link rel="stylesheet" type="text/
css" href="styles/my_style.css">
</head>
<body>
<div id="showfriend">
<a href="#">Our Furry Friends Need
Your Help

</a>
</div>
```



index.html

This anchor tag has "hover" and "active" states set in the CSS. The user hovers over the link, and the image appears.

The furry friend image of the dog is nested inside the anchor tag. This image shouldn't show up until the user clicks the link in the anchor tag.

```
a:link img, a:visited img {
display:none;
}

a:hover img, a:active img {
display:block;
}

a{
text-decoration:none;
color: #000;
}
```



my_style.css

This CSS selector changes the display property of the nested image to "none" so it's not visible when the page first loads.

When the user hovers her mouse over or clicks on the anchor tag, the img element's display property will change to "block." The image will then suddenly appear.




OK, so now we can just dive in and start writing jQuery for all the functionality we want, right?

You could, but things might get messy.

Before we can use jQuery to make the cool effects that Marketing wants, we need to make sure that jQuery has everything in place to work its magic. As you already know now, one of jQuery's main jobs is to manipulate HTML elements, so we need to have good *structure*. To get at elements, jQuery uses the same selectors that CSS uses, so we also need to have well-defined *styles*.

Revisit your requirements

When you're thinking about your structure, it's always good to go back to what you're trying to build. Marketing wants an image to slide down and fade in when people click on the "Show Me the Furry Friend of the Day" section of the page. What changes to the HTML and CSS might you need to make?

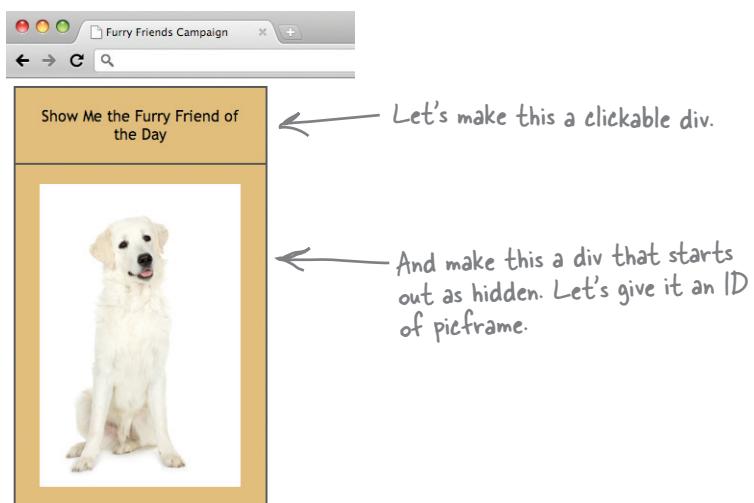

get your house in order

Set up your HTML and CSS files

Let's think about what we'll have to set up in our HTML and CSS files before you write any jQuery statements. Open up the jQuery files for Chapter 1 (if you haven't done that yet, be sure to go back to the opening section "How to use this book" for details). Find the *Begin* folder in Chapter 1. Then, add the code in bold below to the files, as shown here.

```
<!DOCTYPE html>
<html><head>
  <title>Furry Friends Campaign</title>
  <link rel="stylesheet" type="text/css" href="styles/my_style.css">
</head>
<body>
  <div id="clickMe">Show Me the Furry Friend of the Day</div>
  <div id="picframe">
    
  </div>
<script src="scripts/jquery-1.6.2.min.js"></script>
<script>
  $(document).ready(function() {
    $("#clickMe").click(function() {
      });
    });
  </script>
</body>
</html>
```

This makes a clickable div, and we'll style it in the CSS file below so it has the same look and feel as the picframe div.

Here's the picframe div that will slide open to show the furry friend picture.



index.html

```
#clickMe {
  background: #D8B36E;
  padding: 20px;
  text-align: center;
  width: 205px;
  display: block;
  border: 2px solid #000;
}
#picframe {
  background: #D8B36E;
  padding: 20px;
  width: 205px;
  display: none;
  border: 2px solid #000;
}
```

This styles the clickMe div so that so it has the same look and feel as the picframe div.

Set the picframe selector to "display: none" so that it won't show when the page loads.



my_style.css



jQuery Up Close



Now that you have your HTML and CSS files set up, let's break down the code that's sitting between the <script> tags.

```

Hey, DOM...
...whenever you're
ready and loaded...
...I want you to do
something for me.

$(document).ready(function() {
    $("#clickMe").click(function() {
        {
            The dot separates the selector
            part from the method part.
            The code for what will happen when the
            button is pressed will go between these
            curly braces (aka the "code block").
            The semicolon is a terminator. It
            ends our jQuery click statement.
        } );
    });
}
  
```

As soon as I possibly can, I'll start executing code within the curly braces!

The DOM

Here's our ID selector for the clickMe div.

Connecting the button with an ID of clickMe to the click event, this code makes the button clickable.

This semicolon ends our jQuery ready function.

There are a lot of potentially new terms here.

We'll get into events, methods, and functions in a lot more detail soon.



put a little glide in your slide



You're right. Our HTML and CSS are ready; now we need some jQuery.

We want the `picframe` div to slide and to fade. Fortunately, the jQuery folks have built *effects* that let us control both of these rich visual actions: *slides* and *fades*. We've devoted a whole chapter later in the book to jQuery effects (Chapter 5), so don't worry about getting every little thing down now. Let's just start sliding and fading first.



Slide on in...

The first effect we'll implement is having the image slide into view, which is one of the things the marketing team manager wants to have happen. There are three ways to deal with sliding:

```
$("div").slideUp();
```


```
$("div").slideDown();
```

```
$("div").slideToggle();
```

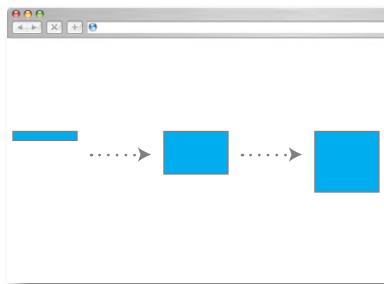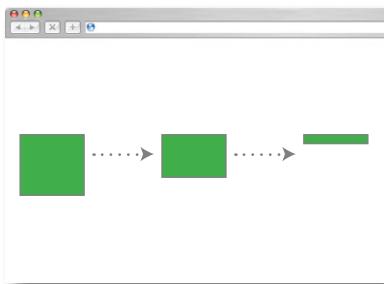

The `slideUp` method changes the `height` property of the element until it's 0, and then hides the element.

The `slideDown` method changes the `height` property of the element from 0 to whatever it's set to in the CSS style.



The `slideToggle` action says, "If it's up, slide it down; if it's down, slide it up."


May the fade be with you

We also want the image to gradually appear, going from invisible to fully visible. Again, jQuery has a method for that, and that method is called a *fade*. The fade methods are pretty similar to what you just saw for sliding: you have FadeIn, FadeOut, FadeTo, and FadeToggle. For now, let's just use FadeIn, which gives us control over the opacity and transparency properties of HTML elements.

Here's what we want to fade in;
in this case, it is an image.

```
$("img").fadeIn();
```

You can specify how fast it fades in by
putting a value inside the parentheses,
typically represented in milliseconds (ms).

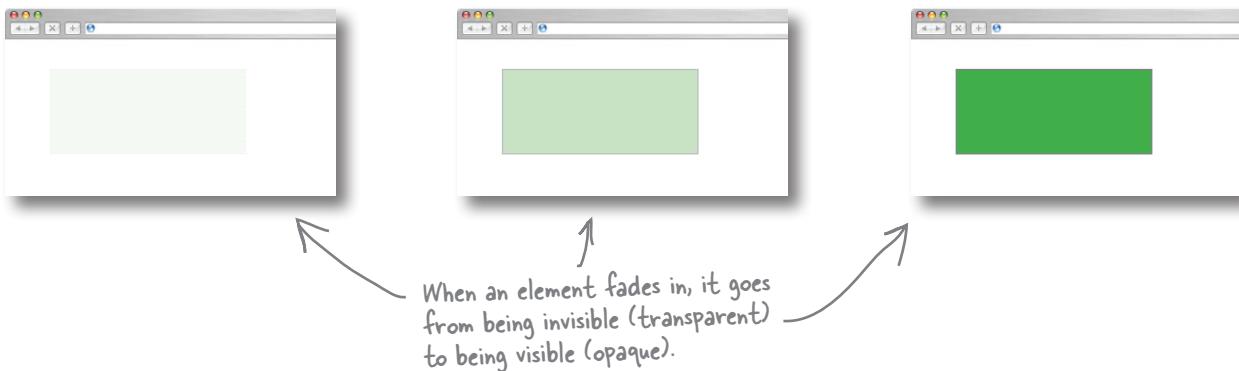

How many jQuery statements do you think it will take us to accomplish the effect we want?

Take a shot at writing those statements on a piece of scratch paper. If you're not sure, try to write it out first in plain English; then you'll start getting your brain to think in jQuery.

hey, that was easy

That's it?

Amazingly, you only need to write **two lines** of jQuery code to get these effects to work. Now you're probably beginning to get a sense of why so many people like jQuery. Add the bolded lines below to your *index.html* file, and you're good to go.



```
<!DOCTYPE html>
<html>
  <head>
    <title>Furry Friends Campaign</title>
    <link rel="stylesheet" type="text/css" href="styles/my_style.css">
  </head>
  <body>
    <div id="clickMe">Show me the Furry Friend of the Day</div>
    <div id="picframe">
      
    </div>
    <script src="scripts/jquery-1.6.2.min.js"></script>
    <script>
      $(document).ready(function() {
        $("#clickMe").click(function() {
          $("img").fadeIn(1000);
          $("#picframe").slideToggle("slow");
        });
      });
    </script>
  </body>
</html>
```

In jQuery, it's important to sequence our effects in such a way that they don't run over one another. We'll deal with this issue throughout the book.

We run the fade effect on our image first.

We added some extra stuff in the parentheses to juice up the effects. We'll look at these in more depth in Chapter 5.





Test Drive

Open the page up in your favorite browser to make sure everything's working.



Watch it!

Check it across multiple browsers.

Just because jQuery will work the same across all browsers doesn't mean the styles you define in your CSS file, or any dynamic styles you apply to elements in your page, will react the same in all browsers!

canine crusader

You rescued the Furry Friends campaign


You got the job done with some HTML and CSS fine-tuning, and just two lines of jQuery. Just think of all the puppies you've saved...





jQuerycross

It's time to sit back and give your left brain something to do. It's your standard crossword; all of the solution words are from this chapter.

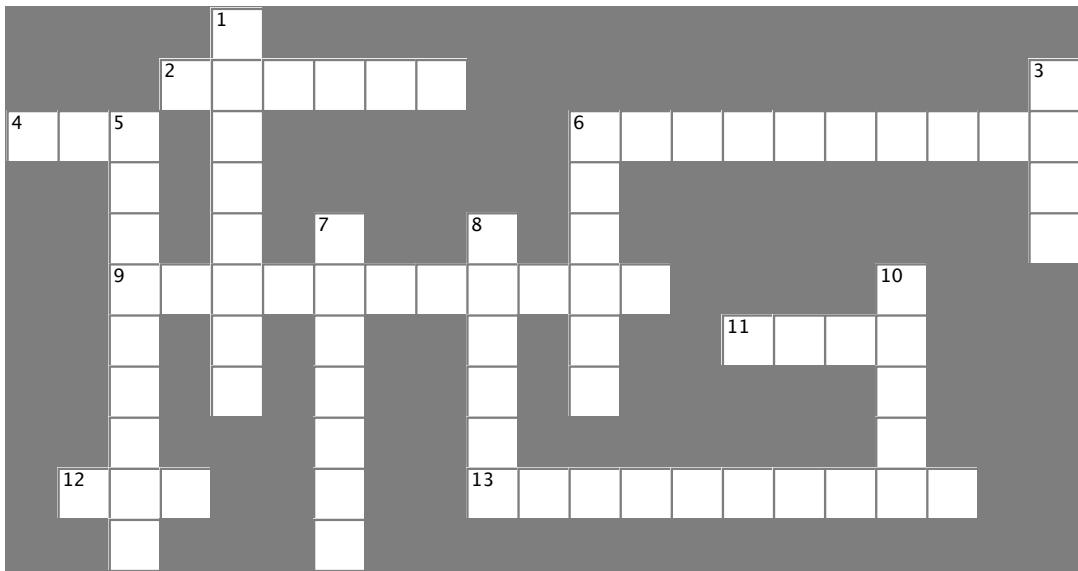

Across


2. After your browser receives a web page from a web server, it loads that web page into its _____.
4. Adds style to a web page.
6. The language jQuery is written in.
9. The JavaScript _____ translates directions you give it into different actions on the page.
11. A CSS setting that makes sure an element won't show when the page loads, `display: _____`.
12. Name of the character used to separate a jQuery selector from a jQuery method.
13. The name of the symbol we use for the jQuery shortcut.

Down

1. A _____ is used by jQuery to locate and return an element from the web page.
3. This kind of file builds the structure of the web page.
5. The name of the symbol that ends a jQuery statement.
6. JavaScript library specialized for complex interactivity and rich visual effects.
7. Use a _____ to test that your jQuery scripts are working.
8. You know you're dealing with a _____ when you see a set of parentheses after a keyword.
10. Creator of the jQuery library, John _____.



jQuerycross Solution

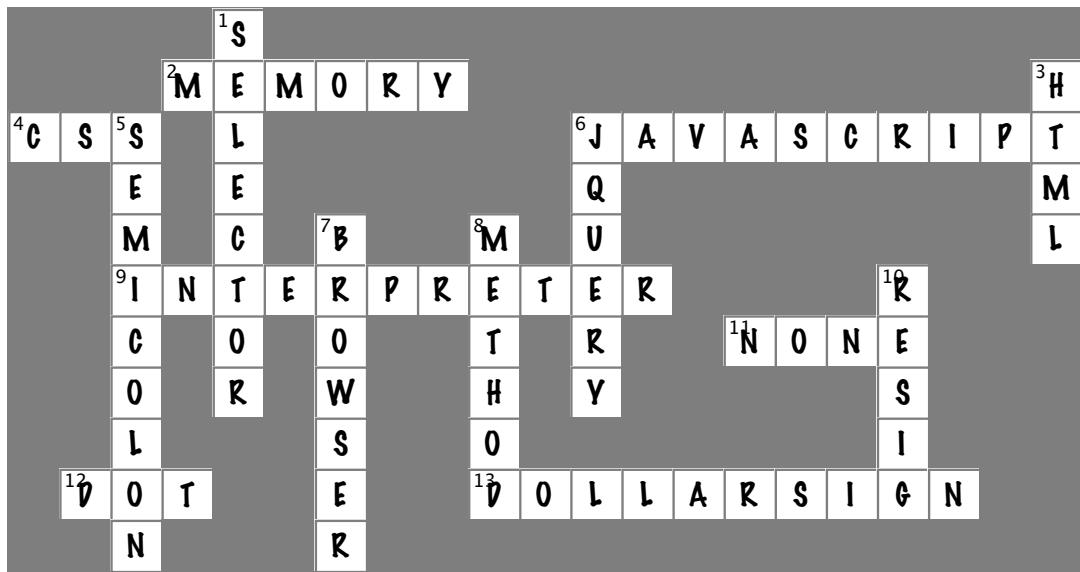



Your jQuery Toolbox

You've got Chapter 1 under your belt and now you've added the basic jQuery function, selectors, click events, and the fade effect to your toolbox.

jQuery function

You use this to select elements from an HTML page to manipulate.

The `$` shortcut means you don't have to type "jQuery" over and over.

The jQuery function can handle selectors, straight HTML, and even JavaScript objects.

Selectors

jQuery selects elements the same way CSS does: with selectors.

Just about any kind of HTML element is fair game for a jQuery selector.

Fade effect

Once you've selected an element, you can fade it in a variety of ways, using `fadeIn`, `fadeOut`, `fadeTo`, and `fadeToggle`.

You can fade in all kinds of elements, from text to images and more.

Control the speed of your fade effect by putting a time (in milliseconds) value inside the parentheses at the end of the statement.

2 selectors and methods

Grab and go



jQuery helps you grab web page elements and do all kinds

of things with them. In this chapter, we'll dig into jQuery selectors and methods. With jQuery selectors, we can grab elements on our page, and with methods we can do stuff to those elements. Like a massive book of magic spells, the jQuery library lets us change tons of things on the fly. We can make images disappear and reappear out of thin air. We can select a certain piece of text and animate the change to its font size. So, on with the show—let's grab some web page elements and go!

word is getting out

Jump for Joy needs your help

You receive an email from your friend, who is a professional portrait photographer. She wants to roll out a “Jump for Joy” promotion that allows users to win deals on a package of prints. She needs your help making the promotion work.

From: Emily
Subject: Jump for Joy Promotion!

Hey,

I saw your tweet that you're doing more interactive web work these days, so I was hoping you could help me with making some interactive stuff for the “Jump for Joy” promotion on my website. I'd like to give my visitors a chance to receive a discount off their purchase before they check out, to encourage them to click around the site some more (and hopefully buy more as a result!).

The page should have four sections with one of four images per section. I need a message that says “Your Discount is” that displays a random discount amount (between 5 and 10 percent). When a user clicks on one of the sections, the message should appear below the image in that section. If a user clicks again, I'd like to get rid of the last message and display a new one.

I've attached a mockup of how I want it to look.

Think you can help??

--

Emily



What are the project requirements?

Emily is a great photographer, but her request is kind of all over the place.
Let's take a closer look at that email and figure out what she is really asking for.
Before you can even start writing any jQuery, you want to be super clear on
what the project (or user) requirements are.



Sharpen your pencil

Take the requests in the email and break them down into a list
of things our web app needs to do. This list will be our guide for
ensuring that our web app meets the client's needs.

To-Do List:

1.

2.


3.

4.

5.

Converting user **requests** into actual
project requirements is an important skill
that gets better with practice and time.

Make it Stick



sharpen solution

Sharpen your pencil Solution

Take the requests in the email and break them down into a list of things our web app needs to do. This list will be our guide for ensuring that our web app meets the client's needs. Here's our solution.

To-Do List:

1. The page should have four sections with one of four “jump for joy” images per section.
2. The sections should be clickable.
3. We need a message that says “Your Discount is” along with a random discount amount (between 5 and 10 percent).
4. When a user clicks on one of the sections, the message should appear below the image in that section.
5. If a user clicks again, get rid of the last message and make a new one.

**Whoa! Hold your horses there, hoss!**

Working out project requirements first is a good habit to get into for every jQuery project you'll work on. But before we jump right into writing jQuery code, we need to do a little work setting up the structure and styles first. We did a bit of this in Chapter 1, and now we've got even more to set up before we get any jQuery goodness going.

Dig in with divs

We need four clickable areas on the page, so let's make those first. The most useful and flexible HTML element for our purposes is the `<div>` tag. The `<div>` tag serves very well in the structure role, since it's a block-level element. We can also easily style div elements to act exactly as we want them to.



Open your favorite text editor to create the HTML and CSS files you'll need. Below is the starter code with some key elements missing. Add the following items to the page and check them off as you're done:

- A tag to include the jQuery library, version 1.6.2.
- A `<div>` tag with the ID of `header`.
- A `<div>` tag with the ID of `main`.
- Inside each of the four `div` elements inside of the `main` div, put a different image (get the images here: www.thinkjquery.com/chapter02/images.zip).

```

<html>
  <head>
    <title>Jump for Joy</title>
    <link href="styles/my_style.css" rel="stylesheet">
  </head>
  <body>

    .....
    <h2>Jump for Joy Sale</h2>
  </div>

    .....
    <div></div>
    <div>.....</div>
    <div>.....</div>
    <div>.....</div>
  </div>

    .....
    <script> </script>
  </body>
</html>

```



```

div{
  float:left;
  height:245px;
  text-align:left;
  border: solid #000 3px;
}

#header{
  width:100%;
  border: 0px;
  height:50px;
}

#main{
  background-color: grey;
  height: 500px;
}

```



my_style.css

exercise solution



Open your favorite text editor and create the HTML and CSS files to solve this exercise. Below is the starter code with some key elements missing. Once you've added the following items, your page should look like our solution.

- A tag to include the jQuery library, version 1.6.2.
- A `<div>` tag with the ID of `header`.
- A `<div>` tag with the ID of `main`.
- Inside each of the four `div` elements inside of the `main` div, put a different image.

Your HTML and CSS files should look like this.

```

<html>
  <head>
    <title>Jump for Joy</title>
    <link href="styles/my_style.css" rel="stylesheet">
  </head>
  <body>
    <div id="header">
      <h2>Jump for Joy Sale</h2>
    </div>
    <div id="main">
      <div></div>
      <div>  ... </div>
      <div>  ... </div>
      <div>  ... </div>
    </div>
    <script src="scripts/jquery-1.6.2.min.js"></script>
    <script> </script>  </body>
  </html>

```

A div element with the ID of header

A div element with the ID of main

The div elements for the images

Include the jQuery library.

```

div{
  float:left;
  height:245px;
  text-align:left;
  border: solid #000 3px;
}

#header{
  width:100%;
  border: 0px;
  height:50px;
}

main{
  background-color: grey;
  height: 500px;
}

```



my_style.css




index.html



Test Drive

Open the page up in your favorite browser to make sure everything's working. This will give us an opportunity to note how we want the page to function.

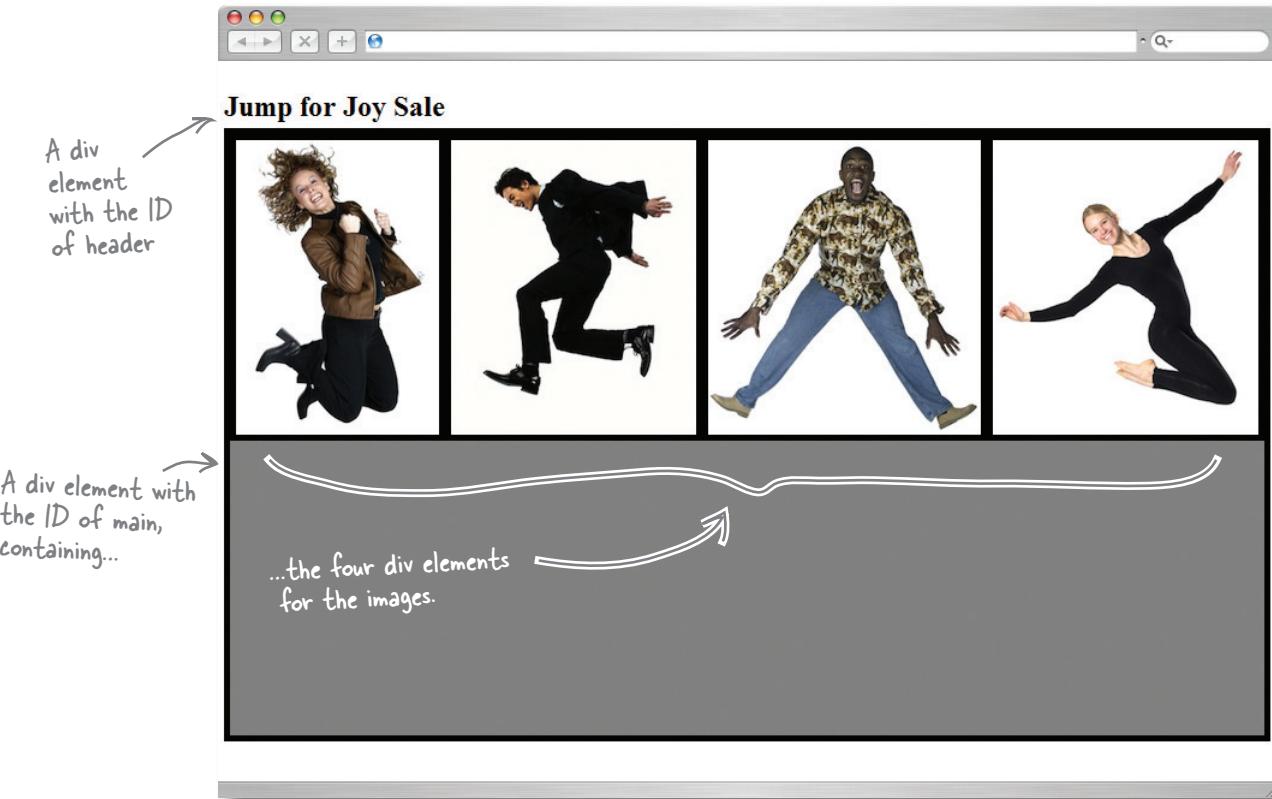

We now have four areas on our page with images.
How do we make them clickable?

A click event up close

As we've seen, making an element clickable with jQuery is easy.

Clicking on a page element causes an *event* to trigger on the page, and can also run *functions*. We'll get more in depth into events and functions later on, but for now, let's just review how the **click** event works on a paragraph (or <div>) tag.



```

$( "p" ).click( function () {
    alert("You rang?");
})
  
```

This is the element we want to attach the click event to.

Because it's inside the parentheses that belong to the click action, the function will run when the click is triggered by the user.

Here, we tell the JS interpreter that we want to make paragraph elements do something when we click on them.


A function is a way to collect together a bunch of things we want to do.

We use opening curly braces to start a "block" of code. A block is a lot like a paragraph: it contains related statements.

We use the alert statement when we want to test that our function was called properly.

Whatever we put into the quotes will pop up in a new window.

We use closing curly braces to end a "block" of code.

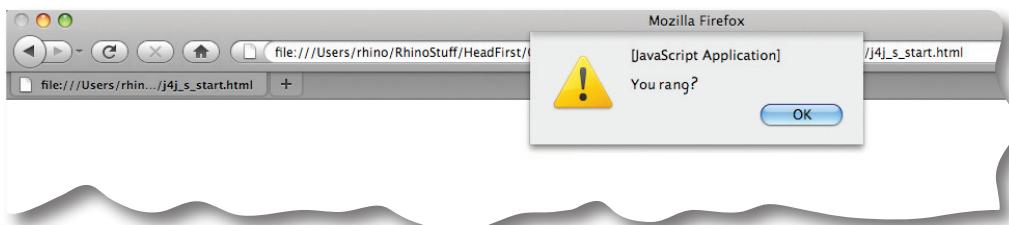



jQuery Code Magnets


Move the magnets to write the code that will make all the `div` elements clickable. When a `div` is clicked, use a JavaScript alert function to display the text "You clicked me." We've put a few in place for you already.

```
<script>
$(document).ready(function() {
    $("div").click(function() {
        alert("You clicked me.");
    });
});
```

code magnets solution

jQuery Code Magnets Solution

Move the magnets to write the code that will make all the `div` elements clickable. When a `div` is clicked, use a JavaScript alert function to display the text "You clicked me."

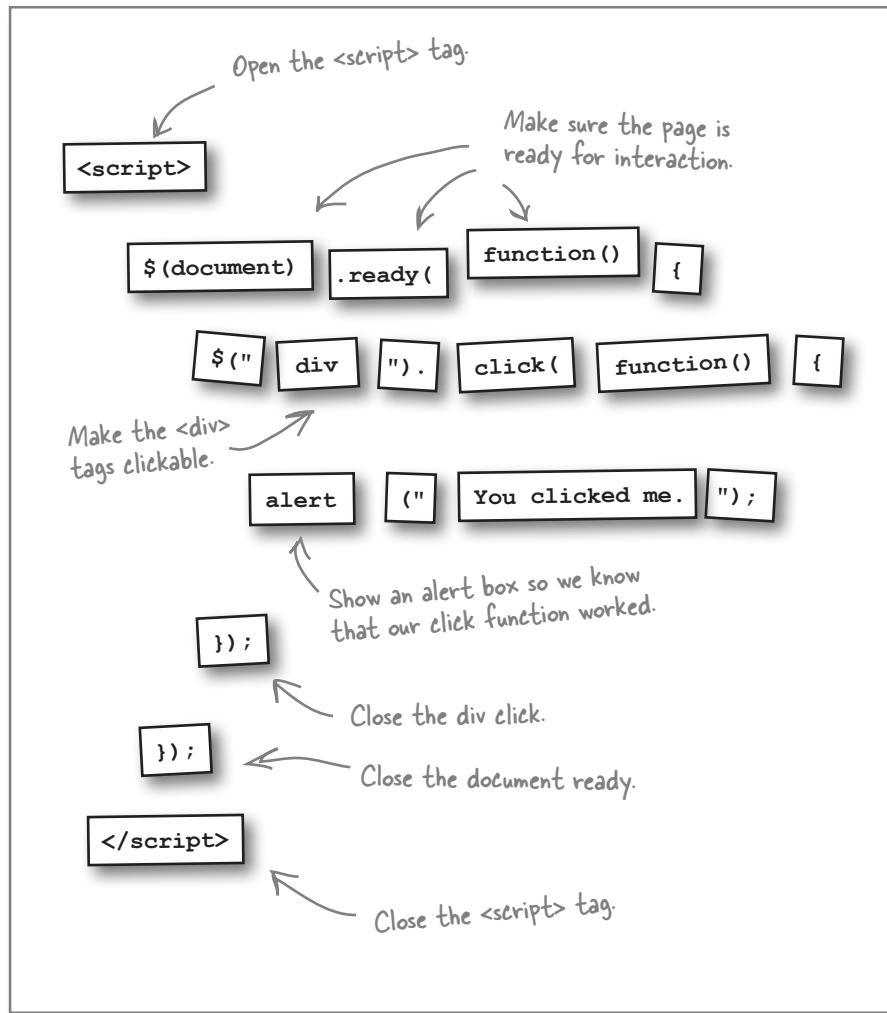

Add the click method to your page

Using the code you put together in the magnets solution on the previous page, update your HTML file to include this script. Don't forget to put it inside a `<script>` tag!



```

<html>
  <head>
    <title>Jump for Joy</title>
    <link href="styles/my_style.css" rel="stylesheet">
  </head>
  <body>
    <div id="header">
      <h2>Jump for Joy Sale</h2>
    </div>
    <div id="main">
      <div></div>
      <div></div>
      <div></div>
      <div></div>
    </div>
    <script src="scripts/jquery-1.6.2.min.js"></script>
    <script>
      $(document).ready(function() {
        $("div").click(function() {
          alert("You clicked me.");
        });
      });
    </script>
  </body>
</html>

```

The `alert` function calls up a window in your browser with a message inside it. We'll use it whenever we want to see the results of things we've added to code like variables and functions.

Add these lines between your `<script>` tags to make the divs clickable.

Some programmers add comments to help identify parentheses and curly braces. It's a matter of coding style that's entirely up to you.




index.html

test drive

Test DRIVE

Open the page up in your favorite browser to make sure everything's working. You should see the alert message now as you click around the images on the page.

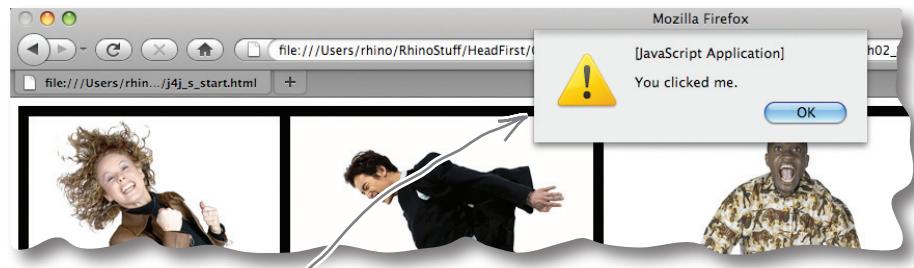

Here's the alert box you added. You can see that the click function worked.

Yes, but no matter where I click, I get the alert message. Why is that?



Hmmmm, that is a problem.

It looks like we've gotten a bit click-happy. Let's take a look at that click event again.

The JS interpreter did exactly what we asked it to do. It selected all the divs...


...and added a click method to each of them.

`$("div").click();`

In fact, you don't even have to click on the images to get that message. Our page structure has `div` elements nested in another `div`, so when you click on those, the browser thinks you've clicked on both, and you might get two alerts in that case. Clearly, we need to narrow down what we're asking jQuery to do here...

Get more specific

The issue is that we haven't been specific enough in our selection. So how can we get at the four sub-divs and leave out the larger container div? Remember from Chapter 1 that jQuery selectors use CSS classes and IDs. We can get even more specific about which elements we want jQuery to grab by adding classes and IDs to those elements.

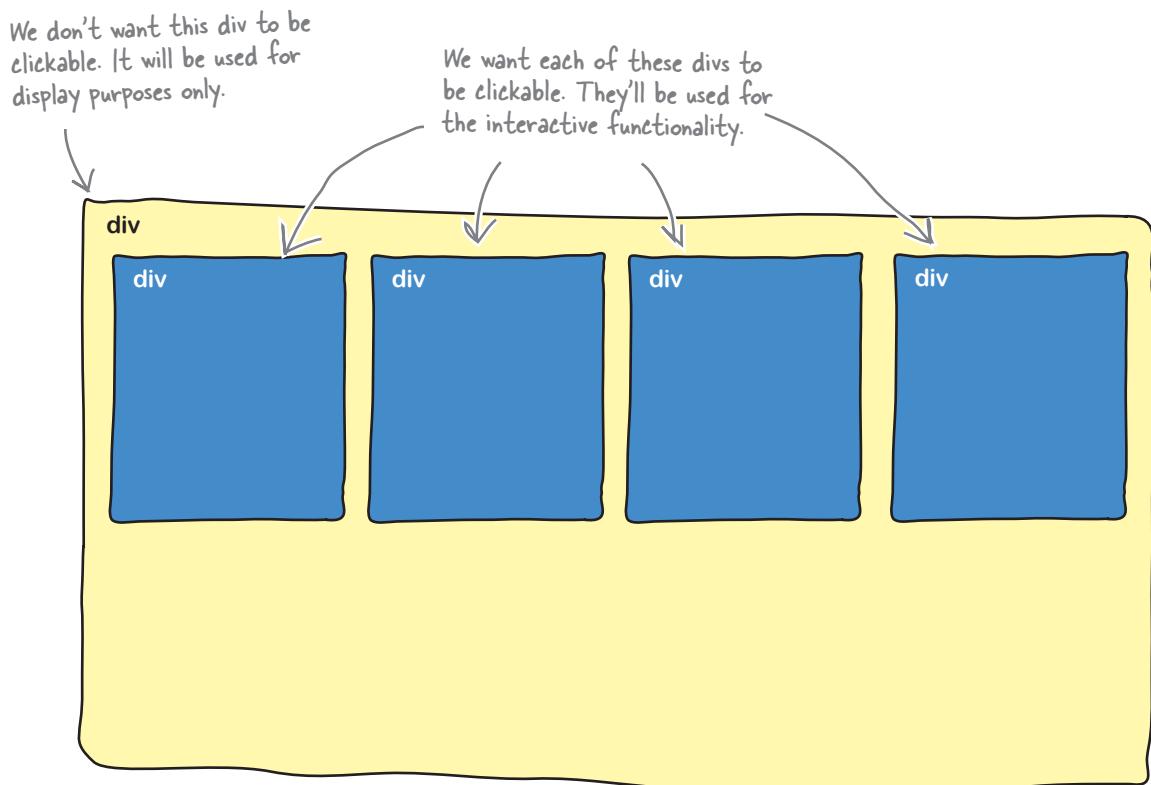


Would you use just CSS classes or IDs separately, or a combination of both, to specify the `div` elements above? Which would work best, and why?

head of the class

Classing up your elements

In CSS, classes are used to group elements together and give them common style attributes. You can have one or more elements on the page that have the same class. For jQuery, we can use the same class selector, and affect the same group of elements with jQuery methods. Both CSS and jQuery use the “.” to signify a class, which makes it super easy to start classing up your code.

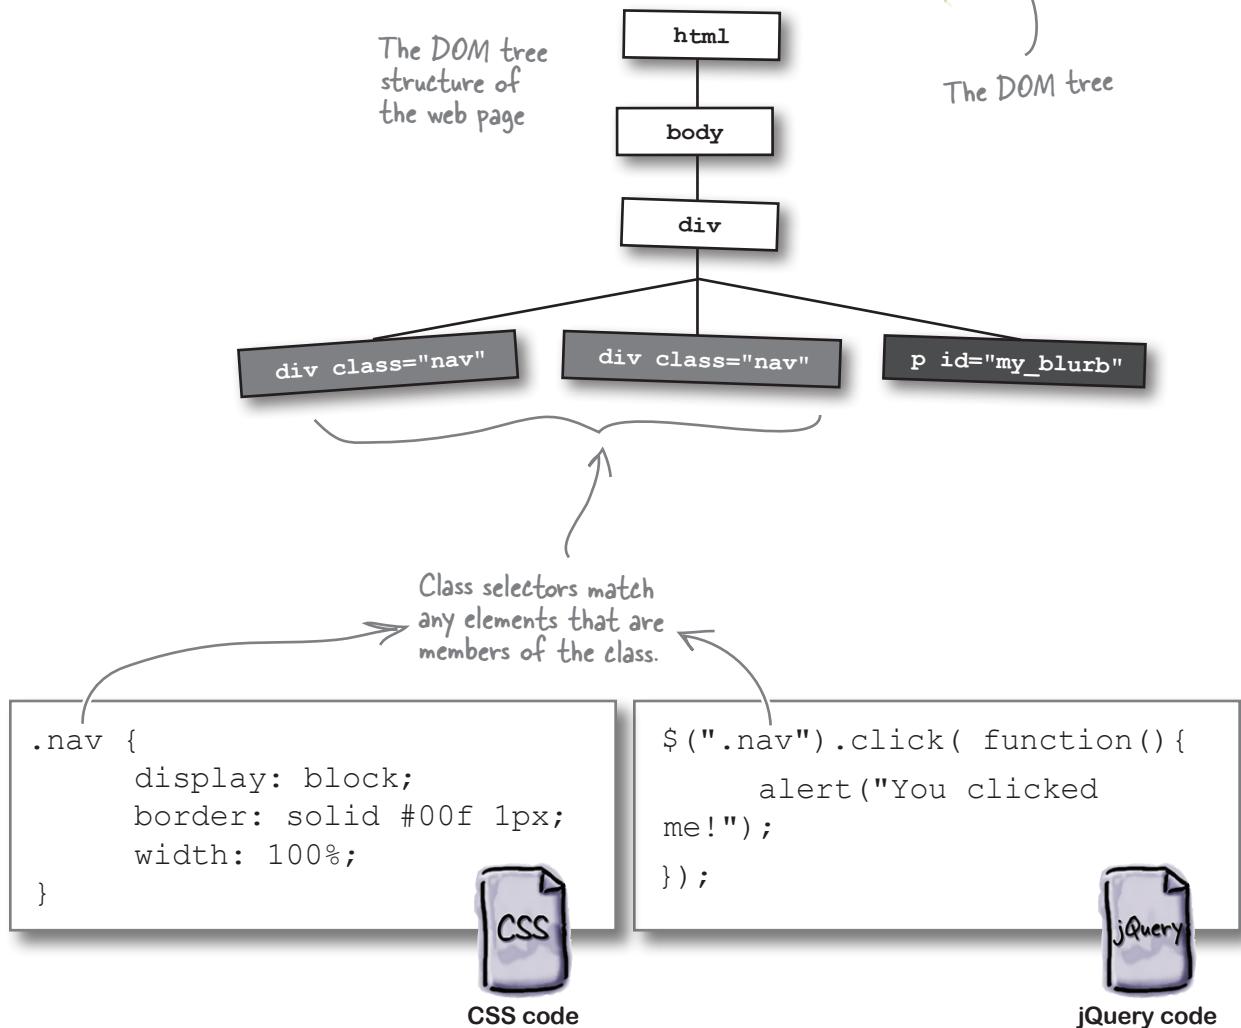

ID-entifying elements

An ID selector is used to identify a single, unique element on a page. In jQuery, as in CSS, the # symbol is used to identify an ID selector. IDs are great when you want to get specific with an element, or when there is only going to be one of that kind of element on the page, like a page header or footer.

ID selectors match one unique element.

```
#my_blurb {
    display: block;
    border: 0px;
    height: 50%;
}
```



CSS code

```
$( "#my_blurb" ).slideToggle("slow");
```



jQuery code



Check the boxes in the appropriate columns to indicate what you can use classes for and what you can use IDs for. Remember, sometimes a class and an ID can do the same job!

	Class	ID
Uniquely identify a single element on the page	<input type="checkbox"/>	<input type="checkbox"/>
Can identify one or more elements on the page	<input type="checkbox"/>	<input type="checkbox"/>
Can be used by a single JavaScript method, cross-browser, to identify an element	<input type="checkbox"/>	<input type="checkbox"/>
Can be used by CSS to apply style to elements	<input type="checkbox"/>	<input type="checkbox"/>
More than one of these can be applied to an element at the same time	<input type="checkbox"/>	<input type="checkbox"/>

who does what solution

Check the boxes in the appropriate columns to indicate what you can use classes for and what you can use IDs for. Remember, sometimes a class and an ID can do the same job!

	Class	ID
Uniquely identify a single element on the page	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Can identify one or more elements on the page	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Can be used by a single JavaScript method, cross-browser, to identify an element	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Can be used by CSS to apply style to elements	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
More than one of these can be applied to an element at the same time	<input checked="" type="checkbox"/>	<input type="checkbox"/>

there are no Dumb Questions

Q: What is a *block-level* element?

A: Block-level elements appear within their parent elements as rectangular objects that do not break across lines. They also appear with block margins, width and height properties that can be set independently of the surrounding elements.

Q: Why is the `<script>` tag at the bottom of the page before the `</body>` tag? I thought it was always supposed to be inside the `<head> </head>` tags?

A: Yes, that used to be (and for some people, still is) the suggested best practice. However, the problem caused by scripts is that they block parallel downloads in the browser. Images from different servers can be downloaded more than two at a time, but once your browser encounters a `<script>` tag, it can no longer download multiple items in parallel. Having them at the bottom means it will help speed up your page load time.

Q: What's up with that whole JavaScript alert thing?

A: The ones we used didn't look that pretty, but alerts are useful for a variety of reasons. Really, a JavaScript alert is a simple window containing a message. The text inside the parentheses is what is shown in the alert message. If you want to show a string of text, enclose the text in quotes. To display variable values, enter the variable name without quotes. You can also combine variable values and text strings by using the + sign. You probably see these all the time and don't think about it, like when you don't fill in a required field in a form. In our case, we're using them more for testing and debugging purposes. There are certainly more robust ways to do that, and we'll get into those in later chapters in the book.

Fireside Chats



Tonight's talk: **CSS and jQuery Selectors discuss their differences.**

CSS Selector:

Howdy, jQuery Selector. I'm relieved that you're here to let everyone know that you owe your entire existence to me.

Well, I've definitely got style, but I've got quite a bit of power. I can change the look and feel of things in the blink of an eye.

And what is it you can do that I can't do?

Hello, fancy jargon! What do you mean, you "return" elements?

But I can affect all the elements I select, too. I can change all of their background colors to fuchsia if I want. And don't forget that my engine gives you all the power you have.

I've got to admit, that does sound pretty cool.

jQuery Selector:

Uh, thanks, I guess. I certainly get a lot of my power from your approach to picking out elements. However, I'm more about behavior than style. You just sit around and make things look nice, while I actually get some serious action going.

I won't argue about your usefulness on a page. You've got your job, which is changing how elements look, and I've got mine, which is very different.

My job is to find elements and return them so that a method can do something to the returned set.

Say someone uses me to select all the paragraph elements on the page. I grab that set of paragraphs and hold them so that a jQuery method can do whatever it wants to them.


Your selector engine gives me a good chunk of power, but another chunk of my power comes from JavaScript. Don't forget the "Query" part of my name. I can actually ask the browser for an element, hold on to that element, and pass it off to a jQuery method to make it fly across the page or even disappear.

Yeah, and you're right that I couldn't do it without you.

Wire up your web page

Classes and IDs are common ground for the three layers of a web page that we looked at in Chapter 1: structure, style, and script. Selectors are where those layers get *wired* together so they can all work in concert. HTML provides the building blocks (i.e., elements and their attributes), or **structure** of the web page. CSS provides the **style**, or the presentation and position of those elements. JavaScript and jQuery provide the **script** that controls the behavior or function of those elements.

Imagine that we have a class called `slideshow` for an image we want to run the `slideUp` method on:

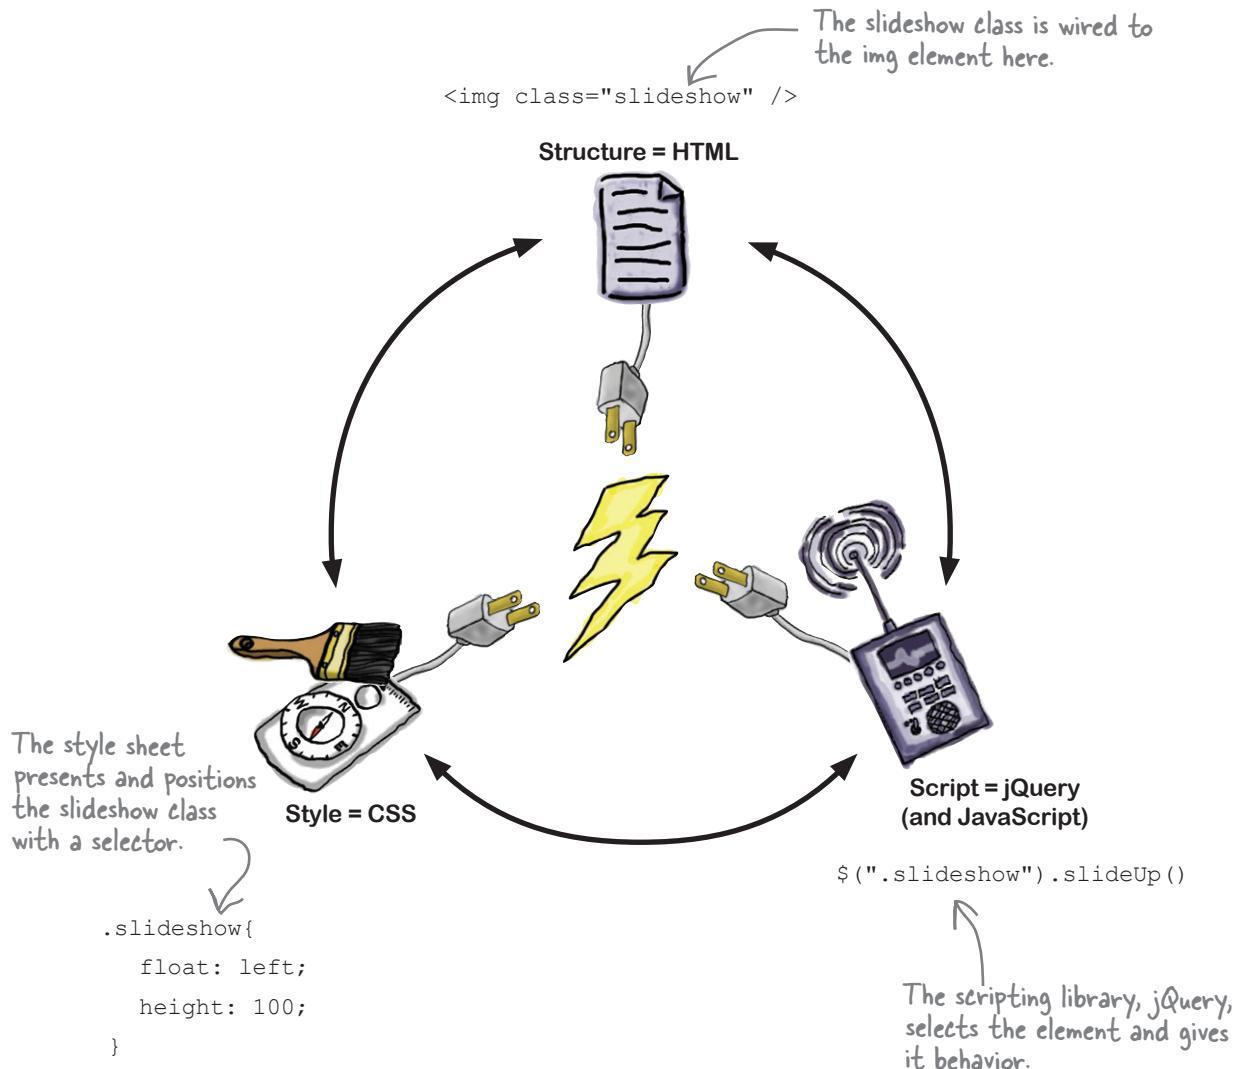



Update the structure, style, and script in your page to make only the four image div sections clickable. In the CSS file, create a CSS class (called `guess_box`) and apply it to the `html` and the script. It looks like one of our `div` elements lost its ID attribute too. Can you figure out which one and put it back?

```
<html>
  <head>
    <title>Jump for Joy</title>
    <link href="styles/my_style.css" rel="stylesheet">
  </head>
  <body>
    <div id="header">
      <h2>Jump for Joy Sale</h2>
    </div>
    <div .....>
      <div .....></div>
      <div .....></div>
      <div .....></div>
      <div .....></div>
    </div>
    <script src="scripts/jquery-1.6.2.min.js"></script>
    <script>
      $(document).ready(function() {
        $(".....").click(function() {
          alert("You clicked me.");
        });
      });
    </script>
  </body>
</html>
```

```
div{
  float:left;
  height:245px;
  text-align:left;
  border: solid #000 3px;
}

#header{
  width:100%;
  border: 0px;
  height:50px;
}

#main{
  background-color: grey;
  height: 500px;
}
```

.....
.....
height 245px;
.....



my_style.css



index.html

sharpen solution

Add the `guess_box` class to all the `div` elements that will be used to hide the discount code. Also, update our selector to use this class, and add it into our CSS file. And it was the main `div` element that needed to get its ID attribute back.

```
<html>
  <head>
    <title>Jump for Joy</title>
    <link href="styles/my_style.css" rel="stylesheet">
  </head>
  <body>
    <div id="header">
      <h2>Jump for Joy Sale</h2>
    </div>
    <div id="main">
      <div class="guess_box" ></div>
      <div class="guess_box" ></div>
      <div class="guess_box" ></div>
      <div class="guess_box" ></div>
    </div>
    <script src="scripts/jquery-1.6.2.min.js"></script>
    <script>
      $(document).ready(function() {
        $("guess_box").click(function() {
          alert("You clicked me.");
        });
      });
    </script>
  </body>
</html>
```

```
div{
  float:left;
  height:245px;
  text-align:left;
  border: solid #000 3px;
}

#header{
  width:100%;
  border: 0px;
  height:50px;
}

#main{
  background-color: grey;
  height: 500px;
}

.guess_box{
  height 245px;
}
```



my_style.css

Attach the click method to the `guess_box` class only and not all `div` elements.




index.html

Here's where you add a class for the guess boxes. The height matches the height of the images in the boxes, so everything lines up nicely.

Meanwhile, back to our list

Let's have a look at our requirements to-do list to see where we are on building everything that Emily asked for:

- The page should have four sections with one of four “jump for joy” images per section.
- The sections should be clickable.
- We need a message that says “Your Discount is” along with a random discount amount (between 5 and 10 percent).
- When a user clicks on one of the sections, the message should appear below the image in that section.
- If a user clicks again, get rid of the last message and make a new one.

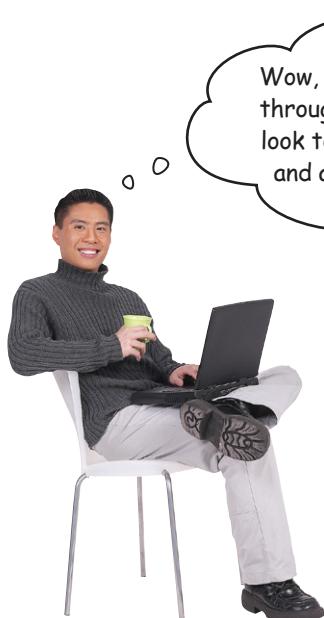

Wow, that was easy. We're almost halfway through our list already. The next few things don't look too bad either. We have to create some text and a number. How hard can that be?

Actually, not very hard.

There are several things involved in displaying a message to the user. Don't forget, it could be a different message for each user who visits the site.



You're going to have to create a message and store it somewhere to display it to your visitors. How do you think you can do that?

Creating some storage space

The next requirement on our list is to show some text that will stay the same as our script runs: “Your Discount is”. But beside that, we need to hold a number that will change or **vary** depending on the random amount. We need a way to carry that information throughout the script—our page needs a way to store that information. Storing information (or data) that varies is a perfect job for **variables**. When we want variables in jQuery, we use JavaScript variables.

The var keyword lets you declare a variable.

After the var keyword, you name your variable.

This is how we set the value of the variable in code.

```
var pts = 250;
```

When we declare a variable, the JavaScript interpreter gives us some browser memory in which we can store your data.



We name a variable so that we can reference it later in our script.



We place a value into our variable using an equals sign.




Now, whenever we want to get the data we stored, we just ask for it by its variable name.

If you want to know more about JavaScript variables and the math functions, pick up a copy of Head First JavaScript!

Mix things up with concatenation

For many of our jQuery scripts, we'll be storing different kinds of data: numbers, text, or true or false values. In many cases, especially when we need to display different messages to our visitors, we'll be mixing HTML with these other kinds of data, which gives our web pages even more power. So, how do we go about combining our variables with other values? We use **concatenation**. Imagine you have a video game where you have a variable called pts that stores the highest score, and you need to display it to the winner:

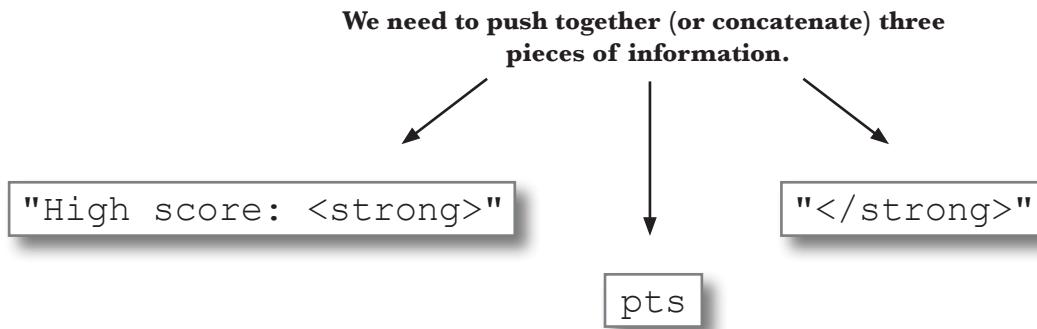

Which give us:

```
var msg = "High score: <strong>" + pts + "</strong>"
```

When setting a text or HTML value, we use quotes.

We can put HTML tags into variables, too!

When referencing a variable, we use its name without quotes.

The "+" character lets you concatenate (or put together) text, numbers, variables, and much more.



We'll give you the JavaScript code to make a variable called discount that holds a random number from 5 to 10. Write the code for a discount_msg variable that shows the message and the random variable. Make sure the discount message appears inside a paragraph element.

```
var discount = Math.floor((Math.random() * 5) + 5);
```

exercise solution**Exercise Solution**

We'll give you the JavaScript code to make a variable called `discount` that holds a random number from 5 to 10. Write the code for a `discount_msg` variable that shows the message and the random variable. Make sure the discount message appears inside a paragraph element.

Don't worry, we'll explain the math and random function in Chapter 3.

```
var discount = Math.floor((Math.random()*5) + 5);
var discount_msg = "<p>Your Discount is "+ discount +"%</p>";
```

Meanwhile, back in the code...

Now that you've got a variable set up to store your concatenated discount message, you just need to update what's in between your `<script>` tags, so let's focus there.



```
<script>
$(document).ready(function() {
    $(".guess_box").click( function() {
        var discount = Math.floor((Math.random()*5) + 5);
        var discount_msg = "<p>Your Discount is "+ discount +"%</p>";
        alert(discount);
    });
});
</script>
```

Create new
JavaScript
variables.

We put the discount variable
in our alert to make sure it's
doing what we want it to.



Insert your message with append

You've got your message ready to go, but how do you display it on the page below the image that's been clicked? If you think of adding a new message as *inserting* it into the page, jQuery provides several ways to insert content into an existing element. We'll cover some more useful ones in more depth in Chapter 4, but for now, let's just look quickly at the `append` action.

```
<p>jQuery lets me add stuff onto my web page  
without having to reload it.</p>
```



This jQuery statement is telling the JS interpreter to append the content in quotes to all paragraph elements.

```
$("p").append(" <strong>Like me, for instance.</strong>");
```



If you run this in your script, the text in bold appears on your page.



jQuery lets me add stuff onto my web page without having to reload it.

Like me, for instance.

The resulting HTML as seen in the DOM

```
<p>jQuery lets me add stuff onto my web page  
without having to reload it.</p> <strong>Like me,  
for instance.</strong>
```



With what you know about selectors already and your new `append` powers, write the code to append the `discount` variable to your `guess_box` element.

exercise solution**Exercise Solution**

Adding a new message to a web page is really just this simple!

```
$(".guess_box").append(discount_msg);
```

append is a jQuery method. You
use methods to do stuff in jQuery.

^{there are no} **Dumb Questions**

Q: Are there any restrictions on what I can use for class names?

A: A class name must begin with an underscore (_), a dash (-), or a letter (a–z), followed by any number of dashes, underscores, letters, or numbers. There is a catch: if the first character is a dash, the second character must be a letter or underscore, and the name must be at least two characters long.

Q: Are there any restrictions on what I can call variables?

A: Yes! Variables cannot begin with numbers. Also, they cannot contain any mathematical operators (+ * - ^ / ! \), spaces, or punctuation marks. They can, however, contain underscores. They cannot be named after any JavaScript keywords (like window, open, array, string, location), and are case sensitive.

Q: How many classes can I give to elements?

A: There is no defined maximum, according to the standards, but the number in real-world usage is around 2,000 classes per element.

Q: Is there a way to select every element on the page?

A: Yes! Simply pass in a "*" into the jQuery wrapper to get all the elements.

Q: If I give my elements a class or ID, without any style, will that have any effect on how they look in a browser?

A: No, there are no browser defaults for classes or IDs. Some browsers do treat elements differently, but a class or ID without any CSS applied to it will not have any effect.



Test DRIVE

Open the page up in your favorite browser to make sure everything's working. Pay special attention to the alert to make sure that the `discount` variable is set up properly.

Jump for Joy Sale

Your Discount is 6%

Your Discount is 6%

Your Discount is 6%

Your Discount is 6%

When someone clicks, the discount message is added to every div that's in the `guess_box` class.

Everything works great, but...

The `discount` variable is generating a random number and appends the message to our page the way we expected, but it has an unexpected side effect: the discount shows up over and over again in every `div`.

That's not what we wanted to happen. So what went wrong?

```
<script>
  $(document).ready(function() {
    $(".guess_box").click( function() {
      var discount = Math.floor((Math.random()*5) + 5);
      var discount_msg = "<p>Your Discount is "+discount+"%</p>";
      alert(discount_msg);
      $(".guess_box").append(discount_msg);
    });
  });
</script>
```

This applied the `click` method so that each member of the `guess_box` class is clickable.

This is just to test the variable.

Our selector is specific enough to grab a class, but we end up affecting all the divs in the class


We need to append the `discount` variable **only** to the individual `div` that's clicked. So, how do we select only the one that was clicked and append the `discount` variable to that one?

in an ideal world



Give me `$(this)` one

Throughout this chapter, we've been looking at jQuery selectors and how they return elements that jQuery methods use. And very often, we want to be really specific about which element we're selecting. When it comes to specificity, the simplest selector to write is `$(this)`. (All you have to remember is the pronoun "this," after all.) The `$(this)` selector gives us an easy way to point to the *current* element.

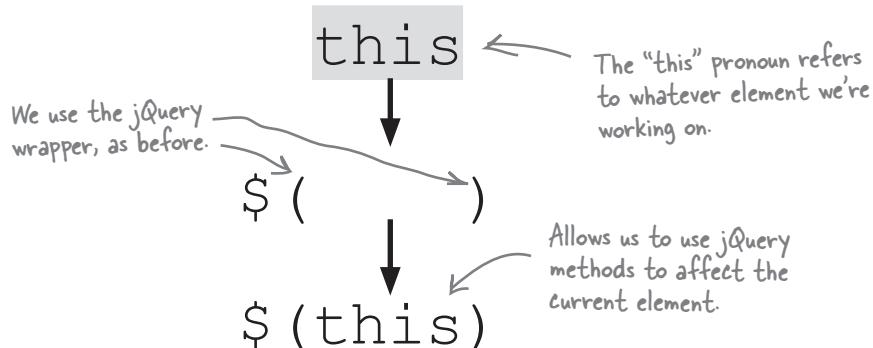

It's important to think about `$(this)` as *context-dependent*. In other words, `$(this)` means different things depending on where or when you use it. One of the **best** places to use it is within a function that runs when a jQuery method is called:

```

$( "#myImg" ).click( function() {
    $(this).slideUp();
})
    
```

Here's the selector to access our element.

Call a jQuery method.

Run this function when the method is called.

Both click and slideUp are jQuery methods. You know you're dealing with a method or a function when you see the parentheses.

Access the current element (#myImg, in this case) inside our function.

A small illustration of a colorful computer mouse sits to the left of the code snippet.



Geek Bits

this vs. `$(this)`

In JavaScript, "this" refers to whatever DOM element we want to work with in our code. Adding the `$()` to `this`, giving us `$(this)`, allows us to interact with our DOM element using jQuery methods.

\$(this) is awesome

Put ***\$(this)*** to work

Let's see if ***\$(this)*** can help us solve our problem. Update your code to use ***\$(this)***, as shown in bold below.

```
<script type="text/javascript">
$(document).ready(function() {

    $(".guess_box").click( function() {

        var discount = Math.floor((Math.random() *5) + 5);
        var discount_msg = "<p>Your Discount is "+ discount +"%</p>";
        alert(discount_msg);
        $(this).append(discount_msg);

    });
}); //end doc ready
</script>
```

Now we're telling our guess boxes to append the discount code only to the one clicked.




index.html



Test Drive

Open the page up in your favorite browser to make sure everything's working. Pay special attention to the alert to make sure that we got the `discount` variable right. Make sure to click several times to check that the random number concatenated into the `discount` variable works too.

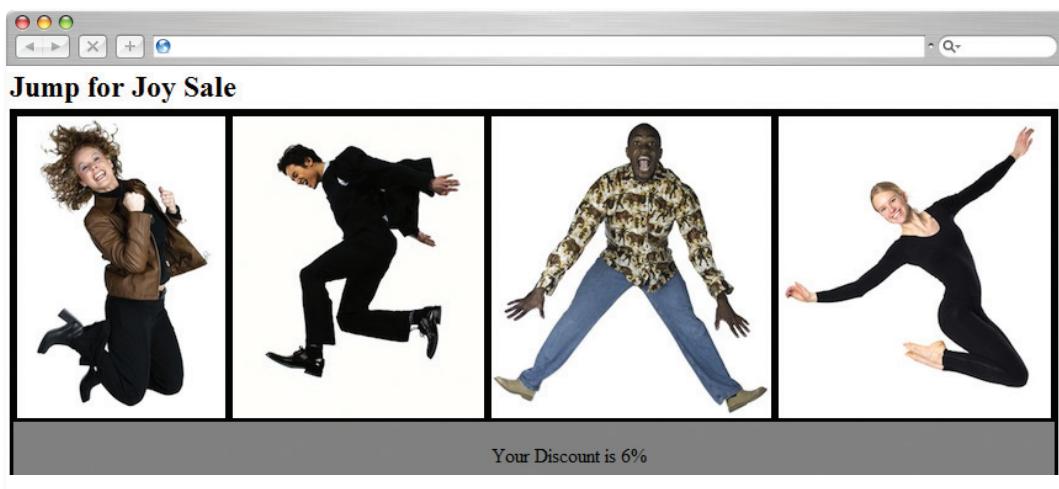



Great question!

That leads us right to the last step on our to-do list:

- The page should have four sections with one of four “jump for joy” images per section.
- The sections should be clickable.
- We need a message that says “Your Discount is” along with a random discount amount (between 5 and 10 percent).
- When a user clicks on one of the sections, the message should appear below the image in that section.
- If a user clicks again, get rid of the last message and make a new one.



How do you think you can remove the last message?


presto, change

Good riddance with remove

So how do we get rid of the last message and make a new one? Use the `remove` method. The `remove` method allows us to take an element, or a group of elements, off of the page. Let's have a look at a really simple page with a list and a button.

1

Here's what it looks like in the browser, and the HTML that creates it.

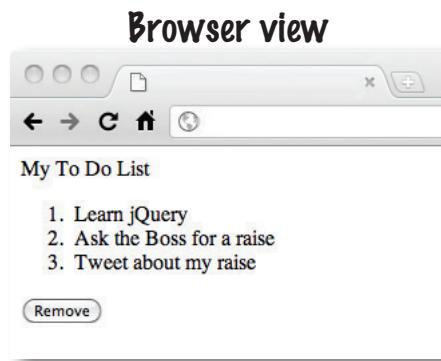

HTML view

```
<div>My To Do List</div>
<ol>
  <li>Learn jQuery</li>
  <li>Ask the Boss for a raise</li>
  <li>Tweet about my raise</li>
</ol>
<button id="btnRemove">
```

2


And here's the code for the button, which will remove all the list items from your list:

```
$ ("#btnRemove") .click(function() {
  $("li") .remove();
});
```

remove is another
jQuery method. Think
of a jQuery method as
a verb—it's all about
web page action.

3

Looking again at the page in the browser and the HTML—after jQuery is finished—we can see that all our list items are gone, even in the HTML!

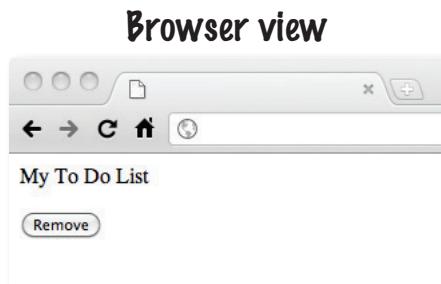

HTML view

```
<div>My To Do List</div>
<ol>
</ol>
<button id="btnRemove">
```



Which selector do you need to use to remove just the discount message from the page?

Dig down with descendant selectors

Descendant selectors are yet another selector we can use with jQuery, and they happen to fit our situation perfectly. With descendant selectors, we can specify *relationships between elements*. We can select children, parents, or siblings.

The selector on the left is the parent.

`$("div p")`

Leave a space between the parent element name and child element name.



The selector on the right is the child.


Here's how you select the child of a child.

`$("div div p")`



This returns all div elements that are children of a div element.

`$("div div")`

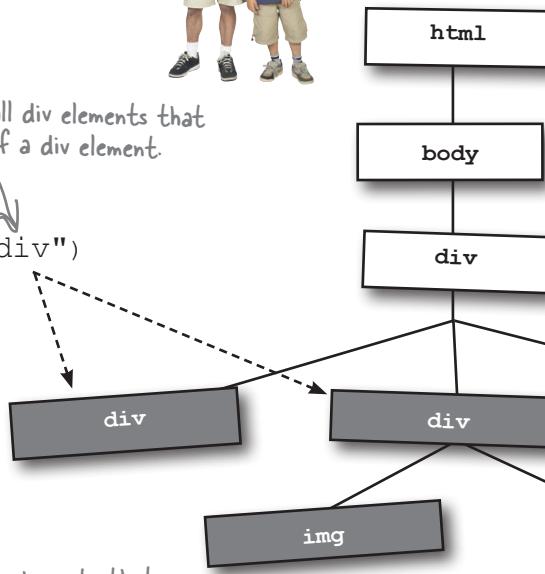

Grabs all img elements that are children of the children of a div element

`$("div div img")`

(Would these be grand-divs then?)

Grabs all p elements that are children of a div element

`$("div p")`

When you combine class and ID selectors with descendant selectors, you can really get specific, which works great on a complex HTML page.

`$("div p#my_blurb")`

Sharpen your pencil



Write the statement that will remove the last paragraph in the *Jump for Joy* DOM using a descendant selector.


sharpen solution

Sharpen your pencil

Solution

Start by using the `.guess_box` class selector, followed by a descendant `p` selector to access the paragraph you added. Then, use the `remove` method to take all the `p` elements in any element with the class of `guess_box` off the page.

```
$(".guess_box p").remove();
```

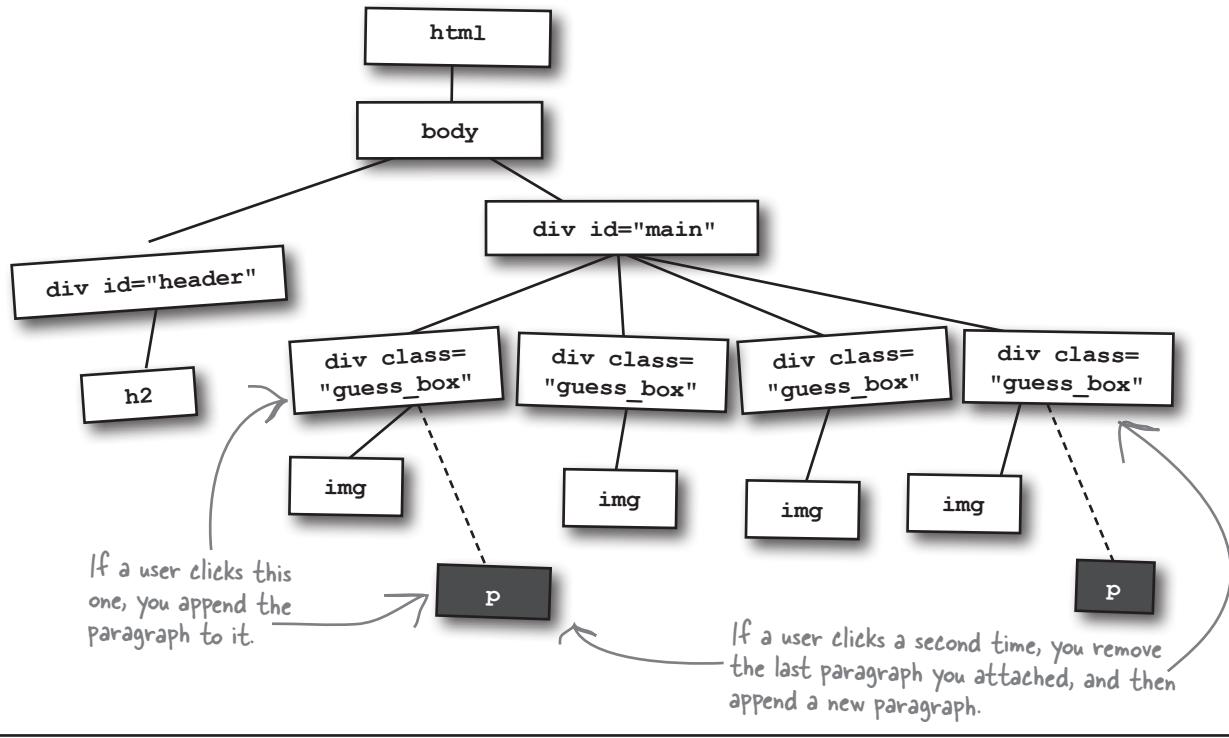

Yes, the order in which you add or remove your elements is important.

You can't remove an element before you add it, and there's no point removing an element just after you add it, right?



Your job is to decide where the `remove` statement should go. Write the statement on the line numbered 1, 2, or 3 below. Then explain why you put it there. Think about *when* you need to remove the paragraph, and use the process of elimination to pick the correct place to do that.

```
<script>
$(document).ready(function() {
    1. .....
    $(".guess_box").click( function() {
        2. .....
        var discount = Math.floor((Math.random()*5) + 5);
        var discount_msg = "<p>Your Discount is "+ discount +"%</p>";
        alert(discount_msg);
        $(this).append(discount_msg);

        3. .....
    });
});
</script>
```



index.html

Why I think the statement goes there:

.....
.....
.....
.....
.....

sharpen solution


Sharpen your pencil Solution

Your job is to decide where the `remove` statement should go. Write the statement on the line numbered 1, 2, or 3 below. Then explain why you put it there. Think about *when* you need to remove the paragraph, and use the process of elimination to pick the correct place to do that.

```
<script>
$(document).ready(function() {
    1. .....
    $(".guess_box").click( function() {
        2. .....
        var discount = Math.floor((Math.random()*5) + 5);
        var discount_msg = "<p>Your Discount is "+ discount +"%</p>";
        alert(discount_msg);
        $(this).append(discount_msg);
    3. .....
    });
});
</script>
```



Why I think the statement goes there:

The remove statement can't go on line 1 because it would be outside of the click function for the guess box. The statement can't go on line 3 because that would remove what I just appended. I want to remove the last discount message before generating a new one, so I'll put it as the first line of the code block (inside the curly braces) for the `guess_box` click.



Watch it!

The order and timing of when you make your jQuery calls is important.

This is true especially when you are giving important information to your visitors and removing it again. We'll look more into the timing and order of on-screen effects in Chapter 5.

there are no Dumb Questions

Q: Sometimes, after calling the `remove` method, I still see the elements I removed in the source of the page. Why is that?

A: Oftentimes, browsers actually make a fresh call to the server to get the source of the page when you use the View Source option. Using DOM inspectors, like Chrome Developer tools or Firebug for Firefox, should show you the DOM as it is displayed on the page.

Q: What do the `Math.floor` and `Math.random` methods mean?

A: The `floor` method rounds a number down to the nearest integer and returns the result. The `random` method returns a random number between 0 and 1. When we multiply it by a number, we guarantee getting a number between 0 and whatever number we multiply by.

Q: Where did `this` come from?

A: In many object-oriented programming languages, `this` (or `self`) is a keyword that can be used in instance methods to refer to the object on which the currently executing method has been invoked.

Q: So I can display a random discount only when someone clicks one of the images, and remove it when he clicks another one. But really, that's not all we need to do to make this work for real, right?


A: You're right, you've got us there. This is only the first piece of the puzzle, really. People are going to need to have that code carry over when they check out to buy their photos. To pass the discount code to a shopping cart, you'll need to send the code back to the server for processing. We'll work on that kind of functionality in more detail in Chapters 8–10.

test drive



Test Drive

Add the line of code you just wrote to your *index.html* file. Then, open the page up in your favorite browser to make sure everything's working. Click several times to check that the random number concatenated into the `discount` variable works too, and that the old discount values are removed properly, before appending the new code.

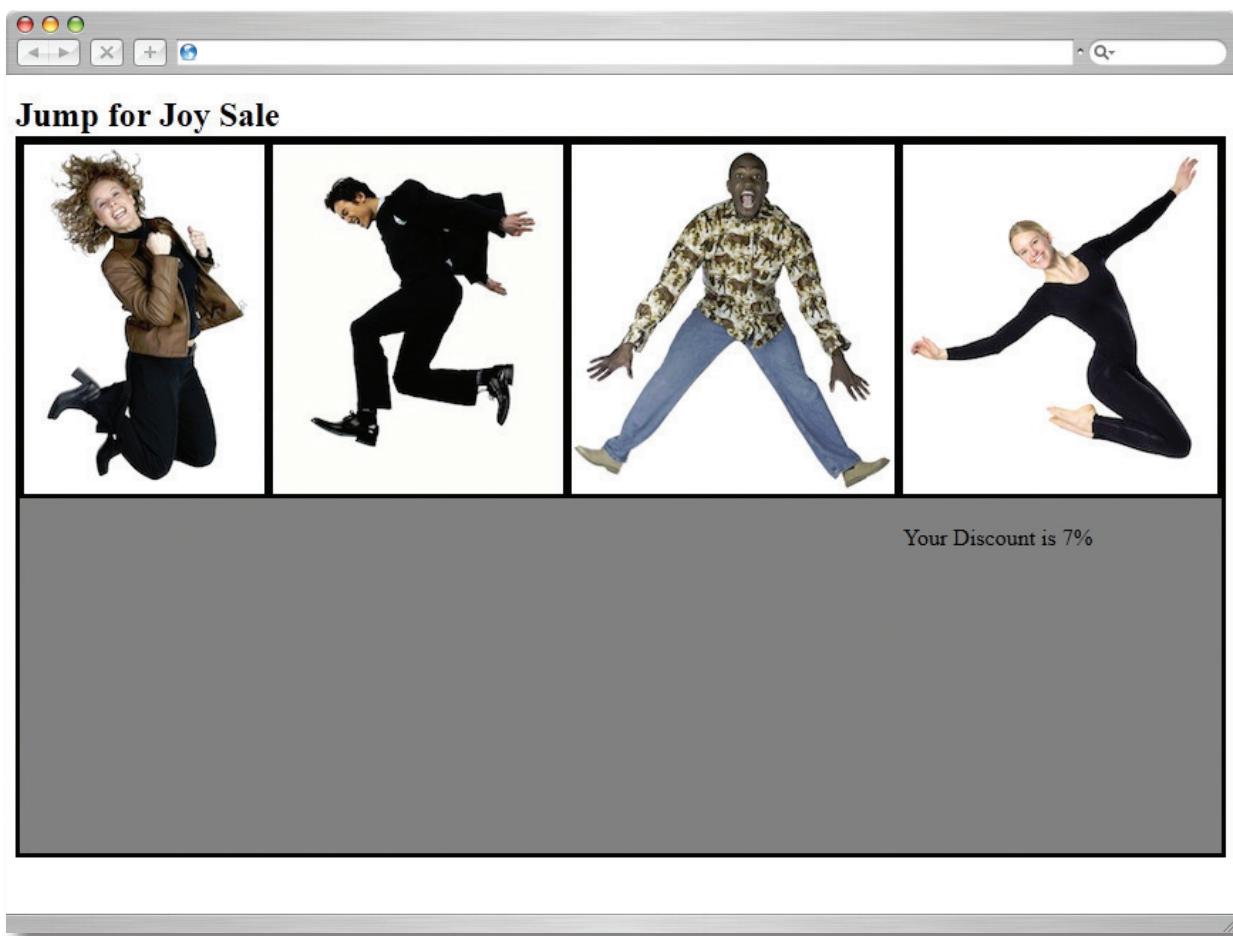

Your turn to jump for joy

Congratulations! You nailed the requirements and made the campaign work.

- The page should have four sections with one of four “jump for joy” images per section.
- The sections should be clickable.
- We need a message that says “Your Discount is” along with a random discount amount (between 5 and 10 percent).
- When a user clicks on one of the sections, the message should appear below the image in that section.
- If a user clicks again, get rid of the last message and make a new one.

From: **Emily**
Subject: **Re: Jump for Joy Promotion!**

Thank you so much for doing this for me. My site is so much better.

I hope people enjoy my photos as much as I enjoy my new page!

--

Emily

> PS. I've attached a self-portrait of me with my photo gear when I saw the new web page... No prizes for guessing what I'm doing!



your jquery toolbox



Your jQuery Toolbox

You've got Chapter 2 under your belt
and now you've added the basics of
jQuery selectors and jQuery methods to
your toolbox.

`$(this)`

Selects the “current” element.

The meaning of `$(this)` will change
throughout your code, depending
on where it is being referenced.

jQuery methods

`method` — A jQuery method is
reusable code defined in the jQuery
library. You use methods to do
stuff in jQuery and in JavaScript.
Think of a method as a verb—it's
all about web page action.

`.append` — Inserts the specified
content into the DOM. It gets
added to the end of whatever
element calls it.

`.remove` — Takes elements out of
the DOM.

Selectors

`$(this)` — Selects the current element.

`$("div")` — Selects all the div elements on
the page.

`$("div p")` — Selects all the p elements
that are directly inside div elements.

`$(".my_class")` — Selects all the elements
with the my_class class.

`$("div.my_class")` — Selects only the divs
that have the my_class class. (Different
types of elements can share a class.)

`$("#my_id")` — Selects the element that
has the ID of my_id.

3 jQuery events and functions

Making things happen on your page



jQuery makes it easy to add action and interactivity to any web page. In this chapter, we'll look at making your page react when people interact with it. Making your code run in response to user actions takes your website to a whole new level. We'll also look at building reusable functions so you can write the code once and use it multiple times.

Your jQuery skillz are in demand again

Emily was pleased with the work you did for her Jump for Joy promotion, but she's met with her accountant and now has a few changes she'd like you to make.

**From: Jump for Joy
Subject: RE: Jump for Joy Promotion**

Hey,

You did a great job of making the web promotion work! I met with my accountant and crunched some numbers on the success of the promotion.

My accountant suggested some changes to the app that should bring in more sales.

Visitors should still get four options to pick from for the chance to receive a discount. However, now let's make it the same discount amount each time. My accountant recommends offering 20% off visitors' purchases before they check out. That should be more enticing for them.


Visitors should only get one chance to find the discount code, which should be in a random square for each visit. If a visitor finds the discount code when she clicks, show it to her on the screen before she proceeds. Otherwise, show her the box where the code was hiding.

Think you can do this as well as you did the first part?

--


Emily Saunders
jumpforjoyphotos.hg

Emily's taken some photos of her accountant for his profile, but she couldn't get him to jump for joy. Can your changes to the site help?

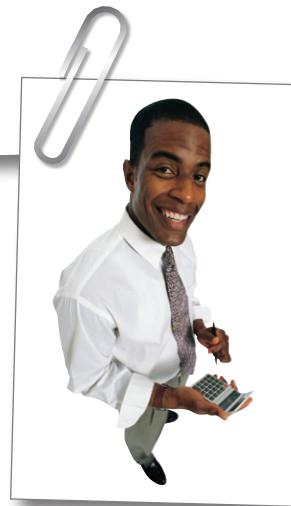

The money man has a point...

Making the promotion limited to only one square keeps Emily from having to hand out so many discount codes, and it keeps people clicking around the site. Seems like these new features are *all* about clicking...

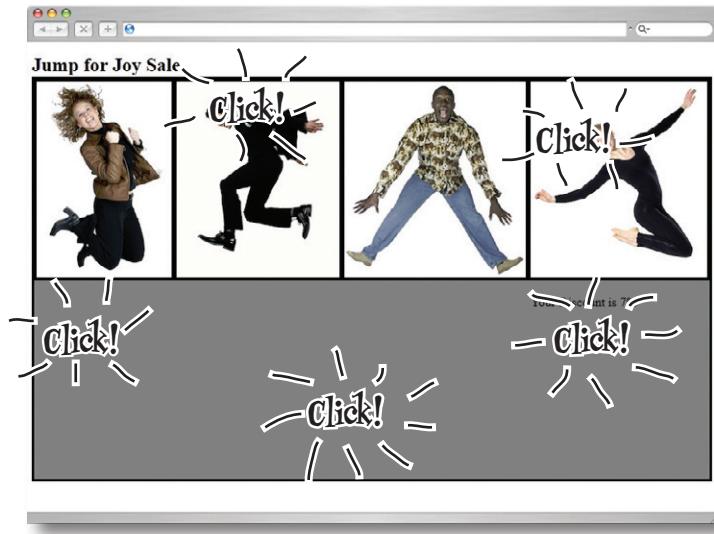

Sharpen your pencil

It's time for another list of requirements. You know what to do: look at Emily's email again and pick out all the new features she's asking for. Write out in plain English what you think each feature is.

Requirements:

sharpen solution!

Sharpen your pencil



Solution



It's time for another list of requirements. You know what to do: look at Emily's email again and pick out all the new features she's asking for. Write out in plain English what you think each feature is. Here's our solution.

Requirements:

- The discount should only be in one of the four image boxes, and the images should be in a different (random) box each time the page loads.
- Visitors should only get one chance to find the discount when they load the page. So we'll need to stop them from clicking more than once in order to find a better discount.
- After the visitor has made his guess and clicked on a box, the answer should be revealed as to whether or not he got it right. If he chose correctly, show him the discount so he can apply it to his order.
- There will be a standard 20% discount, instead of a variable one. So instead of a percentage, give visitors a discount code.

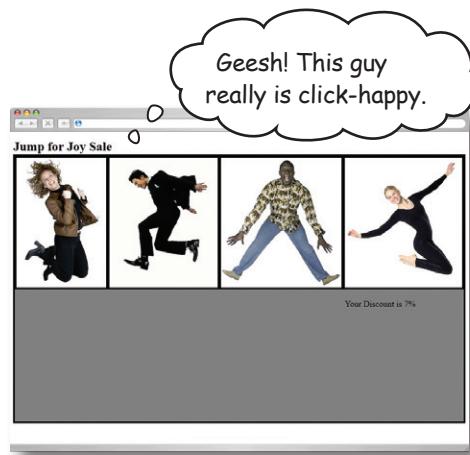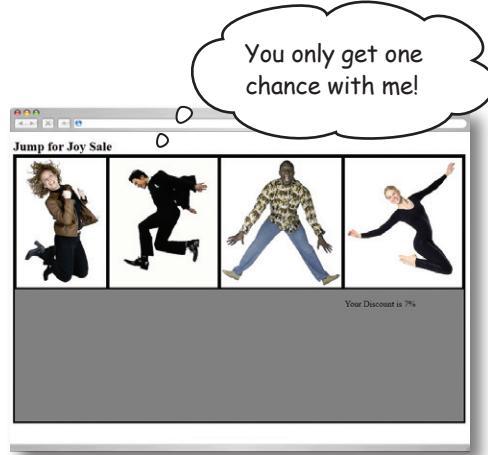
What our solution currently does**What we need our solution to do**

You know how to add a click to your page. But how do you make sure a user can only do it once?

You also learned in the previous chapters how to run code when a click gets called. Can you think of a way we could use that to help us complete our solution?

Making your page eventful

The Jump for Joy application is all about the clicks. In jQuery and JavaScript, a click is referred to as an *event* (there are plenty of other events, but for our purposes, we'll just focus on clicks for now). An event is a mechanism that allows you to run a piece of code when something happens on the page (like a user clicking a button). The code that gets run is a *function*, and functions allow you to make your jQuery more efficient and reusable. We'll look more closely at functions in a minute, but for now, let's look at how a click event really works.

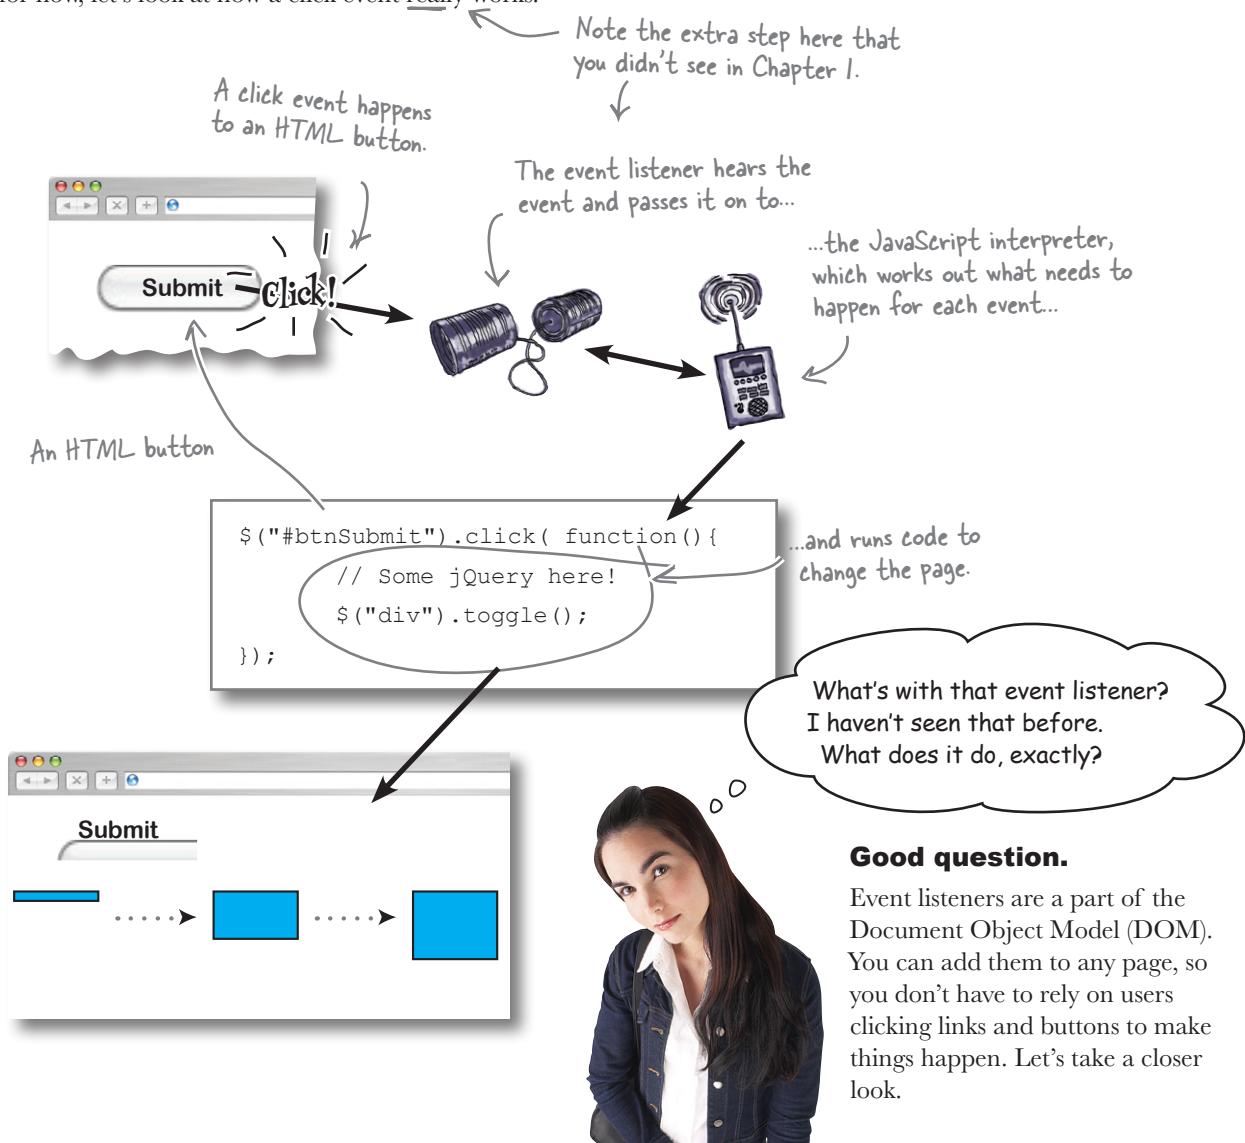


Behind the scenes of an event listener

Event listeners are the browser's way of paying attention to what a person does on a page, and then telling the JavaScript interpreter if it needs to do something or not.

jQuery gives us very easy ways to add event listeners to *any element* on the page, so users are no longer just clicking on links and buttons!

```
An element with the ID of showMessage. → $("#showMessage").click(function() {
    alert('You Clicked Me!'); ← Run this code.
});
```

Add a click event.

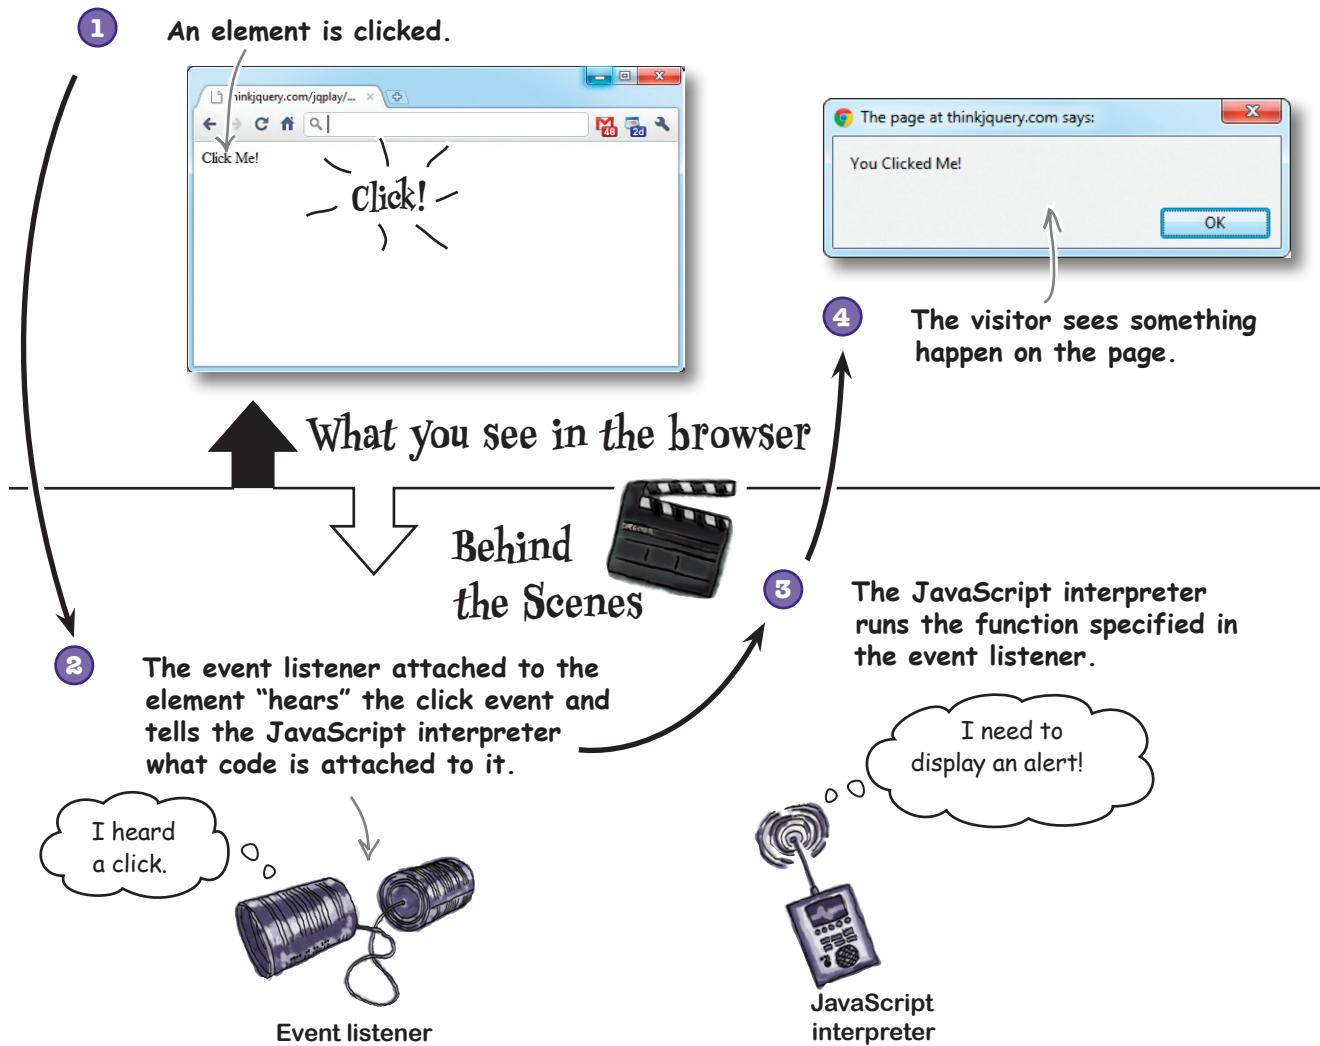

Binding an event

When we add an event to an element, we call this *binding* an event to that element. When we do this, the event listener knows to tell the JavaScript interpreter what function to call.

There are two ways of binding events to elements.

Method 1

We use this method to add events to elements as the page is getting loaded.

This is often known as the *convenience* method.

```
$ ("#myElement").click( function() {
    alert($(this).text());
});
```

Both methods add a click event listener for our element with the ID of myElement.

```
$ ("#myElement").bind('click', function() {
    alert($(this).text());
});
```



Watch it!


Method 1—the convenience method—is simply a shortcut for Method 2, but only when the DOM elements exist already.


jQuery offers many shortcuts like this to help you keep your code cleaner. They are known as *convenience methods* because they are included solely for ease of use—but they do have limits. You'll want to use Method 2 to add events to new DOM elements that you create within your code, like if you added a new clickable image, or a new item to a list that you want the user to interact with.

getting trigger-happy

Triggering events

Events can be triggered by a wide variety of things on any given page. In fact, your entire browser is eventful, and pretty much any part of it can trigger events!

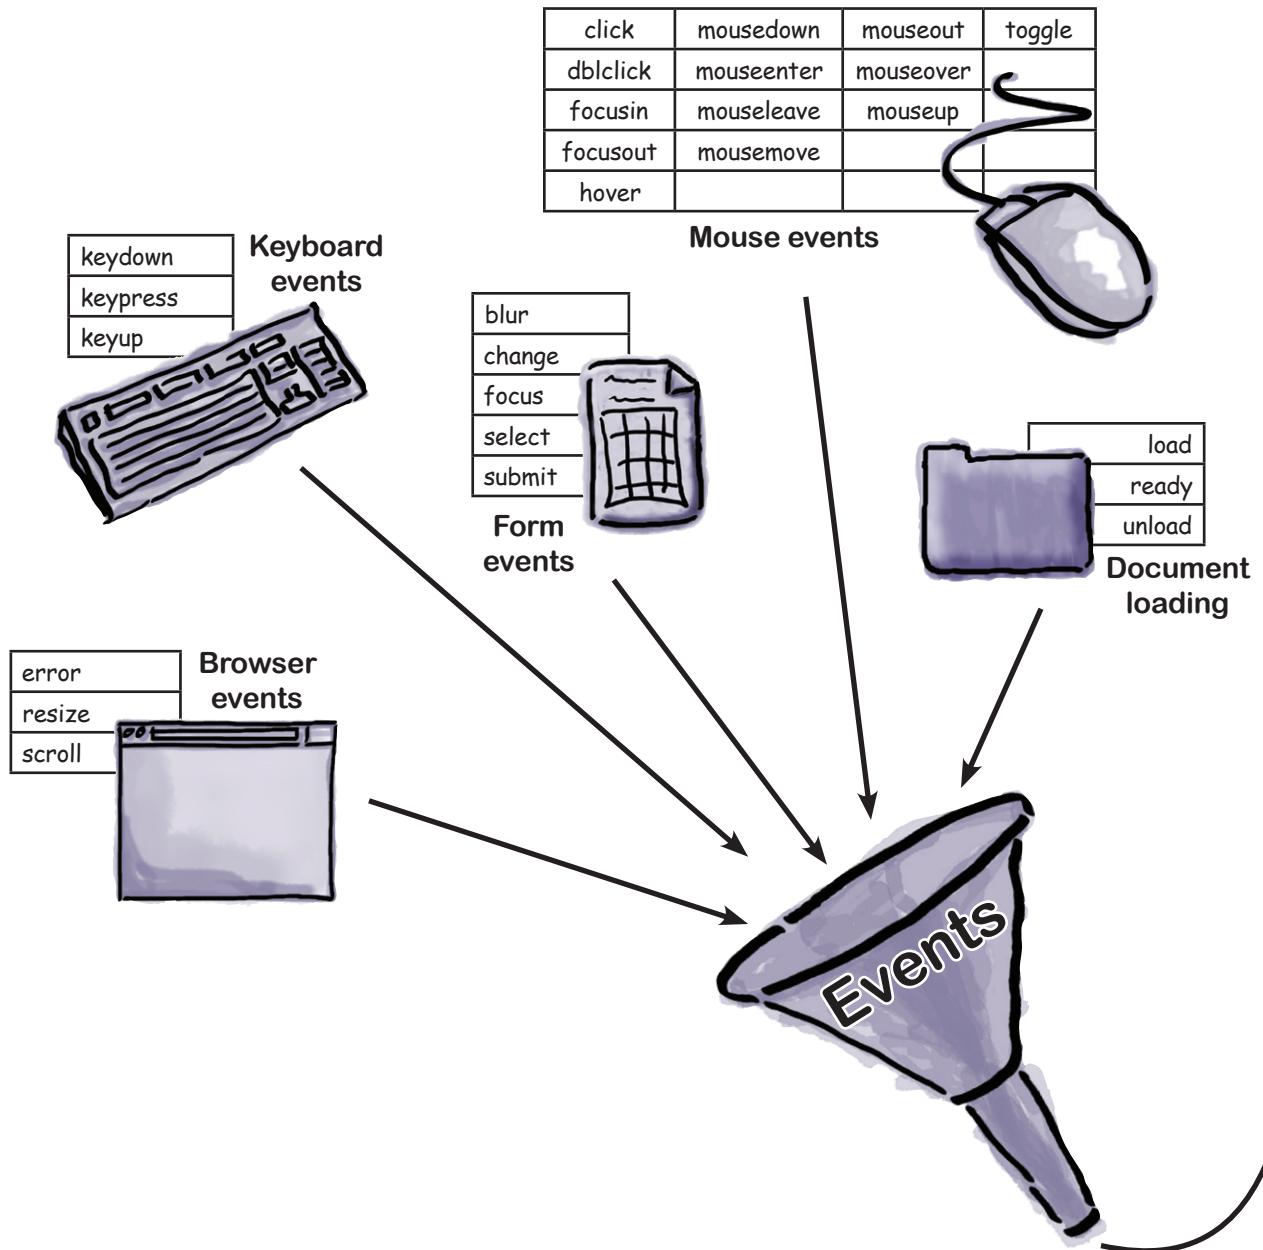

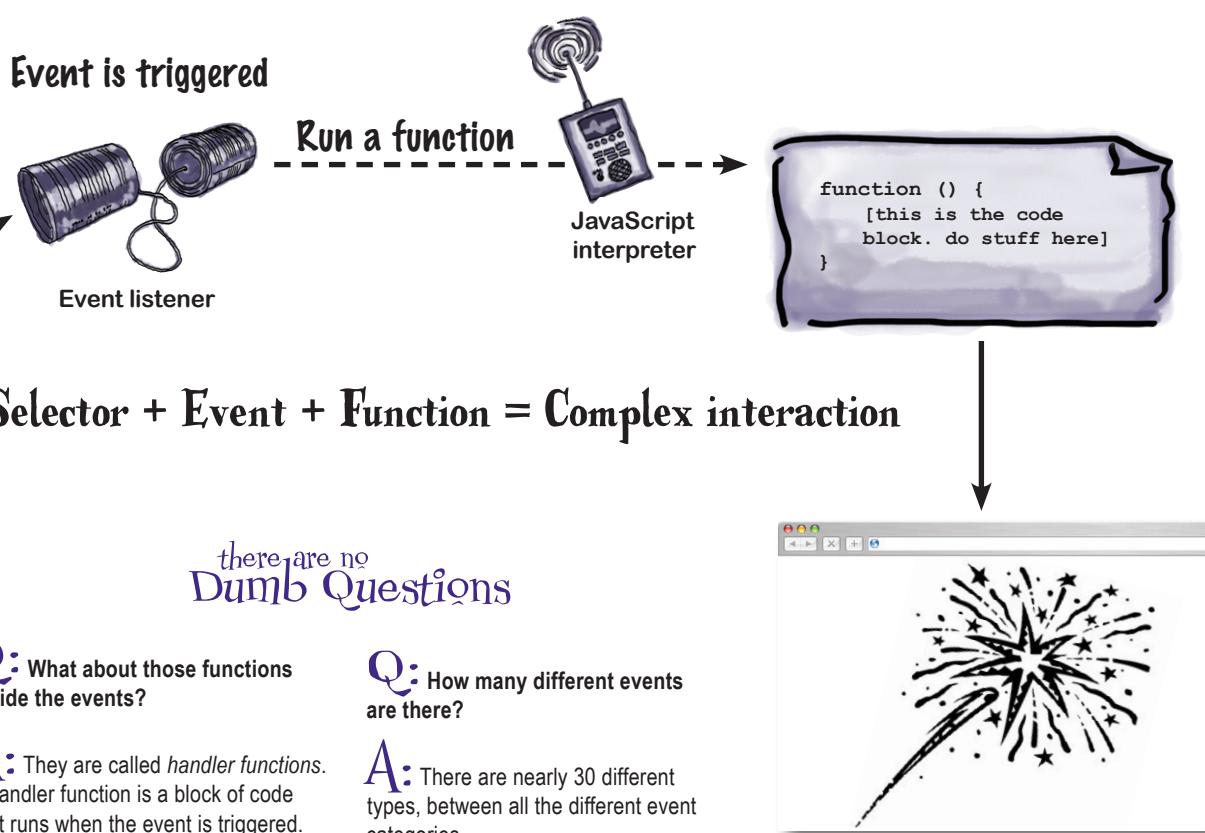

Q: What about those functions inside the events?

A: They are called *handler functions*. A handler function is a block of code that runs when the event is triggered. We'll see more on functions later in this chapter.

Q: Where can I find all the different types of events?

A: On the jquery.com website, under Documentation → Events.

Q: How many different categories of events are there?

A: jQuery groups events into five different categories: browser events, document loading events, form events, keyboard events, and mouse events.

Q: How many different events are there?

A: There are nearly 30 different types, between all the different event categories.

Q: What can trigger an event (i.e., make an event happen) on the page?

A: It's mostly input devices (keyboard and mouse) that trigger the different event types. However, your browser, the page document, your jQuery code, and even an HTML form on your page can trigger events, too.



The Event Exposed

This week's interview:
What's so special about events?

HeadFirst: Hi, Event, it's nice to be able to talk to you.

Event: It's great to be here.

HeadFirst: So, who are you? Who's the real Event?

Event: These days, I've really come into my own, but before jQuery came along, I was a little scattered. I'm an object that helps people interact with a web page.

HeadFirst: That sounds cool. I'll come back to that in a bit, but why were you scattered? Where did you come from?

Event: It's a long story. Back in the mid 1990s, Netscape released Navigator 2.0. It was great. I was a really simple model. The DOM, JavaScript, and I were the new kids on the block. There was a W3C standard on how we were supposed to be implemented in browsers and everything!

HeadFirst: That was a long time ago. You've come a long way.

Event: Yes, we all have. Along the way, we got caught up on the browser wars between Microsoft Internet Explorer and Netscape. Eventually, Microsoft won out, after both companies tried to one-up each other with cool tricks that were not in the standard, but only supported in each company's browser.

HeadFirst: That sounds like a tough time.

Event: It was, but good things came out of it. In 1997, both Netscape and Microsoft released version 4.0 of their respective browsers. There were many new events, and we could do so much more with the page. It was a great time to be an event.

HeadFirst: So what happened?

Event: Things got out of control. Netscape went open source, and later became Mozilla Firefox. But there was still a Netscape too, for a while. Both it and Internet Explorer had different event models. Many things would only work on one browser, leaving people frustrated when they got to a website with the wrong browser. Netscape eventually went away, but several other browsers came on the scene.

HeadFirst: So why are things so great now?

Event: Browser by browser, things are still not ideal. Internet Explorer supports different events than Firefox, Google Chrome, Apple's Safari, and Opera. But that is changing with each release. They are starting to get more in line with the standards. But the really great news is that jQuery handles these issues for the web developer.

HeadFirst: Really? That's great! How? What's this object you said you were?

Event: jQuery knows which browser is being used, so it decides how to deal with events, depending on what browsers your website viewer is using. As for an object, it's nothing fancy. In practical terms, an object is really just variables and functions combined into a single structure.

HeadFirst: Where can we go to read more about these variables and functions?

Event: You can find out more about me in jQuery's official documentation here:
<http://api.jquery.com/category/events/event-object/>.

HeadFirst: Thanks! I'll be sure to check that out. How do we go about using you on our pages?

Event: Well, first, I have to be bound to something, so the event listener knows to listen out for me. Then, something has to trigger me, so I can run whatever code I'm supposed to when an event happens.

HeadFirst: OK, but how do you know what code to run?

Event: That happens when I get bound to an element. Pretty much any code can get called when I get bound to an element. That's what makes me so useful. I can also be unbound from an element. If that happens, the event listener will no longer listen out for events on that element, so whatever code was supposed to run when I was triggered won't run.

HeadFirst: That sounds pretty slick, but we're running out of time. Where can I find out more about you and the types of events that happen on the page?

Event: The link I gave you already will explain what makes me an object. There's more information about me and all the types of events on the jQuery website, in the Documentation section. Thanks for having me.

HeadFirst: Thanks for being here. We're looking forward to using you in our code.



We'll dive into functions and variables later in this chapter.

Plus, we'll look more at JavaScript in coming chapters.

that's pretty uneventful

Removing an event

Just like binding events to elements, you often need to *remove* events from elements—for example, when you don't want people to click a submit button twice on a form, or you only want to allow them to do something once on a page. That's just what you need for these new Jump for Joy requirements.

After an element has an event bound to it, we can remove that event from the element so it doesn't get triggered.

To remove one event:

The `unbind` command tells the web browser to no longer listen for this particular event for this element.

Run this code
when myElement
gets clicked.

```
$("#myElement").bind('click', function() {
    alert($(this).text());
});
```

Add a click event listener
to the element with an ID of
myElement.

Remove the click event
from myElement.

```
$("#myElement").unbind('click');
```

To remove all events:

```
$("#myElement").bind('focus', function() {
    alert("I've got focus");
});
```

Add a focus event listener
to the element with an ID
of myElement.

```
$("#myElement").click(function() {
    alert('You clicked me.');
});
```

Add a click event listener
to the element with an ID
of myElement.

```
$("#myElement").unbind();
```

Tell the browser to no
longer listen for events
from myElement.



So, an event listener sits inside the browser, attached to elements, waiting for events to happen, and tells the JavaScript interpreter to do something when they do happen, right?

Yes! That's exactly right.

Let's see how events can help us tackle the first requirement.

- Visitors should only get one chance to find the discount when they load the page. So we'll need to stop them from clicking more than once in order to find a better discount.

Don't let users have another try at finding the discount.



Sharpen your pencil

Using what you know about `$(this)` and what you learned about events, update the code from the last chapter and add in the code to remove the click event from the `div` sections.

```
$(".guess_box").click( function() {  
    $(".guess_box p").remove();  
    var my_num = Math.floor((Math.random()*5) + 5);  
    var discount = "<p>Your Discount is "+my_num+"%</p>";  
    $(this).append(discount);  
    .....  
    .....  
    .....  
});
```



index.html

sharpen solution

Sharpen your pencil Solution

Using what you know about `$(this)` and what you learned about events, update the code from the last chapter and add in the code to remove the click event from the `div` sections.

```
$(".guess_box").click( function() {
    $(".guess_box p").remove();
    var my_num = Math.floor((Math.random()*5) + 5);
    var discount = "<p>Your Discount is "+my_num+"%</p>";
    $(this).append(discount);

    $(this).unbind("click");           ← Tell the browser to no longer
                                         listen for events from the
                                         current element.

});
```




index.html



Test DRIVE

Update your `index.html` file with this new code, save it, and click around to make sure everything is working as it should.

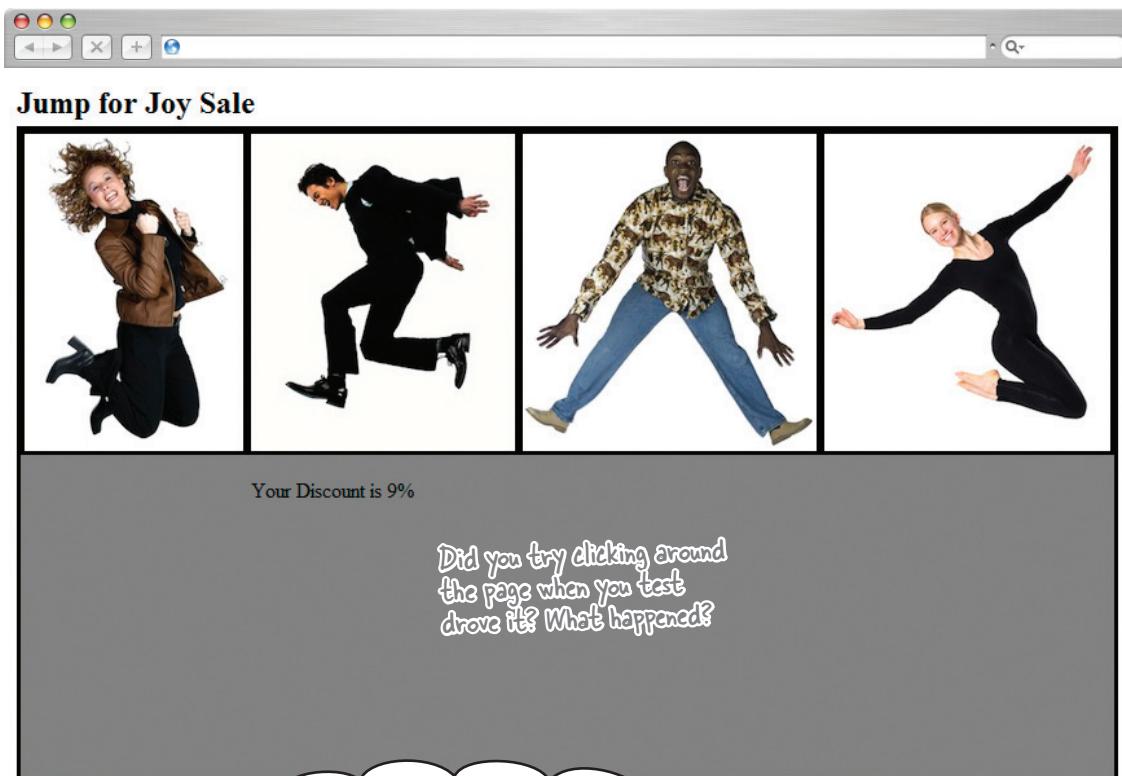

I'm guessing your page is acting a lot like mine. And it's not doing what you said it would at all...



You're right, it's not removing the click from all the events yet.

This only removes the click from whatever box you click on. You could still click on the other boxes. If only you could stop the click happening on each of the other elements...




How would you remove the click event **from every box** after the visitor **clicks one box**? Do you have to go through the elements one by one?

hey, do that again!

Going through the ~~metions~~ elements

Oftentimes, we need to interact with a group of elements *one by one*.

Thankfully jQuery gives us the ability to *loop* through groups of elements, based on whatever selector we choose. Looping, also known as *iteration*, is simply going through a group of elements one at a time, and doing something to each element along the way.

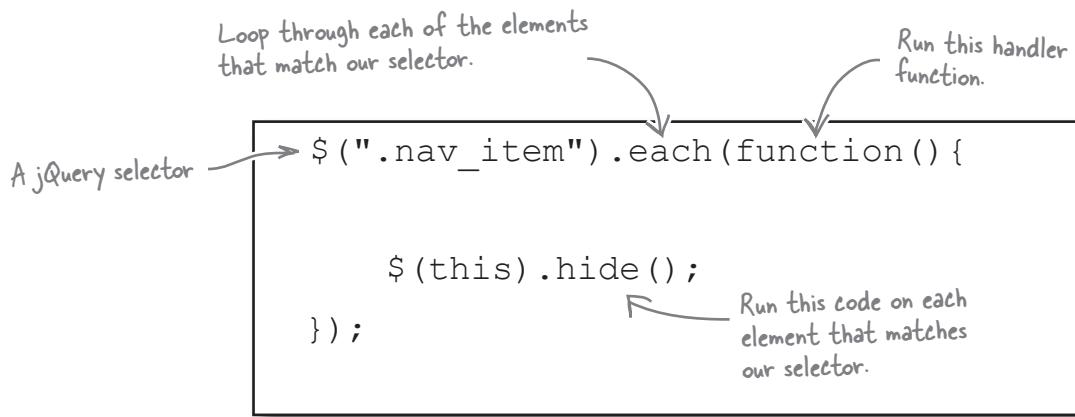

We'll look at iteration in more depth later in the book.

there are no Dumb Questions

Q: Can I trigger events in my code?

A: Yes! This is relatively common. Good examples of this are submitting forms for validation or hiding modal pop-up boxes, to name a couple.

Q: So, how do I trigger an event then?

A: Just like most things in jQuery, its creators tried to make things memorable. You can just use the `.trigger` method, combined with a selector; for example, `$(".button:first").trigger('click');` or `$("#form").trigger('submit');`.

Q: Can I use events in a web page without jQuery?

A: Yes, you can. jQuery just makes it much easier to bind events to any element because it's cross-browser compatible and uses easy-to-use functions to help bind the events to elements.

Q: How does `.each` work?

A: `.each` uses the selector that calls it and creates an array of elements identified by that selector. It then loops through each element in the array sequentially. Don't worry, though, we'll explain arrays and loops a little later on!

Q: So, I've seen that I can create elements with jQuery, after the page is loaded. Can these elements also get events?

A: Yes, they can. After an element gets created, you can still use the `.bind` method to give it an event listener. Also, if you know ahead of time that your element will behave like some other elements already created, you can use the `.live` method. This will attach a handler to the event for all elements that match the current selector, now and in the future. This will work even for elements that have not yet been added to the DOM.



Sharpen your pencil

Write the code to use iteration to remove the `click` event from every clickable box on your Jump for Joy page. Also, read your code carefully to see if there are any pieces you don't need anymore.

```
$(".guess_box").click( function() {
    $(".guess_box p").remove();
    var my_num = Math.floor((Math.random()*5) + 5);
    var discount = "<p>Your Discount is "+my_num+"%</p>";
    $(this).append(discount);

    $(this).unbind('click');

});
```



index.html

sharpen solution

Sharpen your pencil Solution

Since you're only allowing people to click once, you don't need to remove the old one!

Calling the `.each` method on the `.guess_box` class loops through all of the elements with that class. You can then unbind the click method from each one of them in turn. You also no longer need our `.remove` code; since visitors can only click once, there won't be anything to remove anymore.

```
$(".guess_box").click( function() {
    $(".guess_box p").remove();


    var my_num = Math.floor((Math.random()*5) + 5);
    var discount = "<p>Your Discount is "+my_num+"%</p>";
    $(this).append(discount);


    $(".guess_box").each( function() {
        $(this).unbind('click');
    });
});
```

Loop through `each .guess_box` element and remove the `click` event from it.



index.html

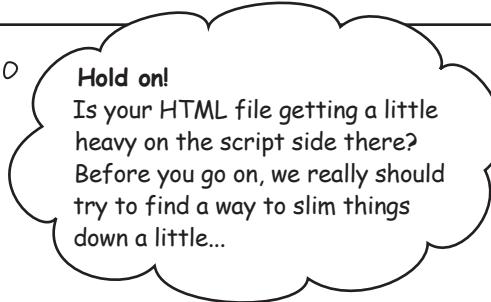

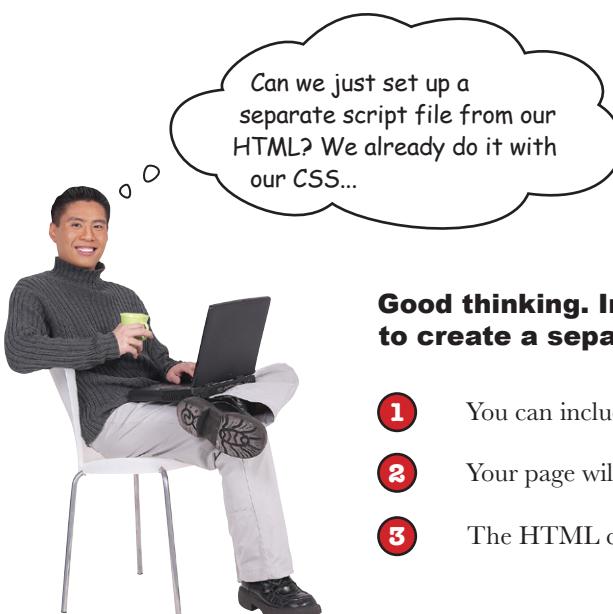

Good thinking. In fact, there are several reasons to create a separate file for your jQuery code:

- ① You can include it in more than one page (code reuse).
- ② Your page will load faster.
- ③ The HTML code you write will be cleaner and easier to read.



You already know how to include CSS files, and you've seen how to include the jQuery library. Including your own JavaScript/jQuery file is no different!

You should already have a folder called *scripts* in your root web directory (where you put the jQuery library).

- ① Using your favorite text editor, create a file called *my_scripts.js* and save it in the *scripts* folder.
- ② Take all the JavaScript and jQuery code from our *index.html* file and move it into this new file. There is no need to put the `<script>` and `</script>` tags in the new file.
- ③ Create the link to this file in your HTML page by putting the following code just before the closing `</body>` tag:

```
<script src="scripts/my_scripts.js"></script>
```

exercise solution

You already know how to include CSS files, and you've seen how to include the jQuery library. Including your own JavaScript/jQuery file is no different!

- 1** Using your favorite text editor, create a file called *my_scripts.js* and save it in the *scripts* folder.
- 2** Take all the JavaScript and jQuery code from our *index.html* file and move it into this new file. There is no need to put the `<script>` and `</script>` tags in the new file.

```
$ (document) .ready(function() {
    $(".guess_box") .click( function() {
        var my_num = Math.floor((Math.random()*5) + 5);
        var discount = "<p>Your Discount is "+my_num+"%</p>";
        $(this) .append(discount);

        $(".guess_box") .each( function() {
            $(this) .unbind('click');
        });
    });
});
```

**my_scripts.js**

Now, if you include this file in every HTML file you have for this project, you can access the same jQuery code. You don't have to repeat it in every file.

3

Create the link to this file in your HTML page by putting the following code just before the closing </body> tag.

```
<!DOCTYPE html>
<html>
  <head>
    <title>Jump for Joy</title>
    <link href="styles/styles.css" rel="stylesheet">
  </head>
  <body>
    <div id="header">
      <h2>Jump for Joy Sale</h2>
    </div>
    <div id="main ">
      <div class="guess_box"></div>
      <div class="guess_box"></div>
      <div class="guess_box"></div>
      <div class="guess_box"></div>
    </div>
    <script src="scripts/jquery.1.6.2.min.js"></script>
    <script src="scripts/my_scripts.js"></script>
  </body>
<html>
```



index.html




All right, that's
more like it. Nice and
organized. Move along...

ahhh, that's much better

Your project structure

You just made some important changes to how your files are structured. Let's look at how these all fit together. We've added several things since the last time we looked at it.

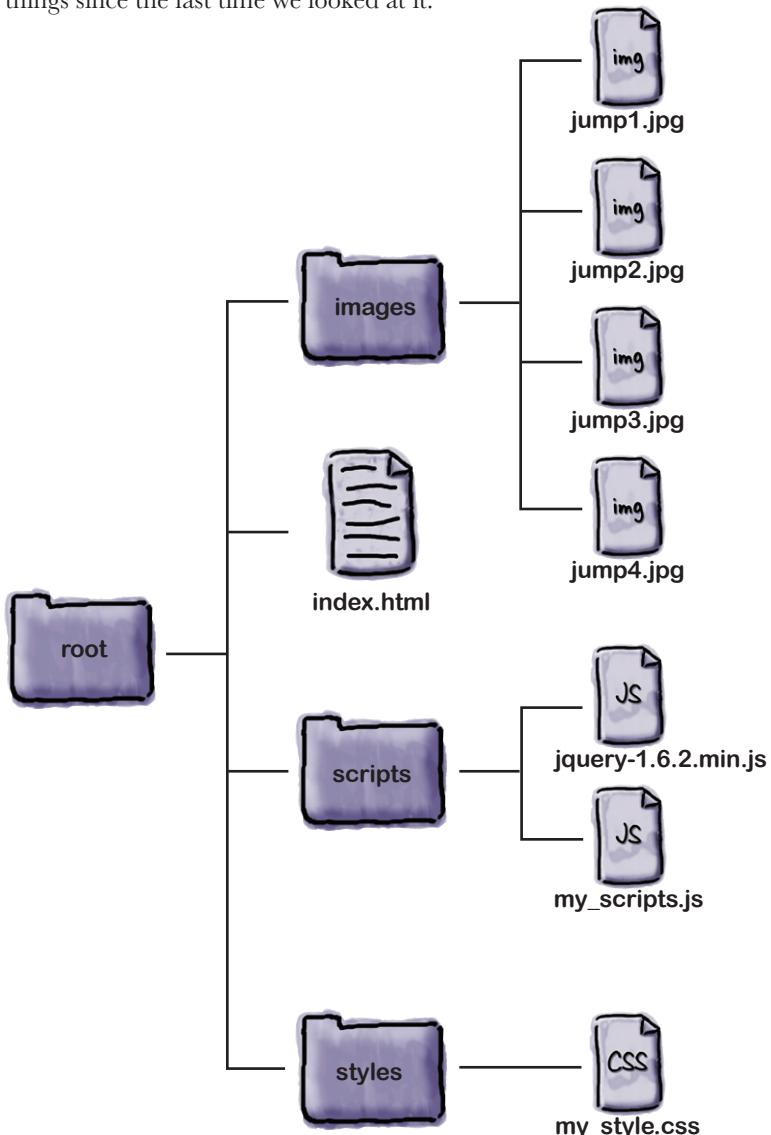

there are no
Dumb Questions

Q: Why does this file have a `.js` extension?

A: Because jQuery is a JavaScript library, any code we write needs to be included as if it were JavaScript.

Q: How does this help speed things up on our page?

A: If your `.js` file is included in several HTML files, your browser only asks for it once. It stores it in the browser cache so it doesn't have to ask the server for the file every time we go to another HTML page that references your script file.

Q: Why don't we need the `<script>` and `</script>` tags in our `my_scripts.js` file?

A: They are HTML tags. Since this is already being included in our page as a JavaScript file, the browser already knows what to expect in the file.



jQuery Magnets

Use the magnets below to organize your project files so you know how to separate out your HTML, CSS, and jQuery code. Let's make sure you can get this right every time.


```
<!DOCTYPE html>
<html>
.....
<title>Jump for Joy</title>
<link href="styles/styles.css" rel="stylesheet">
</head>

.....
<div id="header">
  <h2>Jump for Joy Sale</h2>
</div>

.....
<div id="main">
  <div .....></div>
  <div class="guess_box"></div>
  <div class="guess_box"></div>
  <div .....></div>
</div>
<script src="scripts/ ....."></script>
< ..... src="scripts/my_scripts.js"></script>
</body>
</html>
```

```
$(document).ready(function() {
  $(.....).click( function() {
    var ..... = Math.floor((Math.random()*5) + 5);
    var discount = "<p>Your Discount is "+my_num+"%</p>";
    $(.....).append(discount);

    $(".guess_box").each( function(){
      $(this).unbind('click');
    });
  });
});
```



my_scripts.js

my_num

this

});

<head>

".guess_box"

</div>



index.html

jquery-1.6.2.min.js

<body>

class="guess_box"

script

class="guess_box"

jquery magnets solution

jQuery Magnets Solution

Use the magnets below to organize your project files so you know how to separate out your HTML, CSS, and jQuery code. Let's make sure you can get this right every time.

```
<!DOCTYPE html>
<html>
  <head>
    <title>Jump for Joy</title>
    <link href="styles/styles.css" rel="stylesheet">
  </head>
  <body>
    <div id="header">
      <h2>Jump for Joy Sale</h2>
    </div>
    <div id="main">
      <div class="guess_box" ></div>
      <div class="guess_box" ></div>
      <div class="guess_box" ></div>
      <div class="guess_box" ></div>
    </div>
    <script src="scripts/ jquery-1.6.2.min.js " ></script>
    <script src="scripts/my_scripts.js"></script>
  </body>
</html>
```



index.html

```
$(document).ready(function() {
  $(".guess_box").click( function() {
    var my_num = Math.floor((Math.random()*5) + 5);
    var discount = "<p>Your Discount is "+my_num+"%</p>";
    $( this ).append(discount);

    $(".guess_box").each( function() {
      $(this).unbind('click');
    });
  });
});
```



my_scripts.js




reduce, reuse, recycle

Making things function-al

Now that we've seen how to add and remove events on our page, let's look at another important feature that will help us master our websites with jQuery: *functions*.

A function is a block of code, separate from the rest of your code, that you can execute wherever you want in your script.

Believe it or not, we've been using functions all throughout the book. Remember these?

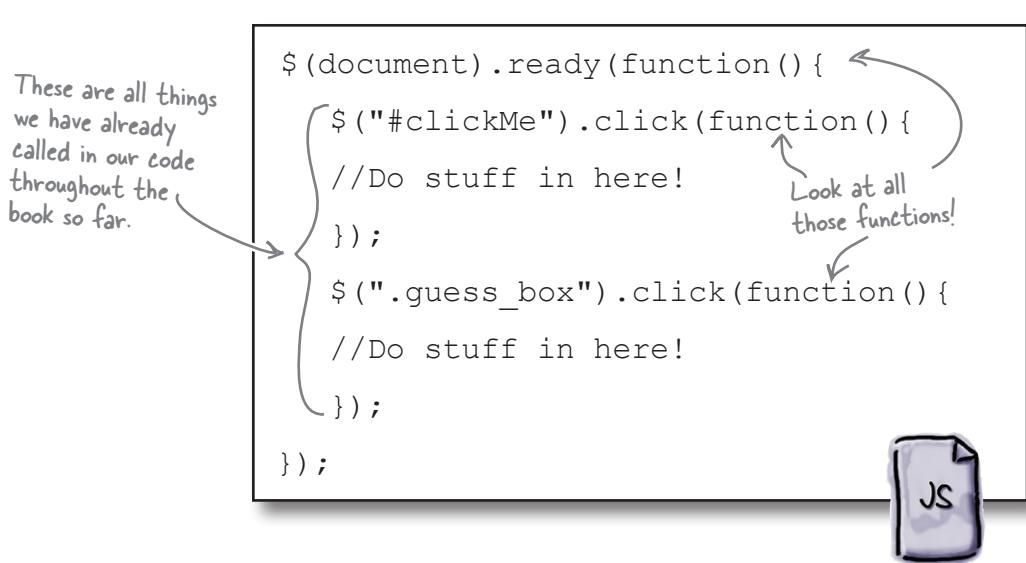


jQuery provides a lot of functions for you, but you can also write your own custom functions to provide features not supplied by jQuery. By creating a custom function, you can use your own code again and again without repeating it in your script. Instead, you just call the function by name when you want to run its code.

Custom functions allow you to organize a chunk of jQuery code by name so that it can be easily reused.

The nuts and bolts of a function

To create a function, you need to use a consistent syntax that ties the name of the function with the code that it runs. This is the syntax for the most basic JavaScript function:

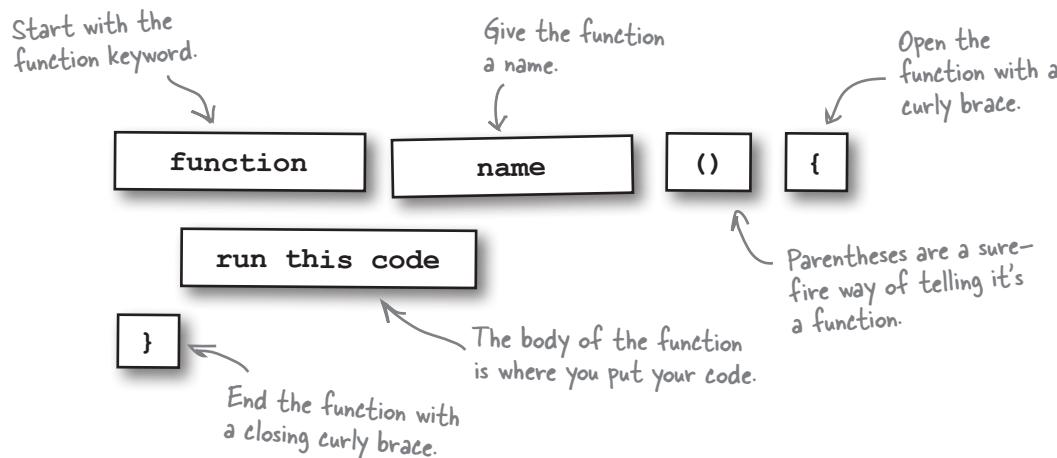

Giving functions names

There are two ways to give names to functions.

Function declaration

The first method is a *function declaration*, which defines a named function variable without requiring variable assignment. This one starts with `function`, like so:

```
function myFunc1() {  
    $("div").hide();  
}
```

The function name

Function expression

A named *function expression* defines a function as part of a larger expression syntax (typically, a variable assignment):

```
var myFunc2 = function() {  
    $("div").show();  
}  
This assigns a variable  
while you're at it.
```

Function names? But all the functions we've used so far didn't have names. Why start giving them names now?

Good point.

Naming your functions allows you to call them from more than one place in your code. Unnamed functions—also known as *anonymous functions*—are pretty limited in how you can use them. Let's look at anonymous functions in more detail so you can see how limiting it is not to have a name.



what's in a name?

The anonymous function

Anonymous, or *self-executing*, functions don't have a name, and they get called immediately when they're encountered in the code. Also, any variables declared inside these functions are available only *when the function is running*.

We can't call this function from anywhere else in our code.

If we want to use this code elsewhere, we'll have to duplicate it.

```
$ (document) .ready(function() {
    $(".guess_box") .click( function() {

        var my_num = Math.floor((Math.random()*5) + 5);
        var discount = "<p>Your Discount is "+my_num+"%</p>";
        $(this) .append(discount);

        $(".guess_box") .each( function(){
            $(this) .unbind('click');
        });
    });
});
```




my_scripts.js

Watch it!

Since we didn't give this function a name, we can't call it from anywhere else in our code.

there are no
Dumb Questions

Q: What is the difference between the function declaration and the named function expression?

A: The main difference is one of timing. While they do the same thing, a function declared as a *named function expression* cannot be used in code until after it is encountered and defined. On the other hand, the function defined using the *function declaration* method can be called whenever you want to on the page, even as an *onload* handler.

Q: Are there any restrictions on what names we give to our functions?

A: Yes. Function names should never start with a number and must not use any mathematical operators or punctuation marks of any kind other than an underscore (_). Also, spaces are not allowed in any part of the name, and both function names and variable names are case sensitive.

Named functions as event handlers

Earlier, we saw how anonymous functions can be used as handler functions for events. We can also use our own custom, named functions as these handlers, and call them directly from our code. Let's look closer at the two functions we named two pages ago.

Function declaration

```
function myFunc1() {
    $("div").hide();
}
```

Call a function from our code.
myFunc1();
Our function names
We need the parentheses here.
The divs will be hidden, according to the rest of the function declaration.

Function expression

```
var myFunc2 = function() {
    $("div").show();
}
```

\$("#myElement").click(myFunc2);
Call a function as a handler function.
No parentheses needed when our function is called as a handler function.
This one means the divs will be shown, after myElement is clicked.



jQuery Magnets

See if you can arrange the magnets to move the code that checks for the discount code into its own named function called `checkForCode`, and use it as the handler for the click event on the boxes.

```
$(document).ready(function() {
    $(".guess_box").click( checkForCode );

    .....  


    var my_num = Math.floor((Math.random()*5) + 5);
    discount = "<p>Your Discount is "+my_num+"%</p>";
    .....  

    $(this).append( ..... );
    .....  

    $(".guess_box").each( function(){
        $(this).unbind('.....');
    });
});
```



my_scripts.js

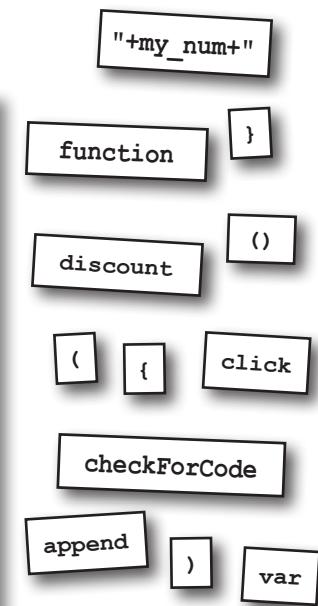



jQuery Magnets Solution

See if you can arrange the magnets to move the code that checks for the discount code into its own named function called `checkForCode`, and use it as the handler for the click event on the boxes.

Our function declaration

```

$(document).ready(function() {
    $(".guess_box").click( checkForCode );
    var my_num = Math.floor((Math.random()*5) + 5);
    var discount = "<p>Your Discount is "+my_num+"%</p>";
    $(this).append( discount );
}

$(".guess_box").each( function(){
    $(this).unbind('click');
});
});
```

Our named function as the handler

End the statement with a semicolon.

The random number generator we used in Chapter 2

Show the discount on the screen.

Remove the click event from each box, like we learned earlier in this chapter.



Do this!



Nice work! Once you update your code file with this code, you'll have created your first function and used it as a handler function in your click event.

Hint: Now that it's part of a function
declaration, you can use the random
number generator in both our existing
checkForCode function AND your
soon-to-be-made function to put the
discount code in a random box.

How would you create a function to hide the discount code in a random box, and another to generate a random number for the discount code itself?



) (append
"+my_num+"

my_scripts.js

You didn't need these magnets.



So, really, we need to have our function do something different based on which box is clicked...how can we do that?

Sometimes we want functions to do a task repeatedly, but have the result change depending on information we give it.

Our functions can accept *variables* passed into them—as you recall from Chapter 2, a variable is used to store information that can change over time. We've already looked at variables. Let's remind ourselves how they work.

The var keyword lets you declare a variable.

After the var keyword, you name your variable.

This is how we set the value of the variable in code.

`var pts = 250;`

When we declare a variable, the JavaScript interpreter gives us some browser memory in which we can store stuff.

We name a variable so that we can reference it later in our script.

We place a value into our variable using an equals sign.



We're already using some variables in our code, remember?


```
var my_num = Math.floor((Math.random()*5) + 5);
```

```
var discount = "Your Discount is "+my_num+"%";
```


please pass the variables

Passing a variable to a function

When variables are added (or passed) into functions, they are known as *arguments*. (Sometimes you may see them referred to as *parameters* too.) Let's take a closer look at how to pass an argument to a function.

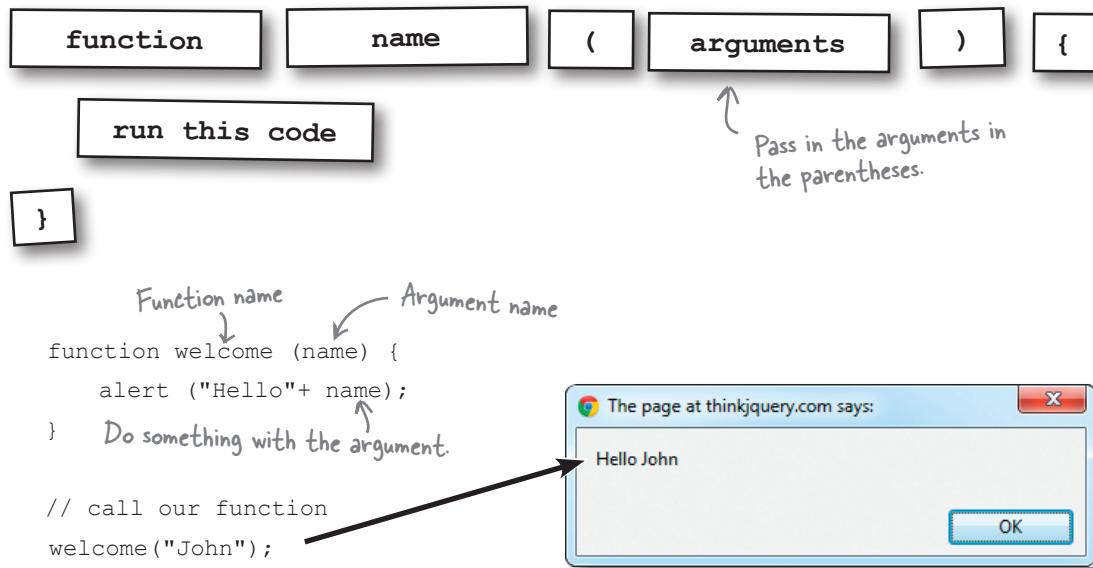

The function doesn't need to know what's contained in the variable; it just displays whatever is currently stored. That way, you can change what the function displays simply by changing the variable, instead of having to change your function (which wouldn't make it a very reusable function!).

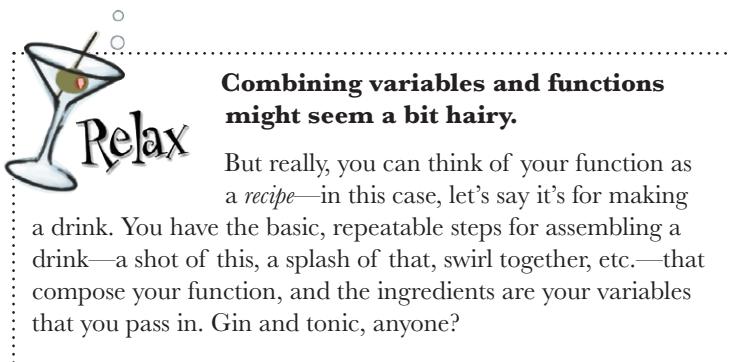

Functions can return a value, too

Returning information from a function involves using the `return` keyword, followed by what should be returned. The result is then returned to the code that called the function, so we can use it in the rest of our code.

```

function multiply (num1, num2) {
    var result = num1*num2;
    return result;
}

// Call our function
var total = multiply (6, 7);


alert (total);

```

Annotations in the diagram:


- Function name:** Points to the word `multiply`.
- Argument names:** Points to the parameters `num1` and `num2`.
- Do something with the arguments.** Points to the multiplication statement `var result = num1*num2;`.
- Return a value.** Points to the `return result;` statement.

The return type can be a number, a string of text, or even a DOM element (object).

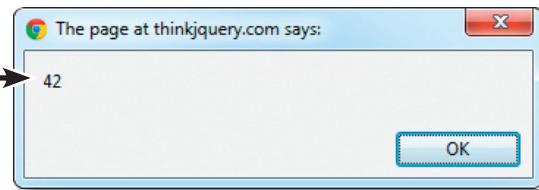

Sharpen your pencil

Now that you can create your own functions, add a new function to your `my_scripts.js` file that accepts a single argument (called `num`), and then returns a random number based on the argument you give it. Call the function `getRandom`.



`my_scripts.js`


Hint: Remember the code that you have already used to generate a random number.

sharpen solution

Sharpen your pencil

Solution

Now that you can create your own functions, add a new function to your `my_scripts.js` file that accepts a single argument (called `num`) and then returns a random number based on the argument you give it. Call the function `getRandom`.

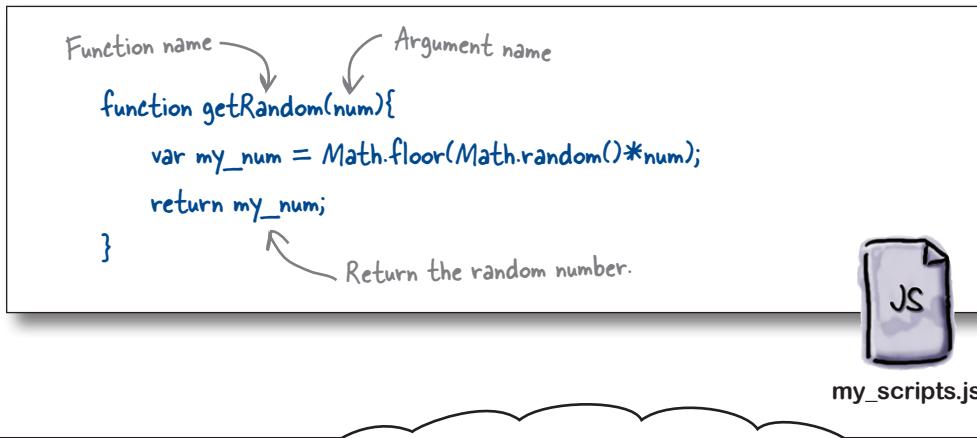

Looking good! But there's still plenty more to do—let's see what your team has to say about checking for the "right" box...

OK, all that function and argument stuff is great, but how much nearer are we to finishing off the code for the Jump for Joy page?



Jim: Well, along with our new `getRandom` function, we still need another one...

Frank: ...Right, one to put the discount code in a random box that can use the `getRandom` function.

Joe: That makes sense. Then, after a click happens, we can check to see if the user clicked the right box.

Jim: Wait, what? How can we tell if someone clicked on the right box?

Frank: Conditional logic!

Jim: What?

Frank: Conditionals allow us to check for a particular situation and run the code accordingly.

Joe: So we could say, check if a variable has a certain value, or if two values are equal?

Frank: Exactly! We can even check if there is an element inside another element, which I think will help us here.

Jim: Wow, I can't wait to see this!

Use conditional logic to make decisions

jQuery uses JavaScript's *conditional logic* features. Using conditional logic, you can run different code based on decisions you want your code to make, using information it already has. The code below is just one example of conditional logic with JavaScript. We'll look at some others in Chapter 6.

```

Start the if statement.          The thing we
                                want to check
if( myBool == true ) {           The equality operator. This
                                can be read as "is equal to."
    // Do Something!             The code we want to run,
                                if what we check turns
                                out to be true
} else{                         The code we want to
                                run, if what we check
                                turns out to be false.
    // Otherwise Do something else!
}

Note: You don't need an else statement
to balance your if statement, but it's a
good idea to include one.

```




jQuery Magnets

See if you can arrange the magnets to create a new named function called `hideCode` that uses conditional logic to hide a new `span` element, with the ID of `has_discount`, in one of the existing clickable `.guess_box` elements randomly each time.

```

var ..... = function () {
    var numRand = .....(4);
    $(.....).each(function(index, value) {
        if(numRand == index) {
            $(this).append("<span id='.....'></.....>");
            return false;
        }
    .....
}

```

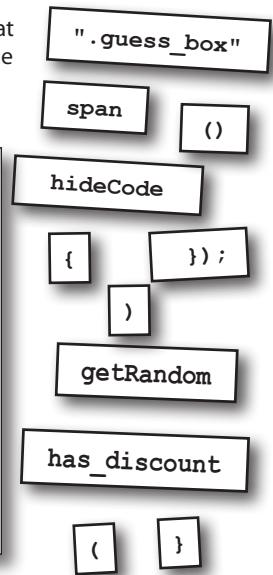

my_scripts.js



jQuery Magnets Solution

See if you can arrange the magnets to create a new named function called `hideCode` that uses conditional logic to hide a new `span` element, with the ID of `has_discount`, in one of the existing clickable `.guess_box` `div` elements randomly each time. Here's our solution.

Our named function

```

var hideCode = function () {
    var numRand = getRandom(4);
    $( ".guess_box" ).each(function(index, value) {
        if(numRand == index) {
            $(this).append("<span id='has_discount'></span>");
            return false;
        }
    });
}

```

Call our random number function.

Conditional logic to compare where we are in our list to our random number.

Break out of the `.each()` loop.

Add the discount element to the elements with the `.guess_box` class.

my_scripts.js



Watch it!

The **index of an element in a list refers to where it appears on the list.**

Indexes always start at 0.

So, the *first element in the list has an index of 0, the second has an index of 1, and so on. We'll see more about using the index when we look at arrays and loops in Chapter 6.*



Frank: Yes, they are. But now that you've hidden the code, can you find it again?

Jim: Oh, uh, good question. I don't know.

Joe: I'm guessing we'll need some of this conditional magic again?

Frank: Exactly. Now, rather than picking a random index in our list of `.guess_box` elements, we'll have to loop through them again to see if they contain our `has_discount` element.

Joe: "Contain?" Hey, Frank, you might be on to something there.

Frank: Yep. Let's take a look at what jQuery has along these lines.



Update your `checkForCode` function to include some new code based on Jim, Frank, and Joe's discovery.

Conditional logic to see if the user has found the discount code

Declare the discount variable.

A jQuery method that checks if whatever is in the first parameter contains whatever is in the second parameter. The clue's in the name.

```
function checkForCode() {
  var discount;
  if($.contains(this, document.getElementById("has_discount")) ) {
    var my_num = getRandom(5);
    discount = "<p>Your Discount is "+my_num+"%</p>";
  } else{
    discount = "<p>Sorry, no discount this time!</p>" ;
  }
  $(this).append(discount);

  $(".guess_box").each( function(){
    $(this).unbind('click');
  });
}
```

The current element—i.e., the one that called the function

Look for a DOM element with the ID of `has_discount`.

Set the message so that it will be different depending on whether users find the discount code or not.



my_scripts.js

a custom function to call your own

Do this, too!

Time to add some custom functions: one for generating a random number, one for hiding the code, and one for checking for the discount code.

```

$(document).ready(function() {
    $(".guess_box").click( checkForCode );
    function getRandom(num) {
        var my_num = Math.floor(Math.random()*num);
        return my_num;
    }
    var hideCode = function(){
        var numRand = getRandom(4);
        $(".guess_box").each(function(index, value) {
            if(numRand == index){
                $(this).append("<span id='has_discount'></span>");
                return false;
            }
        });
    }
    hideCode();
    function checkForCode() {
        var discount;
        if($.contains(this, document.getElementById("has_discount")) )
        {
            var my_num = getRandom(5);
            discount = "<p>Your Discount is "+my_num+"%</p>" ;
        }else{
            discount = "<p>Sorry, no discount this time!</p>" ;
        }
        $(this).append(discount);
        $(".guess_box").each( function(){
            $(this).unbind('click');
        });
    }
}); //End document.ready()

```

Call the function when an element with the .guess_box class is clicked.

Our random number generator function

The named function that hides the discount variable

Call the named function...

...that tells you what the discount code is.



my_scripts.js

Jump for Joy needs even more help

Just when you thought you were done with the Jump for Joy campaign, it looks like Emily has a few more requirements...

From: Jump for Joy
Subject: RE: Jump for Joy Promotion

Hey,

Thanks so much for all your work on this.

I was wondering, is there a way you could highlight the box before people click on it? That way, they'll know which box they're on, and it will lessen any confusion before they click.

Also, instead of popping up the code, can you put it into its own easy-to-read area below the boxes on the screen? Can the discount code be some text together with a number? I was thinking that might be nice... Oh, and can the number be bigger than just between 1 and 10? How about up to 100?

Let me know if you think we can make these little changes!

--

Emily Saunders
jumpforjoyphotos.hg



Sharpen your pencil

You know what to do. Pick out all the new requirements from Emily's email.

Requirements:

sharpen solution

Sharpen your pencil Solution

You know what to do. Pick out all the new requirements from Emily's email.

Requirements:

- Highlight whatever box visitors are on before they click it, so they know for sure what option they are choosing.
- Put the discount code into its own area on the screen. The discount code should be text and a number between 1 and 100.

^{there are no} Dumb Questions

Q: Do we need to specify a return value for all our functions?

A: Technically, no. All functions return a value whether you specify one or not. If you don't tell a function what value to return, it will return a value of `undefined`. If your code is not able to handle an `undefined` value, it will cause an error. So, it is a good idea to specify a return value, even if it is something like `return false;`.

Q: Are there any restrictions on arguments or parameters that I can pass into a function?

A: No, you can pass any object, element, variable, or value into a function. You can also pass in more parameters than your function is expecting. These will be ignored. If you pass in too few, the remaining parameters will automatically be set to `undefined`.

Q: What does the `$.contains` method do?

A: This is a static method of the jQuery library that takes two parameters. It checks all the child elements of the first parameter, seeing whether it contains the second parameter, and returns a `true` or `false`. In our case, `$.contains(document.body, document.getElementById("header"))` is `true`; on the other hand, `$.contains(document.getElementById("header"), document.body)` would be `false`.

Q: What is a static method in jQuery?

A: That means it is a function that is associated with the jQuery library, as opposed to any specific object. We do not need a selector to call this method, only the jQuery name or its shortcut (`$`).

Q: What was that `index` and `value` about in our `.each` handler function?

A: The `index` refers to where in the loop we are, starting at 0 for the first item in the array returned by the selector. The `value` refers to the current object. It is the same as `$(this)` inside the `.each` loop.

Q: Why does our `.each` loop in the `hideCode` function return `false`?

A: Returning `false` in an `.each` loop tells it to stop executing and move on. If any non-`false` return value is returned, it will move on to the next item in the list. For our purposes, we know we have already hidden the code, so we can stop going through the rest of the elements.



Can you think of a way to tell the user what square she's about to choose **before** she clicks?

Methods can change the CSS

To complete our solution, we'll need to highlight whatever box the user is hovering over before she clicks. The easiest way we can change how an element looks is with CSS and CSS classes.

Thankfully, jQuery provides an easy way to give elements CSS classes and remove them again, with a few easy-to-use methods. Let's have a look at how we can put them to use in our solution.

Remember those from
Chapters 1 and 2?



Ready Bake

Code

Create these new files, separate from your Jump for Joy files, so you can observe these methods in action. That should help you figure out how you can highlight the box before a user clicks on it.

```
<html>
  <head>
    <link href="styles/test_style.css" rel="stylesheet">
  </head>
  <body>
    <div id="header" class="no_hover"><h1>Header</h1></div>
    <button type="button" id="btn1">Click to Add</button>
    <button type="button" id="btn2">Click to Remove</button>
    <script src="scripts/jquery.1.6.2.js"></script>
    <script src="scripts/my_test_scripts.js"></script>
  </body>
</html>
```



class_test.html

```
$(document).ready(function() {
  $("#btn1").click( function(){
    $("#header").addClass("hover");
    $("#header").removeClass("no_hover");
  });
  $("#btn2").click( function(){
    $("#header").removeClass("hover");
    $("#header").addClass("no_hover");
  });
});
```



my_test_scripts.js

```
.hover{
  border: solid #f00 3px;
}
.no_hover{
  border: solid #000 3px;
}
```




test_style.css

test drive

Test Drive

Open your newly created `class_test.html` file in your browser. After clicking on the Add button, your class gets applied to the `div`, with the ID of `header`. Clicking the Remove button removes the class again!

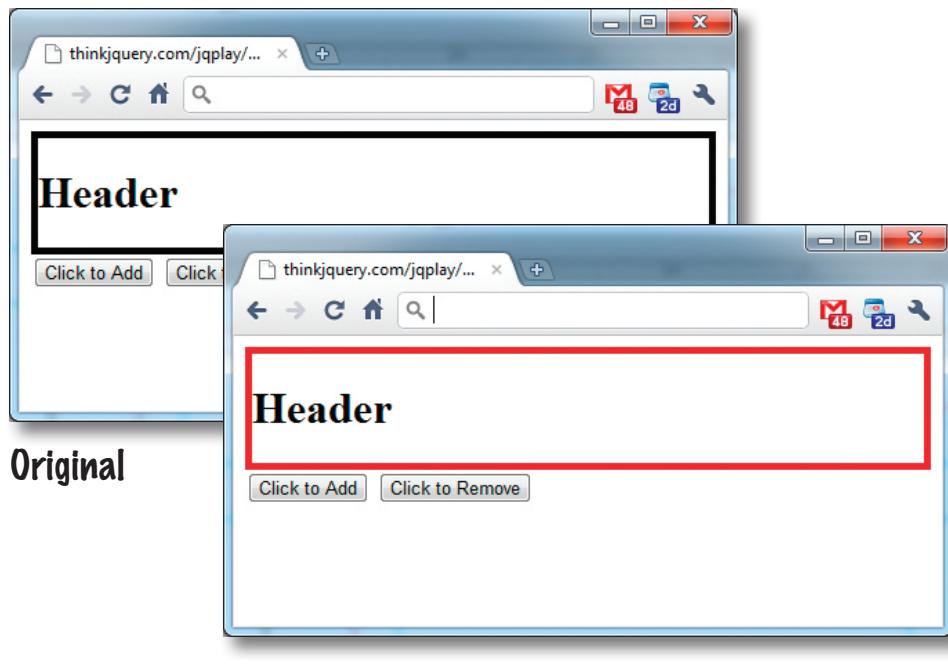

After click



Sweet! If only everything were this easy.
Does this CSS change work on anything
other than a click event?

Yes, it does. And it's just as easy...

You can switch up the CSS for any event type. But for this solution, you'll need another event to help you out. Take a look at the list back on page 82 and see if you can figure out which event you'll need to use.

Add a hover event

The hover event can take two handler functions as parameters: one for the mouseenter event and another for the mouseleave event. These handler functions can be named or anonymous functions. Take a closer look at the test script you just used to see how we can use the hover event to apply behavior to an element during the time the mouse is over the element.



my_test_scripts.js

```
$(document).ready(function() {
    $("#btn1").click( function(){
        $("#header").addClass("hover");
        $("#header").removeClass("no_hover");
    });
    $("#btn2").click( function(){
        $("#header").removeClass("hover");
        $("#header").addClass("no_hover");
    });
});
```

The removeClass jQuery method allows us to remove a CSS class from an element.

The addClass jQuery method allows us to add a CSS class to an element. It does not affect any CSS classes the element already has.



Update your *my_style.css* and *my_scripts.js* files so that the image boxes are highlighted when the user places the cursor over them. You'll need a new CSS class to apply the hover to, and two handler functions in your script file (after your `checkForCode` function) that use the `addClass` and `removeClass` methods to set the CSS class. We've started those for you; you just need to write in the functions below.



my_style.css

```
$(".guess_box").hover(
    function () {
        // this is the mouseenter event handler
        .....
    },
    function () {
        // this is the mouseleave event handler
        .....
    });
});
```



my_scripts.js

exercise solution**Exercise Solution**

Set the CSS class of the box when the user hovers over it using this anonymous handler function for the mouseenter event.

The `removeClass` jQuery method lets you remove a CSS class from an element.

Now you've got a CSS class you can manipulate with a hover event.

Here's the new class.

```
.my_hover{
    border: solid #00f 3px;
}
```



my_style.css

The `addClass` jQuery method lets you add a CSS class to an element. It does not affect any CSS classes the element already has.

```
$(".guess_box").hover(
    function () {
        // this is the mouseenter event handler
        $(this).addClass("my_hover");
    },
    function () {
        // this is the mouseleave event handler
        $(this).removeClass("my_hover");
    });

```


Here's the anonymous handler function for the mouseleave event.



my_scripts.js

**Test Drive**

Open your `index.html` file in your browser, which should include your new `my_scripts.js` file. Move your mouse over the images and see if the border changes.

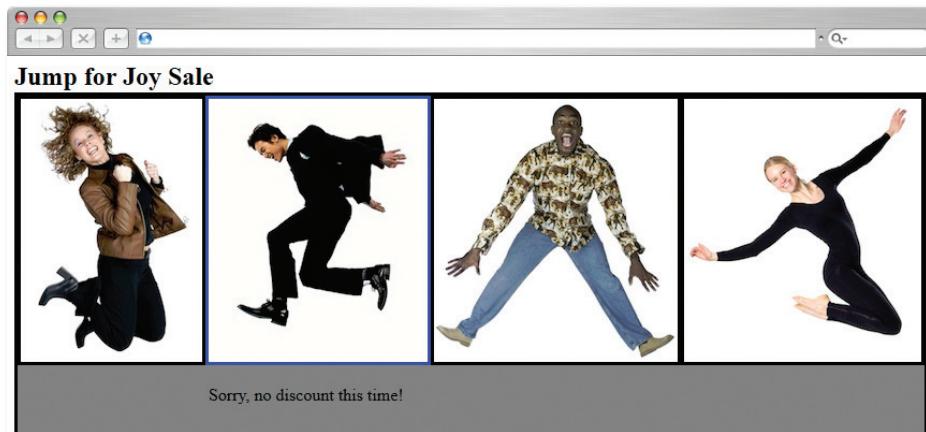

Hmm. The image border color changes now, but there's still more to do...

You're almost there...

That's definitely good progress, but the message still appears in the wrong place, and it doesn't look the way you were asked to make it look. Plus, there's still one requirement from the first email we didn't cover yet. Here's the requirements list as it stands right now:

- ~~Highlight whatever box visitors are on before they click it, so they know for sure what option they are choosing.~~
- Put the discount code into its own area on the screen. The discount code should be text and a number between 1 and 100.
- After the visitor has made his guess and clicked on a box, the answer should be revealed as to whether or not he got it right. If he chose correctly, show him the discount so he can apply it to his order.

This one's
from the
first email!



Update your `checkForCode` function to complete these last three things:

1. Put the discount code in its own area on the screen.
2. Make the code a combination of letters and a number between 1 and 100.
3. Show the visitor where the code was hiding, if she guessed wrong.

To help you out, we've created these CSS classes that you can add to your `my_styles.css` file to indicate if the code was found or not.

While you're at it, add a `span` element with the ID of `result` below the four boxes to display the discount code.

```
.discount{
    border: solid #0f0 3px;
}

.no_discount{
    border: solid #f00 3px;
}
```



`my_style.css`

exercise solution

Exercise
Solution

Now you've updated your `checkForCode` function with all the pieces you were asked for: a separate place on the screen for a discount code, a discount code consisting of text and a number up to 100, and indications of where the discount code was, after the visitor clicks.

```
function checkForCode() {
    var discount;
    if ($.contains(this, document.getElementById("has_discount")) ) {
        var my_num = getRandom(100);
        discount = "<p>Your Code: CODE"+my_num+"</p>" ;
    }else{
        discount = "<p>Sorry, no discount this time!</p>" ;
    }
    $(".guess_box").each(function() {
        if ($.contains(this, document.getElementById("has_discount")))
        {
            $(this).addClass("discount");
        }else{
            $(this).addClass("no_discount");
        }
        $(this).unbind();
    });
    $("#result").append(discount);
} // End checkForCode function
```

Check to see if this box has the discount code, using the jQuery contains function.

If it does, visually change the box to tell people where the code was...

...if it does not, show that to the user.

Use the getRandom function to increase the discount code to a value up to 100.

Set the output message, indicating whether the code is found or not.

Write the output message onto the page into its own area.



my_scripts.js



Test Drive


Now that you've updated your `checkForCode` function, test out all the new features on the Jump for Joy website. (For comparison, your code should look like what is in this file: http://thinkjquery.com/chapter03/end/scripts/my_scripts.js.)



Loaded page



No discount code

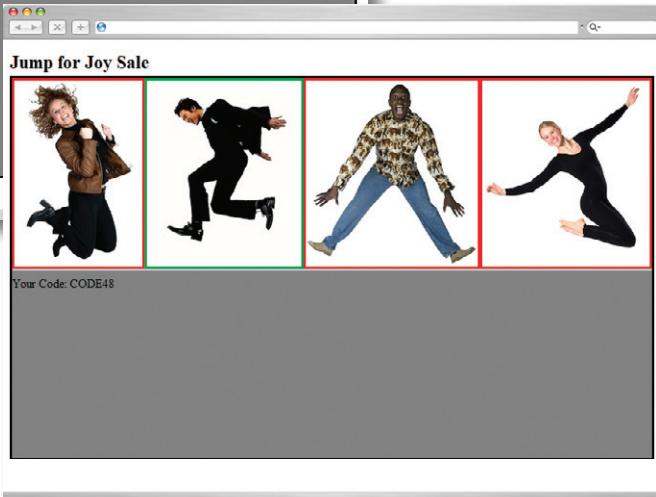

Discount code

your jquery toolbox



Your jQuery Toolbox

You've got Chapter 3 under your belt and now you've added events, reusable functions, and conditionals to your toolbox.

Functions

Reusable chunks of code that you can use elsewhere in your code...

...but only if they are named.

Unnamed functions only run right where they are called in the code and can't be used anywhere else.

You can pass variables (or arguments or parameters) to functions, and functions can return results, too.

Conditionals

Test for logical conditions (if $XYZ = \text{true}$) before doing something.

Often come with an else statement if the conditional result is false, but it's not required.

Events

Objects that help users interact with a web page.

There are around 30 of them, and just about anything that can happen on a browser can trigger an event.

4 jQuery web page manipulation



Mod the DOM



Just because the page is finished loading doesn't mean it has to keep the same structure. Back in Chapter 1, we saw how the DOM gets built as the page loads to set up the page's structure. In this chapter, we'll look at how to move up and down through the DOM structure and work with element hierarchy and parent/child relationships to change the page structure on the fly using jQuery.

one page to rule them all

The Webville Eatery wants an interactive menu

Alexandra, the head chef of the Webville Eatery, has a job for you. She's been maintaining separate web pages for different versions of her menu: the regular menu and the menu with vegetarian substitutions. She wants you to make one page that will adjust the menu for the restaurant's vegetarian customers.



Go vegetarian

Here's what Alexandra would like you to do.

We want a "Go Vegetarian" button that automatically substitutes the vegetarian options on our web page menu.

Here's how our substitutions work:

- We offer no substitutes for our fish entrées, so we need those removed.
- We offer giant portobello mushrooms as a vegetarian substitute for our hamburgers.
- We offer tofu as a vegetarian substitute for all of our meat and egg dishes except hamburgers.
- We'll need a button that restores the menu to its original state.

P.S. If you can pull it off, we'd also like a leaf icon to show up next to the substituted vegetarian entrees.

I had the web designer email you the files for the current menu so you can get started.

The Webville Eater

Before we write any jQuery, let's look at the HTML and CSS files the web designer sent us, and see if their style and structure are up to snuff.



There's no exercise for it this time around—because you're probably already thinking it—but be sure to write down what the requirements are in your own words so you know what you're building here.

build your DOM tree



DOM Tree Magnets

Dig into the current structure of the web menu by diagramming how the DOM sees it. Below, you'll find all the element magnets you need to complete the tree. Using the HTML fragment for the menu on the right, complete the tree. Each magnet will fit where you see a hollow circle. We've done a few for you already.

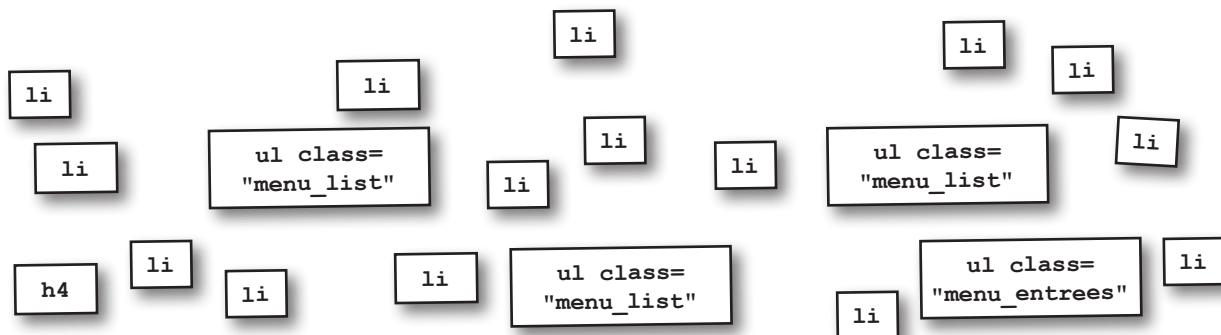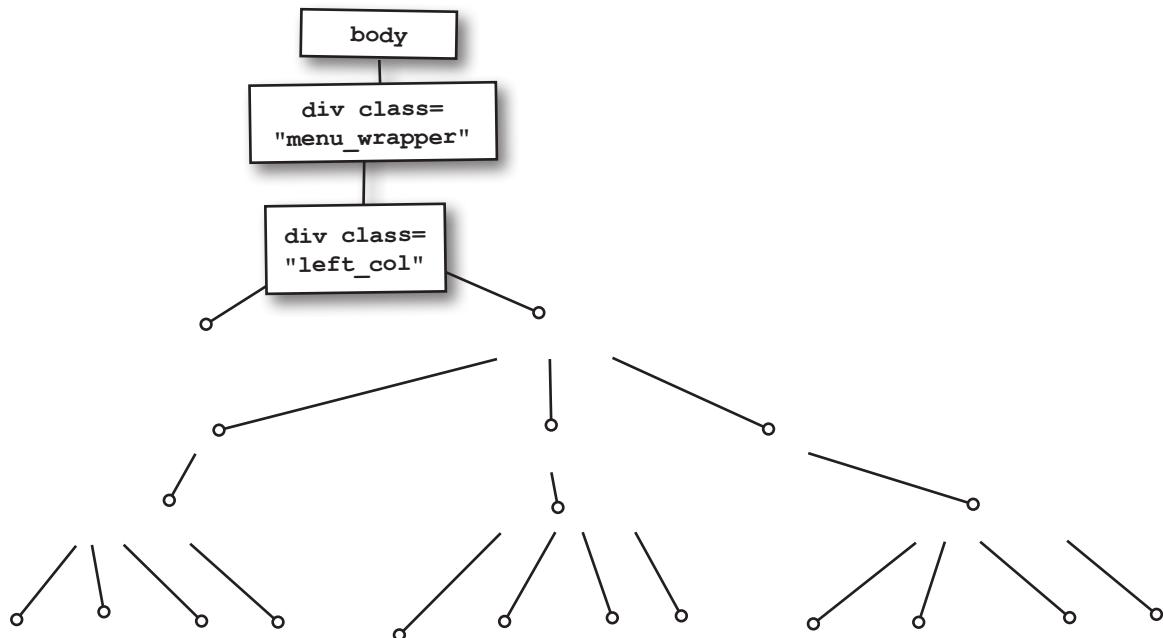

This is just a fragment of
the actual HTML page.

```
<body>
<div id="menu_wrapper">
<div class="left_col">
<h4>Dinner Entrees</h4>
<ul class="menu_entrees">
<li>Thai-style Halibut
    <ul class="menu_list">
        <li>coconut milk</li>
        <li>pan-fried halibut</li>
        <li>early autumn vegetables</li>
        <li>Thai spices </li>
    </ul>
</li>
<li>House Grilled Panini
    <ul class="menu_list">
        <li>prosciutto</li>
        <li>provolone</li>
        <li>avocado</li>
        <li>sourdough roll</li>
    </ul>
</li>
<li>Southwest Slider
    <ul class="menu_list">
        <li>whole chiles</li>
        <li>hamburger</li>
        <li>pepperjack cheese</li>
        <li>multigrain roll</li>
    </ul>
</li>
</ul>
</div>
</div>
</body>
```




index.html



DOM Tree Magnets Solution

It looks like all the ingredients are set up as child list items of the parent entrée list items. They aren't really labeled very clearly or uniquely, now are they?

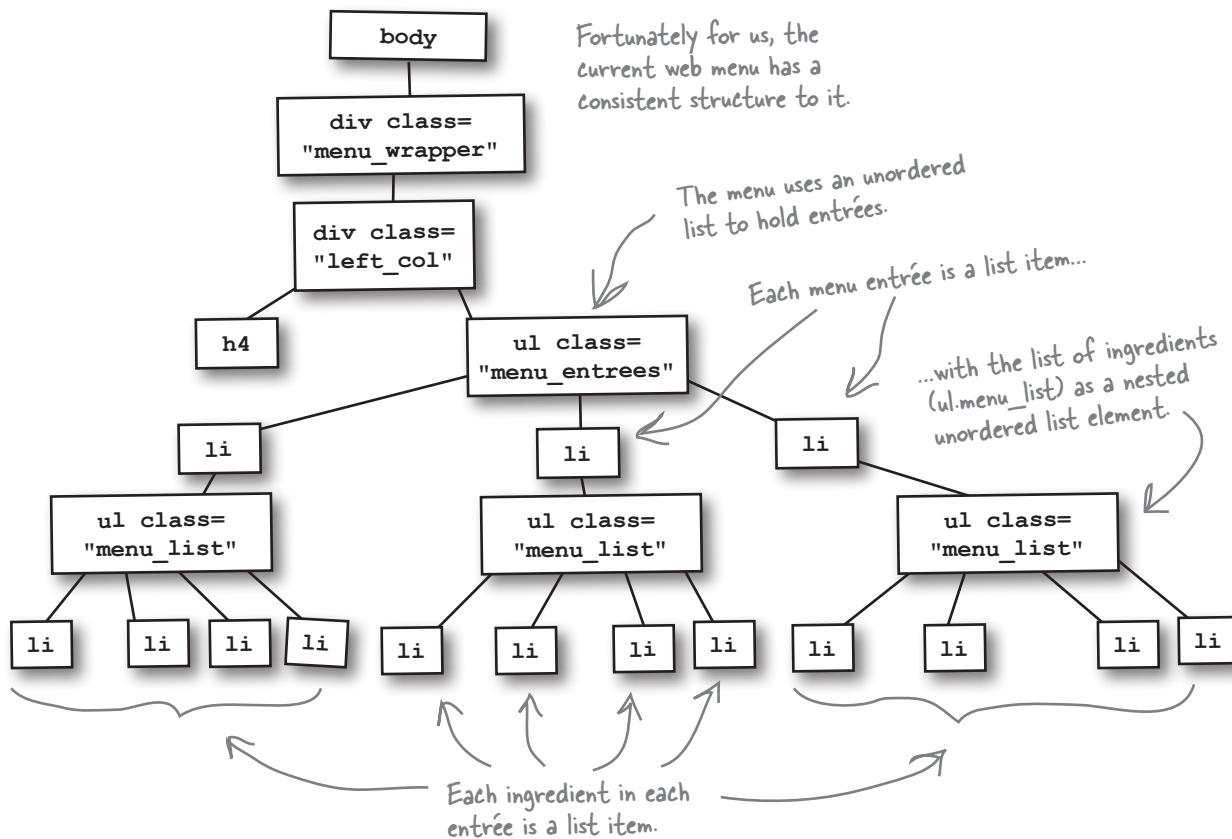

We need to write selectors that will find the ingredients we need to change. At this level, they're all list elements...

...so how can we distinguish the ingredients we want to substitute from the rest?

```
<body>
<div id="menu_wrapper">
<div class="left_col">
<h4>Dinner Entrees</h4>
<ul class="menu_entrees">
<li>Thai-style Halibut
    <ul class="menu_list">
        <li>coconut milk</li>
        <li>pan-fried halibut</li>
        <li>early autumn vegetables</li>
        <li>Thai spices </li>
    </ul>
</li>
<li>House Grilled Panini
    <ul class="menu_list">
        <li>prosciutto</li>
        <li>provolone</li>
        <li>avocado</li>
        <li>sourdough roll</li>
    </ul>
</li>
<li>Southwest Slider
    <ul class="menu_list">
        <li>whole chiles</li>
        <li>hamburger</li>
        <li>pepperjack cheese</li>
        <li>multigrain roll</li>
    </ul>
</li>
</ul>
</div>
</div>
</body>
```

This is just
a fragment
of the actual
HTML page.



index.html





Regular web page structure (HTML) makes writing jQuery code much easier, but the ingredient elements we want to find aren't labeled in a way that will make our jQuery code easier to write. How can we make our elements easier to select?

you said you were high class...

Class up your elements

As we've seen in each chapter so far, we can help jQuery find elements on web pages more effectively by setting up our HTML and CSS properly. To really make our structure sing, we should add classes and IDs to our style sheet and set our HTML elements' attributes with the appropriate classes and IDs. This makes selecting elements easier and saves you coding time later on.

For jQuery, selectors aren't just about controlling the look and feel of your page. Selectors allow jQuery to match (or query) elements on the page, too.

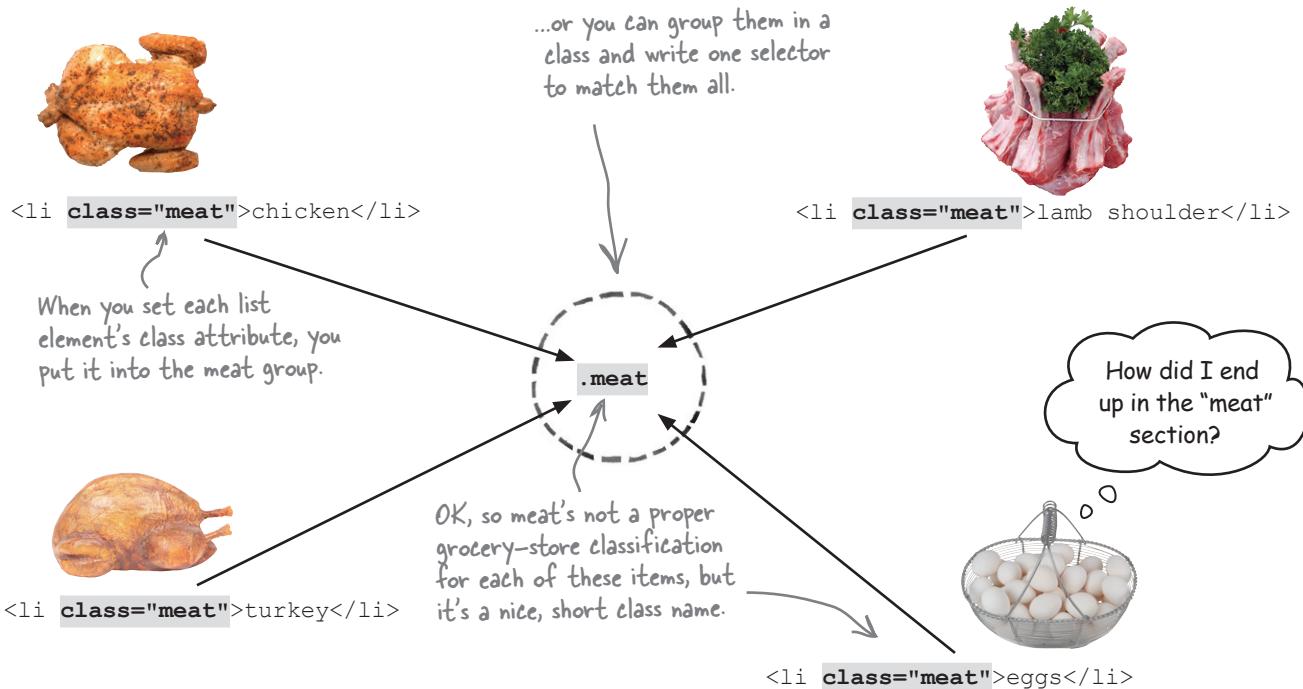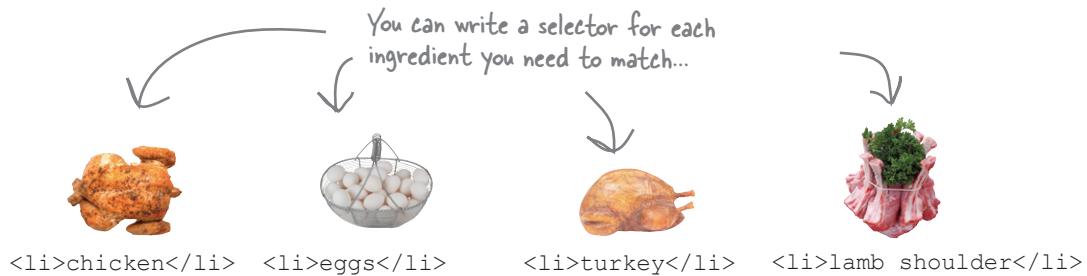



Find the menu substitutions the head chef wants and label each one with the appropriate class (fish, meat, or hamburger). If an ingredient doesn't need a class, leave the line blank.

The HTML is laid out just like your menu will appear on the page.

```

<li>Thai-style Halibut
    <ul class="menu_list">
        <li>.....>coconut milk</li>
        <li>.....>pan-fried halibut</li>
        <li>.....>lemongrass broth</li>
        <li>.....>vegetables</li>
        <li>.....>Thai spices </li>
    </ul>
</li>

<li>Braised Delight
    <ul class="menu_list">
        <li>.....>lamb shoulder</li>
        <li>.....>cippolini onions</li>
        <li>.....>carrots</li>
        <li>.....>baby turnip</li>
        <li>.....>braising jus</li>
    </ul>
</li>

<li>House Grilled Panini
    <ul class="menu_list">
        <li>.....>prosciutto</li>
        <li>.....>provolone</li>
        <li>.....>avocado</li>
        <li>.....>cherry tomatoes</li>
        <li>.....>sourdough roll</li>
        <li>.....>shoestring fries </li>
    </ul>
</li>

<li>House Slider
    <ul class="menu_list">
        <li>.....>eggplant</li>
        <li>.....>zucchini</li>
        <li>.....>hamburger</li>
        <li>.....>balsamic vinegar</li>
        <li>.....>onion</li>
        <li>.....>carrots</li>
        <li>.....>multigrain roll</li>
        <li>.....>goat cheese</li>
    </ul>
</li>
```

```

<li>Frittata
    <ul class="menu_list">
        <li>.....>eggs</li>
        <li>.....>Asiago cheese</li>
        <li>.....>potatoes </li>
    </ul>
</li>

<li>Coconut Soup
    <ul class="menu_list">
        <li>.....>coconut milk</li>
        <li>.....>chicken</li>
        <li>.....>vegetable broth</li>
    </ul>
</li>

<li>Soup Du Jour
    <ul class="menu_list">
        <li>.....>grilled steak</li>
        <li>.....>mushrooms</li>
        <li>.....>vegetables</li>
        <li>.....>vegetable broth </li>
    </ul>
</li>

<li>Hot and Sour Soup
    <ul class="menu_list">
        <li>.....>roasted pork</li>
        <li>.....>carrots</li>
        <li>.....>Chinese mushrooms</li>
        <li>.....>chili</li>
        <li>.....>vegetable broth </li>
    </ul>
</li>

<li>Avocado Rolls
    <ul class="menu_list">
        <li>.....>avocado</li>
        <li>.....>whole chiles</li>
        <li>.....>sweet red peppers</li>
        <li>.....>ginger sauce</li>
    </ul>
</li>
```

exercise solution
**Exercise
Solution**

Find the menu substitutions the head chef wants and label each one with the appropriate class (fish, meat, or hamburger). If an ingredient doesn't need a class, leave the line blank.

```

<li>Thai-style Halibut
    <ul class="menu_list">
        <li>.....>coconut milk</li>
        <li>.....<b>class="fish">pan-fried halibut</li>
        <li>.....>lemongrass broth</li>
        <li>.....>vegetables</li>
        <li>.....>Thai spices </li>
    </ul>
</li>

<li>Braised Delight
    <ul class="menu_list">
        <li>.....<b>class="meat">lamb shoulder</li>
        <li>.....>cippolini onions</li>
        <li>.....>carrots</li>
        <li>.....>baby turnip</li>
        <li>.....>braising jus</li>
    </ul>
</li>

<li>House Grilled Panini
    <ul class="menu_list">
        <li>.....<b>class="meat">prosciutto</li>
        <li>.....>provolone</li>
        <li>.....>avocado</li>
        <li>.....>cherry tomatoes</li>
        <li>.....>sourdough roll</li>
        <li>.....>shoestring fries </li>
    </ul>
</li>

<li>House Slider
    <ul class="menu_list">
        <li>.....>eggplant</li>
        <li>.....>zucchini</li>
        <li>.....<b>class="hamburger">hamburger</li>
        <li>.....>balsamic vinegar</li>
        <li>.....>onion</li>
        <li>.....>carrots</li>
        <li>.....>multigrain roll</li>
        <li>.....>goat cheese</li>
    </ul>
</li>
```

```

<li>Frittata
    <ul class="menu_list">
        <li>.....<b>class="meat">eggs</li>
        <li>.....>Asiago cheese</li>
        <li>.....>potatoes </li>
    </ul>
</li>

<li>Coconut Soup
    <ul class="menu_list">
        <li>.....>coconut milk</li>
        <li>.....<b>class="meat">chicken</li>
        <li>.....>vegetable broth</li>
    </ul>
</li>

<li>Soup Du Jour
    <ul class="menu_list">
        <li>.....<b>class="meat">grilled steak</li>
        <li>.....>mushrooms</li>
        <li>.....>vegetables</li>
        <li>.....>vegetable broth </li>
    </ul>
</li>

<li>Hot and Sour Soup
    <ul class="menu_list">
        <li>.....<b>class="meat">roasted pork</li>
        <li>.....>carrots</li>
        <li>.....>Chinese mushrooms</li>
        <li>.....>chili</li>
        <li>.....>vegetable broth </li>
    </ul>
</li>

<li>Avocado Rolls
    <ul class="menu_list">
        <li>.....>avocado</li>
        <li>.....>whole chiles</li>
        <li>.....>sweet red peppers</li>
        <li>.....>ginger sauce</li>
    </ul>
</li>
```

Button things up

Now that you've got things mostly set up, let's go back to the napkin with the head chef's requirements. Next up, you need to build two buttons.

— We want a "Go Vegetarian" button that automatically substitutes the right vegetarian option on our web page menu.

— We'll need a second button that restores the menu to its original state.



Sharpen your pencil

Update the structure and script to make the two buttons from the napkin. Give the "Go Vegetarian" button an ID of vegOn and the "Restore Menu" button an ID of restoreMe.

```
<div class="topper">
  <h2>Our Menu</h2>
  <ul>
    <li class="nav">.....</li>
    <li class="nav">.....</li>
  </ul>
</div>
```



index.html

```
$(document).ready(function() {
  var v = false;

  if (v == false) {
    v = true}
  });//end button

  if (v == true) {
    v = false;}
  };//end button
});//end document ready
```



my_scripts.js

sharpen solution

Sharpen your pencil

Solution

Update the structure and script to make the two buttons from the napkin. Give the "Go Vegetarian" button an ID of vegOn and the "Restore Menu" button an ID of restoreMe.

```
<div class="topper">
  <h2>Our Menu</h2>
  <ul>
    <li class="nav"> <button id="vegOn">Go Vegetarian</button> </li>
    <li class="nav"> <button id="restoreMe">Restore Menu</button> </li>
  </ul>
</div>
```



Build button elements with IDs of vegOn and restoreMe.

index.html

A more specific selector, using the element type and ID

```
$ (document) .ready(function() {
  var v = f;
  $("button#vegOn").click(function(){
    if (v == false){
      v = true;
    } //end button
  });
  $("button#restoreMe").click(function(){
    if (v == true){
      v = false;
    } //end button
  });
}); //end document ready
```

Attach the click method to the buttons.



my_scripts.js

What's next?

That was quick! You've got the two buttons set up. Let's check those items off of the napkin and move on to the stuff that the "Go Vegetarian" button needs to do.

- ~~— We want a "Go Vegetarian" button that automatically substitutes the right vegetarian option on our web page menu.~~
- ~~— We'll need a second button that restores the menu to its original state.~~

Here's how our substitutions work:

- We offer no substitutes for our fish entrées, so we need those removed.
- We offer giant portobello mushrooms as a vegetarian substitute for our hamburgers.
- We offer tofu as a vegetarian substitute for all of our meat and egg dishes except hamburgers.



Exercise

In your own words, write the three things that the "Go Vegetarian" button needs to do.

1.
.....
2.
.....
3.
.....

exercise solution

In your own words, write the three things that the “Go Vegetarian” button needs to do.

1. Match li elements of the fish class and remove those entrees from the menu.
2. Match li elements in the hamburger class and replace them with portobello mushrooms.
3. Match li elements in the meat class and replace them with tofu.

Don't worry if your answers were a bit different. Translating requirements into stuff that your web app needs to do takes practice.


Our next task is to tackle item 1 above: match `li` elements of the `fish` class and remove them from the menu. We matched elements with class selectors and used `remove` to take elements out of the DOM in Chapter 2.

jQuery also offers us the `detach` method. `detach` and `remove` both take elements out of the DOM. So what's the difference between the two methods, and which one should we use?

remove

The `remove` method drops the element out of the DOM.

```
$( "img#thumbnail" ).remove();
```

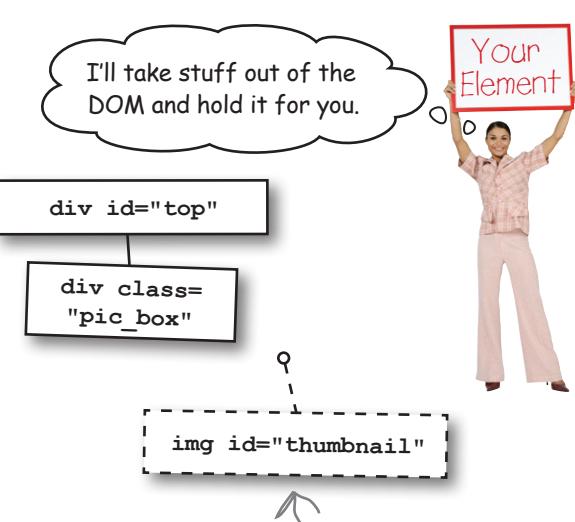detach

The `detach` method takes the selected element(s) out, but holds on to it so that it can be reattached later.


```
$( "img#thumbnail" ).detach();
```



Sharpen your pencil


In the space provided, write the selector and `remove` or `detach` code that will create the result shown on the right.

DOM result




jQuery statement

.....

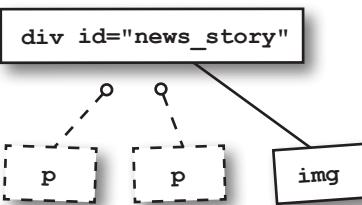

.....

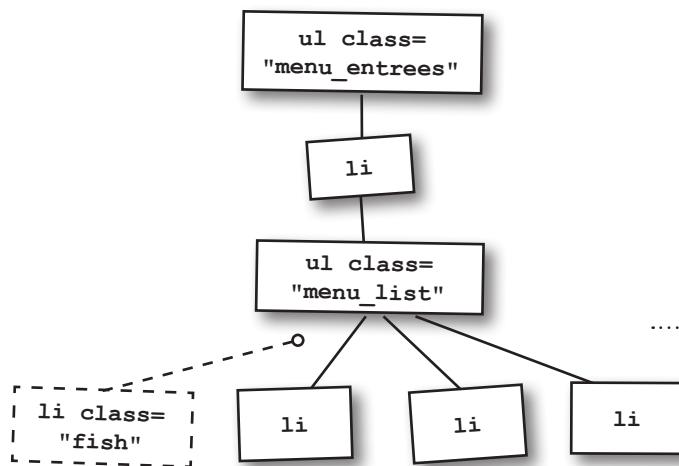


.....


sharpen solution**Solution**

In the space provided, write the selector and `remove` or `detach` code that will create the result shown on the right.


When you run `remove` or `detach` on an element, all of the element's children will be removed as well.

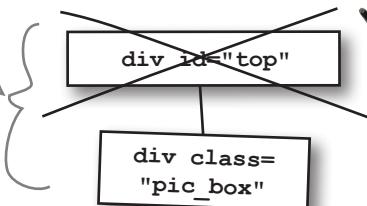DOM result**jQuery statement**
`$("div#top").remove()`


Remember that all of the elements matched by the selector will be detached.

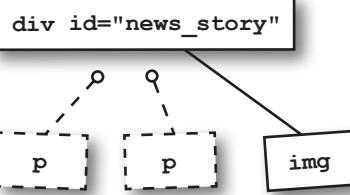
`$("div p").detach()`

When you group the elements by class or ID, you can be more specific in selecting those elements.


`$("li.fish").detach()`

When you group the elements by class or ID, you can be more specific in selecting those elements.



Test Drive

Add the line of code for the third Sharpen Your Pencil solution inside the vegOn button click function in your *my_scripts.js* file. Then, open the page up in your favorite browser to make sure everything's working.

Our Menu

Dinner Entrees

- Poached Salmon
 - salmon white wine salt black pepper
- Roasted Trout
 - grilled trout mint capers olives tomato lemon olive oil potatoes
- Thai-style Halibut
 - coconut milk pan-fried halibut lemongrass broth early autumn vegetables Thai spices

Go Vegetarian Restore Menu

Our Menu

We removed this...

Dinner Entrees

- Poached Salmon
 - white wine salt black pepper
- Roasted Trout
 - mint capers olives tomato lemon olive oil potatoes
- Thai-style Halibut
 - coconut milk lemongrass broth early autumn vegetables Thai spices

...but we need to remove the whole entrée.

Soups and Sides

- Coconut Soup
 - coconut milk chicken vegetable broth
- Soup Du Jour
 - grilled steak mushrooms seasonal vegetables vegetable broth
- Hot and Sour Soup
 - roasted pork carrots Chinese mushrooms chili vegetable Broth

Go Vegetarian Restore Menu

Before running
\$("li.fish").detach()

After running
\$("li.fish").detach(), all the elements with a class of fish are gone.

The `detach` method definitely got rid of stuff, just not everything we wanted to remove. We removed the list element of the entrée. What we need to do is to remove the entire entrée inside which the `.fish` list element is nested.

How do we tell the DOM to detach the entire entrée?


it's ok to monkey around

Swinging through the DOM tree

In Chapter 1, we learned that the DOM is built like a tree. It has a root, branches, and nodes. The JavaScript interpreter in a browser can *traverse* (and then manipulate) the DOM, and jQuery is especially good at it. DOM traversal simply means climbing up and down and across the DOM.

We've been manipulating the DOM since Chapter 1. The `detach` method we just looked at is an example of DOM manipulation (i.e., we dynamically take elements out of the DOM).

But what is traversal really all about? Let's take one section of the menu and visualize it as a DOM tree to see how traversal works.

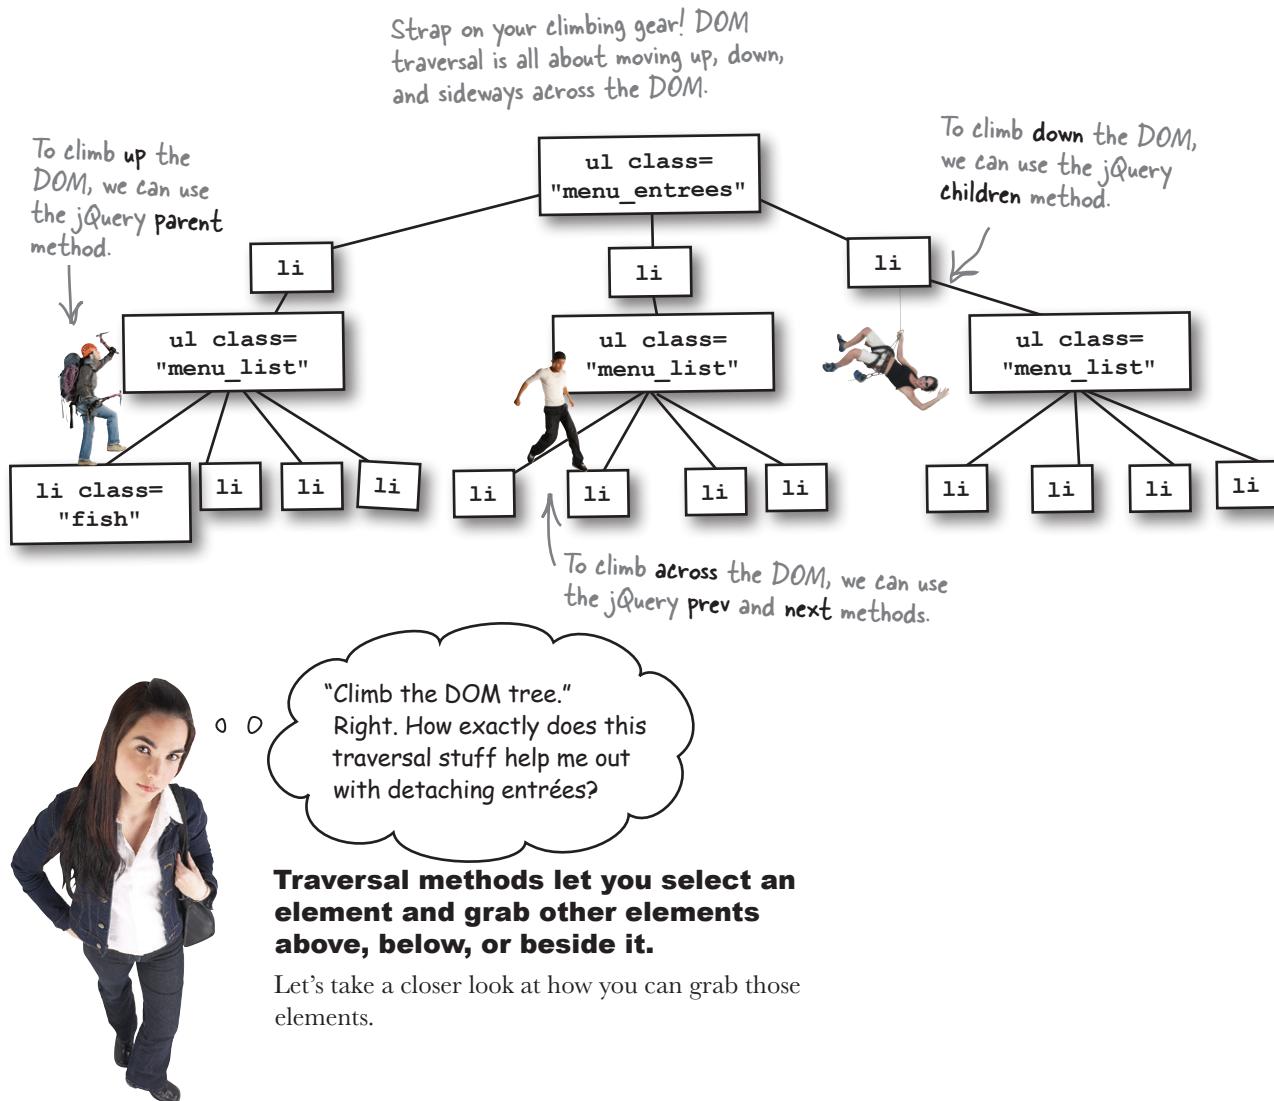


Traversal methods climb the DOM

To tell the DOM that we want to detach entrées whose menu lists contain fish, we have to reference elements by their relationship. jQuery's traversal methods allow us to get at those element relationships.

Select all the elements in the fish class.


`$(".fish").parent()`

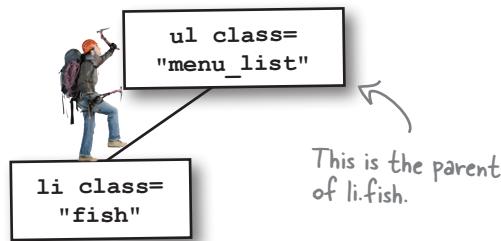

Then get the element above those elements.

Select all the elements in the menu_list class.


`$(".menu_list").children()`

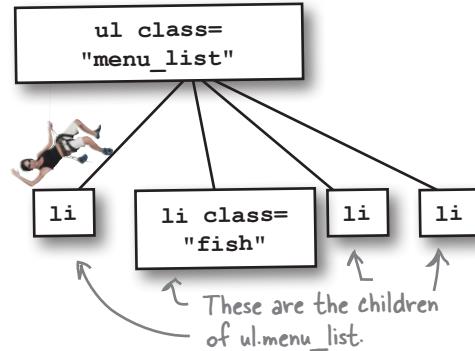

Then get the element below those elements.


Select all the elements in the fish class. Then get the sibling element immediately to the left.

`$(".fish").prev()`

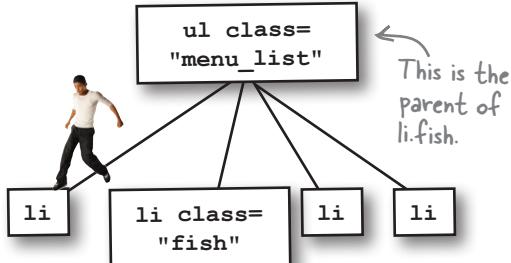

Select all the elements in the fish class. Then get the sibling element immediately to the right.

`$(".fish").next()`

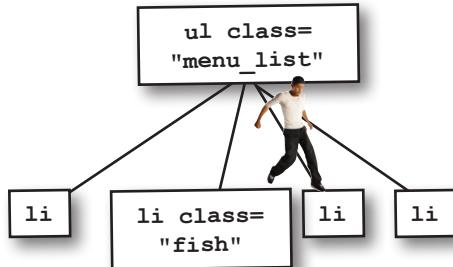

Which of these methods can help us detach menu entrées with elements in the fish class?


no weak links here!

Chain methods to climb farther

What if we want to climb higher, lower, or deeper? Strap on the chains, man! jQuery offers us method *chaining*. Method chaining lets us manipulate and traverse our pages in a more effective way. Here's how it works:


To go one parent higher, just add another method to the method chain.

`$(".fish").parent().parent()`

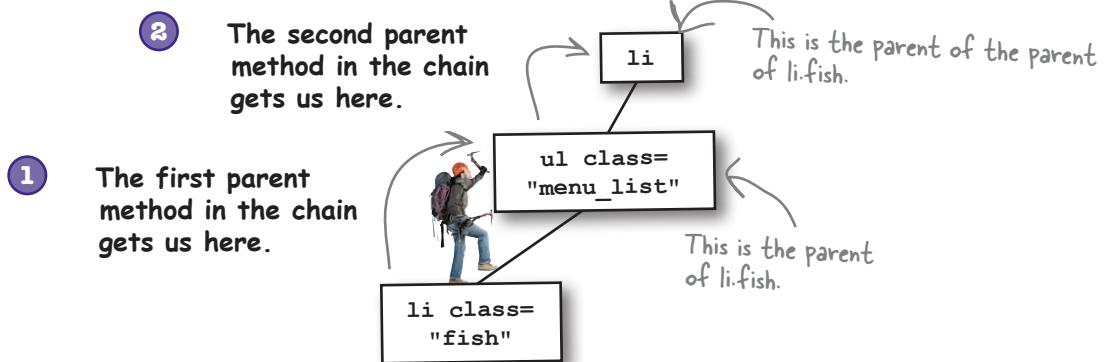

You can mix and match methods too.

`$(".menu_list").parent().next().remove()`

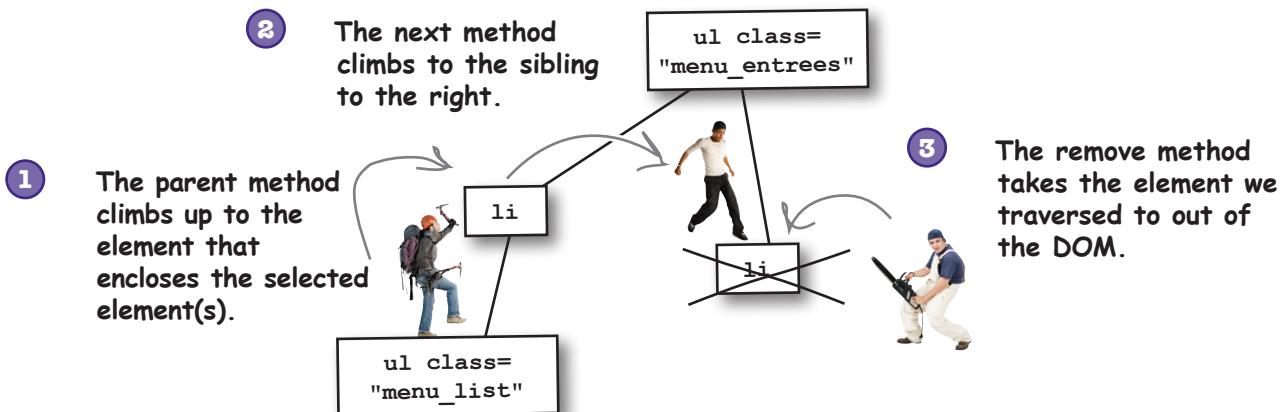



Exercise

Go to <http://www.thinkjquery.com/chapter04/traversal/> and open the JavaScript console in your favorite browser's developer tools. The "Read Me" section at the front of the book covers browser developer tools. Run each of the four traversal methods along with the chained `detach` method as shown below. Then, write why or why not this will help us with the problem at hand.

Important: Make sure to **refresh the browser** after running each statement.

```
$(".menu_entrees").children().detach()
```

.....
.....
.....

```
$(".menu_list").children().detach()
```

.....
.....
.....

```
$(".fish").parent().detach()
```

.....
.....
.....

```
$(".fish").parent().parent().detach()
```

.....
.....
.....


exercise solution**Exercise Solution**

Go to <http://www.thinkjquery.com/chapter04/traversal/> and open the JavaScript console in your favorite browser's developer tools. Don't remember how to use browser dev tools? Head back to the "Read Me" section of the book to refresh yourself. Run each of the four traversal methods along with the chained `detach` method as shown below. Then, write why or why not this will help us with the problem at hand.

Important: Make sure to **refresh the browser** after running each statement.


```
$(".menu_entrees").children().detach()
```

This traversal method detaches the children element of `menu_entrees`. It won't work for removing entrées that contain fish because it removes ALL of the entrée lists. Crud! Not what we needed.

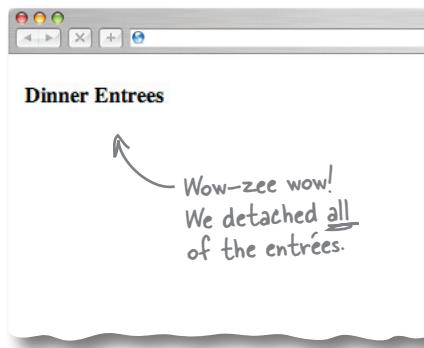


```
$(".menu_list").children().detach()
```

This traversal method detaches the children element of `menu_list`. It won't work for removing entrées that contain fish because it removes the list of ingredients from every `ul.menu_list`. Oops! Not what we wanted at all.

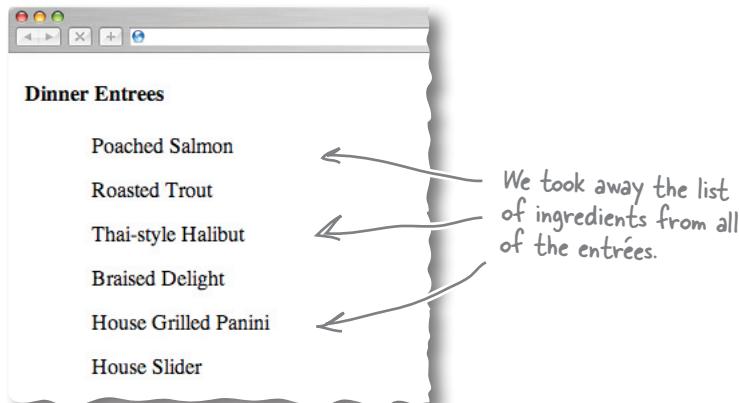


```
$(".fish").parent().detach()
```

This traversal method detaches the parent element of .fish. It won't work for removing entrées that contain fish because it doesn't go far enough up the DOM tree. Instead, it removes the ul.menu_list (and everything below it).

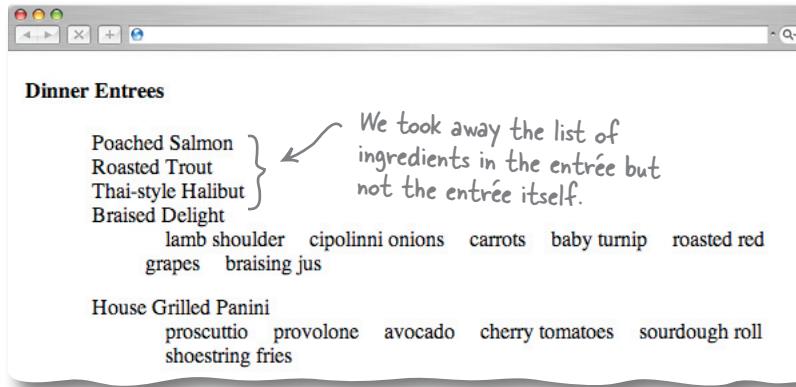

```
$(".fish").parent().parent().detach()
```

This traversal method detaches the parent of the parent element of .fish. It does just what we need it to do.

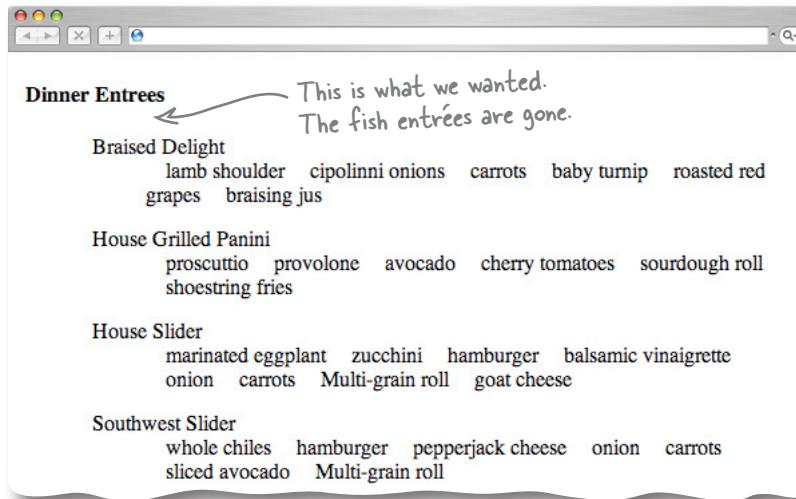


where did those elements go?



Wait a second—don't we need to restore the fish entrées when we program the "Restore Menu" button?

Right. We can't just detach the fish entrées and forget about them.

We'll have to rethink our code a bit to make this work.

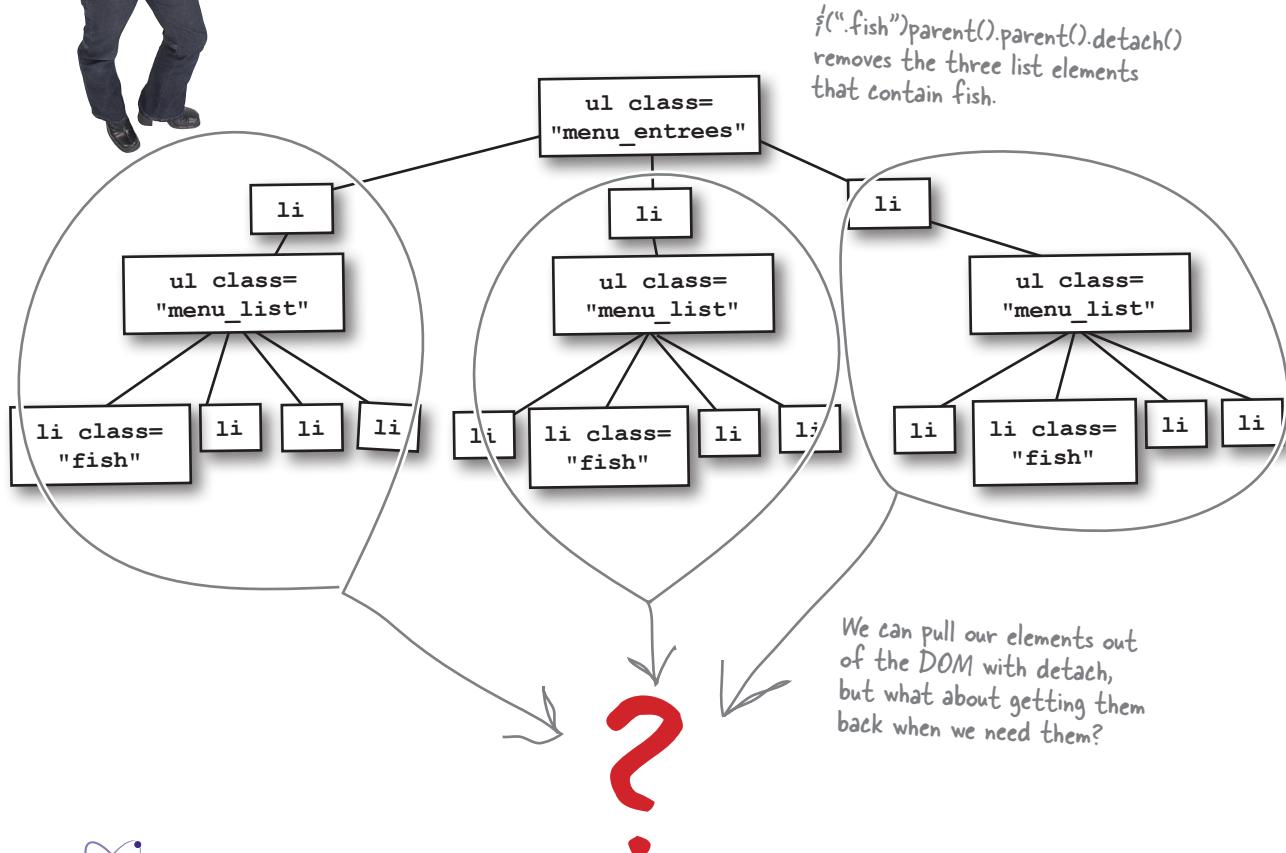

We need to bring back the fish entrées later.
What should we do with them?



We've seen quite a few jQuery and JavaScript constructs so far. Which ones do we need so that we don't forget the `.fish` class elements? Write a "Yes" or "No" in the "Should we use it?" column for each, and explain why you chose or didn't choose it. We did one for you, so now you're down to three.

	Should we use it?	Why?
Terminator	No	A terminator simply ends a statement. It won't solve the problem of remembering the detached elements.
Variable		
Function		
Selector		

sharpen solution

We've seen quite a few jQuery and JavaScript constructs so far. Which one do we need so that we don't forget the `.fish` class elements? Write a "Yes" or "No" in the "Should we use it?" column for each, and explain why you chose or didn't choose it. Here's our solution.

	Should we use it?	Why?
Terminator	No	A terminator simply ends a statement. It won't solve the problem of remembering the detached elements.
Variable	Yes	A variable stores stuff for us. If we store the detached elements, we can bring them back later by simply referencing the variable.
Function	No	A function lets us perform manipulations on data. The problem with the detached elements is a problem of storing data, not manipulating it.
Selector	No	A selector selects elements based on what's in the DOM. We've already selected our elements. What we need is a way to store those elements.

there are no
Dumb Questions

Q: I get `remove` and `detach`, but what if I just want to get rid of something inside an element and not the element itself?

A: To get rid of the content in an element, you can use the `empty` method. Let's say you want to delete all of the stuff inside the paragraphs on a page; just do this:
`$("p").empty();`

Q: Is there a way to traverse all of an element's parent elements?

A: Yes. In addition to the `parent` method, jQuery also offers the `parents` method, which lets you traverse all of the selected element's parent elements. You'll see this method in action later in this chapter.

Q: What if I want to get the parent element nearest to the selected element?

A: You can use the `closest` method. Like the `parents` method, the `closest` method will climb through an element's parent elements, but it stops when it finds a match. For example, if you want to find the closest `ul` above a list item, use this:
`$("li").closest("ul");`

Q: I know about `next` and `previous`, but what if I want to traverse all of the elements on the same level of the DOM tree?


A: Fortunately, the jQuery team has thought of that one, too. The `siblings` method will traverse all of the elements at the same level as the selected element.

Q: Does Google Chrome have jQuery built in?

A: No. The reason we can run jQuery in Chrome's browser dev tools is that we've included jQuery in the HTML page. If you visit a web page that doesn't use jQuery, don't expect the Chrome JavaScript console to run jQuery statements.

Variables can store elements, too

Variables must be pretty useful because we find ourselves needing them again. We've seen variables throughout the first three chapters, but we've only used them to store numbers and text strings. Wouldn't it be convenient if JavaScript variables could store our elements too? As it turns out, they can.

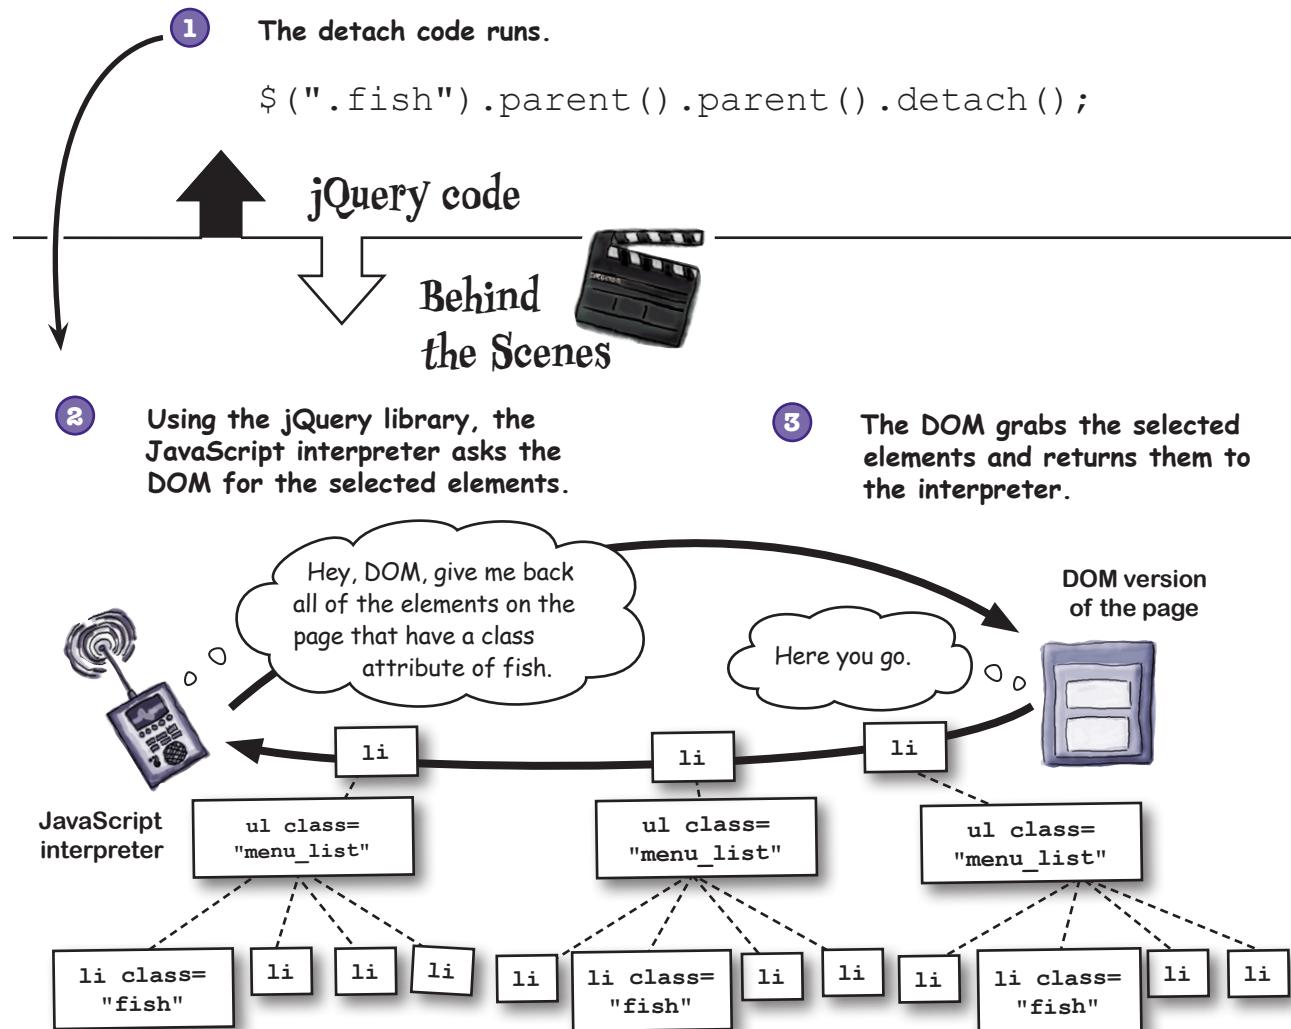


The browser will hold those elements in memory temporarily. If we want to keep them to use in our program later, it's a good idea to put them into a variable. But how do we do that?

special \$friends

There's that dollar sign again...


Storing our elements is simple. We create a variable, just as we have for numbers and text strings, and set the variable (using the equals sign) to the statement that returns elements. But wouldn't it be good to know when the variable is storing *special* stuff like elements (versus just numbers or text strings)? It's common practice among jQuery coders to place a dollar sign in front of a variable that will be used to store elements returned from jQuery. That way, anyone else who looks at our code knows that we are using the variable to store stuff that we got from jQuery.

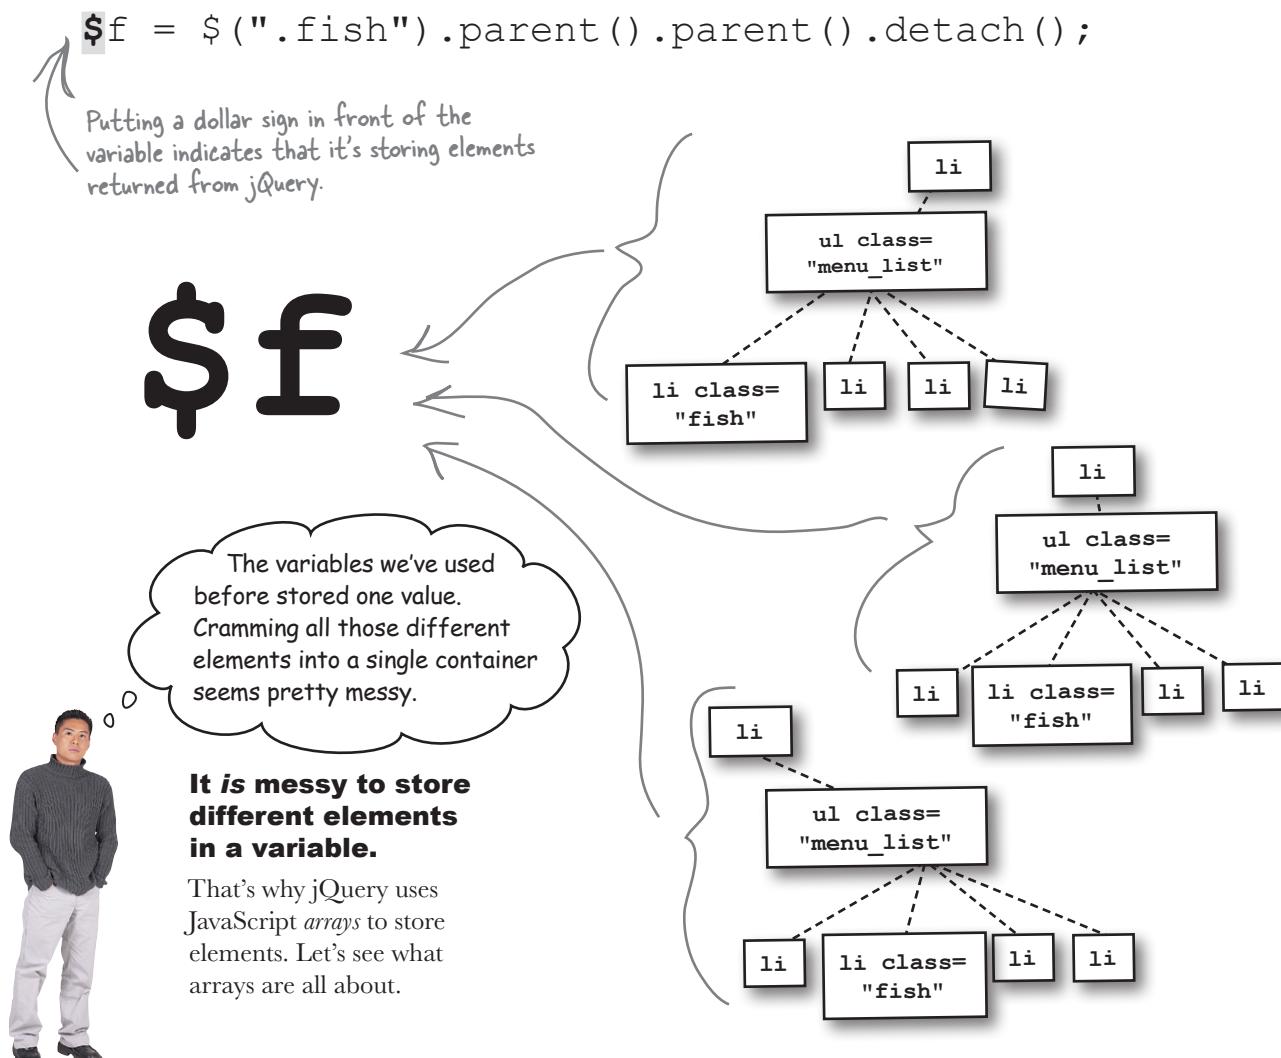

Expand your storage options with arrays

Any time we select elements from the DOM and store them in a variable, jQuery returns the data as an *array*. An array is simply a variable with greater storage options.


A basic variable stores one value.

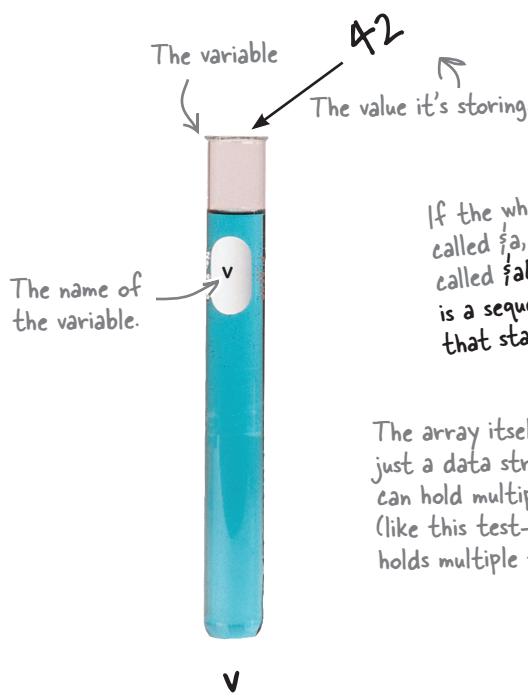

If the whole array is called `[$a]`, each slot is called `[$a[n]]`, where `n` is a sequential number that starts at 0.

The array itself is really just a data structure that can hold multiple variables (like this test-tube holder holds multiple test tubes).

An array stores many values.

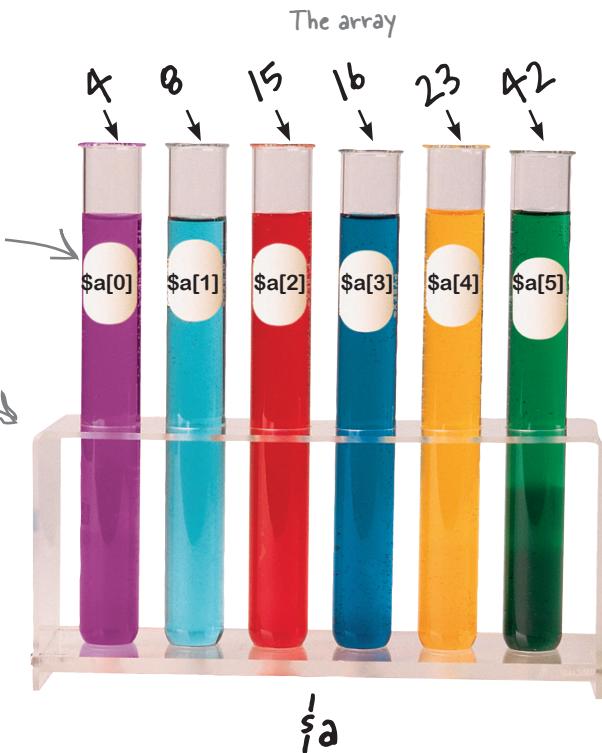

We can put stuff in and take things out of each storage slot. To put the value "15" into the third slot, we would write this:

`$a [2] = 15;`

The third slot is numbered 2 because we started at 0.



Geek Bits


Arrays don't **have** to start with a dollar sign (\$). The practice of indicating a jQuery array with a dollar sign is a coding convention of jQuery developers.

so tidy!

Store elements in an array

When we select and detach the `li` elements and set a variable (`$f`) to the result, jQuery takes the elements the DOM returns and stores them neatly for us in a JavaScript array. When we want to put those elements back with the restore button, our job will be way less messy.

```
$f = $(".fish").parent().parent().detach();
```

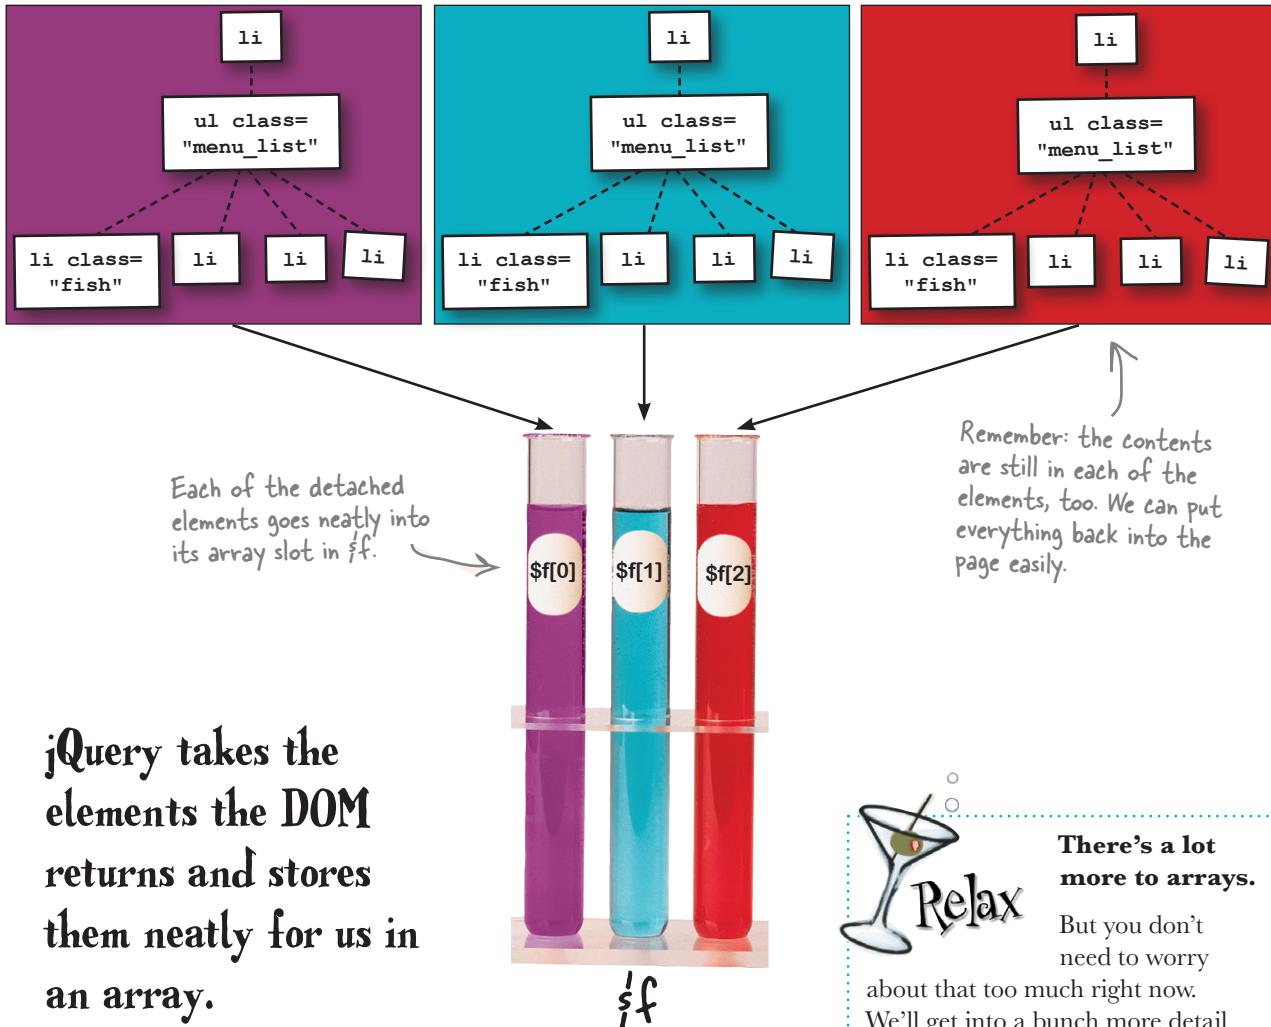



Test Drive

Add the line of code on the previous page, which will detach the parents of the parents of the #fish elements, inside the vegOn button click function in your *my_scripts.js* file. Then, open the page up in your favorite browser to make sure everything's working.

Our Menu	
Dinner Entrées	<i>This is what we wanted. The fish entrées are detached.</i>
Braised Delight lamb shoulder cipollini onions carrots baby turnip roasted red grapes braising jus	Soups and Sides
House Grilled Panini prosciutto provolone avocado cherry tomatoes sourdough roll shoestring fries	Coconut Soup coconut
House Slider marinated eggplant zucchini hamburger balsamic vinaigrette onion carrots Multi-grain roll goat cheese	Soup Du Jour grilled st broth
Southwest Slider whole chiles hamburger pepperjack cheese onion carrots sliced avocado Multi-grain roll	Hot and Sour So roasted p Broth
Frittata eggs asiago, provolone, and romano cheeses potatoes	Stuffed Baked Po potato cheddar
	Avocado Rolls Avocado sauce

You did it. Now let's update the checklist.

- 1. Match li elements of the fish class and remove those entrées from the menu.
- 2. Match li elements in the hamburger class and replace them with portobello mushrooms.
- 3. Match li elements in the meat class and replace them with tofu.

Next up, you need to find entrées that contain hamburger and replace the hamburger with portobello mushrooms.



We've seen how to take elements out of the DOM, but how do we dynamically replace DOM content with different content?

this for that

Change out elements with replaceWith

The `replaceWith` method allows you to replace selected element(s) with new ones. Whenever you want modify the DOM by exchanging one thing for another, you can use this handy jQuery method. Let's say we want to dynamically change the heading level 2 element that says "Our Menu" to a heading level 1 that says "My Menu." Here's how you can do it using the `replaceWith` method:

Select all the h2 elements.


Replace the selected elements with...

...the stuff in parentheses.


```
$("h2").replaceWith("<h1>My Menu</h1>");
```



- 1 The JS interpreter matches the heading level 2 element...

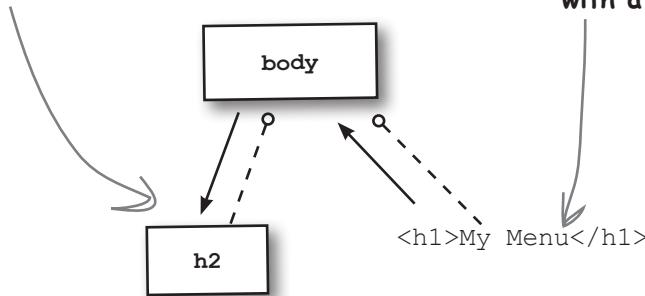


- 2 ...and replaces it with the contents of the stuff in the parentheses, updating the DOM with a new element and new content.




How can replaceWith help?

You need to match `li` elements in the `hamburger` class and replace them with an `li` element of the `portobello` class. Let's think about that problem before we write our code.

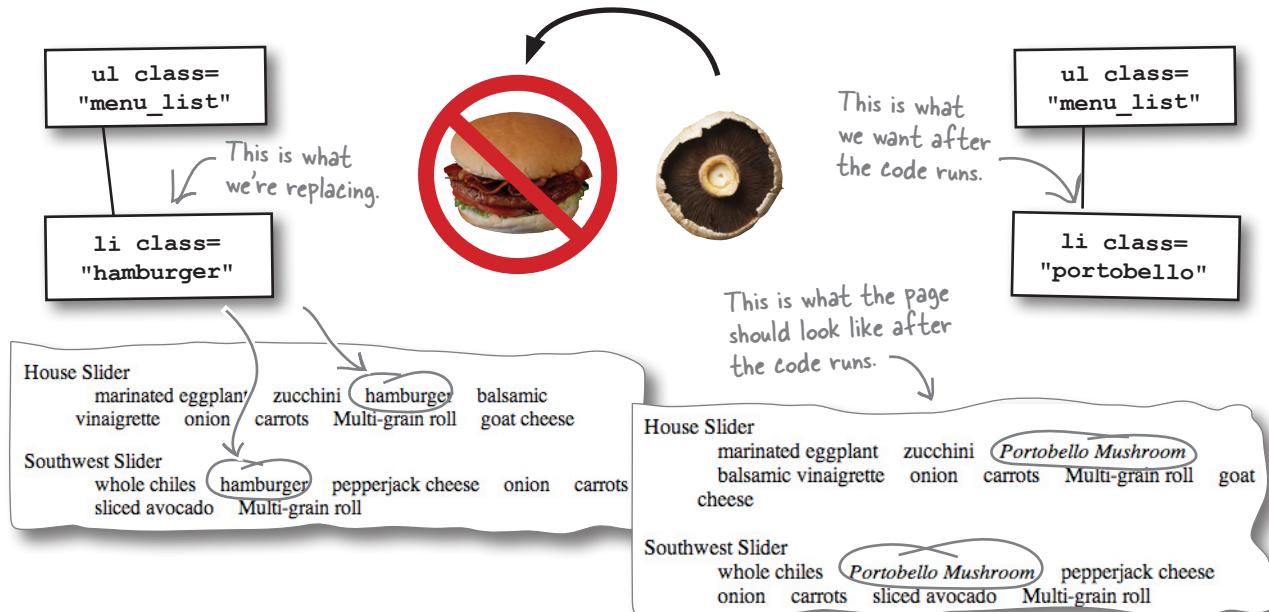


Write the code that will find the `li` elements in the `hamburger` class and replace them with `li` elements in the `portobello` class. The diagram below should help you think it out. We wrote part of the answer for you. You do the rest.

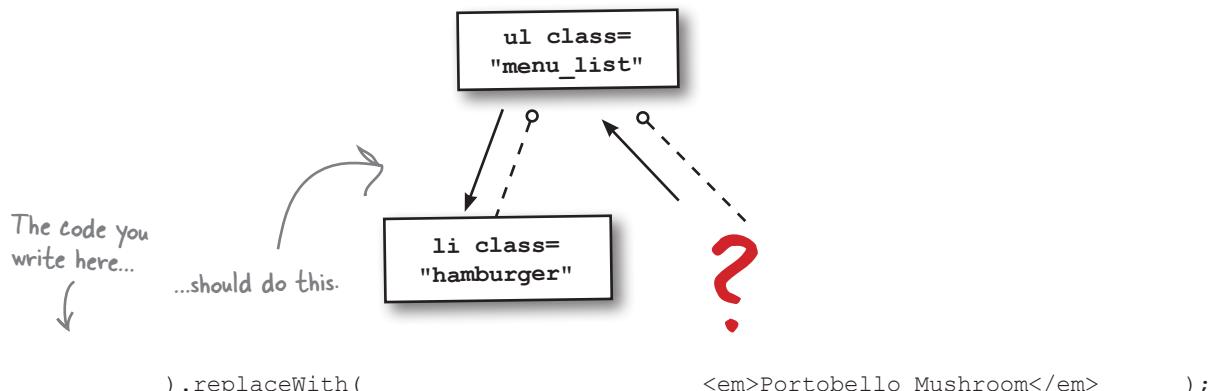

`Portobello Mushroom`

exercise solution**Exercise Solution**

Write the code that will find the `li` elements in the `hamburger` class and replace them with `li` elements in the `portobello` class. Here's our solution.

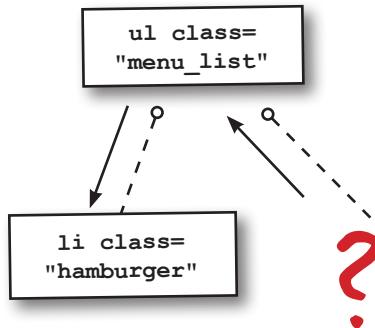


Select all elements in the `hamburger` class.

`$(".hamburger").replaceWith("<li class='portobello'>Portobello Mushroom");`

The `replaceWith` method dynamically trades the selected content for the element in the parentheses. The main thing to remember is that you can put HTML in the parentheses.

**Test Drive**

Add the `replaceWith` code inside the `vegOn` button click function in your `my_scripts.js` file. Then, open the page up in your favorite browser and press the “Go Vegetarian” button to make sure everything’s working.

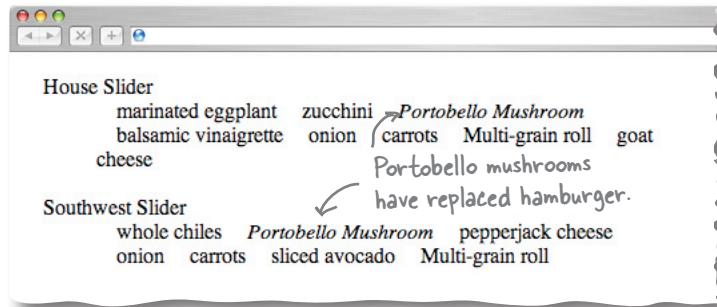

Think ahead before using replaceWith


What's next on the checklist?

- 1. Match li elements of the fish class and remove those entrées from the menu.
- 2. Match li elements in the hamburger class and replace them with portobello mushrooms.
- 3. Match li elements in the meat class and replace them with tofu.

You need to find entrées in the meat class and replace them with tofu.



Actually, we can't use replaceWith for this one.

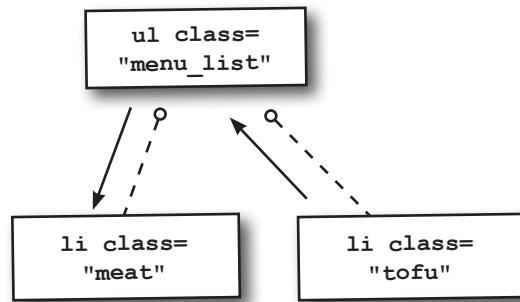

jQuery's `replaceWith` method is straightforward and powerful, but unfortunately, it won't help us solve this one. Why not?

not quite one for all

replaceWith doesn't work for every situation

The replaceWith method works well when you have a **one-to-one** replacement like exchanging the hamburger class for portbello class.

One-to-one substitution



One-to-many substitution

But the scenario of trading out elements for the next item on our checklist isn't one for one. We have to replace many *different* kinds of ingredients (i.e., turkey, eggs, steak, lamb chops) with one ingredient (tofu).

One-to-many substitution



We can take items in the meat class and replace them all with tofu.


Many-to-one substitution

But when we want to select tofu and replace it later, we have a problem. When we want to put the different kinds of meat back in, the DOM has forgotten about them.

We could replace tofu with just *one* of the types of meat, but that's not what we wanted at all.

So we'll need to accomplish this menu substitution in two steps:

Many-to-one substitution

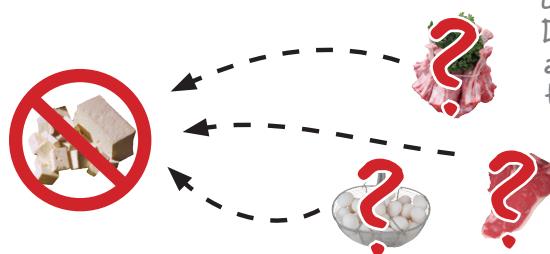

Later on, the DOM's forgotten all the different types of meat.


- ➊ Insert li elements of the tofu class into the DOM after the meat elements.
- ➋ Detach the elements of the meat class and hold them in a variable.

Insert HTML content into the DOM

Up to this point, we've either removed or replaced elements in the DOM. Fortunately for us, the creators of the jQuery library gave us many ways to insert stuff into the DOM. The ones we'll look at are before and after.


`before` inserts content before the selected element.

```
$(".meat").before("<li>Tofu</li>");
```

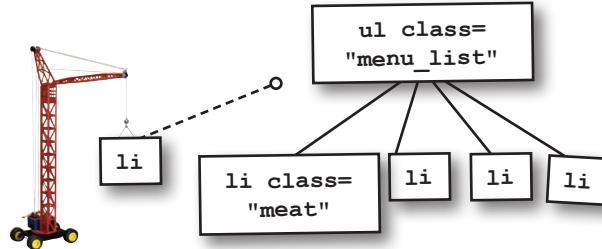

`after` inserts content after the selected element.

```
$(".meat").after("<li>Tofu</li>");
```

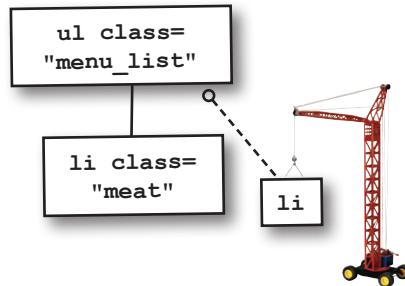

Sharpen your pencil

Write the jQuery code that will accomplish each step to our solution.

- 1 Insert li elements of the `tofu` class into the DOM after the meat elements.
- 2 Detach the elements of the `meat` class and hold them in a variable.

sharpen solution

Sharpen your pencil Solution

Write the jQuery code that will accomplish each step to our solution.

- 1** Insert li elements of the tofu class into the DOM after the meat elements.
- 2** Detach the elements of the meat class and hold them in a variable.

```
$(".meat").after("<li class='tofu'><em>Tofu</em></li>");
```

```
$m = $(".meat").detach();
```

You've accomplished each of the steps for the “Go Vegetarian” button:

- 1. Match li elements of the fish class and remove those entrées from the menu.
- 2. Match li elements in the hamburger class and replace them with portobello mushrooms.
- 3. Match li elements in the meat class and replace them with tofu.

Up next, we need to build the “Restore Menu” button. Here’s what that button needs to do.

- Put the fish entrées back into the menu where we removed them (i.e., before the first menu item in the left column).
- Find entrées that contain portobello mushrooms and replace them with hamburger.
- Find entrées that contain tofu and replace them with the different kinds of meat (in the right order).

Let’s dig right in and look at what we need to do for the first one.



We know how to use `before`, but how do we specify the `first child`?

Use filter methods to narrow your selections (Part 1)

Fortunately, jQuery provides filtering methods that let us narrow our selection for problems like finding the first child. Let's look at six of them (three on this page, three on the next).

first

The `first` method will filter out *everything but the first element* in a selected set of elements.


eq

The `eq` method will filter out *everything but the element whose index number is equal* to what you put in the parentheses in a selected set of elements.

last

The `last` method will filter out *everything but the last element* in a selected set of elements.

Let's look at one item from our menu to see how these methods work:

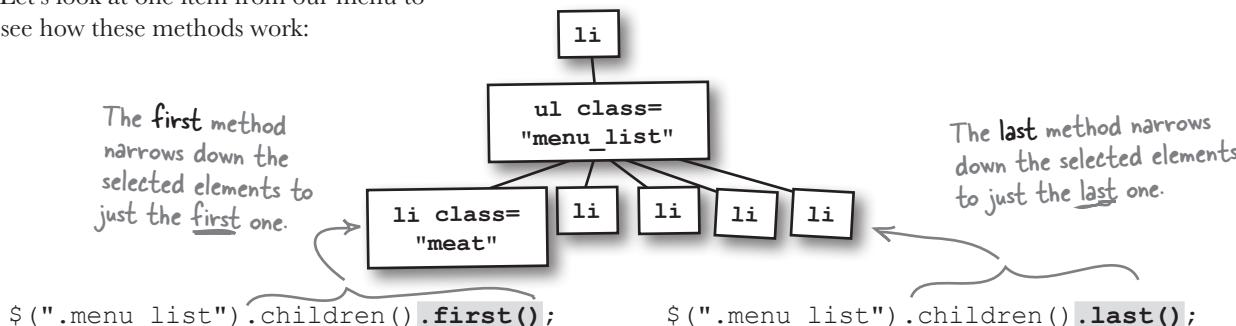

The `eq` method narrows down the selected elements to just the element whose index number is in the parentheses.

```
$(".menu_list").children().eq(0);
$(".menu_list").children().eq(1);
$(".menu_list").children().eq(2);
$(".menu_list").children().eq(3);
$(".menu_list").children().eq(4);
```



Remember that jQuery returns our selected elements in an array. The index number we put in the `eq` method refers to its slot in the array.

narrowing things down

Use filter methods to narrow your selections (Part 2)

Now let's check out the `slice`, `filter`, and `not` methods, and how they work.

`slice`

The `slice` method will filter out everything but elements with an index between the index numbers you put in its parentheses.

`filter`

The `filter` method will filter out everything but elements that match the selector you put in its parentheses.

`not`

The `not` method will filter out everything that does not match the selector you place in the parentheses.

The `slice` method narrows down the selected elements to those between the two index numbers you put in parentheses.

```
$(".menu_list").children().slice(1,3);
```

In this case, only one element will be returned—the second li element.



The `filter` and `not` methods let us use selectors to create a subset from the matched set using selectors as arguments of their methods.

The `filter` method narrows down the selected elements to the selector you put in parentheses.

```
$(".menu_list").parents().filter(".organic");
```

The filter and not methods work great with the `parents` and `children` methods.

The `parents` method lets us grab all the elements that are parents, grandparents, great-grandparents, etc., of the selected element.

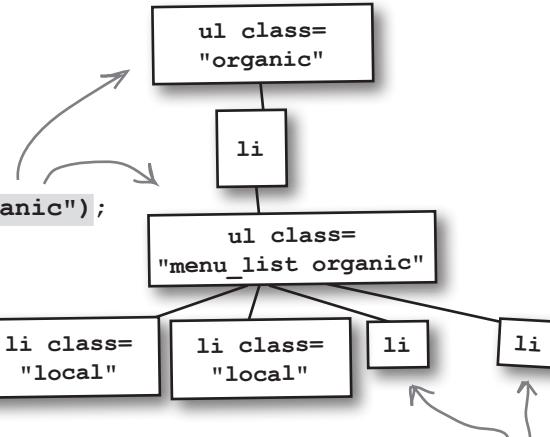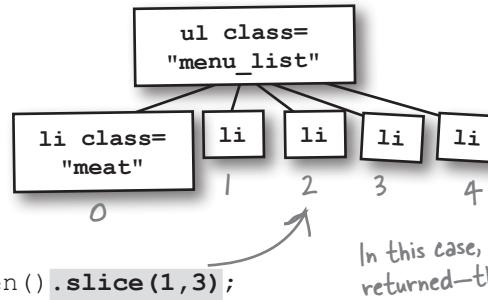

The `not` method narrows down the selected elements to those that do not match the selector you put in parentheses.


```
$("#ul.menu_list.organic").children().not(".local");
```

Which of these methods will help you specify the first child on the menu?



BE the DOM

Your job is to play the DOM. Draw a line from the jQuery statement to the element(s) in the DOM the selector will return. Assume that these are the only elements on the page. We've done the first one for you.

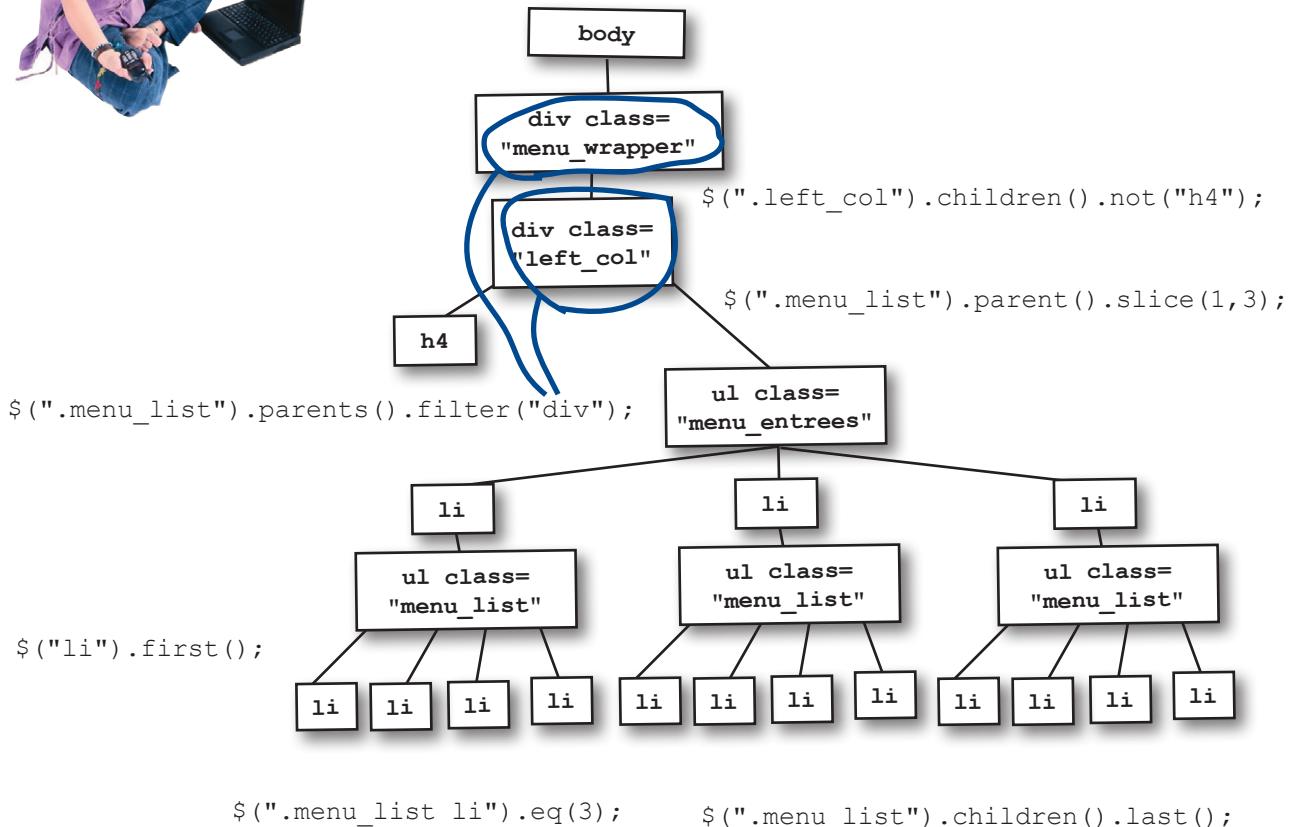

Sharpen your pencil


Write the line of jQuery code that will put the fish entrées back into the menu where we removed them (i.e., before the first menu item below `menu_entrees`).

.....`.before($f);`



BE the DOM Solution

Your job is to play the DOM. Draw a line from the jQuery statement to the element(s) in the DOM the selector will return. Assume that these are the only elements on the page. We've done the first one for you.

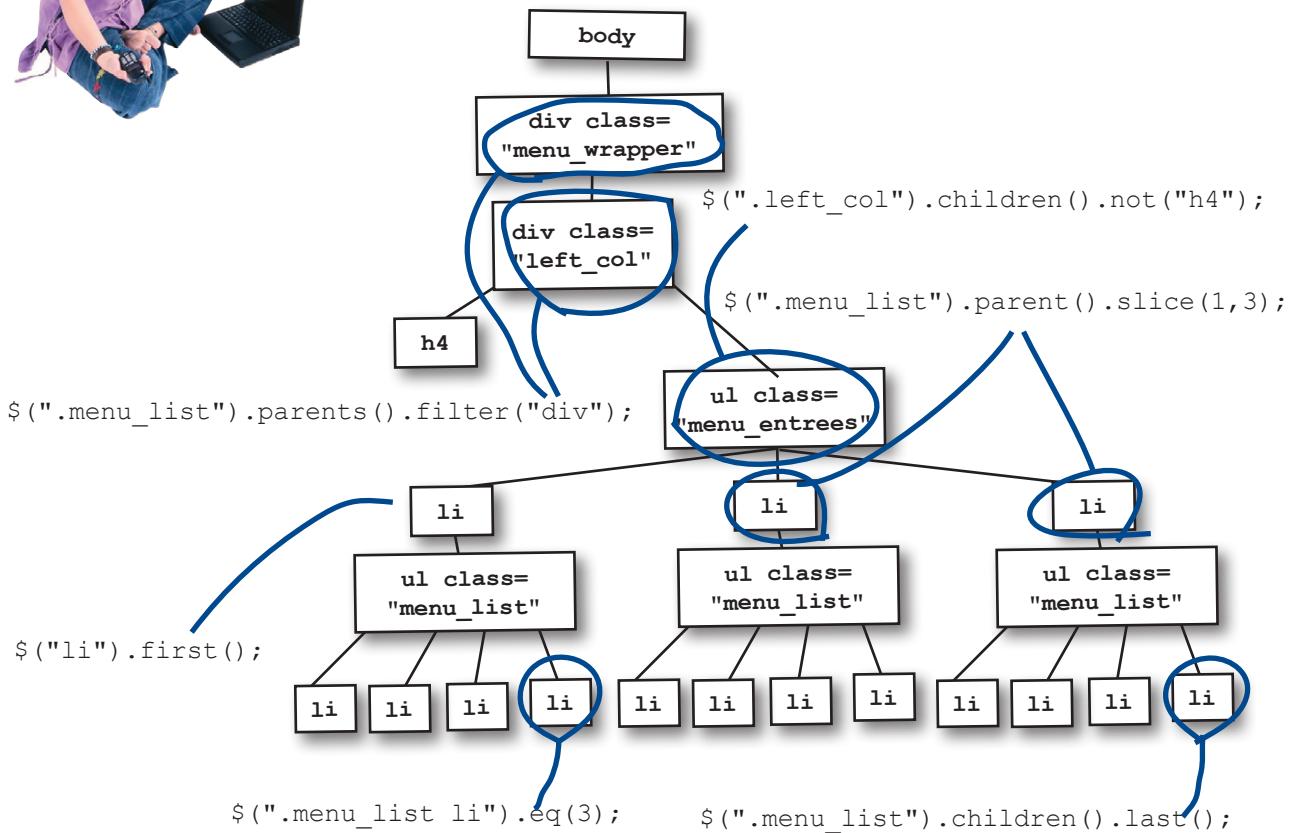

Sharpen your pencil Solution

Write the line of jQuery code that will put the fish entrées back into the menu where we removed them (i.e., before the first menu item below `menu_entrees`).

```
$( ".menu_entrees li" ).first() .before($f);
```

Bring the burger back


So far for the “Restore Menu” requirement, we’ve got one item down, two to go:

- Put the fish entrées back into the menu where we removed them (i.e., before the first menu item in the left column).
- Find entrées that contain portobello mushrooms and replace them with hamburger.
- Find entrées that contain tofu and replace them with the different kinds of meat (in the right order).


Our next checklist item seems a bit like *déjà vu*, doesn’t it? All we really need to do is reverse what we did for the original substitution. Why?

Because we’re dealing with a one-to-one substitution, and we love one-to-one substitutions because they’re logically simple.

One-to-one substitution

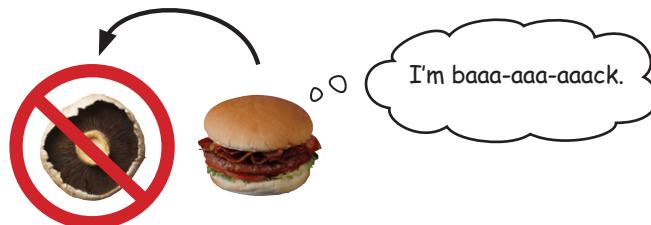


Remember this exercise? We’re going to flip it. Write the code that will find the `li` elements in the `portobello` class and replace them with `li` elements in the `hamburger` class. The diagram below should help you think it out. We wrote part of the answer for you—you’ve got the rest.

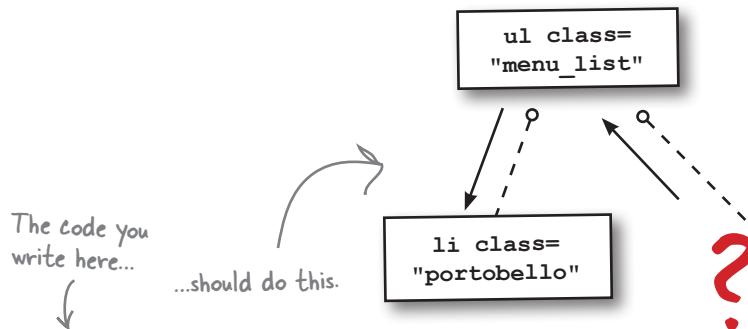

```
$( ..... ).replaceWith( ..... );
Hamburger ..... );
```

exercise solution**Exercise Solution**

replaceWith brings it all back in one swift move. Nicely done!

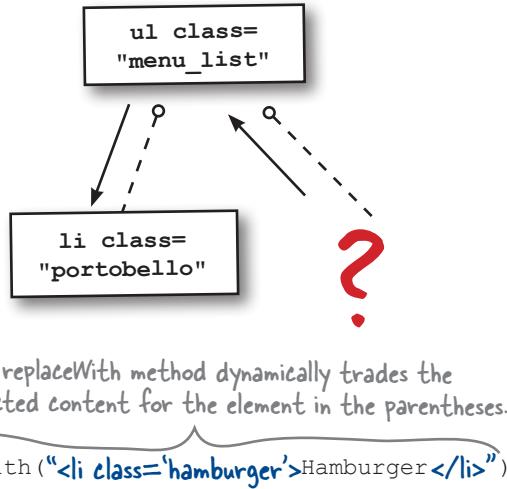

Where's the beef (er...meat)?

We're down to our last item for the “Restore Menu” button:

- Put the fish entrées back into the menu where we removed them (i.e., before the first menu item in the left column).
- Find entrées that contain portobello mushrooms and replace them with hamburger.
- Find entrées that contain tofu and replace them with the different kinds of meat (in the right order).

What did we do with those `li.meat` elements again? Let’s review:

We put `li.tofu` elements into the DOM after the `meat` elements.

```
$(".meat").after("<li class='tofu'><em>Tofu</em></li>");
```


Then, we detached the `li.meat` elements but held on to them by saving them into `$m`.

```
$m = $(".meat").detach();
```

So where are those elements, and how do we bring them back?

A meaty array

Remember that whenever we store jQuery elements, we give the variable a dollar sign to signify that the variable we're using has a special kind of storage. In this case, it's a jQuery array, and here's how the elements in \$m are stored:

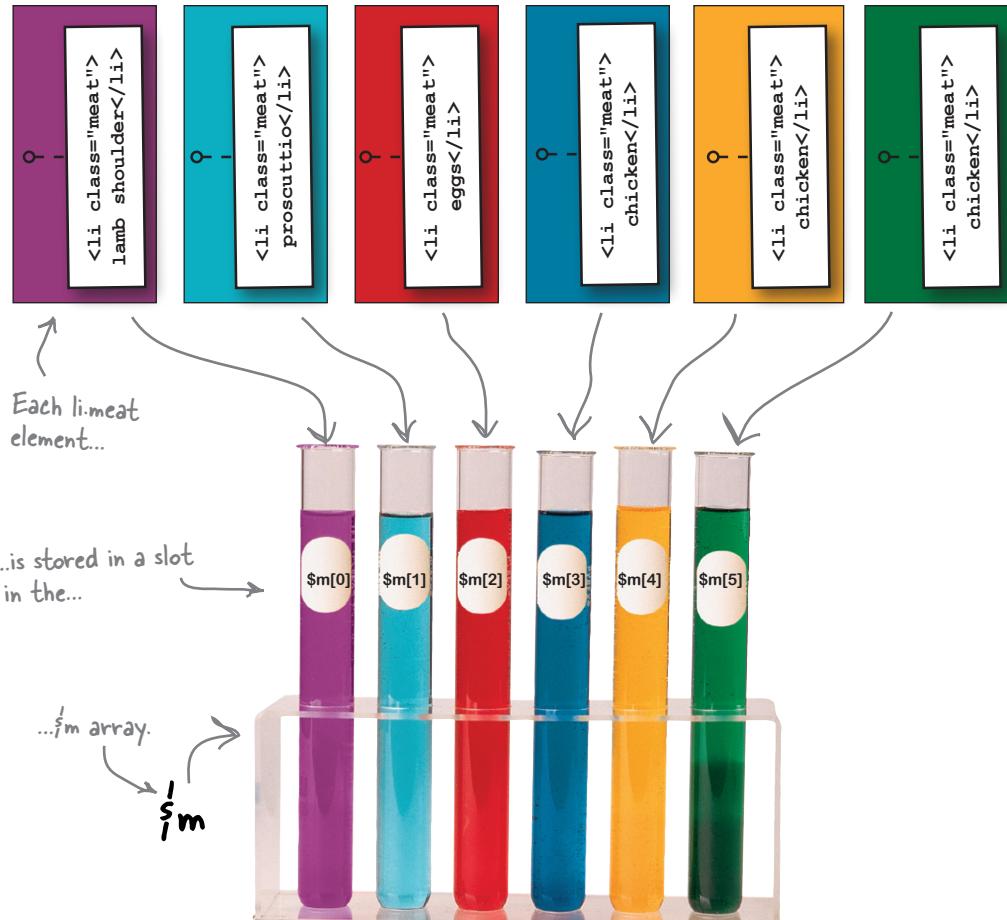

You need to put each `li.meat` element back in for each `li.tofu` element. You've seen many methods that put elements into the DOM. Which method would you use for this one?

the return of each

The each method loops through arrays

In Chapter 3, you saw how to use the `each` method to loop through elements. We can use it again here to loop through all the meat elements in the `$m` array and put them back where they were. But to do that, we'll need to check out a bit more about how the `each` method works.

The each method is like an assembly-line machine for your elements.

The `each` method gives you jQuery scripting power. It lets you work on one element in an array at a time.



We add real power when we put a function inside of `each`. The function lets us do something to each element as it's processed.

The index (or iterator) keeps track of the element that the function is working on.

`i = 0`

The `this` keyword refers to the element that the function's working on.

When we select our paragraph element, jQuery stores what we selected in an array.

The `each` method processes the elements in the array one by one and does something to each one.

The variable `i` starts at 0 and counts each element as that element is processed.

`{this}` is how you tell the function about the element that is being processed.

```
$( ".tofu" ).each(function(i) {
    $(this).after();
});
```

We're using the `after` method here, but you can use any jQuery method to do stuff to an array of elements.

We want to put meat elements in for each `li.tofu` element. So what should we put in here?



jQuery Magnets

Put back the code magnets in the proper order to get the `restoreMenu` button finished and working. We put in a few for you.


```
$("button#restoreMe").click(function() {
```

```
    if (v == true) {
```

```
        v = false;
```

```
}
```

```
});
```



my_scripts.js

```
"<li class='hamburger'>Hamburger</li>";
```

```
$m[i]);
```

```
.before($f);
```

```
$(".portobello").replaceWith(
```

```
});
```

```
$(".tofu").remove();
```

```
$(".menu_entrees li").first()
```

```
$(this).after(
```

```
$(".tofu").each( function(i) {
```

jquery magnets solution

jQuery Magnets Solution

Put back the code magnets in the proper order to get the `restoreMenu` button finished and working. We put in a few for you.

```

$( "button#restoreMe" ).click(function() {

    if (v == true) {

        $(".portobello").replaceWith( "<li class='hamburger'>Hamburger</li>");

        $(".menu_entrees li").first().before($f);

        $(".tofu").each( function(i){

            $(this).after( $m[i] );
        });

        $(".tofu").remove();

        v = false;
    }
});
```

We put back the meat elements by referencing the `$m` array and the index that matches the `tofu` elements the function is working on.



`my_scripts.js`

That's it...right?

You did everything required for the “Restore Menu” button.
Let’s update our files and call this project done.

- Put the fish entrées back into the menu where we removed them (i.e., before the first menu item in the left column).
- Find entrées that contain portobello mushrooms and replace them with hamburger.
- Find entrées that contain tofu and replace them with the different kinds of meat (in the right order).



P.S. If you can pull it off, we’d also like a leaf icon to show up next to the substituted vegetarian entrées.

Oops, you’re right.

Luckily, the web designer already put the `veg_leaf` class in the `my_style.css` file. Let’s have a look at it.

```
.veg_leaf{
    list-style-image:url('../images/leaf.png');
}
```



my_style.css



Write the statement that will add the `veg_leaf` class to the parent of the parent of the `tofu` classes.

Hint: `addClass` is your friend here.

exercise solution**Exercise Solution**

Just a little DOM transversing, plus some `addClass` magic, and you're done!

```
$(".tofu").parent().parent().addClass("veg_leaf");
```

there are no
Dumb Questions

Q: I get the other filter methods, but `slice` still confuses the heck out of me. Can you give me a more in-depth explanation of it?

A: The `slice` method can be confusing. The most confusing thing about `slice` are its parameters: `slice(start, end)`.

The first parameter is the `start` parameter, and you have to include it, or `slice` won't work. The `start` parameter tells where to start the selection within an array of elements. Remember that the first element in an array has a "zero index," which means you have to start counting at 0. The `start` parameter will also take a negative number. If you put in a negative number, `slice` will start counting backward from the end of the array rather than forward from the beginning.

Q: OK, so what does the `end` parameter of the `slice` method do?

A: The `slice` method's second parameter, the `end` parameter, is not required. If you don't include it, `slice` will select all elements from whatever the `start` parameter is set to and will select all of the elements in the array that are greater than the `start` parameter. The `end` parameter can be counterintuitive if you don't remind yourself that the array starts counting at 0.

Q: The `each` method seems pretty powerful. How does `each` know what element it's working on?

A: The real power comes from combining each with the `this` keyword. The `each` method keeps track of its index automatically and "knows" which element it's working on. You should only use `each` when you've selected multiple elements. To reference the current element, you use `this` but wrap it with the jQuery shortcut: `$(this)`.

Q: Why do I have to put the "i" or "index" inside the `each` function?

A: The `index` variable, often called "i" or "index," is used by the `each` function to keep a count of the element `each` is working on. That way, the `each` function knows when it's done processing. If `each` didn't have an `index` variable, it wouldn't know which function to work on and it wouldn't be able to stop.

Q: How can I find elements within a jQuery array?

A: You can find elements within a jQuery array using the `find` method. Let's say you have an array of `li` elements in a jQuery array:

```
var $my_elements = $("li");
```

Now, you want to find all of the anchor elements in that array. Here's what you do:

```
$my_elements.find("a");
```

Q: Does jQuery give us a way to wrap an element inside of another element?

A: Indeed, it does. Let's say you want to surround an image with an ID of `oreilly` inside of an anchor element. Here's how you do it:

```
$("#img#oreilly").wrap("<a href='http://www.oreilly.com'></a>");
```



Test Drive

It's been a while since you updated your files. Add the code for the "Restore Menu" button and the code for adding and removing the `veg_leaf` class where you make vegetarian substitutions. You can always download the files for this chapter from <http://www.thinkjquery.com/chapter04/> and compare them to your code.

Our Menu

[Go Vegetarian](#) [Restore Menu](#)

Dinner Entrees

- Braised Delight
Tofu cipollini onions carrots baby turnip roasted red grapes braising jus
- House Grilled Panini
Tofu provolone avocado cherry tomatoes sourdough roll shoestring fries
- House Slider
marinated eggplant zucchini *Portobello Mushroom* balsamic vinaigrette onion carrots Multi-grain roll goat cheese
- Southwest Slider
whole chiles *Portobello Mushroom* pepperjack cheese onion carrots sliced avocado Multi-grain roll

Soups and Sides

- Coconut Soup
coconut milk *Tofu* vegetable broth
- Soup Du Jour
Tofu mushrooms seasonal vegetables vegetable broth
- Hot and Sour Soup
Tofu carrots Chinese mushrooms chili vegetable Broth
- Stuffed Baked Potato
potato *Tofu* seasonal veggies cheddar & jack cheese creamy alfredo sauce

Avocado Rolls
Avocado Whole chiles Sweet red peppers Ginger

Here's the leaf we added with the `veg_leaf` class.

This is great! Our customers love the new web menu, and the best thing is that we no longer have to maintain two different menus. It's all on one page!



Now Alexandra can focus on cooking up some tasty new menu items instead of worrying about the website.

your *jquery* toolbox



Your jQuery Toolbox

You've got Chapter 4 under your belt and now you've added DOM manipulation and traversal, arrays, and filters to your toolbox.

DOM manipulation

You can add to, replace, and remove things from the DOM at will:

- detach
- remove
- replaceWith
- before
- after

DOM traversal

This is all about climbing around the DOM tree so you can manipulate it.

You use element relationships with associated methods like parent and child to get where you want.

Chaining methods is an efficient way to traverse the DOM quickly.

Arrays

jQuery arrays store all kinds of things, including elements, so you can access them later.

Just like with variables, put a `$` in front of your array to signify that it is storing special jQuery goodies.

Filters

Filter methods help you narrow down a set of selected elements:

- first
- equal
- last
- slice
- filter
- not

5 jQuery effects and animation

A little glide in your stride

Look at how well I can move around; I'm so graceful. I bet you can't do that!




Making things happen on your page is all well and good, but if you can't make it look cool, people won't want to use your site. That's where jQuery effects and animation come in. In this chapter, you'll learn how to make elements transition on your page over time, show or hide specific pieces of elements that are relevant, and shrink or grow an element on the page, all before your users' eyes. You'll also see how to schedule these animations so they happen at various intervals to give your page a very dynamic appearance.

passing on flash

DoodleStuff needs a web app

DoodleStuff supplies Webville kids with cool art supplies. A few years ago, DoodleStuff started up a popular website that provides interactive art apps for kids. The company's fan base has grown so fast that it has trouble keeping up with requests.

To cater to DoodleStuff's new, wider audience, the web projects director wants to build an app that doesn't use Flash or any other browser plug-ins.

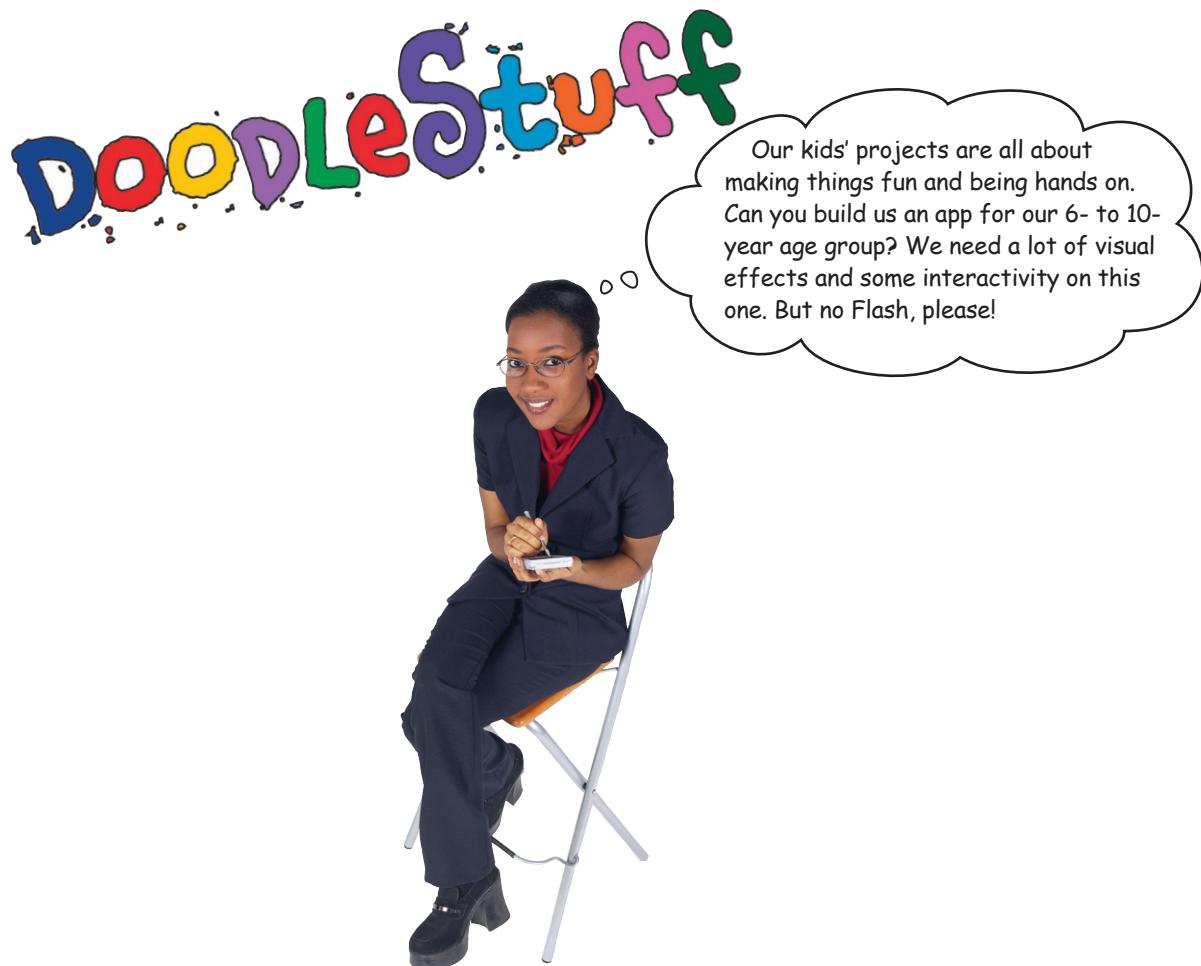

Our kids' projects are all about making things fun and being hands on. Can you build us an app for our 6- to 10-year age group? We need a lot of visual effects and some interactivity on this one. But no Flash, please!

Do the Monster Mashup

Here's the project blueprint from the web projects director, along with the graphic designer's files for the app.

Monster Mashup Project

The Monster Mashup application is intended to entertain children in the target age group by allowing them to “mash up” their own monster head by mixing 10 different heads, eyes, noses, and mouths. The transitions between the monster face parts should be animated.

User Interface

Container

- Frame**
- Head Area**
Click to advance monster head.
- Eyes Area**
Click to advance monster eyes.
- Nose Area**
Click to advance monster nose.
- Mouth Area**
Click to advance monster mouth.

After nine clicks, each strip should “rewind” to the beginning.

Animation

A mockup of how a monster face part should change.



A mockup of how the lightning animations should look.



The lightning images should fade in and then out quickly, as if they are flashing.

Graphic Files

frame.png
width: 545 pixels
height: 629pixels



headsstrip.png width: 3670 pixels, height: 172 pixels



lightning_01.jpg



eyessstrip.png width: 3670 pixels, height: 79 pixels



lightning_02.jpg



nosesstrip.png width: 3670 pixels, height: 86 pixels



lightning_03.jpg




mouthsstrip.png width: 3670 pixels, height: 117 pixels



You have a lot of detail on the project requirements and the graphic files you need, but the graphic designer didn't write any HTML or CSS—that's where you'll need to get started. What do you need to do to set that up?

Monster Mashup needs layout and positioning

We've certainly had a lot to say about getting your structure and style right out of the gate before you write any jQuery. And it's even more important now—if you don't get your layout and position right up front, your effects and animations can go wrong, *fast*. There's nothing worse than staring at your jQuery code and wondering why it's not doing what you want it to do in the browser. It's a good idea to sketch up your ideas and think about what's going to happen on screen.

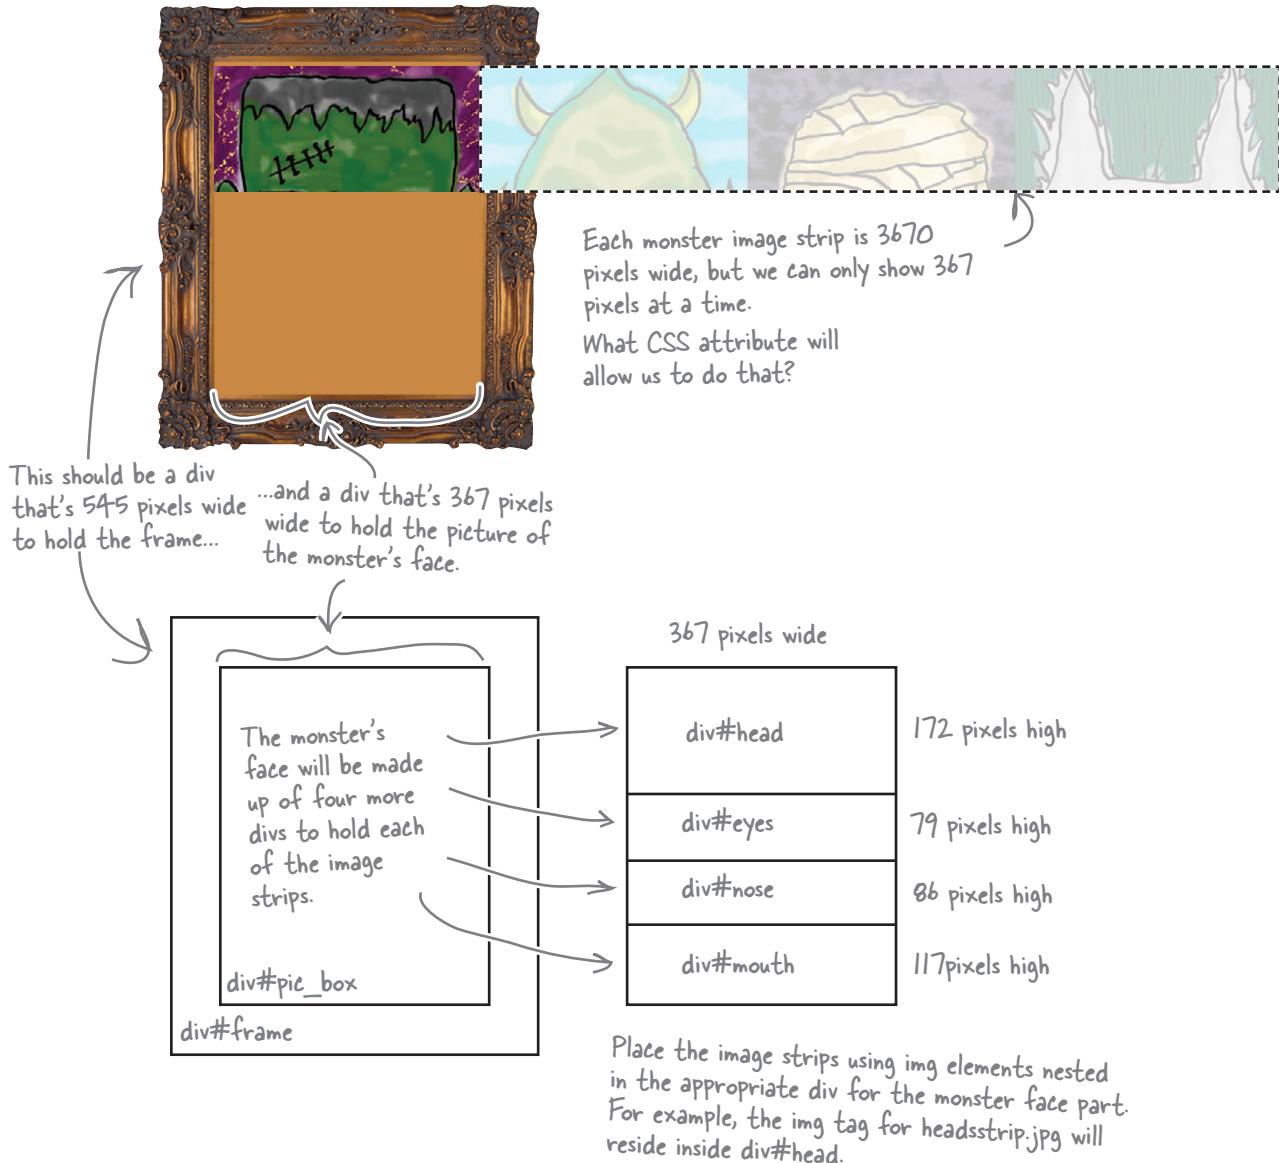



For each blank line in the HTML and CSS files, write in the CSS ID, property, or setting that will help lay out and position the Monster Mashup app. When in doubt, look at the previous two pages for guidance. We've done a few for you.

```

body>
<header id="top">
<p>Make your own monster face by clicking on the picture.</p></header>

<div id="frame">
  <div id=...pic_box...>
    <div id=.....class="face"></div>
    <div id=.....class="face"></div>
    <div id=.....class="face"></div>
    <div id=.....class="face"></div>
  </div>
</div>
<script type="text/javascript" src="scripts/jquery-1.6.2.min.js"></script>
<script type="text/javascript" src="scripts/my_scripts.js"></script>
</body>
```



index.html

```

#frame {
  position: .....
  left:100px;
  top:100px;
  width:545px;
  height:629px;
  background-image:url(images/frame.png);
  z-index: 2;
  overflow: .....
}

#pic_box{
  position: relative;
  left:91px;
  top:84px;
  .....
  height:460px;
  z-index: 1;
  overflow: .....
}

.face{
  position: .....
  left:0px;
  top:0px;
  z-index: 0;
}

#head{
  .....
  height:172px;
}

#eyes{
  .....
}

#nose{
  .....
}

#mouth{
  .....
}
```



my_style.css

exercise solution**Exercise Solution**

For each blank line in the HTML and CSS files, write in the CSS ID, property, or setting that will help lay out and position the Monster Mashup app. When in doubt, look at the previous two pages for guidance. We've done a few for you.

```

body>
<header id="top">
<p>Make your own monster face by clicking on the picture.</p></header>

<div id="frame">
  <div id="pic_box">
    <div id="head".....class="face"></div>
    <div id="eyes".....class="face"></div>
    <div id="nose".....class="face"></div>
    <div id="mouth".....class="face"></div>
  </div>
</div>
<script type="text/javascript" src="scripts/jquery-1.6.2.min.js"></script>
<script type="text/javascript" src="scripts/my_scripts.js"></script>
</body>

```



index.html

```

#frame {
  position: absolute;
  left:100px;
  top:100px;
  width:545px;
  height:629px;
  background-image:url(images/frame.png);
  z-index: 2;
  overflow: hidden;
}

#pic_box{
  position: relative;
  left:91px;
  top:84px;
  width:367px;
  height:460px;
  z-index: 1;
  overflow: hidden;
}

When we animate the
position of elements, we
need to use absolute or
relative positioning.

Setting the overflow
property to "hidden" allows
us to hide the part of the
image strip that extends
beyond the pic_box area.

You could also
use the CSS "clip"
property for this.

```

```

.face{
  position: relative;
  left:0px;
  top:0px;
  z-index: 0;
}

#head{
  height:172px;
}

#eyes{
  height:79px;
}

#nose{
  height:86px;
}

#mouth{
  height:117px;
}

```



my_style.css

A little more structure and style

Next up are the structural changes to the HTML and CSS files. Add the code below to your `index.html` and `my_style.css` files. You can grab the image files from www.thinkjquery.com/chapter05.

Add a container and nest the lightning images inside of it.

Do this!

```
<div id="container">
  
  
  
<div id="frame">
  <div id="pic_box">
    <div id="head" class="face"></div>
    <div id="eyes" class="face"></div>
    <div id="nose" class="face"></div>
    <div id="mouth" class="face"></div>
  </div>
</div>
</div>
```



index.html

```
#container{
  position: absolute;
  left: 0px;
  top: 0px;
  z-index: 0;
}

.lightning{
  display: none;
  position: absolute;
  left: 0px;
  top: 0px;
  z-index: 0;
}
```

We want the lightning images to start out as invisible.

When we want to animate elements, we need their position property set to absolute, fixed, or relative.

```
body{
  background-color: #000000;
}

p{
  color: #33FF66;
  font-family: Tahoma, Verdana, Arial,
  Helvetica, sans-serif;
  font-size: 12px;
}

#text_top {
  position: relative;
  z-index: 4;
}
```




my_style.css

you're a clicking expert by now

Make the interface click

Now that we have the Monster Mashup laid out visually, let's set up the rest of the user interface section called for in the blueprint. This part is all about clicking to make stuff happen, and you've done that for four chapters now. Setting this up should be a cake walk.

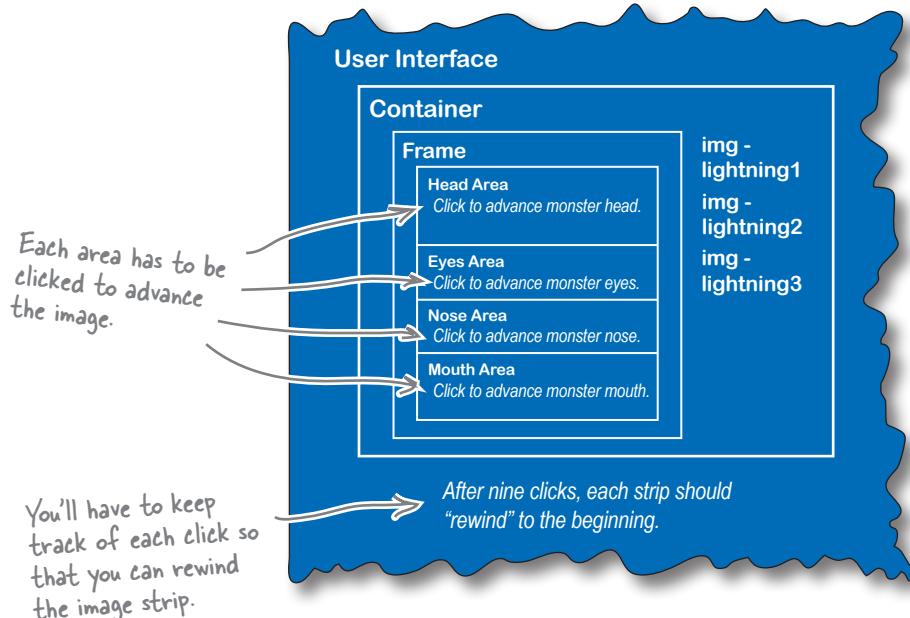

there are no
Dumb Questions

Q: I'm a little rusty on CSS positioning. Why do we need it for jQuery effects and animation?

A: `position` is a CSS property that controls how and where elements are placed by the browser's layout engine. jQuery accomplishes many of its effects using the CSS `position` property. If you're rusty and need a refresher, check out this excellent explanation at Mozilla's developer's center:

http://developer.mozilla.org/en/CSS/position#Relative_positioning

Q: Why do we have to set the CSS `position` property to `absolute`, `fixed`, or `relative` when we want to animate elements ?

A: If we leave the CSS `position` property set to its default setting (i.e., `static`), then we can't apply top, right, left, or bottom positioning. When we get to the `animate` function, we'll need to be able to set those positions, and `static` simply doesn't allow for that. The other position settings—`absolute`, `fixed`, and `relative`—do.

Q: You mentioned a browser layout engine. What the heck is *that*?

A: The browser layout engine is the core part of a browser that interprets the HTML and CSS code and displays it in the browser's *viewport* (the window that displays content to the viewer). Google's Chrome and Apple's Safari use the Webkit browser layout engine. Firefox uses the Gecko layout engine, and Microsoft Internet Explorer use a layout engine called Trident.



jQuery Magnets

Put the code magnets in proper order to make the `div#head` element clickable. Make sure to sequence the variables and conditional statements in the right order so that you can detect the ninth click.

```
headclix
}
if (headclix
    = 0;
else {
    });
headclix
    = 0;
});
< 9) {
$(document).ready(function() {
    var headclix
        $("#head").click(function() {
```



jQuery Magnets Solution

Put the code magnets in proper order to make the `div#head` element clickable. Make sure to sequence the variables and conditional statements in the right order so that you can detect the ninth click.

```

$(document).ready(function() {
    var headclix = 0;
    $("#head").click(function() {
        if (headclix < 9) {
            headclix += 1;
        } else {
            headclix = 0;
        }
    });
});

```

If `headclix` is greater than or equal to 9, do this next stuff.

You start the variable at 0 because nothing's been clicked yet.

This conditional limits the user to nine clicks.

Here's where you'll eventually put your animation code.

Set the `headclix` variable to whatever it was before plus one.

Here's where you'll eventually put the code to rewind the image strip.

Reset the `headclix` variable to 0 after the ninth click.

Could we reuse this code somehow to make the other elements clickable?



Absolutely!


Each of the elements follows a similar pattern to the `div#head` element (with a few variations in things like the variable name).



Sharpen your pencil

Fill in the jQuery script below to make the eyes, nose, and mouth elements clickable. We'll add some functionality to each click in a bit. Make sure to sequence the variables and conditional statements in the right order so that you can detect the ninth click.

```
$ (document) .ready(function () {  
  
    $("#head") .click(function () {  
        if (headclix < 9){  
            headclix += 1;  
        }  
        else{  
            headclix = 0;  
        }  
    }) ;  
  
}) ;
```



my_scripts.js

sharpen solution

Sharpen your pencil

Solution

You've made the eyes, nose, and mouth elements clickable by sequencing the variables and conditional statements in the right order so that you can detect the ninth click.

```

$(document).ready(function() {
    var headclix = 0, eyeclix=0, noseclix= 0, mouthclix = 0;
    $("#head").click(function(){
        if (headclix < 9){
            headclix += 1;
        }
        else{
            headclix = 0;
        }
    });
    $("#eyes").click(function(){
        if (eyeclix < 9){
            eyeclix += 1;
        }
        else{
            eyeclix = 0;
        }
    });
    $("#nose").click(function(){
        if (noseclix < 9){
            noseclix += 1;
        }
        else{
            noseclix = 0;
        }
    });
    $("#mouth").click(function(){
        if (mouthclix < 9){
            mouthclix += 1;
        }
        else{
            mouthclix = 0;
        }
    });
});

```

We can declare and set multiple variables by putting commas between them.

Each part of the monster face is now clickable and is set up to allow only nine clicks before rewinding the image strip

Notice how each function inside the click is structured in a similar way with minor variations? This might be a good case for reuse.


Patience, grasshopper—we'll get to that in Chapter 7.



my_scripts.js

Make the lightning effect

Next up is the lightning effect. Let's review what the blueprint calls for before trying to make the effect work.

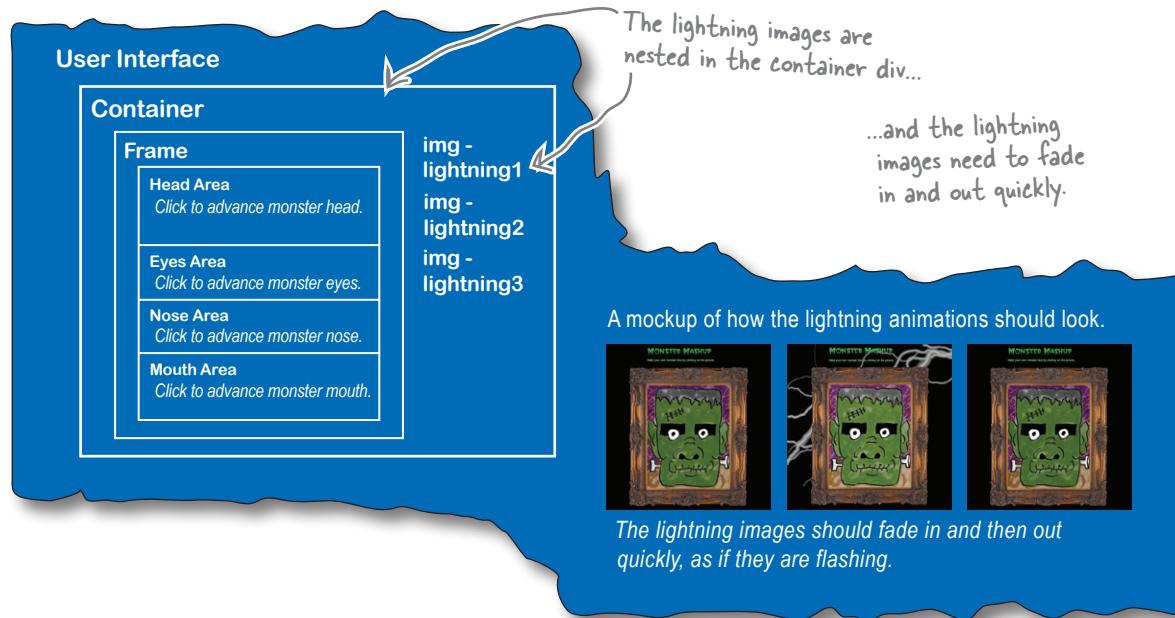

We did something kinda similar in Chapter 1 with slides and fades. Can't we just use those to make the Monster Mashup work?

Potentially. But there might be a better way.

We looked at jQuery's out-of-the-box effects in Chapter 1, but let's dig in a little more.

property prestidigitation

How does jQuery animate elements?

When the browser loads a CSS file, it sets the visual properties of the elements on the page. Using jQuery's built-in effects, the JS interpreter changes those CSS properties and animates the change right before your eyes. But it's not magic...it's all about CSS properties. Let's look again at a few you've already seen.

hide, show, and toggle change the CSS display property


hide



show



toggle



The JS interpreter changes the CSS `display` property of the selected element to `none` and removes it from the layout.

The JS interpreter changes the CSS `display` property of the selected element so that it becomes visible.

If an element is hidden, the JS interpreter will show it, and vice versa.

jQuery effects change CSS properties on the fly, making the page change right before your users' eyes.




hide, show, and toggle are all about the `display` property. But we need to slide the face parts around and fade the lightning in and out this time around. What CSS properties do you think jQuery changes with fades and slides?

Fade effects animate the CSS opacity property

fadeIn

With `fadeIn`, the JavaScript interpreter changes the CSS `opacity` property for the selected element from 0 to 100.

fadeTo

`fadeTo` lets you animate the selected element to a specific opacity percentage.

fadeOut

With `fadeOut`, the JavaScript interpreter changes the CSS `opacity` property for the selected element from 100 to 0, but it keeps space on the page for the element.




Geek Bits


The CSS `opacity` property doesn't work the same across browsers. Fortunately, jQuery takes care of that for us. And, really, that's all you have to know about that!

put a little slide in your hide


Sliding is all about height

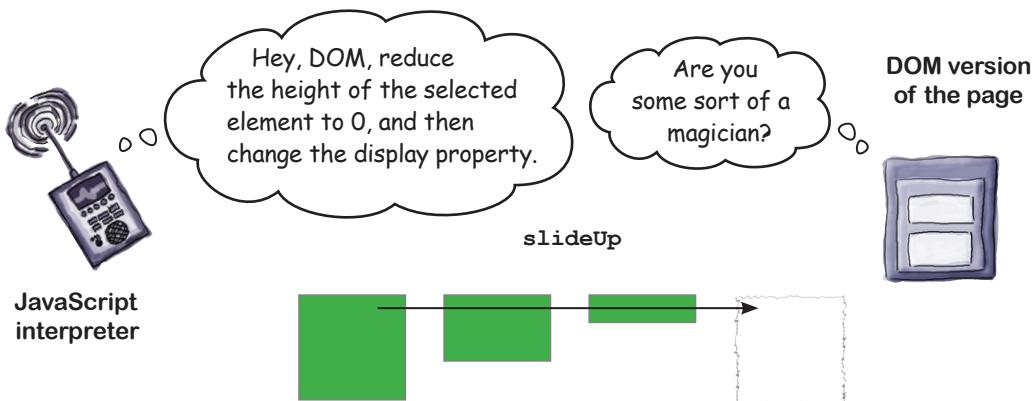

The JavaScript interpreter tells the DOM to change the CSS height property for the selected element(s) to 0 and then sets the `display` property to `none`. It's essentially a `hide` with a slide.

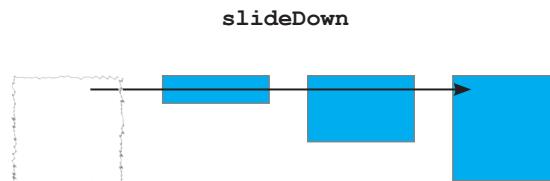

The JavaScript interpreter makes the selected element(s) appear by animating its height from 0 to whatever the height is set to in the CSS style.

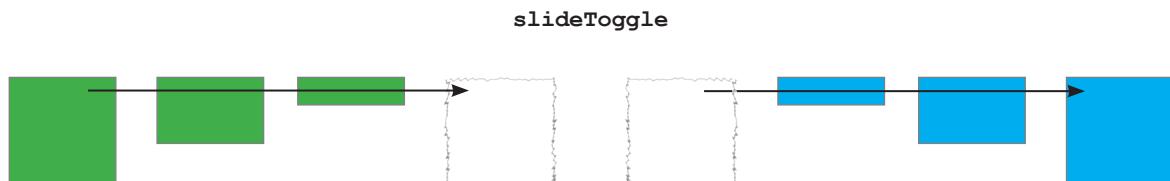

The JavaScript interpreter checks if the image is at full height or 0 height and switches the slide effect depending on what it finds. If the element has a height of 0, the JavaScript interpreter slides it down. If the element is at its full height, the JavaScript interpreter slides the elements up.



So I can only slide stuff up and down? What if I want to slide something to the left or the right?

jQuery only includes out-of-the-box effects for sliding elements up or down.

You won't find a `slideRight` or `slideLeft` method in jQuery (at least at the time of this writing). Don't worry, we'll sort this out a bit later...

You won't find a `slideRight` or `slideLeft` method in jQuery.



Sharpen your pencil

Which of jQuery's out-of-the-box effects will work for the Monster Mashup app? For each effect group, answer whether it will help us and explain why you chose or didn't choose each one.

Effect	Can we use it?	Why?
Show/Hide		
Slides		
Fades		

sharpen solution

Sharpen your pencil Solution

Which of jQuery's out-of-the-box effects will work for the Monster Mashup app?

Effect	Can we use it?	Why?
Show/Hide	No	Show/hide effects won't help us with Monster Mashup because we don't need to animate the display property of anything.
Slides	No	Close, but no cigar. We need to slide the image strip left. SlideUp, slideDown, and slides only let us change the height property. We need something that changes the left property.
Fades	Yes	We can use the fade to meet the spec on the blueprint that says the lightning images should fade in and then out quickly, as if they are flashing.

Put fade effects to work

The blueprint calls for the lightning images to fade in and out, but we need to do this quickly so it looks like they're flashing. Let's dig into fade effects a bit deeper to see how we can make the lightning work.

Here's the ID for the first img element.

This is where the "duration" parameter goes. It controls how long it takes for the effect to complete.

```
$("#lightning1").fadeIn("fast");
```

You can use one of the string parameters:
slow, normal, or fast...

...or you can use a value in milliseconds. For example, you could put in 1000, and the effect would take one second to animate.

```
$("#lightning1").fadeIn(1000);
```




Make it Stick

1 second = 1,000 milliseconds

Combine effects with method chains

The lightning will need to fade in and out, and over and over again. Instead of writing those effects separately, you can use chaining, which you used briefly in Chapter 4 when you needed to climb up the DOM. Method chains are a feature of jQuery that links together methods to run on a returned set of elements. They'll make the lightning effects easier and cleaner to write, so let's take a closer look.

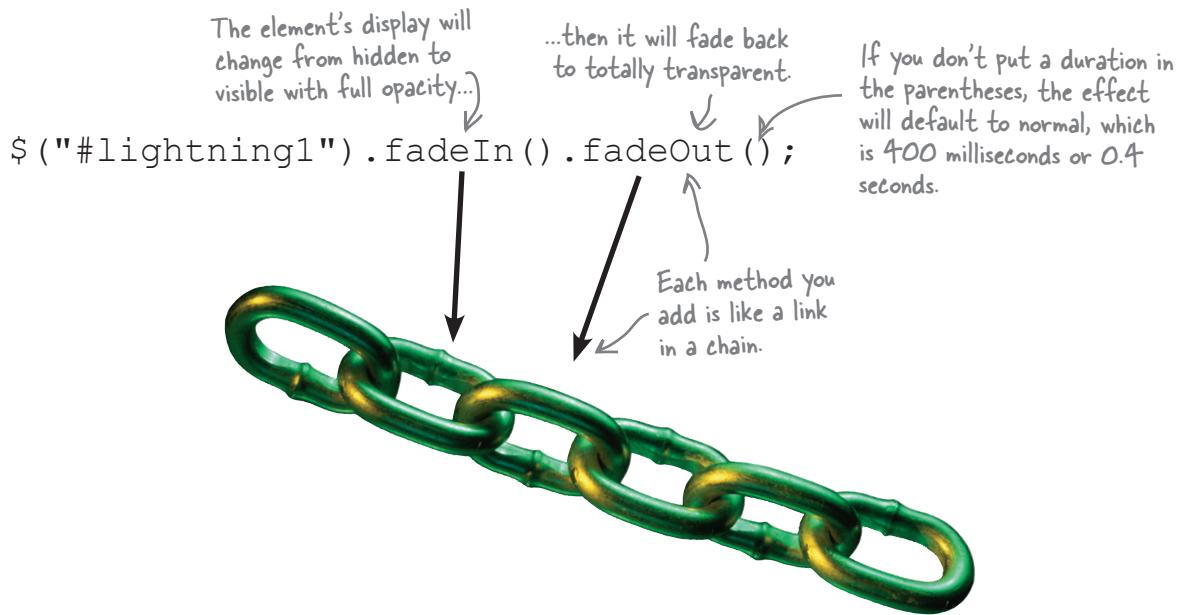

Exercise

Write the line of jQuery code that will accomplish each of the steps shown below.

- 1 Fade in the #lightning1 element with a duration of one-quarter of a second.

.....

- 2 Chain another effect that fades out the #lightning1 element in one-quarter of a second.

.....

lightning strikes**Exercise Solution**

Write the line of jQuery code that will accomplish each of the steps shown below.

1

Fade in the `#lightning1` element with a duration of one-quarter of a second.

```
$("#lightning1").fadeIn("250");
```

2

Chain another effect that fades out the `#lightning1` element in one-quarter of a second.

```
$("#lightning1").fadeIn("250").fadeOut("250");
```

Striking back with a timed function

So now you've got lightning that can fade in and out, but the project requirements are for the lightning to keep striking. Real lightning zaps through the sky and then there's usually an interval of time before another zap crosses the sky. So we need a way to do the fade *repeatedly*.

Think back to earlier chapters where you needed to do a repeated task; what did you use? That's right: functions! They showed up first in Chapter 3 to make a reusable click function and a randomizer, and now you can use functions to run the fades, wait a bit, and then do them again at a given interval. That will provide the slick effect of lots of flashing lightning for the Monster Mashup. Let's take a look at a function that will do this.

```
Hey, JavaScript, build  
me a new function.  
  
function lightning_one(t) {  
    $("#lightning1").fadeIn(250).fadeOut(250);  
    setTimeout("lightning_one()", t);  
};  
  
This line  
contains the  
jQuery effects  
code.  
  
Here's the name we'll  
use when we want to  
call the function.  
  
The setTimeout method  
tells the JS interpreter  
to run a function and then  
wait for a while before  
running it again.  
  
This is some cool JavaScript  
power. You tell the JS  
interpreter that you want  
the function to call itself  
over and over again.  
  
This is our timing parameter (a  
variable called t). Drop it in  
here and use it again below.  
  
This is the timeout interval.  
It's in milliseconds, just like  
the effects duration we  
looked at a few pages ago.
```

In just three lines of code, you have a timed lightning function for the first lightning image. Now, try writing the functions for the other two lightning images.



jQuery Magnets

Put the code magnets in the right order to make the timed lightning functions for the other two lightning elements.

function

lightning_two

(t) {

};

function

lightning_three

(t) {

};

.fadeIn(250)

t);

\$("#lightning2")

.fadeOut(250);

setTimeout(

.fadeIn(250)

(\$("#lightning3")

"lightning_two()",

.fadeOut(250);

"lightning_three()",


setTimeout(

t);



jQuery Magnets Solution

Put the code magnets in the right order to make the timed lightning functions for the other two lightning elements.

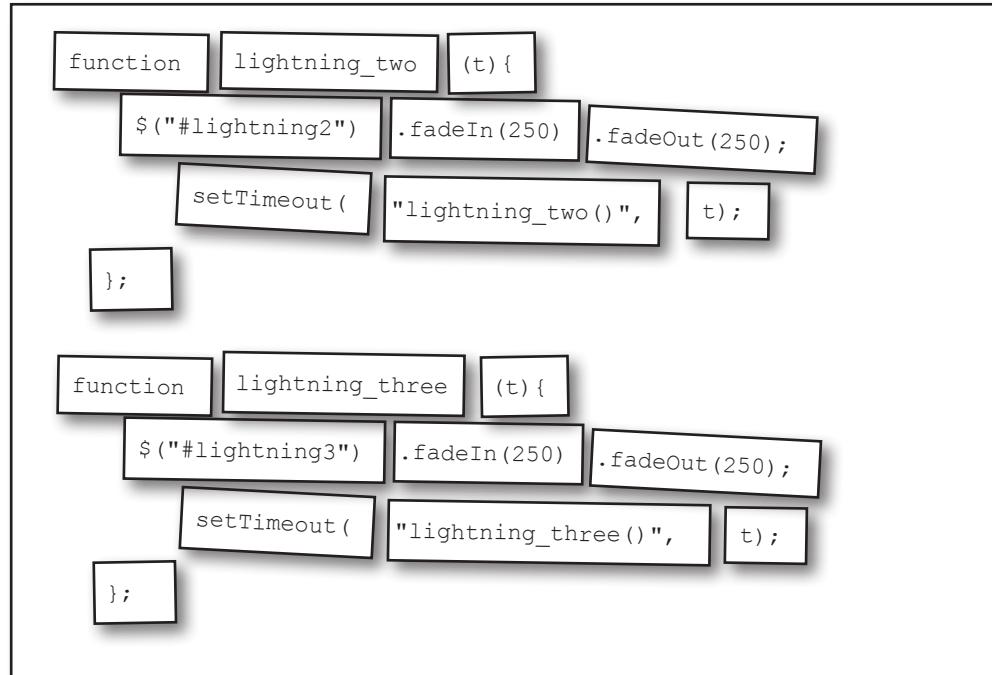

there are no Dumb Questions

Q: Is `fadeIn()` `.fadeOut()` not the same as `toggle`?

A: Great question! They are not the same. The `toggle` method is a single method that just switches the selected element from its hidden state to its visible state or vice versa, depending on what the selected element's current state is. Placing `fadeIn` and `fadeOut` in a chain creates a sequential effect that will first make the selected element(s) fade into view and then, when that effect has finished, fade it out of view.

Q: The `setTimeout` method is new. Is that a jQuery thing or a JavaScript thing?

A: The `setTimeout` method is actually a JavaScript method that you can use to control some aspects of jQuery animations. We'll get more into the `setTimeout` function in later chapters, especially Chapter 7.

If you want to read about it now, visit the Mozilla Developer's Center: <https://developer.mozilla.org/en/window.setTimeout>, or, if you really want to dig in, pick up a copy of David Flanagan's excellent and

thorough JavaScript book, *JavaScript: The Definitive Guide* (O'Reilly; <http://oreilly.com/catalog/9780596805531>).

Q: When I use the `hide` effect, the element just disappears. How do I slow that down?

A: To "slow down" the `hide`, `show`, or `toggle` effect, give a duration parameter in the parentheses. Here's how we could've done the Chapter 1 `hide`:

```
$("#picframe").hide(500);
```

Add the lightning functions to your script

Using the code you put together in the exercise on the previous page, update your script file for Monster Mashup.



These lines call the functions that are defined in bold at the very bottom.

```

$(document).ready(function(){
    var headclix = 0, eyeclix = 0, noseclix = 0, mouthclix = 0;
    lightning_one(4000);
    lightning_two(5000);
    lightning_three(7000); } The numbers in parentheses are parameters in milliseconds
} that will be passed to the setTimeout method. With these,
you can alternate the flashes of lightning.

    $("#head").click(function(){
        if (headclix < 9){headclix+=1;}
        else{headclix = 0;}
    });

    $("#eyes").click(function(){
        if (eyeclix < 9){eyeclix+=1;}
        else{eyeclix = 0;}
    });

    $("#nose").click(function(){
        if (noseclix < 9){noseclix+=1;}
        else{noseclix = 0;}
    });

    $("#mouth").click(function(){
        if (mouthclix < 9){mouthclix+=1;}
        else{mouthclix = 0;}
    });

}); //end doc.onready function

function lightning_one(t){
    $("#container #lightning1").fadeIn(250).fadeOut(250);
    setTimeout("lightning_one()",t);
};

function lightning_two(t){
    $("#container #lightning2").fadeIn("fast").fadeOut("fast");
    setTimeout("lightning_two()",t);
};

function lightning_three(t){
    $("#container #lightning3").fadeIn("fast").fadeOut("fast");
    setTimeout("lightning_three()",t);
};

```

These are the lightning function definitions.

We took out some of the line breaks to save space on this page. Don't worry if your script's line breaks are different.



my_scripts.js

test drive

Test Drive

Open the page up in your favorite browser to see if your lightning effect was successful.



You accomplished the lightning fade effect by combining it with JavaScript's `setTimeout` method.

The lightning fades in and out quickly at different intervals, simulating real lightning.

So far, you've got the click functions working, and you made the three lightning images fade in and out at different intervals. Let's take a look at the blueprint to see what's left to do.

Monster Mashup Project

The Monster Mashup application is intended to entertain children in the target age group by allowing them to "mash up" their own monster head by mixing 10 different heads, eyes, noses, and mouths. The transitions between the monster face parts should be animated.

Animation

A mockup of how a monster face part should change.



A mockup of how the lightning animations should look.

So, now we're at the point where we need to slide these left, and none of the out-of-the-box slide effects do that. Is there some other method we can use?

Out-of-the-box effects are great, but they don't let you do everything you want.

It's time to make a *custom* effect that will slide the monster face parts left.

This chunk of the blueprint is our last challenge for the project.




DIY effects with animate

So jQuery has no `slideRight` or `slideLeft` method, and that's exactly what you need to do at this stage of the project. Does this mean that your Monster Mashup project is dead?


Never fear—jQuery offers the `animate` method for building your own effects. With `animate`, you can create custom animations that do many more things than the out-of-the-box effects do. The `animate` method allows you to animate CSS properties of the selected element(s), and it also allows you to animate multiple properties at the same time.

Let's have a look at some of the things you can do with the `animate` method.

Motion effects

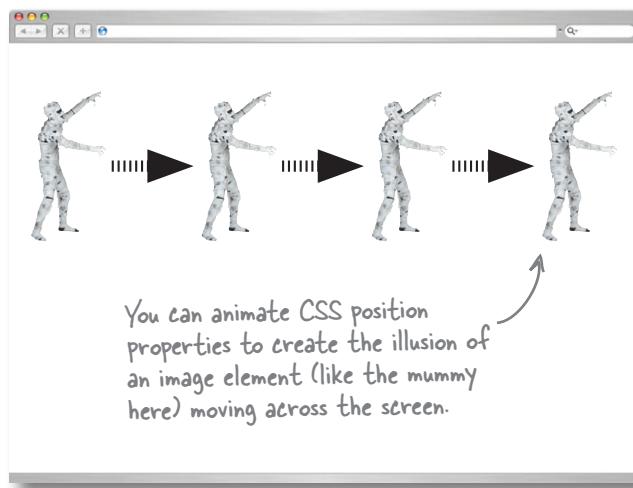

Scale effects

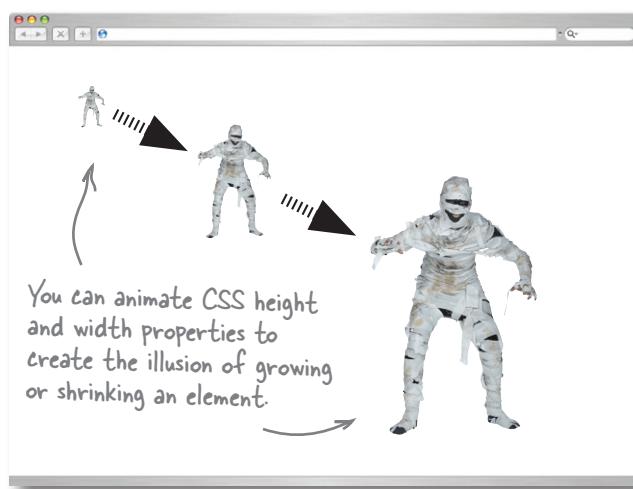

What CSS property will you need to animate to make the monster face parts slide left on each click?

What can and can't be animated

With the `animate` method, you can also dynamically alter font properties to create text effects. You can also animate multiple CSS properties in one animation call, which adds to the palette of cool stuff your web app can do.

As cool as the `animate` method is, it has some limits. Under the hood, animation uses lots of math (which, thankfully, you don't have to worry about), so you are limited to working only with CSS properties that have *numerical* settings. Know your limits, but let your imagination run wild—`animate` offers all kinds of flexibility and fun.

Text effects

**I'm shrinking, shrinking!
Oh, what a world, what a world!**

**I'm shrinking, shrinking!
Oh, what a world, what a world!**

**I'm shrinking, shrinking!
Oh, what a world, what a world!**

**I'm shrinking, shrinking!
Oh, what a world, what a world!**

You can animate CSS font properties to create the illusion of text flying, growing, or shrinking.

These are just a few examples. We'd need many, many, many more pages to show all of the possibilities.



Watch it!

The `animate` method will only work on CSS properties that use numbers for their settings.

- borders, margin, padding
- bottom, left, right, and top position
- element height, min-height, and max-height
- background position
- element width, min-width, and max-width
- letter spacing, word spacing
- text indent
- font size
- line height



The animate Method Up Close

On the surface, animate works a lot like other methods you've already worked with.

Select the element(s) you want to animate.

Call the animate method.

```
$( "#my_div" ).animate( {left:"100px"}, 500 );
```

The first parameter of animate allows you to select the CSS property you want to animate.

The second parameter is the duration in milliseconds. This lets you control how long it takes for the animation to complete.

In this example, we're animating the CSS property left... ...and setting it to 100 px.

The first argument is required—you have to put it in there for animate to work. The second parameter is optional.

But one of the most powerful features of animate is its ability to change multiple properties of the selected element(s) at the same time.

```
$( "#my_div" ).animate( {
    opacity: 0,
    width: "200",
    height: "800"
}, 5000 );
```

In this example, we're animating the element's opacity and size simultaneously.



Watch it!

The parameters for CSS properties have to be set using the DOM standard, not the CSS standard.



**BRAIN
BARBELL**


What do you think is happening behind the scenes in the browser that allows the animate method to change things in front of the user's eyes?

animate changes style over time

The visual effects and animation you see on a movie or television screen use the illusion of motion. Effects technicians and animators take a sequence of images and play them **one at a time at a specific rate** to accomplish that illusion—you've likely seen the low-tech flip books that accomplish this effect as you fan through the pages.

The same thing happens with a browser screen, except that we don't have a series of images to work with. Instead, the JavaScript interpreter **repeatedly runs a function that changes the style of the animated element**. The browser draws (or *repaints*) these changes to the screen. The user sees an illusion of motion or change to an element as that element's style changes.

- When animate runs, the JavaScript interpreter sets a timer for the duration of the animation.

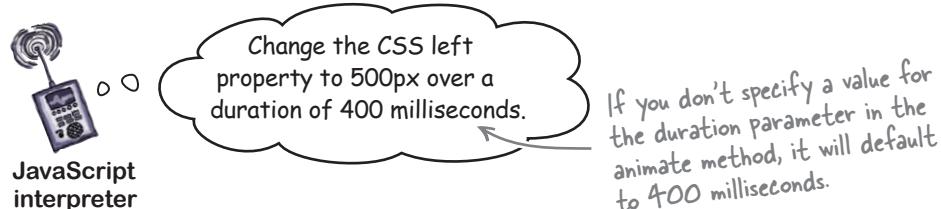


- The JavaScript interpreter tells the browser's layout engine to change the CSS property specified in the parameters of the animate method. The browser's layout engine renders those CSS properties visually onto the screen.



- The JavaScript interpreter repeatedly calls the function that changes the CSS property of the element until the timer set in step 1 runs out. Each time that function runs, the change shows on screen.
- The visitor sees the illusion of movement as the browser renders the changes to the element.

The browser





Match each chunk of custom animation code to what it does when it runs.

```
$("#my_div").animate({top: "150px"}, "slow")
```

Animates the change to all paragraphs' left and right margins simultaneously.

```
 $("p").animate({
    marginLeft:"150px",
    marginRight:"150px"
});
```

Animates the right position of #my_div to 0 in half a second.

```
$("#my_div").animate({width: "30%"}, 250)
```

Animates the space between letters for all paragraphs with default duration of 400 seconds.

```
$("#my_div").animate({right: "0"}, 500)
```

Animates the change to #my_div's padding and width simultaneously.

```
 $("p").animate({letterSpacing:"15px"});
```

Animates the change to #my_div's top position with a slow duration.

```
 $("#my_div").animate({
    padding: "200px",
    width: "30%"
}, "slow")
```

Animates the height of all images with a fast duration.

```
 $("img").animate({height: "20px"}, "fast")
```

Animates the change to #my_div's width in a quarter of a second.

who does what solution

Match each chunk of custom animation code to what it does when it runs.

```
$("#my_div").animate({top: "150px"}, "slow")
```

Animates the change to all paragraphs' left and right margins simultaneously.

```
$(p).animate({
    marginLeft:"150px",
    marginRight:"150px"
});
```

Animates the right position of #my_div to 0 in half a second.

```
$("#my_div").animate({width: "30%"}, 250)
```

Animates the space between letters for all paragraphs with default duration of 400 seconds.

```
$("#my_div").animate({right: "0"}, 500)
```

Animates the change to #my_div's padding and width simultaneously.

```
$(p).animate({letterSpacing:"15px"});
```

Animates the change to #my_div's top position with a slow duration.

```
$("#my_div").animate({
    padding: "200px",
    width: "30%"
}, "slow")
```

Animates the height of all images with a fast duration.

```
$(img).animate({height: "20px"}, "fast")
```

Animates the change to #my_div's width in a quarter of a second.

From where to where exactly?


An important thing to remember about `animate` is that it changes the *current CSS property* to the CSS property that you set in *the first parameter*. To make your custom animation effective, you need to think hard about what you have currently set in the CSS. In the previous example, we changed the left position of `#my_div` to 100px. What will happen on screen depends entirely on the current CSS `left` property setting of `#my_div`.

The current CSS property



```
#my_div{
    left: 20px;
}
```

The animate CSS property




`$("#my_div").animate({left:"100px"});`

The element is
animated to an
absolute position.


If the current property is a different value, we'll get a different result.

The current CSS property



```
#my_div{
    left: 200px;
}
```

The animate CSS property

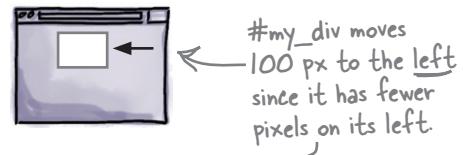

`$("#my_div").animate({left:"100px"});`

This is fascinating, but how will we
use it to make Monster Mashup work?




It's all relative.

To make the Monster Mashup monster face parts slide the way we want them to, we have to think about what their *current positions* are and how we want them to change *relative* to what their positions were the last time `animate` changed them.

it's relatively simple

Absolute vs. relative element movement

Remember that we nested the image strips we want to show inside a `div` with an ID of `#pic_box`. The `left` property of `div#pic_box` is set to `91px` in the current CSS. To achieve the left slide effect that we want, let's think about how we want to move the image strips.

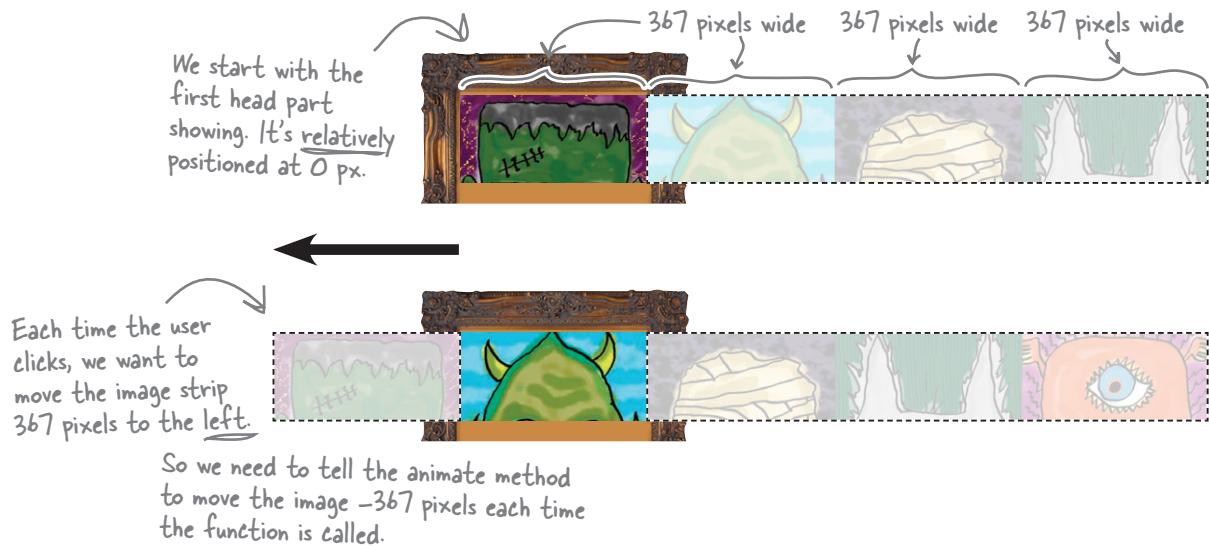

Think about the example of absolute animation on the previous page.

This tells the `animate` method to set the left position of `#my_div` to 100 pixels exactly.

```
$( "#my_div" ).animate({left:"100px"});
```

But how do we tell it to move an element -367 pixels every time the `animate` method is called?

```
$( "#head" ).animate({left:"???"});
```


Relative animation = move it this much each time

With an *absolute* animation, you move an element to an *absolute position* on the visual grid. With a *relative* animation, you move the element relative to where it was the *last time* any animation moved it.

But how do we make an element move relatively with the `animate` method?

Move stuff relatively with operator combinations

There are some special JavaScript operators that move element(s) the same amount every time the `animate` method is called. These are known as *assignment operators* because they are normally used to assign a value to a variable in such a way that the variable adds the new value to its current value. It sounds a lot more complex than it really is.

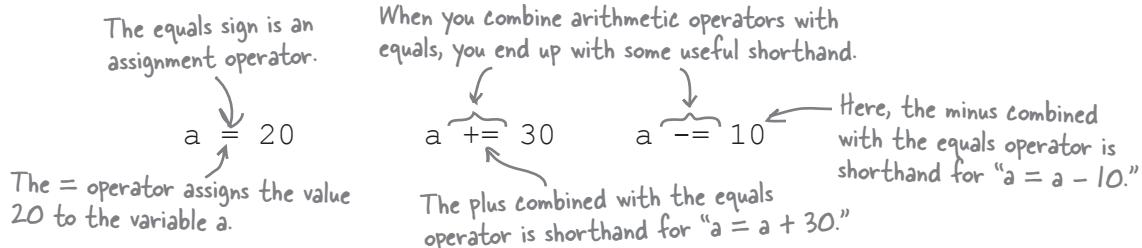


These operator combinations help you create a relative animation by allowing you to set a value to what it's currently at *plus or minus* a number of pixels.

This moves the element with an ID of `box` 20 pixels every time the `animate` method is called.

```
$( "#box" ).animate( {left: "+=20" } );
```

Here's what will happen to `#box` every time the `animate` method above is called.

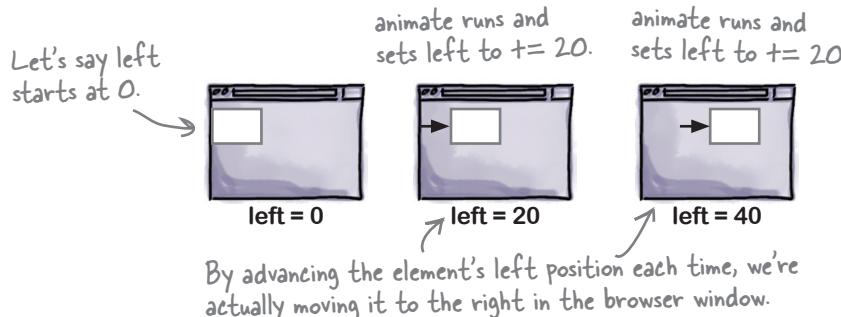

BULLET POINTS

Some other assignment operator combinations:

- `a *= 5` is shorthand for "multiply 5 by the current value of `a` and assign that value to `a`".
- `a /= 2` is shorthand for "divide the current value of `a` by 2 and assign that value to `a`".



Exercise

Write the line of jQuery code that will accomplish each of the steps shown below.

- 1 Move the `#head` element 367 pixels to the left every time `animate` is called. Give it a duration of half a second.

- 2 Move the `#head` element back to its original position (`left: 0px`). Give it a duration of half a second.

exercise solution**Exercise Solution**

Write the line of jQuery code that will accomplish each of the steps shown below.

1

Move the `#head` element 367 pixels to the left every time `animate` is called.
Give it a duration of half a second.

```
$("#head").animate({left:"-=367px"},500);
```

2

Move the `#head` element back to its original position (`left: 0px`).
Give it a duration of half a second.

```
$("#head").animate({left:"0px"},500);
```

This absolute animation resets
the monster head, giving it the
appearance of rewinding.

there are no Dumb Questions

Q: Some people don't want animation to interfere with their web page experience. What do I do if I want to let a user turn off the animation?

A: That's an excellent point. Animation can cause annoyance and accessibility problems. If you want users to turn off your web page animation, you can wire up a click button (you already know how to do that) to this line of code:

```
$.fx.off = true;
```

Another useful method for stopping animation is a jQuery method called `stop`. You can find out more about both of these topics at the jQuery site:

<http://api.jquery.com/jQuery.fx.off/>
<http://api.jquery.com/stop/>

Q: You say, "The parameters for CSS properties have to be set using the DOM standard, not the CSS standard." What the heck does that mean?

A: Great question! The `animate` method takes parameters written in the DOM standard (aka DOM notation) instead of CSS notation. Here's a concrete example that illustrates the difference. To set the width of a border for a `div` in CSS notation, you would do this:

```
div {  
    border-style:solid;  
    border-width:5px;  
}
```

Now, let's say you want to animate that border's width. In jQuery you set the border width property using DOM notation, like this:

```
 $("div").animate({borderWidth:30}, "slow");
```

Note that in the CSS notation, you write `border-width` for the property, whereas in DOM notation, you write `borderWidth` property.

If you want to read more about the difference between these two notation styles, read this article:

http://www.oxfordu.net/webdesign/dom/straight_text.html

Q: What if I want to animate a color change?

A: To animate color transitions, you need to use jQuery UI, which adds more effects than are included in jQuery. We cover jQuery UI in Chapter 10, but not effects. Once you know how to download, theme, and include jQuery UI in your web app, animating color is pretty easy.

Add the animate functions to your script

Using the code you put together in the exercise on the previous page, update your script file for Monster Mashup.



```


$( "#head" ).click(function() {
    if (headclix < 9) {
        $(this).animate({left:"-=367px"},500);
        headclix+=1;
    } else{
        $(this).animate({left:"0px"},500);
        headclix = 0;
    }
    // We can use the "this" keyword here,
    // because we're inside the function for
    // the element we clicked.
});;

$( "#eyes" ).click(function() {
    if (eyeclix < 9){
        $(this).animate({left:"-=367px"},500);
        eyeclix+=1;
    } else{
        $(this).animate({left:"0px"},500);
        eyeclix = 0;
    }
});;

$( "#nose" ).click(function() {
    if (noseclix < 9){
        $(this).animate({left:"-=367px"},500);
        noseclix+=1;
    } else{
        $(this).animate({left:"0px"},500);
        noseclix = 0;
    }
});;

$( "#mouth" ).click(function() {
    if (mouthclix < 9){
        $(this).animate({left:"-=367px"},500);
        mouthclix+=1;
    } else{
        $(this).animate({left:"0px"},500);
        mouthclix = 0;
    }
});

```




my_scripts.js

test drive



Test Drive

Open the page up in your favorite browser to make sure everything's working.

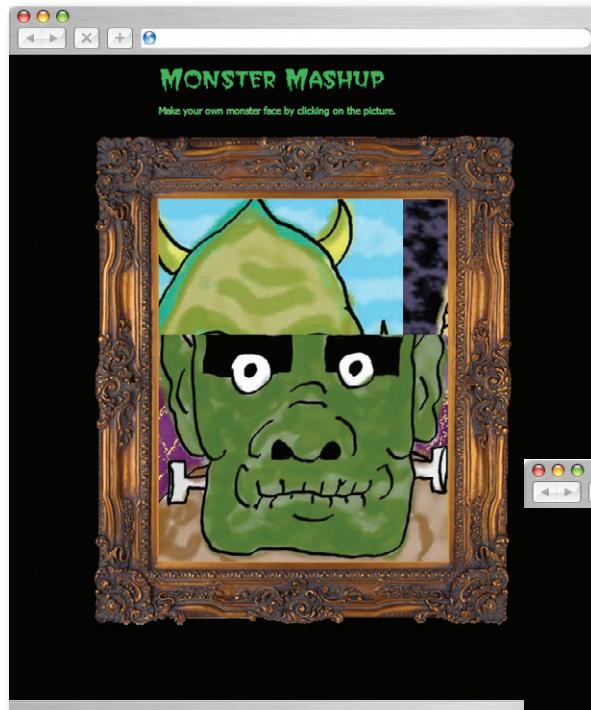

You made the
custom left slide
effect work.


With a few clicks, the visitor can
mash up his own monster face.





jQueryCross

It's time to sit back and give your left brain something to do. It's your standard crossword; all of the solution words are from this chapter.

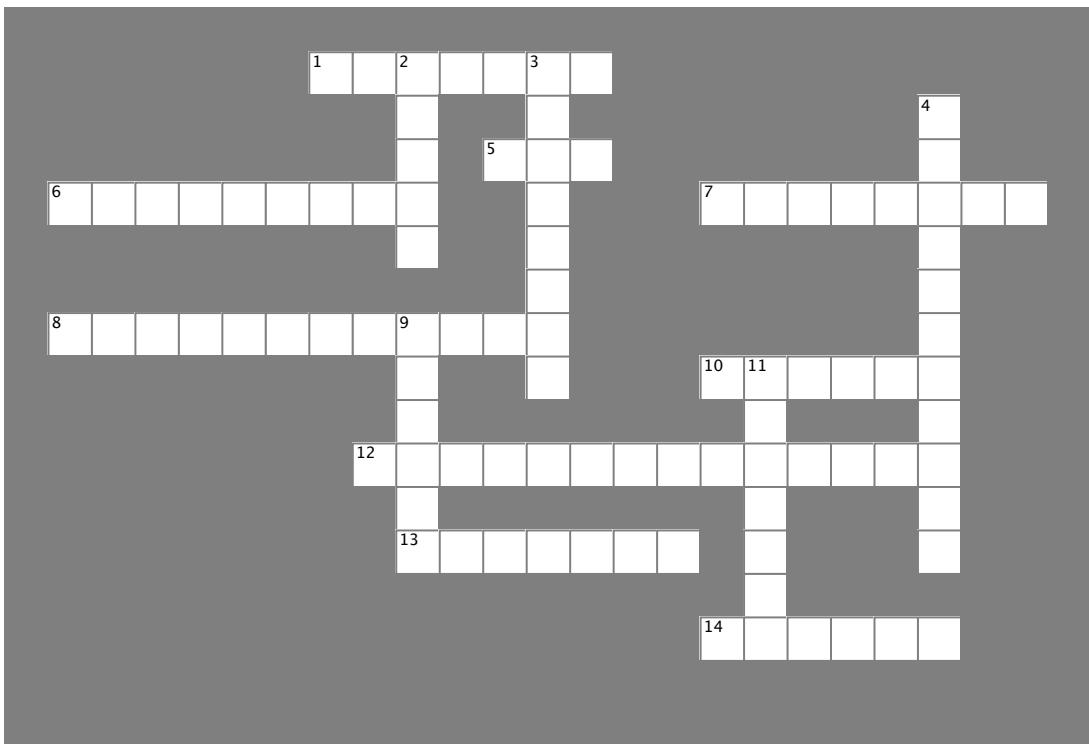

Across

1. hide, show, and toggle animate this CSS property.
5. jQuery effects and animation are about manipulating ____ on the fly.
6. _____ = 1,000 milliseconds.
7. Parameter that controls how long it takes for the effect to complete.
8. Creates the illusion of an element moving on the screen.
10. Effect method that lets you animate the selected element to a specific opacity.
12. jQuery feature that allows you to link together methods you want to run on a returned set of elements.
13. The `animate` method will only work on CSS properties that have _____ values.
14. You can animate CSS _____ and `width` properties to create the illusion of growing or shrinking an element.


Down

2. The effect to use when you want to animate an element's `height` property.
3. When you want to animate elements, you need their position property set to _____, fixed, or relative.
4. Effects method works like this: if the selected element has a height of 0, the JS interpreter slides it down. If the element is at its full height, the JS interpreter slides the elements up.
9. When you run this jQuery effect, the JS interpreter changes the CSS opacity property for the selected element from 0 to 100.
11. The jQuery library offers this method when you want to build custom effects.

a monstrous success


Look, Ma, no Flash!

The web projects director is pleased with the results of Monster Mashup. You used jQuery's out-of-the-box effects combined with your own custom effects tailored to the customer's needs.

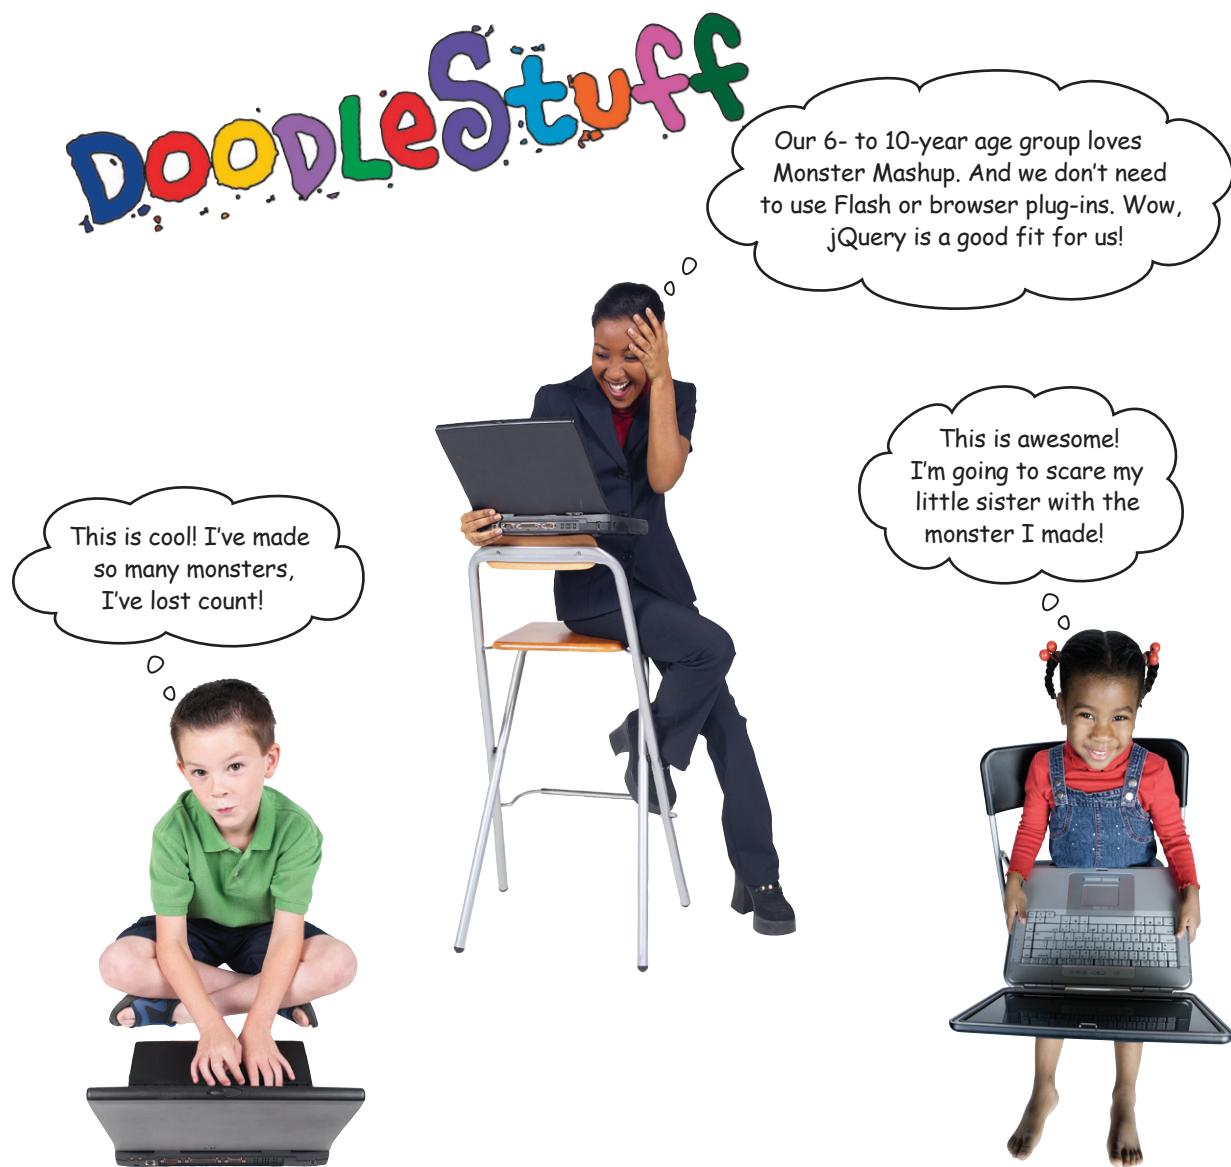



jQueryCross Solution

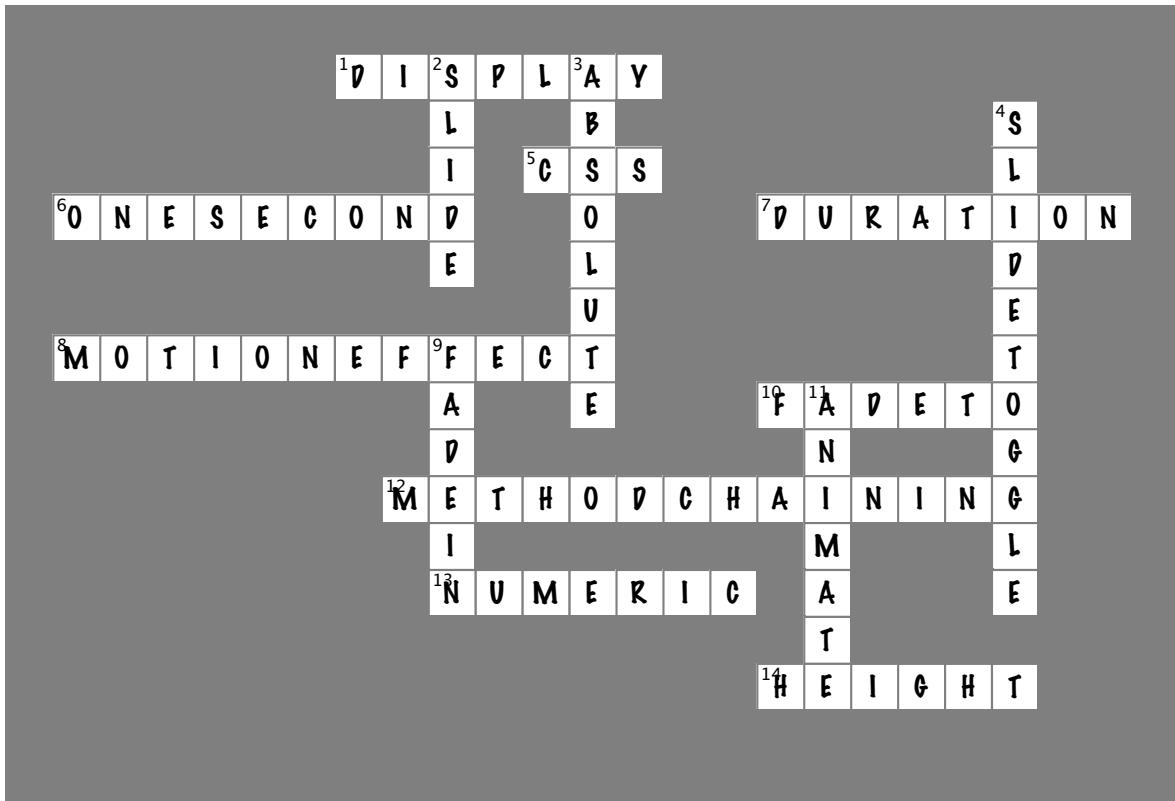

your jquery toolbox



Your jQuery Toolbox

You've got Chapter 5 under your belt and now you've added **jQuery fade and slide effects plus custom animation to your toolbox.**

Fade effects

Change the opacity property of CSS elements:

`fadeIn`
`fadeOut`
`fadeTo`

Slide effects

Change the height property of CSS elements:

`slideUp`
`slideDown`
`slideToggle`

animate

Lets you create custom animations when out-of-the-box jQuery effects aren't enough.

Animates CSS properties over time.

Only works with CSS properties that have numerical settings.

Elements can be moved either absolutely or relatively.

Operator combinations (=, +, -) make relative animation much easier.

6 jQuery and JavaScript

*Luke-jQuery, I am
your father!*



jQuery can't do it all alone. Although it is a JavaScript library, unfortunately it can't do everything its parent language can do. In this chapter, we'll look at some of the features of JavaScript that you'll need to create really compelling sites, and how jQuery can use them to create custom lists and objects as well as loop through those lists and objects to make your life much easier.

jquery or bust

Spicing up the Head First Lounge

Lucky you, news of your jQuery prowess is spreading far and wide. Check out this email from the Head First Lounge asking for some help to increase the entertainment level for its visitors.

From: Head First Lounge
Subject: Blackjack Application

Hi!

It's your pals over at the Head First Lounge. We're hoping you can help us out with a new application we want to give to our visitors.

We would REALLY like a blackjack application for our site. Can you do that?

Ideally, the player would click and get dealt two cards, with the option to ask for more cards.

Here's the house rules we would want included in the game:

1. Ace is ALWAYS high (equaling 11, never 1).
2. If a player's cards add up to more than 21, then she is bust and must start again.
The game is over.
3. If a player's cards add up to exactly 21, then she has gotten a blackjack and the game is over.
4. If a player's cards add up to 21 or less, but she has already been dealt five cards, then the game is over, and she wins.

If none of those conditions is met, players can ask for another card.

If one of the rules/conditions is met, then end the game.

Give the players the option to reset and play again.

But we don't want them to have to reload the page. The game should reset itself.

Can you do that for us? We'd be ever so grateful!

--
 Head First
Lounge





Jim: Hey, have you guys read the email from the Head First Lounge folks?

Frank: Yeah, it looks like they want an easy-to-play blackjack game on their site. Should be pretty straightforward, I think.

Jim: Straightforward? But it's blackjack! We need a deck of cards, a dealer, a counter for the hand, and more. Do you think we can do all that?

Joe: It's not going to be *easy*, but I think we can get it done. Like you said, we'll need something to deal the cards. We can write a function to do that. We've already written a random function before, so we can probably use that again.

Jim: Oh yeah... But what about the cards? There are 52 of them in a deck.

Frank: We can just have a big list of them and pick a random one from the list each time.

Jim: But how do we avoid picking the same card twice?

Frank: I think I know how to do that...

Jim: Wow, that's impressive! And what about remembering which cards we have already? And counting them up as we go?

Frank: OK, now you've got me. I'm not too sure how to do that.

Joe: No worries. There are quite a few JavaScript and jQuery features we can use to help us out here.

Jim: Wait, wait, JavaScript? Can't we use variables or jQuery arrays to remember our cards? I thought we really didn't have to get into a bunch of JavaScript if we're using jQuery...

Frank: Variables on their own may not cut it. They can only really store one value at a time, like a number or a string of text, or a particular element on the page. And a jQuery array can hold multiple values, but only of DOM elements returned by a selector...

Joe: That's right. We need something a little more flexible.

Frank: Like *our own* structures or variable types.

Joe: Correct again! And we're going to need JavaScript to create our own structures...

no objections

Objects offer even smarter storage

The data structures you've used so far are variables and arrays. Variables offer simple storage: they assign one value to one name. Arrays let you store more data more efficiently by letting you create multiple values with one variable name.

Variable



```
var a = 42;
```

A variable remembers one value when you assign the value to the variable name.

Array



```
var v = [2, 3, 4]
```

An array remembers multiple values when you assign those values to the variable name.

Objects offer even smarter storage. You use objects when you need to store multiple variables about a particular thing. Inside of an object, a variable is called a *property*. An object can also contain functions that let you interact with the object's properties. When you build such a function inside of an object, it's called a *method*.

Object



```
planeObject={  
  engines:"4",  
  type:"passenger",  
  propellor: "No"};
```

An object remembers its data as properties.

The data is now collected under one grouping for a plane.



```
leopardObject={  
  num_spots:"23",  
  color:"brown"};
```

You associate a property name... ...with a value.

You can get at any of an object's properties using dot syntax.

```
planeObject.engines;  
leopardObject.color;
```

The object

Its property

Use objects when you need to store multiple pieces of data about a particular thing.



What properties might a card object have?

Build your own objects

Objects are essentially a way to create your own custom variables exactly how *you* want them. You can create one-time-use objects, or create your own object blueprint that you can use again and again. We'll look at reusable objects in a little bit, but for now let's discuss how to create a one-time-use object and some of the terms and diagrams associated with an object.


Objects can be described in a standard way, using a UML (Unified Modeling Language) diagram. UML is a general-purpose, worldwide standard for helping to describe objects in object-oriented programming.

When an object has a variable associated with it, we call that a *property* of the object.

When an object has a function associated with it, we call that a *method* of the object. You create one-time-use objects using the `var` keyword, just like for all the other variables you've seen so far.

UML diagram of an object

This structure helps you see how your object is structured before you write any code.

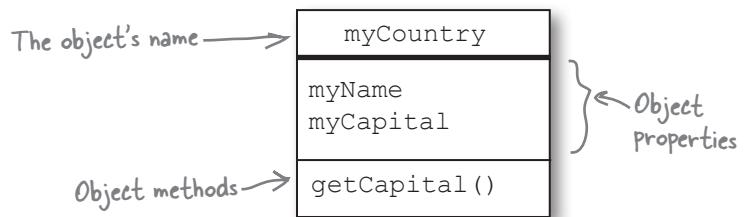

And here's how you'd write that object in code:

```
>Create an object called myCountry using var.    var myCountry = {  
Create a method of the object, called getCapital.  getCapital : function() {  
},  
Create properties of the object, called myName and myCapital.  alert(this.myCapital);  
  myName : 'USA',  
  myCapital : 'Washington DC'  
};
```

Run this function when the method gets called.

Always enclose an object in curly braces.

Set the value of the properties.




As it turns out, nearly everything in jQuery and JavaScript is an object.

This includes elements, arrays, functions, numbers, even strings—and they all have properties and methods.

Create reusable objects with object constructors

One really nice aspect of objects is that they can have the same structure but hold different values for their properties (or variables). Just like creating reusable functions—like we did in Chapter 3—we can create an object blueprint, or *object constructor*, so we can use it multiple times. An object constructor can also be used to create *instances* of the object.

The constructor is just a function, so in order to create a constructor for an object, you use the keyword `function` instead of the keyword `var`. Then, use the new keyword to create a new instance of the object.

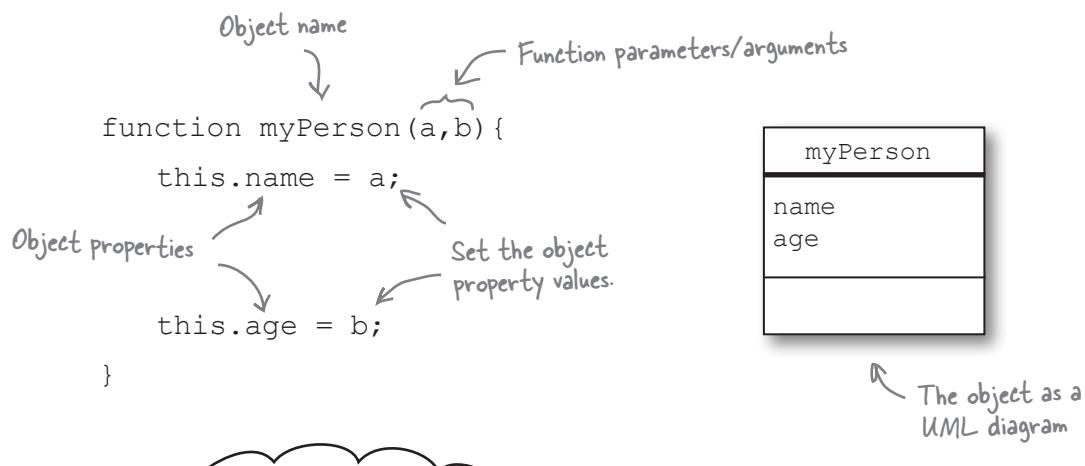

Can you think of a place where you can use these objects?

Interacting with objects

Objects come in all shapes and sizes. After you *instantiate* (or create an instance of) an object—whether it is an object you created or one created by someone else—you interact with it using the dot (.) operator. To get a feel for how this works, let's take a closer look at the myCountry and myPerson objects that we just defined.



Yes! That's a great idea.

Let's set up the HTML page and then have a look at how we can go about creating a card object.

let's get this game started

Set up the page

Create your HTML and CSS files using the information below. Don't forget to create a *my_scripts.js* file, too, in your *scripts* folder. We'll be adding plenty of code to that in the coming pages. You can download all the image resources for the entire chapter from <http://thinkjquery.com/chapter06/images.zip>.



```
<!DOCTYPE html>
<html>
  <head>
    <title>Head First Black Jack</title>
    <link href="styles/my_style.css" rel="stylesheet">
  </head>
  <body>
    <div id="main">
      <h1>Click to reveal your cards</h1>
      <h3 id="hdrTotal"></h3><h3 id="hdrResult"></h3>
      <div id="my_hand">
      </div>
      <div id="controls">
        <div id="btnDeal">
          
        </div>
      </div>
    </div>
    <script src="scripts/jquery-1.6.2.min.js"></script>
    <script src="scripts/my_scripts.js"></script>
  </body>
</html>
```



index.html

```
#controls{
  clear:both;
}
#my_hand{
  clear:both;
  border: 1px solid gray;
  height: 250px;
  width: 835px;
}
h3 {
  display: inline;
  padding-right: 40px;
}
.current_hand{
  float:left;
}
```



my_style.css


Am I going to get
to deal these cards
sometime soon??






Test DRIVE

Open up the *index.html* page you just created in your favorite browser to see the basic structure of the page.

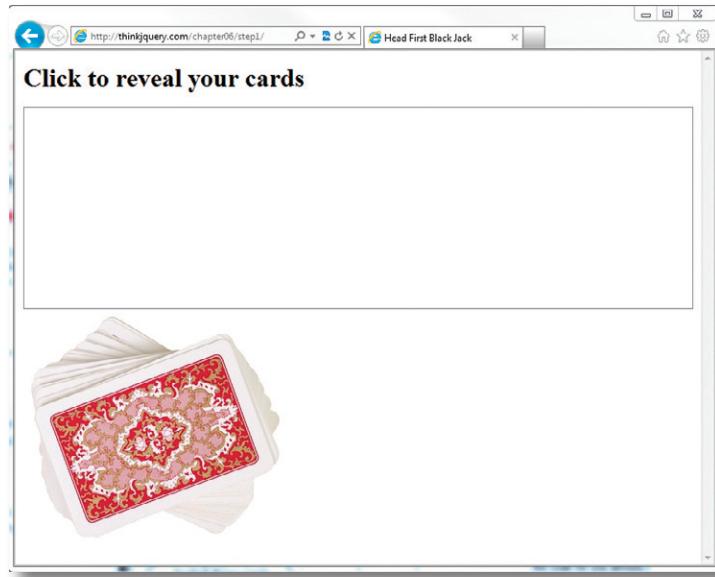

Using the UML diagram for a card object given below, create a reusable object called `card` that takes three parameters called `name`, `suit`, and `value`. Set these parameters as the values of the object's properties. This particular object doesn't have any methods. We've filled in some of the code for you already.

```
function card( ) {  
}  
}
```



exercise solution**Exercise Solution**

Here's your `card` object. Add it to your `my_scripts.js` file, inside the `$ (document) . ready(function() { }) ;` section. For now, this should be the only code in the file.

```
function card( name, suit, value ) {
    this.name = name;
    this.suit = suit;
    this.value = value;
}
```

*Use the function keyword
to make it reusable.*

*Assign the arguments to
the object properties.*



`my_scripts.js`

card
name
suit
value

there are no
Dumb Questions

Q: What's the difference between one-time and reusable objects?

A: One-time use objects are simply a fancy variable defined to hold multiple pieces of information. Reusable objects are just that—reusable. After you define the template for a reusable object with its properties/methods, you can create as many copies of this object as you want—each with different information describing the object.

Q: It looks like you're using different ways of setting properties. Is that right?

A: Yes, we are, and yes, it is. You can assign the value of properties using the assignment operator (=) or the colon (:) symbol, just as we did for our objects. Both are valid and interchangeable.

Q: Anything else about objects you're not telling me?

A: That's a tough one. They are a pretty complex feature in JavaScript. Later in the book, we'll use JavaScript Object Notation, aka JSON. Using JSON, we'll access properties with a slightly different method, which can also be applied to your JavaScript objects here. That is the "key" notation. Rather than doing:

`object.my_property`

you can do the following:

`object['my_property']`

and get the same result—access to the value of `my_property`.

Q: Where did UML come from?

A: UML was born in the mid-90s when companies were trying to get a clear method of describing objects. There have been several iterations of it since, with several private companies competing to have their version as the accepted standard. Thankfully, though, there is a standard, and anyone using UML will be able to read and understand diagrams and information from other UML sources.




So that card object is going to be super useful, but we still need some way of keeping track of individual cards as they're played, right?

You're right.

We need a way to store and access cards as they're dealt. Good thing is, we've already seen how to do this...

It's me again!
You've already
worked with me a bit
back in Chapter 4.



The return of arrays

As you've already seen, we can group several items into a single structure called an array. The items in an array are not necessarily related to one another, but accessing their values becomes a lot easier this way. Back in Chapter 4, we saw how a jQuery selector returns items and stores them in an array. Now we're going to use JavaScript to get even more utility out of arrays.

Variables in an array can be any type, including strings, numbers, objects, even HTML elements! There are several different ways of creating your own arrays:

Create an empty array, using the "new" keyword.
`var my_arr1 = new Array();`

Create an array, using the "new" keyword, and also say what the values of the array are.
`var my_arr2 = new Array('USA', 'China', 'Japan', 'Ireland');`

`var my_arr3 = ['USA', 'China', 'Japan', 'Ireland'];`

Create an array, without the "new" keyword, but set the values by enclosing them in square [] brackets.
`var my_arr4 = ["USA", "China", "Japan", "Ireland"];`

And, as we mentioned earlier, arrays are objects too, which means they have methods and properties. A common array property is `length`. This denotes how many items there are in the array. You can access the `length` property with `array_name.length`.



Watch it!

There is no difference between the various ways of creating arrays.

It's common to mix and match the different ways, depending on the array's purpose. Look up "JavaScript array methods" in your favorite search engine to find all the methods the array object has.

access is all about the index

Accessing arrays

Unlike with creating arrays, there is only one way to access the information inside an array. Arrays are *zero-indexed*—that is, their position (or index) in the list starts at 0. We used the index back in Chapter 3, so you can always go back there for a refresher if this isn't clicking.

```

The first element in the list
has an index of 0, the second
has an index of 1, and so on. → Always use square brackets [ ]
to access items in the array.

alert( my_arr2[0] );
// USA appears in the alert box

Here's the array
name, which we
created on page 225. → There's no need for quotes when
accessing an array by index.

alert( my_arr3[2] );
// Japan appears in the alert box

alert( my_arr1[1] );
// Results in an error because it is empty
    
```

The index of an item in a list refers to where it appears in the list.

OK, so now we've got an array with some stuff in it, but are we stuck with what we initially put in there?

Definitely not!

It's easy to add, change, and delete items in an array. Let's take a look at how.



Add and update items in arrays

We can add as many items to an array as we want. In the example on the previous pages, we prepopulated some items into the `my_arr2` and `my_arr3` arrays, but we left the `my_arr1` array empty. We can add or update items in an array, and to do that, it's again all about the index. Here are a few different approaches to updating an array:

```

Set the value of the first
item in the my_arr1 array.
my_arr1[0] = "France";
alert( my_arr1[0] );
// Displays 'France' on the screen

Add a second value to
the my_arr1 array.
my_arr1[1] = "Spain" ;
my_arr1[0] = "Italy" ;
Update the value of the first
item in the my_arr1 array.
alert( my_arr1[0] );
// Displays 'Italy' on the screen

my_arr3[2] = "Canada";
Update the value of the third
item in the my_arr3 array.
alert( my_arr3[2] );
// Displays 'Canada' on the screen

```



Exercise

In your `my_scripts.js` file, after the `card` object code, create an array called `deck` with all 52 cards in a standard deck in it.

You can use the `card` object you've already created and call the constructor each time with the correct parameters to create each card—Ace through King, for each of the four suits (Clubs, Hearts, Diamonds, and Spades)—and the value of each card, with “Ace” worth 11, “Two” worth 2, “Three” worth 3, and so on.

exercise solution**Exercise Solution**

Your `my_scripts.js` file should now contain an array called `deck` with 52 cards from a standard deck in it, as well as the `card` object. You should use the `card` object you've already created and call the constructor each time with the correct parameters to create each card.

Set the name of the array.

```
var deck = [
    new card('Ace', 'Hearts', 11),
    new card('Two', 'Hearts', 2),
    new card('Three', 'Hearts', 3),
    new card('Four', 'Hearts', 4),
```

Pass in the three parameters
for each of the `card` objects.

```
new card('King', 'Hearts', 10),
new card('Ace', 'Diamonds', 11),
new card('Two', 'Diamonds', 2),
new card('Three', 'Diamonds', 3),
```

```
new card('Queen', 'Diamonds', 10),
new card('King', 'Diamonds', 10),
new card('Ace', 'Clubs', 11),
new card('Two', 'Clubs', 2),
```

```
new card('King', 'Clubs', 10),
new card('Ace', 'Spades', 11),
new card('Two', 'Spades', 2),
new card('Three', 'Spades', 3),
```

```
new card('Jack', 'Spades', 10),
new card('Queen', 'Spades', 10),
new card('King', 'Spades', 10)
```

`];`

Remember to enclose the values in
your array in square brackets.



But we have a lot
of cards in an array now.
It seems like we'd be writing a
whole lot of code to get them
back out again. What a pain!

Not necessarily.

We will still access each item by its index, but we can use a technique similar to `each`, which we saw back in Chapter 3, to access each item in turn without writing a ton of code for every card.

It's time to take a trip
through Loopville...




Perform an action over (and over, and over...)

You're going to be putting cards into and getting info back out of arrays quite a bit for this blackjack game. Thankfully, JavaScript comes prepared for just this scenario with *loops*. And the **even better** news is you've already done this before: back in Chapter 3, you used the `each` jQuery method to loop through elements based on a jQuery selector. But in this case, we've got more options, as JavaScript has several different types of loops, each with a slightly different syntax, and each with its own purpose.

The `for` loop is great for repeating code a defined number of times. You should know this number before you start your loop, or it could go on forever. It can run zero or many times, depending on variable values.


A `for` loop repeat cycle:



for loops let you repeat code a defined number of times.

The `do...while` loop will run your code once, and then will keep running the same code until a particular condition is met, like a value turns from true to false (or vice versa), or counting to a particular number is reached in the code. A `do...while` loop can run one or many times.

A `do...while` loop repeat cycle:



do...while loops let you run your code once and then repeat it until a particular condition is met.

Every loop, regardless of type, has four distinct parts:

1 Initialization

This takes place one time, at the start of the loop.

2 Test condition


This checks to see if the loop should stop or keep going for another round of running code, usually by checking the value of a variable.

3 Action

This is the code that is repeated each time we go through the loop.

4 Update

This portion updates the variables being used by the test condition to see if we should keep looping or not.

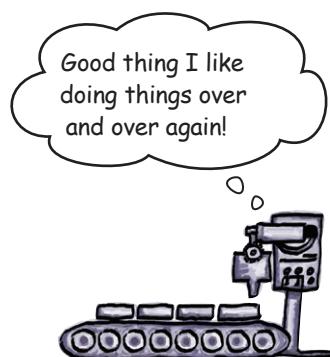


caught in a loop


Loops Up Close


Taking an up close look at the different loop types we mentioned, we can see that they each contain the four main elements, but in a slightly different order. This order reflects some of the main differences between the loop types.

for loops

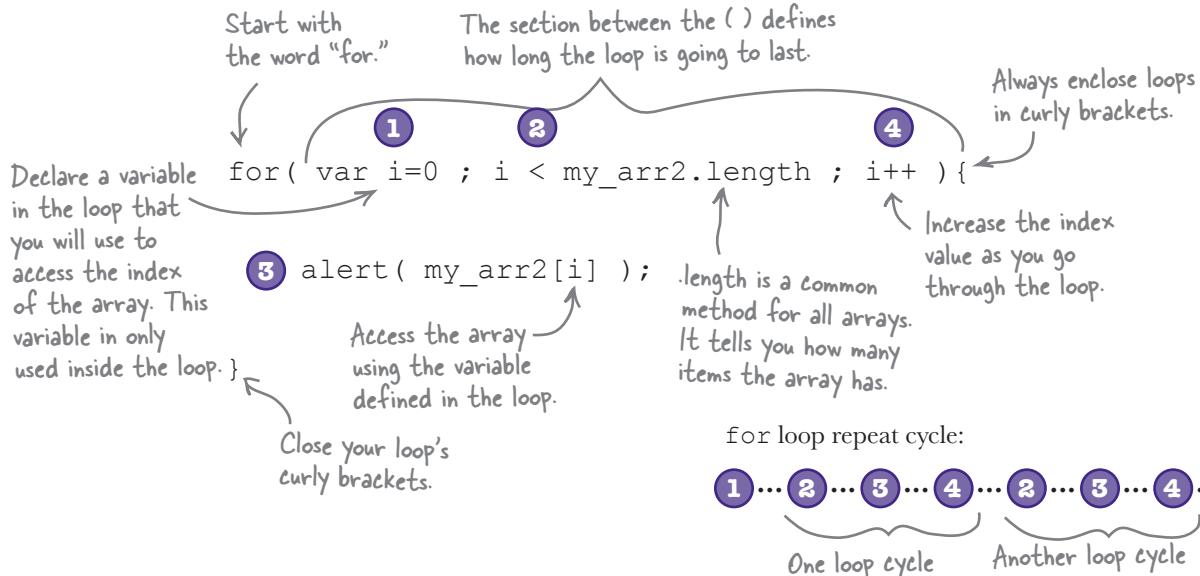

do...while loops

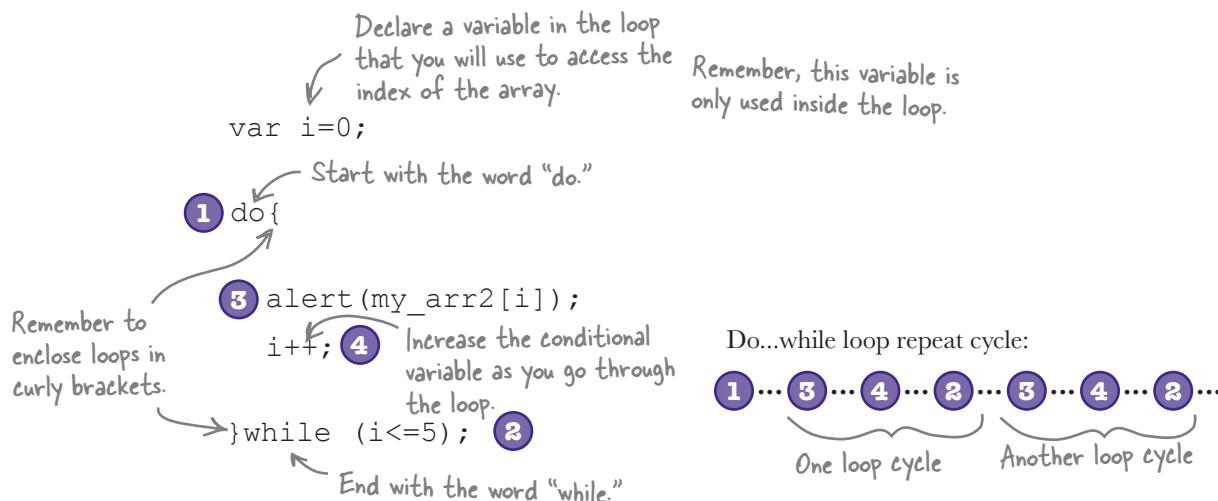

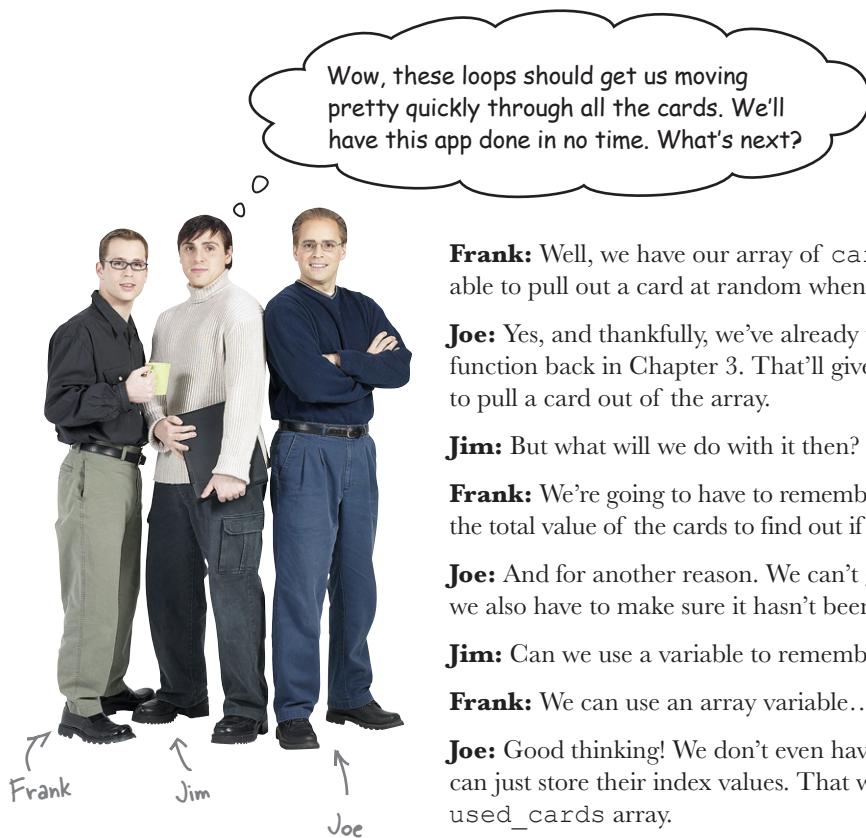

Wow, these loops should get us moving pretty quickly through all the cards. We'll have this app done in no time. What's next?

Frank: Well, we have our array of `card` objects, but we need to be able to pull out a card at random when we deal, right?

Joe: Yes, and thankfully, we've already written that `getRandom` function back in Chapter 3. That'll give us a random number each time to pull a card out of the array.

Jim: But what will we do with it then?

Frank: We're going to have to remember it. We have to be able to add up the total value of the cards to find out if the players went over 21 or not.

Joe: And for another reason. We can't give them the same card twice, so we also have to make sure it hasn't been dealt already.

Jim: Can we use a variable to remember the cards?

Frank: We can use an array variable...

Joe: Good thinking! We don't even have to store the cards; we can just store their index values. That way we can test if it's in our `used_cards` array.

Jim: Wow, that's impressive! How can we tell if a value is in an array?

Frank: Using a jQuery utility method called `inArray`.

Joe: That sounds handy. But I think we're going to need several functions to do this for us. We have to get a random number between 0 and 51, and we have to check if we've used it already. If we have, we need to try again. If not, we need to get the correct card out of the deck and remember the index of that card. And then we need to show that card to the player.

Jim: Sounds like a lot! How are we going to show the card to the player?

Frank: Well, we already have the images, and they're arranged by suit and named type, so we can use those attributes of the `card` object to put the image on the screen.

Joe: Exactly. We can create a DOM element and append it to the `my_hand` div element already on our page.

Frank: This `card` object is already paying dividends... Let's get to it!

variable hide and seek

Looking for the needle in a haystack

Often you'll need to see if a variable already exists in an array or not, so you don't end up duplicating data, or to prevent your code from adding the same thing several times to an array. This can be particularly useful if you use arrays to store things like a shopping cart or a wish list.

Create an array for stuff in the haystack.

```
var haystack = new Array('hay', 'mouse', 'needle', 'pitchfork')
```

But what if we want to find where this value is in our haystack array?

jQuery provides a whole host of *utility* methods to help us get particular tasks done more efficiently. These include functions for checking what type of browser the site visitor is using, for returning the current time, for merging arrays, or for removing duplicates from arrays.

The utility method that's useful for this particular situation is the `inArray` method. It will return where in the array the value you're looking for is located (its index), if at all. If it cannot find the value in the array, it will return `-1`. Like other utility methods, `inArray` does not require a selector—it's called directly by the jQuery function or jQuery shortcut.

Create a variable to hold the return value of the function.

```
var index = $.inArray( value, array );
```

The value you're looking for

The array in which you want to look

The jQuery shortcut

The `inArray` utility method call

```
var needle_index = $.inArray( 'needle', haystack );
```

Here's the value you're looking for.

Here's the array you want to search.



Which feature of the blackjack application needs to check if we've already used a value?



jQuery Blackjack Code Magnets

Arrange the magnets to write the code that will complete several functions to help you finish the blackjack game. The completed code should create two functions—`deal` and `hit`—as well as a click event listener for an element with the ID of `btnDeal`, and a new array variable called `used_cards` to remember what cards have been dealt already.

```

var used_cards = new _____();
function _____{
    for(var i=0;i<2;i++) {
        hit();
    }
}
function getRandom(num) {
    var my_num = Math.floor(_____ *num);
    return my_num;
}
function _____{
    var good_card = false;
    do{
        var index = _____(52);
        if( !$.inArray(index, _____ ) > -1 ) {
            good_card = true;
            var c = deck[ index ];
            _____ [used_cards.length] = index;
            hand.cards[hand.cards.length] = c;
            var $d = $("<div>");
            $d.addClass("current_hand")
                .appendTo(_____ );
            $("<img>").appendTo($d)
                .attr( _____ , 'images/cards/' + c.suit + '/' + c.name + '.jpg'
            )
                .fadeOut('slow')
                .fadeIn('slow');
        }
    }_____(!good_card);
    good_card = false;
}
$("#btnDeal").click( _____ () {
    deal();
    $(this).toggle();
});
```

Magnets available for placement:

- `getRandom`
- `deal()`
- `used_cards`
- `'src'`
- `hit()`
- `while`
- `Array`
- `"#my_hand"`
- `function`
- `used_cards`
- `Math.random()`
-

code magnets solution



jQuery Blackjack Code Magnets Solution


Here's the code to complete the deal and hit functions, as well as a click event listener for an element with the ID of btnDeal, and a new array variable called used_cards to remember what cards have been dealt already.

```

var used_cards = new Array();           ← Create an array to
function deal() {                      hold used cards.
    for(var i=0;i<2;i++) {
        hit();                         ← Use a for loop to call the hit function twice.
    }
}                                       ← The getRandom
function getRandom(num) {              function again!
    var my_num = Math.floor( Math.random() *num);
    return my_num;
}
function hit() {
    var good_card = false;
    do{
        var index = getRandom(52);      ← Check if you're already using the
        if( !$.inArray(index, used_cards ) > -1 ) {   card you've picked, by using the
            good_card = true;             inArray function.
            var c = deck[ index ];       ← Get the card from
            used_cards [used_cards.length] = index;   the deck array.
            hand.cards[hand.cards.length] = c;          ← Add the array index
            var $d = $("<div>");           of the card to the
            $d.addClass("current hand")     used_cards array.
            .appendTo("#my_hand");
            $("<img>").appendTo($d)
                .attr('src', 'images/cards/' + c.suit + '/' + c.name + '.jpg')  ← Use properties of the
            .fadeOut('slow');             card object to build the
            .fadeIn('slow');             path to the image.
        }
    } while (!good_card);               ← Try again, if you've
    good_card = false;                 already used the card.
}

$("#btnDeal").click( function() {
    deal();                         ← Call the deal function on click.
    $(this).toggle();
});


```





Test Drive

Add all the code from the previous magnets exercise to your `my_scripts.js` file, after your `deck` array, and give it a try in your browser. Click on the deck of cards to deal your next hand of blackjack.

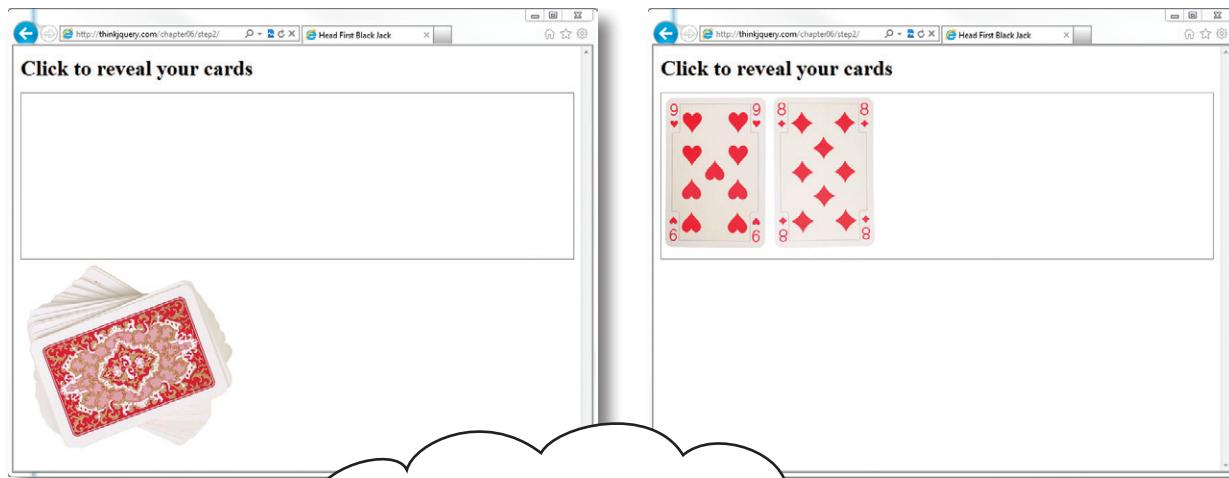

Hey, I can only give out two cards.
As the dealer, I'll nearly always win! But
maybe we should make it fair. Can you
build a way to give out more cards?



Can you think of what we could use to remember
all this different information?

ready bake HTML and CSS



Ready Bake

HTML & CSS

Since you're already a style and structure pro, we'll just give you the updated code for your *index.html* and *my_style.css* files so you can compare. You should see some changes to your page after you add in the new HTML and CSS code. We'll wire it all up in a little bit.

```
<!DOCTYPE html>
<html>
  <head>
    <title>Head First Black Jack</title>
    <link href="styles/my_style.css" rel="stylesheet">
  </head>
  <body>
    <div id="main">
      <h1>Click to reveal your cards</h1>
      <h3 id="hdrTotal"></h3>
      <h3 id="hdrResult"></h3>
      <div id="my_hand">
      </div>
      <div id="controls">
        <div id="btnDeal">
          
        </div>
        <div id="btnHit">
          
        </div>
        <div id="btnStick">
          
        </div>
      </div>
    </div>
    <script src="scripts/jquery-1.6.2.min.js"></script>
    <script src="scripts/my_scripts.js"></script>
  </body>
</html>
```

Add new controls for the blackjack game.

Add some CSS for the new controls.

```
#controls{
  clear:both;
}

.current_hand{
  float:left;
}

#my_hand{
  clear:both;
  border: 1px solid gray;
  height: 250px;
  width: 835px;
}

#btnHit, #btnStick,
#btnRestart{
  display:none;
  float:left;
}

h3 {
  display: inline;
  padding-right: 40px;
}
```



my_style.css



index.html

there are no
Dumb Questions

Q: Are there any other types of loops I should know about?

A: Yes, there are. There's the `while` loop, which is very similar to the `do...while` loop, except it does its conditional check at the start. There's also a `for...in` loop, which will loop through an object's properties and pull out the value of each one.

Q: So, I've started a loop going. Can I stop it in the middle?

A: Yes, you can, with a very simple command: `break`. Calling this anywhere in your loop will cause the loop to stop and proceed to the next piece of code after the loop.

Q: What's `appendTo`? I've only seen `append` before. Is there a difference?


A: With `append`, the selector calling the method is the container into which the content is inserted. With `appendTo`, on the other hand, the content comes before the method, either as a selector expression or as HTML markup created on the fly, and it is inserted into the target container.



Exercise

Using the UML diagram given below, create a one-time object called `hand`. The `cards` property should be a new empty array. The `current_total` property should be set to 0 (zero). The `sumCardTotal` method should loop through all the cards in the `cards` property and add their values together, and set this number as the value of the `current_total` property. Then, use the `current_total` value to set the value of the element with the ID of `hdrTotal`. We've started the object code for you.

```
var hand = {
  cards : new Array(),
  current_total : 0,
  sumCardTotal: function(){
    }
};
```



exercise solution

Exercise
Solution

Now you've got a `hand` object with a `card` property (that's an array) and a function that loops through the `card` array, gets the current card, and updates the current total.

```
var hand = {
  cards : new Array(),
  current_total : 0, ← Set the current_total
  property to 0.

  sumCardTotal: function(){
    this.current_total = 0; ← Set the card property
    for(var i=0;i<this.cards.length;i++){ ← to be a new array.
      var c = this.cards[i]; ← Loop through the
      this.current_total += c.value; ← card array.
    } ← Get the current
    $('#hdrTotal').html("Total: " + this.current_total ); ← card from the array.
  }
}; ← Add the value to
      ← current_total.

      ← Output the total count to the
      ← screen, in the hdrTotal element.
```

hand
cards
current_total

sumCardTotal()

But I don't see anything there that'll tell me if I won. Won't I just get all the cards?

**We definitely don't want that.**

Then there will be no way to see who's won. Based on the rules set out in the email from the Head First Lounge, we have to decide if you won based on several different criteria. Let's have a look at those criteria again.

- ➊ If a player's cards add up to more than 21, then she is bust and must start again. The game is over.
- ➋ If a player's cards add up to exactly 21, then she has a blackjack, and the game is over.
- ➌ If a player's cards add up to 21 or less, but she has already been dealt five cards, then the game is over, and she wins.
- ➍ Otherwise, the player can choose to get another card or stop playing.

Decision making time...again!

Back in Chapter 3, we looked at using conditional logic to run different code based on decisions you want your code to make, given information it already has.

```

Start the if statement.          The thing we want to check
if( myBool == true ) {        The equality operator. This
    // Do Something!           can be read as "is equal to."
} else{                         The code we want to run, if what
    // Otherwise Do something else!
}

```

A JavaScript variable

As it turns out, there's an additional option for making more than a single decision at a time. By combining `if` and `else` statements into a composite statement called `else if`, you can check several conditions all inside one statement. Let's take a look.

```

The thing we
want to check
if( myNumber < 10 ) {
    // Do Something!
} else if( myNumber > 20 ) {
    // Do something else!
} else{
    // Finally, Do something even different!
}

```

Another thing we want to check for





Can you think of where in your code you could use a `if / else if / else` statement?

if this or that, or else!

Comparison and logical operators

For conditional logic statements (like `if/else` or `do...while`) to work properly, they have to be able to make the right decision based on what they are checking for. To do this, they use a series of *comparison* and *logical* operators to help them make the decision. In JavaScript, there are seven different comparison operators and three logical operators, as well as a shorthand operator for the `if/else` statement, called the *ternary* operator. We've seen some of these already, but here's the full list.

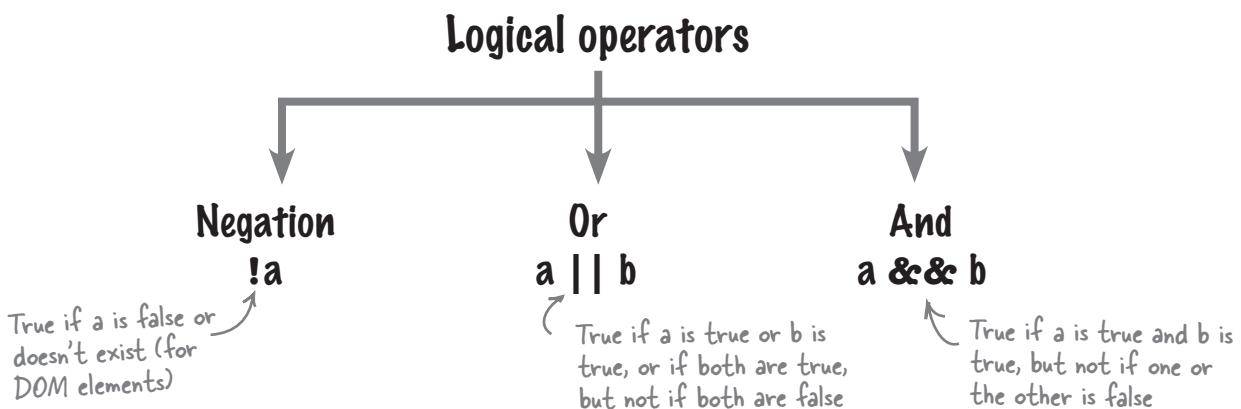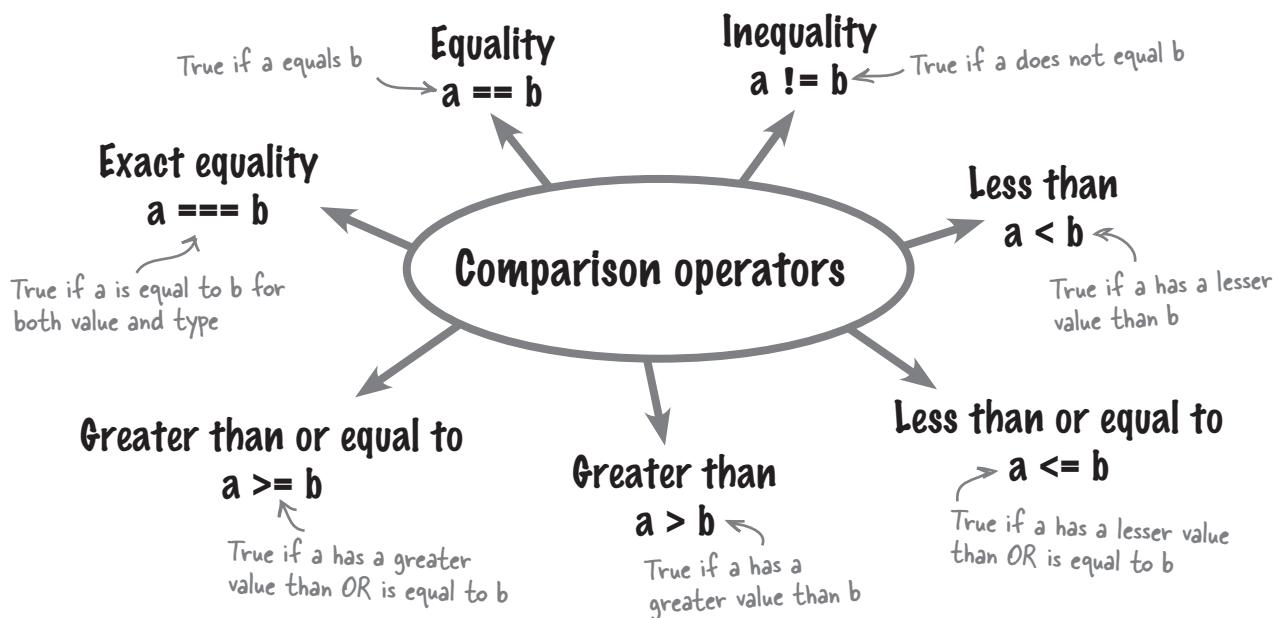



Update your hand object to check if the value of the `current_total` property meets the criteria for the game (go back and check the original email if you don't remember all the rules). Here's the existing object, as well as pieces of the new code you need to write.

```
var hand = {
    cards : new Array(),
    current_total : 0,
    sumCardTotal: function() {
        this.current_total = 0;
        for(var i=0;i<this.cards.length;i++) {
            var c = this.cards[i];
            this.current_total += c.value;
        }
        $("#hdrTotal").html("Total: " + this.current_total );
        if(this._____ > 21){
            $("#btnStick").trigger("click");
            $("#hdrResult").html("BUST!");
        } _____ (this.current_total _____ ){
            $("#btnStick").trigger("click");
            $("#hdrResult").html("BlackJack!");
        }else if( ____ .current_total ____ 21 ____ this.cards.length == 5){
            $("#btnStick").trigger("click");
            $("#hdrResult").html("5 card trick!");
        }
        _____ // Keep playing! :)
    }
};
```



my_scripts.js

sharpen solution

Sharpen your pencil Solution

You've now updated the `sumCardTotal` method to include logic that checks the value of the dealt hand. There are lots of conditional and logical operators in there, even for this simple application.

```
var hand = {
    cards : new Array(),
    current_total : 0,
}

sumCardTotal: function(){
    this.current_total = 0;
    for(var i=0;i<this.cards.length;i++) {
        var c = this.cards[i];
        this.current_total += c.value;
    }
    $("#hdrTotal").html("Total: " + this.current_total );
    if(this.current_total > 21){ ← Check if current_total is
        $("#btnStick").trigger("click");
        $("#hdrResult").html("BUST!");
    }else if(this.current_total == 21){ ← Check if current_total
        $("#btnStick").trigger("click");
        $("#hdrResult").html("BlackJack!");
    }else if(this.current_total <= 21 && this.cards.length == 5){
        $("#btnStick").trigger("click");
        $("#hdrResult").html("BlackJack - 5 card trick!");
    }else{
        // Keep playing! :)
    } ← Otherwise, do nothing!
};

};
```

Check if `current_total` is less than or equal to 21, and if 5 cards have been dealt already.



`my_scripts.js`



But we still can't get at these new functions because we've got nothing to call them with, right?

Yeah, we're not quite done yet.

You already have all the pieces in your HTML code for dealing the initial cards, asking for another card, and ending the game. You just haven't wired them up yet. And don't forget, you need to call the method to add up the card totals each time you deal a new card.



jQuery Blackjack Code Magnets


Move the magnets to write the code for a function that will add several event listeners to the blackjack application. The listeners should be on the elements with the IDs of `btnHit` and `btnStick`. The `btnHit` event should deal another card. The other should stop the game. Also, call the `sumCardTotal` method after any card is dealt out. We've included some code from the end of the `hit` function for you to update too.

```

}while(!_____);
good_card = false;
hand._____();
}
$("#btnDeal").click( _____() {
    deal();
    $(this).toggle();
    $("#btnHit")._____();
    $("#btnStick").toggle();
});
$("_____").click( function(){
    hit();
});
$("#btnStick").click( function(){
    $("#hdrResult").html(_____);
});

```

function
toggle
good_card
'Stick!'
#btnHit
sumCardTotal




my_scripts.js



jQuery Blackjack Code Magnets Solution

This code creates a function that will add several event listeners on the hit and stick buttons, and also calls the `sumCardTotal` method after any card is dealt out.

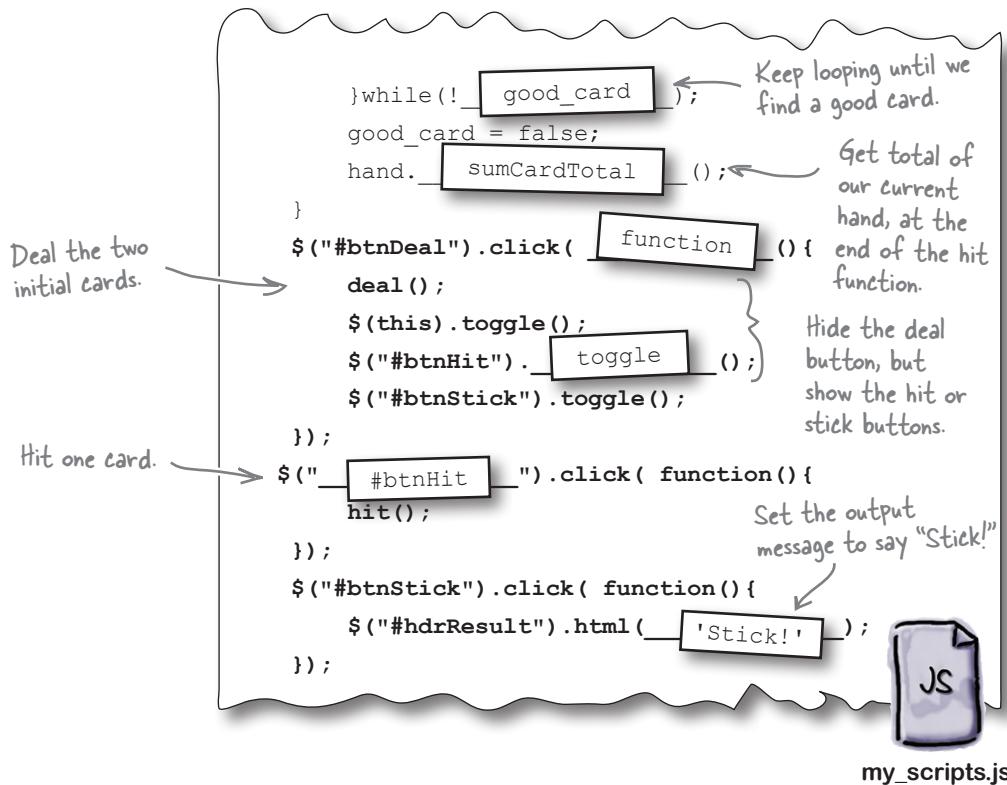

there are no
Dumb Questions

Q: Are there any other ways to compare values in JavaScript?

A: Not compare values, *per se*, but there is another method used to make decisions based on the values of variables. That method is called the `switch` method, and can have many different conditions. Often, if you find yourself writing large `if/else if/else` statements, a `switch` statement might be easier.

Q: You said there was a shortcut for the `if/else` statement. What is it?

A: It's called the ternary operator, and it uses a question mark to separate the logic operation from the resulting actions, like this:

```
a > b ? if_true_code : if_false_code
```



Test Drive

Add all the code you've just created to your `my_scripts.js` file, after your `hit` function—including an update to the end of the `hit` function itself—and give it a runthrough in your favorite browser.

The image shows a computer monitor displaying a blackjack game interface. The title bar says "Click to reveal your cards". Below it, the text "Total: 20" is displayed. Two cards are visible: the Jack of Hearts and the Queen of Spades. In front of the monitor, three programmers are gathered around a laptop. Jim, on the left, is standing and looking at the screen. Frank, in the middle, is sitting on a stool and pointing at the laptop. Joe, on the right, is also looking at the screen. A thought bubble from Jim contains the text "So that's it? Are we done now?".

Jim: So that's it?
Are we done now?

Frank: Not so fast. We still have to add in the reset feature they asked for. So, once a game is over, the players can start again without reloading the page.

Joe: We also need to make sure that people aren't getting cards from previous games. We have to be sure we're removing everything.

Jim: But how do we do that? We have HTML elements that we added dynamically and new items in arrays. We have to clear it all?

Frank: Yes. We'll have to use slightly different techniques for each, but yes, we have to clear it all.

Joe: I know just the tricks! For jQuery, have a look at the `empty` method. For the arrays, there are a few ways, but not all are cross-browser. Let's see what the best options are.

a clean slate

Clearing things up with jQuery...

Remember back in Chapter 2 when we used the jQuery `remove` method to eliminate a particular element and all its child elements from the DOM, never to be seen again? That approach is great if you want to remove the parent element. However, if you want to keep the main element around and you just want to empty out its contents, you can use the jQuery `empty` method, which—like `remove`—requires a selector, but will leave the calling element in place.


...is even easier in JavaScript

Often we find ourselves writing jQuery to avoid having to write multiple lines of JavaScript. Thankfully, there are a few occasions where doing something in JavaScript is as easy as it is in jQuery, and this is one of those times. While the syntax is a little different, the end result is the same and you don't have to keep track of where you are in the DOM. To truly empty an array in JavaScript, you simply set its length to 0 (zero):

```
used_cards.length = 0;
```

Things can't get much easier than that, right?

```
$( "#my_hand" ).empty();
```

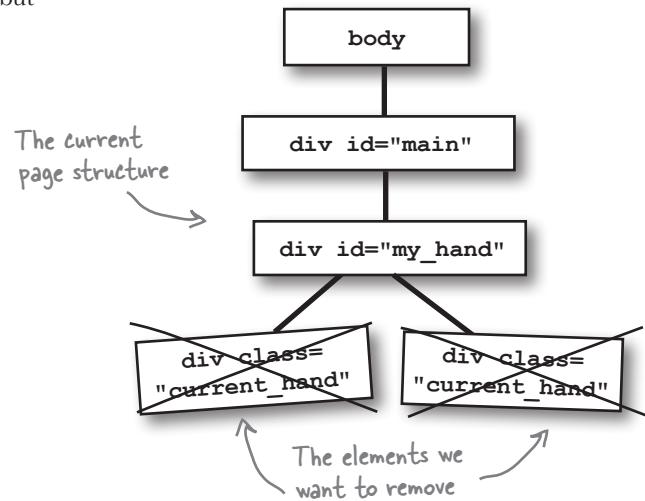

So, all we have to do now is figure out what needs clearing, and we're done, right?

Yes, but the order in which you clear stuff is important.

Since we also have to deal the next hand from a restart, we should clear everything first, *then* deal the new hand. We also have to make another element clickable to call our code.



Sharpen your pencil

Update your `index.html` file with an element, similar to all the other elements in the controls `div` element. Give the clickable `div` an ID of `btnRestart`. Inside the `div`, put an image with a source of `restart_small.jpg`, from the `images` folder.

Also, update your `my_scripts.js` file with an `click` event listener for the `btnRestart` element. This should empty the `my_hand` element, the `used_cards` array, and the `cards` array in the `hand` object. It should also toggle a new `div` element with the IDs of `result` and itself. It should also clear the `html` of the `hdrResult` elements. Finally, it should toggle and trigger the `click` event on the `btnDeal` element.

```
<div id="btnStick">
    
</div>
```



index.html

```
<div id="_____><img src="" id="imgResult">_____
</div>
</div>
<script src="scripts/jquery-1.6.2.min.js"></script>
```

```
$( "#hdrResult" ).html('Stick!');
```

```
});
```

```
$( "#btnRestart" ).click( function() {
```

```
    _____.toggle();
```

```
    $(this)._____
```

```
    $( "#my_hand" )._____
```

```
    $( "#hdrResult" ).html('');
```

```
    used_cards. _____ = 0;
```

```
    _____.length = 0;
```

```
    hand. _____ = 0;
```



my_scripts.js

```
    $( "#btnDeal" ).toggle()
```

```
    ._____('click');
```

```
});
```

sharpen solution

Solution

Now you've got a reset button to start the game over, which resets all the elements back to what they were before the game started. Add a little JavaScript magic with the `length` property, and you're good to go.

```
<div id="btnStick">
    
</div>           ↗ A reset button to start
<div id="btnRestart"> the game over again
    
</div>
<div id="result"><img src="" id="imgResult"></div>
</div>           ↗ Make the result more
</div>           obvious in here.
<script src="scripts/jquery-1.6.2.min.js"></script>
```



index.html

```
$ ("#hdrResult").html('Stick!');
$ ("result").toggle();
});

$("#btnRestart").click( function() {
    $('#result').toggle();
    $(this).toggle();
    $('#my_hand').empty();
    $('#hdrResult').html('');
    used_cards.length = 0;
    hand.cards.length = 0;
    hand.current_total = 0;

    $("#btnDeal").toggle()   ↗ Simulate a click of the
                           .trigger('click');

});
```




my_scripts.js

Reset all the
elements back to
the way they were.



Test Drive

Add a click event for the `btnRestart` element to your `my_scripts.js` file. Also, don't forget to include the additional HTML code in your `index.html` file.

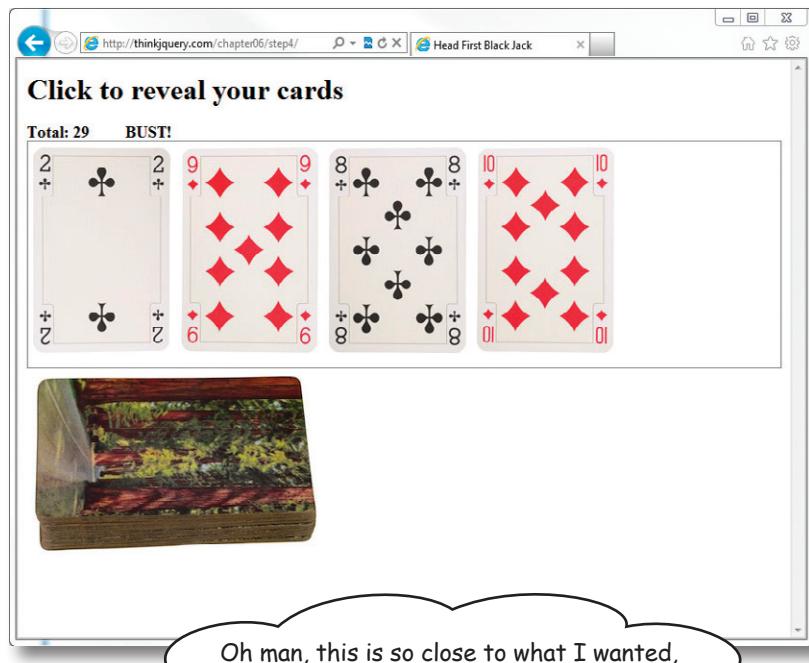

Oh man, this is so close to what I wanted, but there's just one more thing: can we make the win and lose more obvious or exciting?
Sorry to keep messing with ya.



everyone likes a winner

Add some extra excitement

Update your *my_scripts.js* file with a new `end` function, which gets called by `btnStick`, and some other updates to the computational logic in `sumCardTotal`. Also, grab the latest *my_style.css* file here:
http://thinkjquery.com/chapter06/end/styles/my_style.css.



```

if(this.current_total > 21) {
    $("#btnStick").trigger("click");
    $("#imgResult").attr('src','images/x2.png');
    $("#hdrResult").html("BUST!")
        .attr('class', 'lose');
} else if(this.current_total == 21) {
    $("#btnStick").trigger("click");
    $("#imgResult").attr('src','images/check.png');
    $("#hdrResult").html("BlackJack!")
        .attr('class', 'win');
} else if(this.current_total <= 21 && this.cards.length == 5) {
    $("#btnStick").trigger("click");
    $("#imgResult").attr('src','images/check.png');
    $("#hdrResult").html("BlackJack - 5 card trick!")
        .attr('class', 'win');
} else {}
$("#hdrTotal").html("Total: " + this.current_total );
}

};

function end(){
    $("#btnHit").toggle();
    $("#btnStick").toggle();
    $("#btnRestart").toggle();
}

$("#btnStick").click( function(){
    $("#hdrResult").html('Stick!')
        .attr('class', 'win');
    $("#result").toggle();
    end();
});
```

Set the src of imgResult to a different image, depending on the result.

Set a different class for the header, depending on the result.

Toggle all the controls to end the game.

Call the end function to end the game, after you stick.



my_scripts.js



Test Drive

Update the `sumCardTotal` method of the `hand` function in your `my_scripts.js` file. Also, don't forget to grab the new `my_style.css` file and replace your current one with the new version.

The image features a woman in a green patterned dress cheering with her arms raised. She is positioned behind a black blackjack table. On the table, there is a sign that reads "BLACK JACK" and "INSURANCE PAYS 2 TO 1". A small illustration of a cocktail glass is also on the table. In the background, there is a painting of a garden scene.

Two computer screens are displayed above the woman. The top screen shows a blackjack hand with a total of 22, resulting in a "BUST!". The bottom screen shows a blackjack hand with a total of 21, resulting in a "BlackJack!". A large red checkmark is drawn over the first screen, and a large green checkmark is drawn over the second screen. A speech bubble from the first screen contains the text: "Awesome! That is perfect! Now visitors to the Head First Lounge can enjoy a good game of blackjack while they hang out."

your jquery and javascript toolbox



Your jQuery/JavaScript Toolbox

You've got Chapter 6 under your belt and now you've added JavaScript objects, arrays, and loops to your toolbox.

JavaScript object

Creating standalone and creating a constructor

Using objects and calling the constructor

Arrays

Creating arrays

Assigning values to an array

Adding more elements to an array

Updating existing array elements

Loops

for Loop

do...while loop

Logical operators

Comparison operators

jQuery

.empty

\$.inArray – Utility method


.attr

.trigger

7 custom functions for custom effects

What have you done for me lately?

I could really use a
doHousework function.

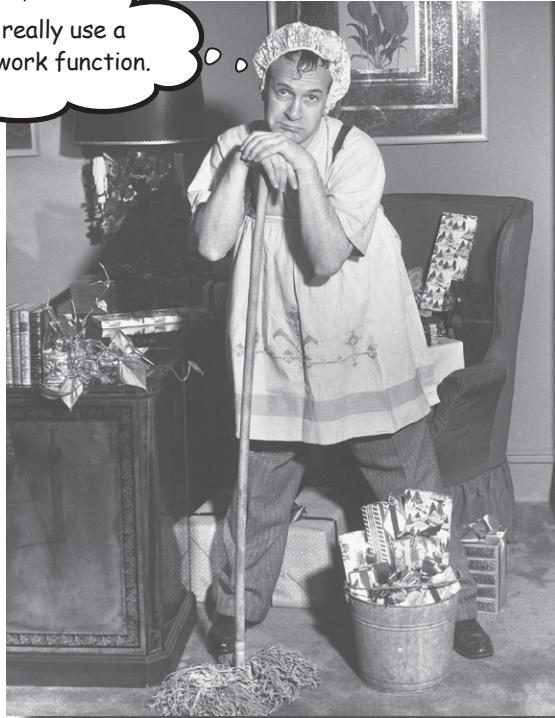

When you combine jQuery's custom effects

with JavaScript functions you can make your code—and your web app—more efficient, more effective, and more *powerful*. In this chapter, you'll dig deeper into improving your jQuery effects by handling **browser events**, working with **timed functions**, and improving the **organization and reusability** of your custom JavaScript functions.

uh oh

A storm is brewing

The Monster Mashup web app you built in Chapter 5 was a big hit with kids and their parents. But it sounds like there might be a bug that's making the lightning go haywire. DoodleStuff's quality assurance manager contacts you with some issues and a feature request for making Monster Mashup better.

When a visitor starts up Monster Mashup...



...and then opens a new browser tab and stays on the tab browsing for a few minutes...



Jill, who runs QA for DoodleStuff



Try reproducing the issue. Then think about what's going wrong with the lightning functions. Why do they all crash together when someone switches from one tab to another?

We've created a monster...function

The lightning function we created in Chapter 5 has turned out to be a bit of a monster. It runs and runs, even if the user navigates away from the page. When the user returns to the tab, the timer has to catch up, and it tries to redraw the lightning on screen in rapid succession. It seems that the timer doesn't work the way we wanted it to, so what happened?

```
function lightning_one(t) {
    $("#lightning1").fadeIn(250).fadeOut(250);
    setTimeout("lightning_one()", t);
}
```

This tells the JS interpreter that the function should call itself, and it does so over and over again.

In JavaScript, you typically define a function and call it somewhere else in the code. In this case, you called the function from inside itself.

The timeout interval is in milliseconds.

The setTimeout method tells the JS interpreter to run a function and then wait for a while before running it again.

In Chapter 5, we needed a way to call the method again and again, with a timeout in between those calls. In solving that problem, we unknowingly created a new problem: the function continues to run when the window loses the visitor's *focus* (i.e., when the visitor opens a new tab and moves away from the active window).

A function that runs infinitely and is out of our control? That's complex and scary! How can we get control back?



Watch it!

You have to be very careful with functions that call themselves.


Creating **infinite loops** can eat up CPU resources and crash the visitor's browser.




one object to rule them all

Get control of timed effects with the window object

Fortunately, you have a way to get control of your lightning animation using JavaScript's window object. The window object is created every time the visitor opens a new window in his browser, and it offers a lot of jQuery and JavaScript power. In the world of JavaScript, the window object is the *global* object. In other words, window is the *topmost object* of the JavaScript world.

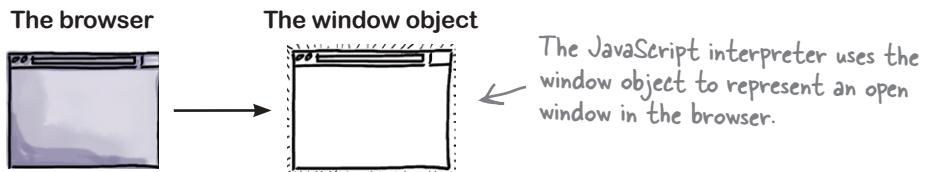

Let's say you've opened three tabs in your browser. The browser creates one window object for each of those tabs. The window object is an object just like the ones you worked with in Chapter 6, so it has properties, event handlers, and methods. And they're super handy—we can use the window object's `onblur` and `onfocus` event handlers to find out what the visitor is doing at the browser level.

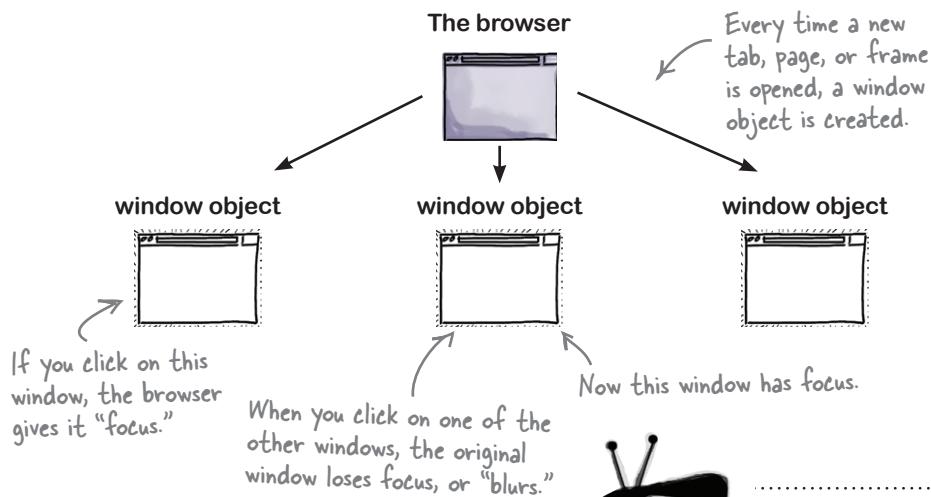

The window object also offers timer methods that you can leverage for running your custom timed functions. window has many more methods, but these are the ones we need to use to fix the lightning functions.



**Don't confuse the
JavaScript window object's
onblur and onfocus event
handlers with jQuery's
blur and focus methods.**

The jQuery blur and focus methods are intended to be attached to HTML form fields and other elements but not the window object.



Match each property, event handler, or method for the window object to what it does.

window.name

Detects when the window receives a click, keyboard input, or some other kind of input.

window.history

A property of the window object that refers to the main content of the loaded document.

window.document

Detects when the window loses focus.

window.onfocus

A method of the window object used to set a period of time to wait before calling a function or other statement.

window.setTimeout()

A method of the window object used to cancel the period of time to wait between repetitions.

window.clearTimeout()

A method of the window object used to set a period of time to wait between repetitions of a function call or other statement.

window.setInterval()

A property of the window object that lets you access the different URLs that the window has loaded over time.

window.clearInterval()

A method of the window object used to cancel the period of time to wait.


window.onblur

A property of the window object that lets us access or set the name of the window.

who does what solution

WHO DOES WHAT?


SOLUTION

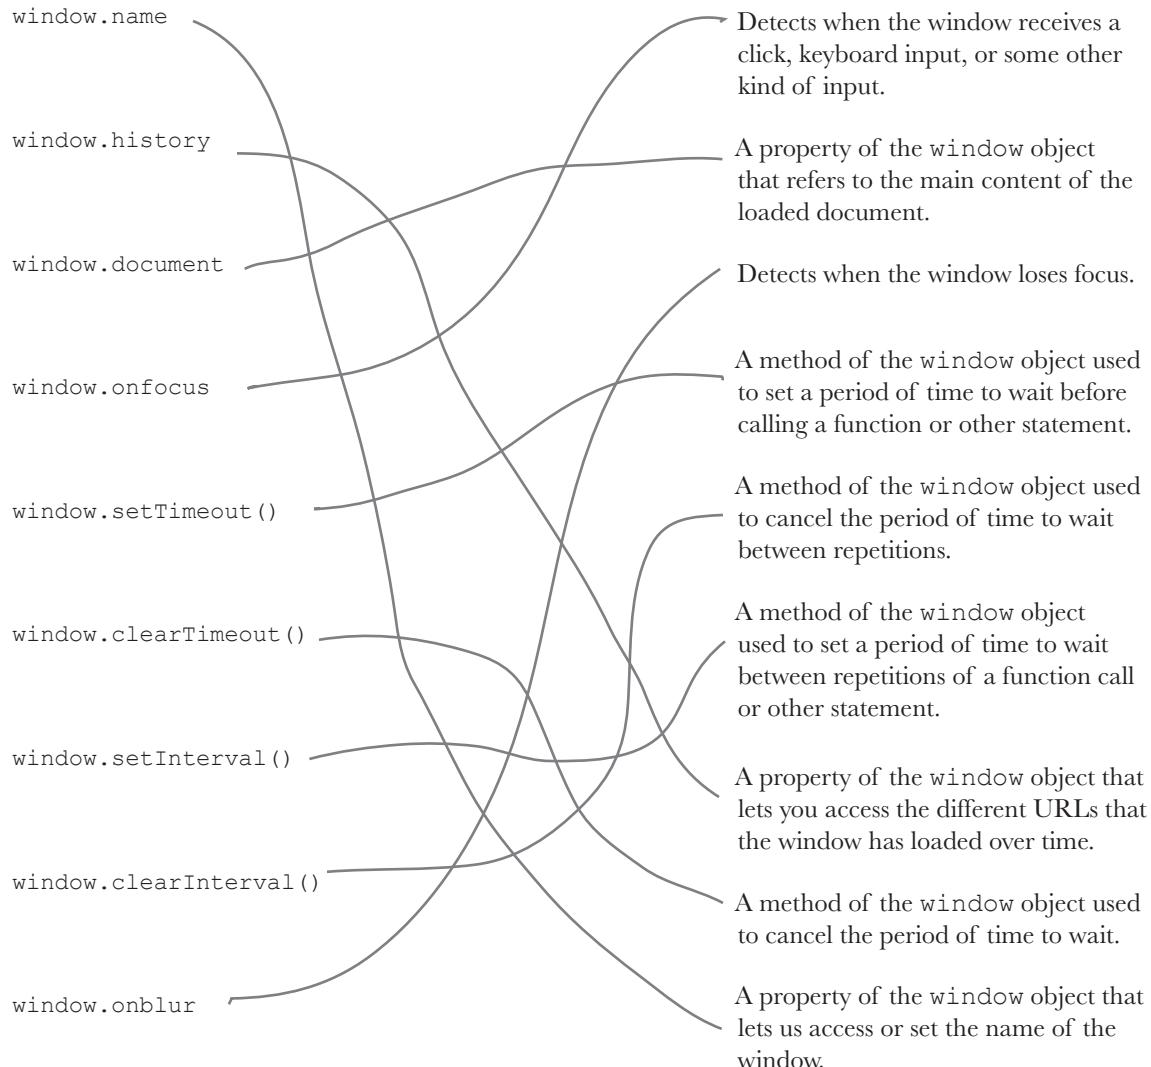

The window object's `onfocus` and `onblur` event handlers can detect a change to the window's focus, but what can you do in response to those events?

Respond to browser events with `onblur` and `onfocus`

So we know that with `window.onfocus`, you can tell when the window gains focus (i.e., a visitor activates the page or directs mouse or keyboard input to the window), and with `window.onblur`, you can tell when the active browser window loses focus. But what can you do in response to these events? You can assign a function reference to `onfocus` or `onblur`.

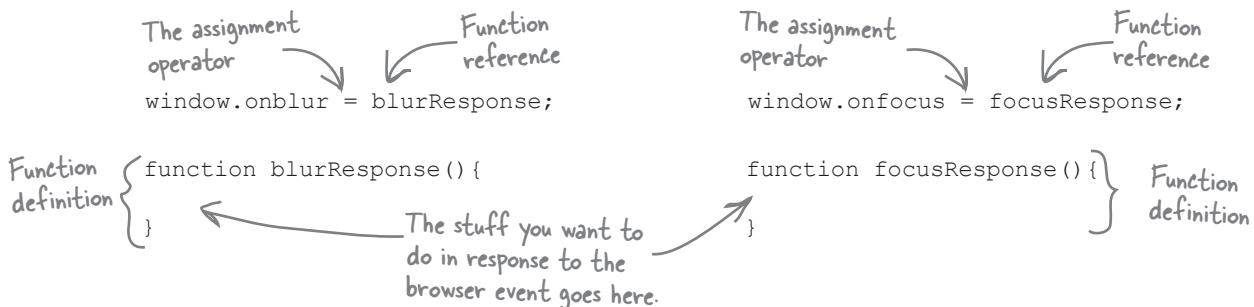

And here's where the power of writing your own custom functions really starts to come into play. Now you've got a `window` object that gives you a ton of information about what your user is doing in the browser, and you can assign your own custom functions based on what that object tells you. So, really, you can do just about anything you want, as long as you can write your own custom function for it...




Test Drive

Let's test-drive the `window` object's `onfocus` and `onblur` event handlers. In the code files you downloaded for Chapter 7, you'll find a folder called `window_tester`. Open the `window_tester.html` file in that folder in your favorite browser. Open a second tab and play with clicking between the two browser windows.

test drive

Test Drive

Here's what you should see when you open the `window_tester.html` file, open a second tab, and switch between the two windows by clicking on them alternately.

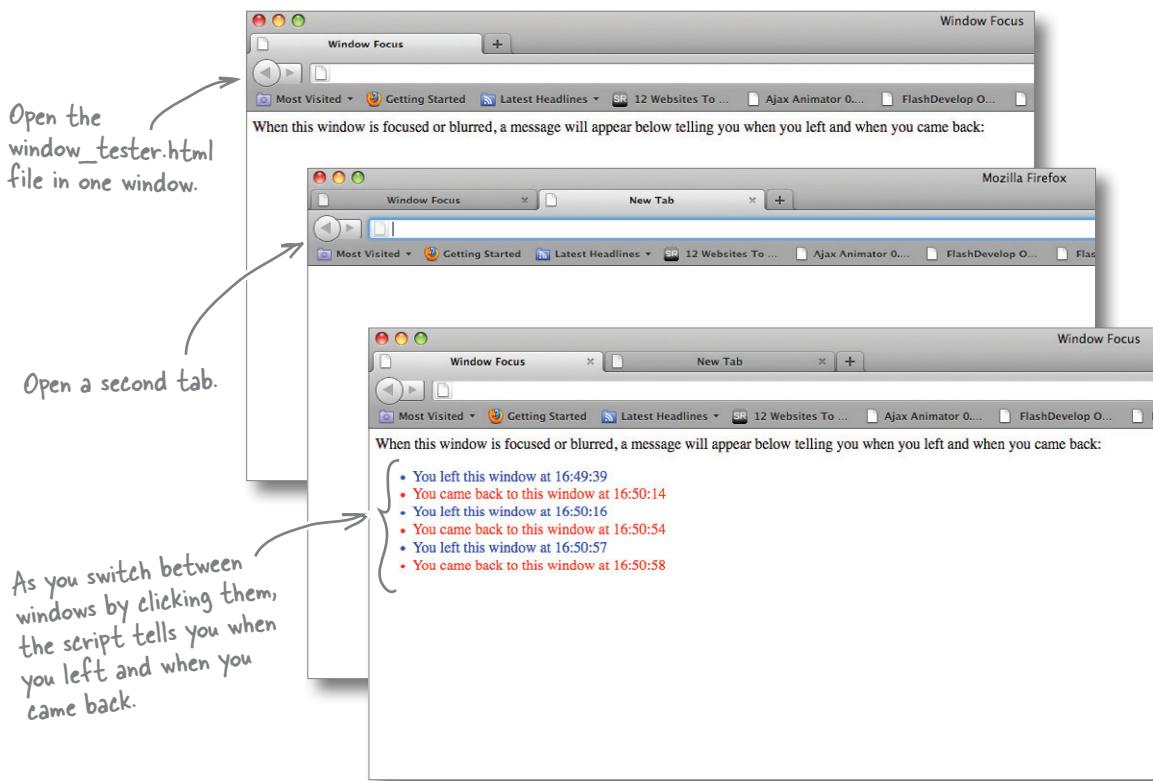


Using the information you get from the `window` object, you can stop the lightning when the visitor wanders away from the Monster Mashup window and then restart it when she returns.



jQuery Magnets


Put the code magnets in the right order to assign function definitions to the `onblur` and `onfocus` handlers. One function definition will stop the lightning when the browser loses focus (call this one `stopLightning`). The other function definition will start the lightning back up when the browser regains focus (call this one `goLightning`). You won't write the code for the functions just yet, so for now, just put the magnets with comments (starting with //) inside each function.

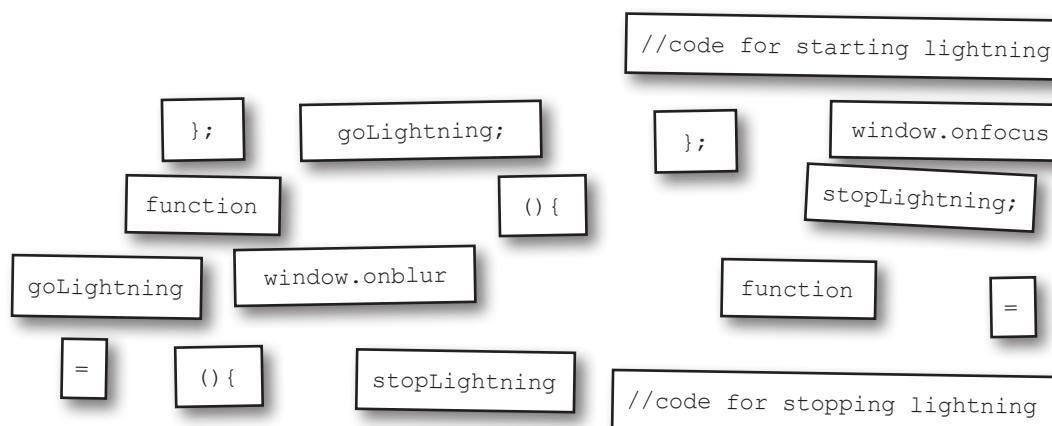



jQuery Magnets Solution

Now you're ready to go with function declarations for both window object event handlers.

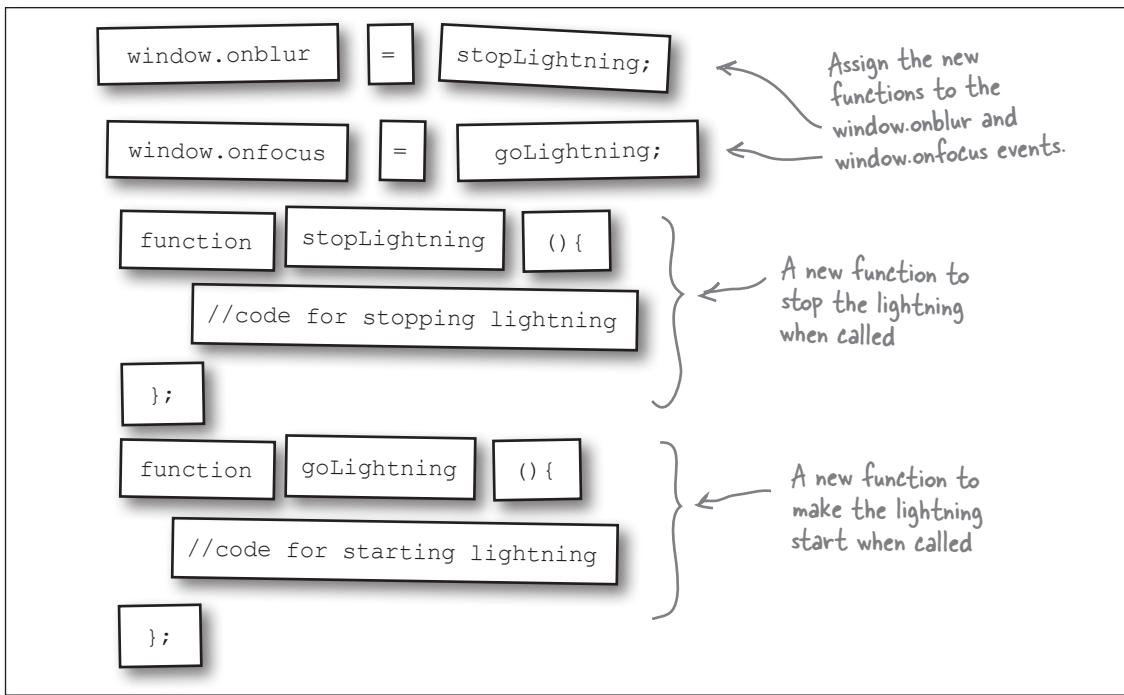


But those are just comments inside the functions. The functions need to do something! Should we just copy and paste the timed lightning functions in there?

Right. The functions don't do anything...yet.

Instead of copying and pasting our old code, let's look at one of the window object's methods—a timer method—that might give us a better way of handling the timing effects for the lightning.

Timer methods tell your functions when to run

Both JavaScript and jQuery offer us timer methods that call functions to run based on time passing. JavaScript's window object has four timer methods for timed control: `setTimeout`, `clearTimeout`, `setInterval`, and `clearInterval`. jQuery offers us the `delay` method. Let's take a closer look at these methods and what they offer us.

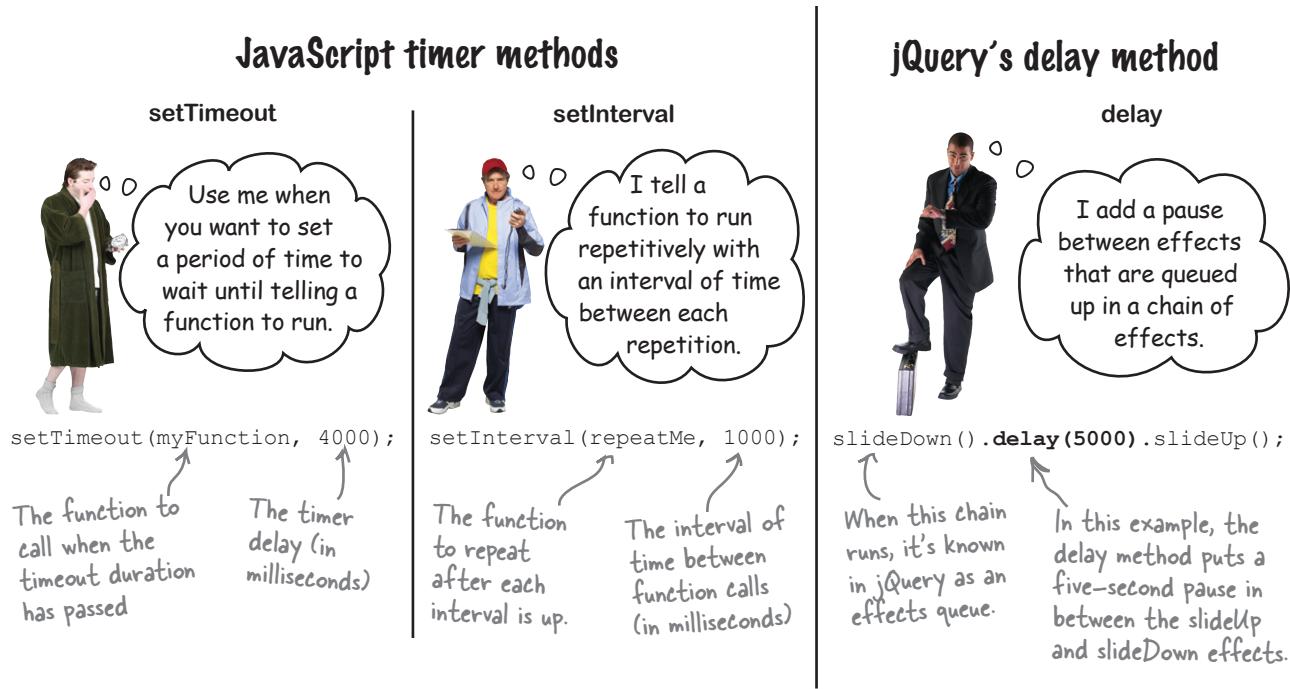


Which of these timer methods will work best for fixing the `goLightning` function? For each timer method, answer whether it will help and explain why you chose or didn't choose it.

Timer	Should we use it?	Why?
<code>setTimeout</code>		
<code>setInterval</code>		
<code>delay</code>		

sharpen solution**Solution**

Which of these timer methods will work best for fixing the lightning function? Here are our answers.

Timer	Should we use it?	Why?
setTimeout	No	The setTimeout method is intended for situations where you want to wait a specific amount of time before running a function.
setInterval	Yes	The setInterval method is specifically intended for situations where you want a function to run on a repeating schedule. That's what you need the lightning to do.
delay	No	The delay method works well for sequenced effects, but it has no mechanism for running on a repeating schedule.

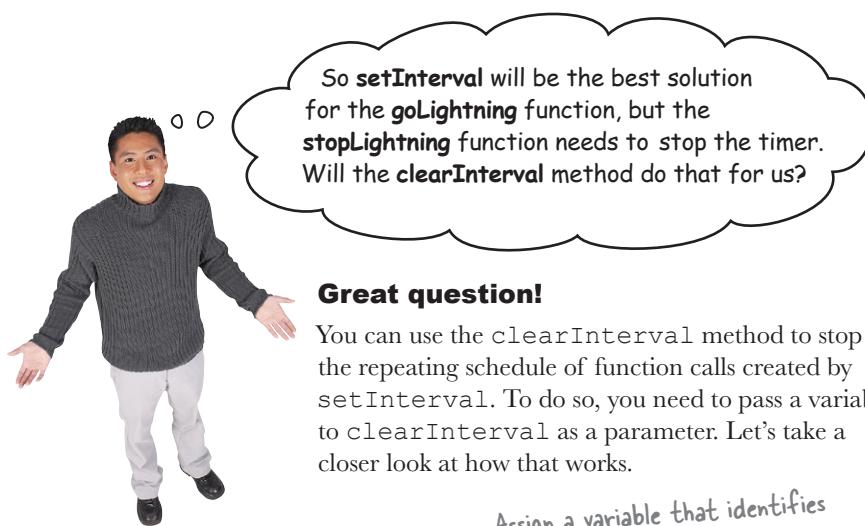**Great question!**

You can use the clearInterval method to stop the repeating schedule of function calls created by setInterval. To do so, you need to pass a variable to clearInterval as a parameter. Let's take a closer look at how that works.

myInterval = setInterval(repeatMe, 1000);

Assign a variable that identifies
the setInterval method.

Pass the variable to
clearInterval as a parameter.

clearInterval(myInterval);

The clearInterval method tells the
setInterval to wipe out its timer and
stops the repeating action.

there are no
Dumb Questions

Q: Do all browsers process the `setTimeout` method the same way?

A: No. Mozilla Firefox and Google Chrome display the behavior we encountered earlier (stacking up the function calls). Internet Explorer 9 keeps calling the function as it was intended from Chapter 5. This shows that not just web designers have issues with cross-browser compatibility.

Q: Can the timing functions like `setInterval` and `setTimeout` be used with things other than the `window` object?

A: That's a great question. Unfortunately, they can't. They are specific methods of the `window` object, and can only be called in reference to the `window` object. They can, however, be called without the prefix "window," and the browser will know you intend for this to be attached to the current `window` object. It's good practice to include the prefix, though.



Match each timer method to what it does when it runs.

```

window.clearInterval(int1);

window.onfocus = goLightning;

setTimeout(wakeUp(), 4000);

$("#container #lightning1") .
fadeIn(250).delay(5000).fadeOut(250) .;

int1 = setInterval( function() {
    lightning_one();
},
4000
);

window.onblur = stopLightning;

```

Detects when the current window gains focus and calls the `goLightning` method.

Sets the `lightning_one` function to run every four seconds and assigns it to the variable `int1`.

Detects when the current window loses focus and calls the `stopLightning` function.

Wipes out the timer and stops the repeating `setInterval` for `int1`.

Sets a four-second wait before calling a function named `wakeUp`.

Creates a five-second pause between a `fadeIn` and `fadeOut` effect.

who does what solution

Match each timer method to what it does when it runs.

window.clearInterval(int1);

Detects when the current window gains focus and calls the goLightning method.

window.onfocus = goLightning;

Sets the lightning_one function to run every four seconds and assigns it to the variable int1.

setTimeout(wakeUp(), 4000);

Detects when the current window loses focus and calls the stopLightning function.

`$("#container #lightning1").
fadeIn(250).delay(5000).fadeOut(250);`

Wipes out the timer and stops the repeating setInterval for int1.

int1 = setInterval(function() {
 lightning_one();
},
 4000
);

Sets a four-second wait before calling a function named wakeUp.

window.onblur = stopLightning;

Creates a five-second pause between a fadeIn and fadeOut effect.

Write the stopLightning and goLightning functions

Now that you know more about timer methods, let's review where we need them.

```
goLightning();           ← Start the lightning when the page loads.

window.onblur = stopLightning;   ← Call the stopLightning function when the browser loses focus.

window.onfocus = goLightning;   ← Call the goLightning function when the browser regains focus.

function stopLightning (){  
    //code for stopping lightning  
};  
  
function goLightning (){  
    //code for starting lightning  
};
```

Clear the timers for the three lightning intervals. We need three clearInterval here. Know why?

Set three timers for the three lightning intervals. And yep, we need three setIntervals here.



Exercise

For each blank line in the file, write in the variable, function, or method that will help fix the Monster Mashup app. When in doubt, look at the previous two pages for guidance. We've done a few for you.

```

goLightning();
window.onblur = stopLightning;
window.onfocus = goLightning;
var int1, int2, int3 ;
function goLightning(){
    int1= .....( function() {
        .....
        4000
    );
    .....= .....( function() {
        .....
        5000
    );
    .....= .....( function() {
        lightning_three();
        .....
        7000
    );
}

function stopLightning()
{
    window. ....(int1);
    window. ....(.....);
    window. ....(.....);
}
function lightning_one() {
    $("#container #lightning1").fadeIn(250).fadeOut(250);
};

function .....
    $("#container #lightning2").fadeIn(250).fadeOut(250);
};

function .....
    $("#container #lightning3").fadeIn(250).fadeOut(250);
};

```



my_scripts.js

exercise solution

Exercise
Solution

Now you've got two custom functions—each with references to the lightning functions you wrote back in Chapter 5—that respond to the window object's `onfocus` and `onblur` events.

```
goLightning();
window.onblur = stopLightning;
window.onfocus = goLightning;
var int1, int2, int3 ;
function goLightning() {
    int1 = setInterval(function() {
        lightning_one();
    }, 4000);
    int2 = setInterval(function() {
        lightning_two();
    }, 5000);
    int3 = setInterval(function() {
        lightning_three();
    }, 7000);
}
```

Declare three variables for remembering our timers so the browser can clear them again.

Set three different timers for the three lightning intervals.

Here, you call the `lightning_one` function.

And then call the `lightning_two` function.

Now call the `lightning_three` function.


```
function stopLightning()
{
    window.clearInterval(int1);
    window.clearInterval(int2);
    window.clearInterval(int3);
}
function lightning_one() {
    $("#container #lightning1").fadeIn(250).fadeOut(250);
}

function lightning_two() {
    $("#container #lightning2").fadeIn(250).fadeOut(250);
}

function lightning_three() {
    $("#container #lightning3").fadeIn(250).fadeOut(250);
}
```

Clear the timers for the three lightning intervals.

Our three lightning function definitions.




my_scripts.js



Do this!

You'll be updating a bunch of code to fix and improve on what you built in Chapter 5, so let's start with a blank script file. The code files you downloaded for this book contain a folder for Chapter 7. In the folder, you'll find a *begin* folder structured like this:

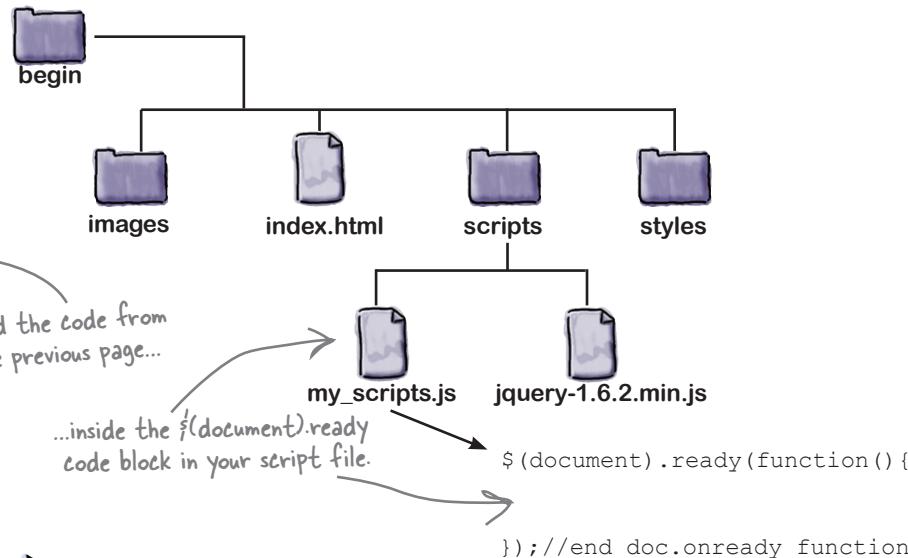

Test Drive

Once you've added the code from the previous page to the script file, open the page up in your favorite browser to see if your lightning effect fix was successful.

Open up Monster Mashup in a browser window.



Next, open a new browser tab and stay on the tab for a few minutes.

Then return to the original tab the Monster Mashup app is running in. When you return, the first effect should not be running. It should start up after four seconds.

cleaning up our functions



Since we're fixing stuff, shouldn't we go back and fix those repetitive functions we built in Chapter 5?

Great idea. We have a bunch of click-related functions for that face that we could likely combine into **one** multipurpose function.

A different data structure would work better here, one that handles multiple variables.

```
var headclix = 0, eyeclix = 0, noseclix = 0, mouthclix = 0;

$("#head").click(function(){
    if (headclix < 9){
        $("#head").animate({left:"-=367px"},500);
        headclix+=1;
    } else{
        $("#head").animate({left:"0px"},500);
        headclix = 0;
    });
});

$("#eyes").click(function(){
    if (eyeclix < 9){
        $("#eyes").animate({left:"-=367px"},500);
        eyeclix+=1;
    } else{
        $("#eyes").animate({left:"0px"},500);
        eyeclix = 0;
    });
});

$("#nose").click(function(){
    if (noseclix < 9){
        $("#nose").animate({left:"-=367px"},500);
        noseclix+=1;
    } else{
        $("#nose").animate({left:"0px"},500);
        noseclix = 0;
    });
}); //end click

$("#mouth").click(function(){
    if (mouthclix < 9){
        $("#mouth").animate({left:"-=367px"},500);
        mouthclix+=1;
    } else{
        $("#mouth").animate({left:"0px"},500);
        mouthclix = 0;
    });
}); //end click
```

Can you write one function that will work for each of these?



my_scripts.js



jQuery Magnets

From the previous page, identify which snippets of code are common to all of the different aspects of the application. Use the magnets below to create a generic function, called `moveMe`, that will be called whenever a user clicks on any of the moveable images. For the `moveMe` function, the first parameter is the corresponding index in the `clix` array, and the second is a reference to whatever was clicked.

```
var clix = _____; // head,eyes,nose,mouth
```

```
$( "#head" ).click( function() {
```

`moveMe(2, this);`

```
) ; //end click function
```

`obj`

```
$( "#eyes" ).click( function() {
```

`moveMe(0, this);`

```
) ; //end click function
```

```
$( "#nose" ).click( function() {
```

`i, obj`

```
) ; //end click function
```

`moveMe(3, this);`

```
$( "#mouth" ).click( function() {
```

`clix[i]`

```
) ; //end click function
```

`[0,0,0,0]`

```
function moveMe(_____) {
```

`moveMe(1, this);`

```
if (_____ < 9) {
```

```
    $(obj).animate({left:"-=367px"},500);
```

```
    clix[i] = clix[i]+1;
```

```
} else{
```

```
    clix[i] = 0;
```

```
    $(______).animate({left:"0px"},500);
```

```
}
```

```
}
```



my_scripts.js



jQuery Magnets Solution

Now that you've got one reusable function that leverages an array, you'll have less code to maintain, and it will be easier to track down and debug any issues you might run into.

```
var clix = [0,0,0,0]; // head,eyes,nose,mouth
```

Turning clix into an array helps economize your code.

```
$("#head").click( function() {
    moveMe(0, this);
}); //end click function
```

You pass the moveMe function a reference to the slot for the clix array. Then you can use that slot to keep track of how many times each element has been clicked.

```
$("#eyes").click( function() {
    moveMe(1, this);
}); //end click function
```

You also pass the moveMe function the current object so that it can be animated.

```
$("#nose").click( function() {
    moveMe(2, this);
}); //end click function
```

```
$("#mouth").click( function() {
```

```
    moveMe(3, this);
}); //end click function
```

By creating a more multipurpose moveMe function, you've reduced the possibility of code errors and the number of functions to maintain.

```
function moveMe(i, obj) {
```

```
    if (clix[i] < 9) {
        $(obj).animate({left:"-=367px"}, 500);
        clix[i] = clix[i]+1;
    } else {
        clix[i] = 0;
        $(obj).animate({left:"0px"}, 500);
    }
}
```

The repetitive logic you had before is now in one place, which makes it easier to fix if something goes wrong.




my_scripts.js



Test Drive

Add the code from the magnets exercise on the previous page to your *my_scripts.js* file and save it. Then, open up the *index.html* page in your favorite browser to make sure your function rewrite didn't introduce any problems when all the various face parts are clicked.

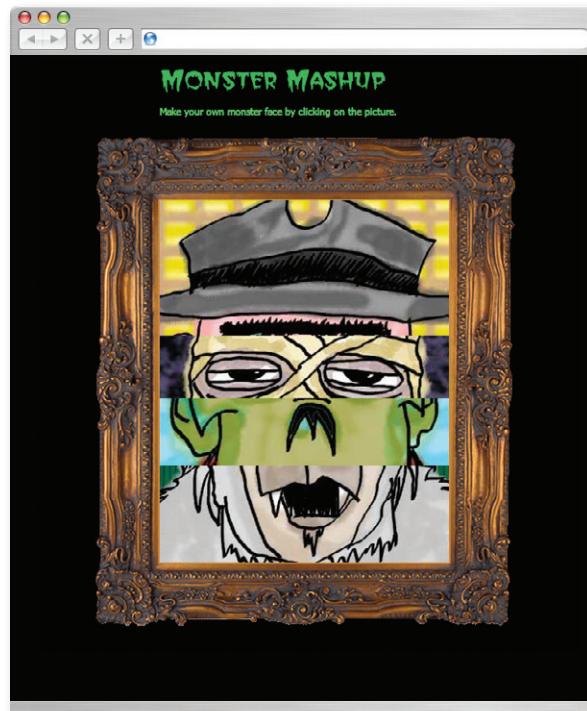

The Mashup page shouldn't look any different than before, but you'll know that your code is more efficient, less repetitive, and easier to maintain.

lightning can strike twice

Feature request for Monster Mashup

Jill and the QA team are really happy with your fixes, and since they like your work, they want to pass along a feature request for Monster Mashup from the product team.



Let's get (more) random

You've been building random functions throughout the book, so you're likely a pro at that by now. In this case, you need to create a function that randomly animates the monster faces.

Let's divide and conquer the problem by breaking it down into smaller steps. Let's start with figuring out the current position for each image strip.

You need to keep track of the current position for each monster image strip. Let's say the visitor is on this one.

The current position is the number of clicks multiplied by the distance between face parts (367 pixels). For our example, the current position is $2 * 367$, which is 734.



From the current position, we need to figure out the target position, which is essentially a random position on the screen. It helps to think of this in two parts:

1 Get a random number.


Here's what we did in Chapters 2 and 3 to get a random number.

```
var my_num = Math.floor((Math.random() * 5) + 5);
```

But now we need a number between 1 and 10 (because each monster strip has 10 monster face parts).

2 Move each face part to a random position based on that random number.

For each monster face part, you need to move it to the random position multiplied by the width of each face on each strip. For a random number of 7, the target position is $7 * 367$, which is 2,569.

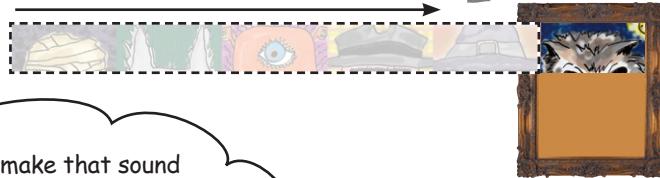

Um, you sure make that sound easy, but isn't getting the current position kind of tricky? How do we know where the face position is on the strip, especially if someone has already moved them around?

It's not as hard as you think.

In fact, just turn the page to find out how.

the more you know...

You already know the current position...

Fortunately, you don't have to come up with all new variables or functions here. The index value of the `clix` array provides the current position because it tells us how many times the user has clicked on each monster face part. So all you need is one line of code:

Set the current position to the value of `clix[index]`. `var current_position = clix[index];`

...and the `getRandom` function too

We built a function for getting random numbers in Chapters 2, 3, and 6.

We can reuse that function here with minimal tweaks.

```
function getRandom(num) {
  var my_random_num = Math.floor(Math.random() *num);
  return my_random_num;
}
```

You can pass a number as an argument to the `getRandom` function...

...to generate and return a whole number. Here, we'd get a number between 0 and 10.

By multiplying `Math.random` and the number passed as input, you can create a number between 0 and whatever the value of the `num` variable is.

1 Set your variable and pass it to the function:

Passing a value to the function `num = 10;`
 `getRandom(num);`

2 Here's the core operation of the function:

`var my_random_num = Math.floor(Math.random() *num);`

Some folks would refer to this as a utility function.
 It does one thing and does it well.

3 And the result (or output) of the function:

`return my_random_num;`

Some folks refer to functions that return values as "getters" because they get you a value.

Next up: the `target_position` (i.e., the random face part) we want to slide to.



Ready Bake Code

Add the bolded code to your *index.html* and *my_scripts.js* files. This will get your randomize function set up, along with some alerts that will show you the target position (which uses a random number) and the current position (which is determined by the number of times the visitor clicked).

```
<header id="top">
    
    <button id="btnRandom">Randomize</button>
    <button id="btnReset">Reset</button>
    <p>Make your own monster face by clicking on the picture.</p>
</header>
```

You need some interface buttons for both the randomize and reset behaviors.



index.html

```
var w = 367; //width of the face strip
var m = 10; //number of the monster face strip we're on

$("#btnRandom").click( randomize );
$("#btnReset").click( );

function getRandom(num) {
    var my_random_num = Math.floor(Math.random()*num);
    return my_random_num;
}

function randomize() {
    $(".face").each(function(index) {
        var target_position = getRandom(m);
        var current_position = clix[index];
        clix[index] = target_position;
        var move_to = target_position * w;
        $(this).animate({left:"-= "+move_to+"px"},500);
    });
}
```

Randomize the position of each face part.

Set the target_position to the result of the getRandom function.

Update clix[index] so the user can still click to advance the monster face parts.

Set move_to to the random position multiplied by the width of the face strip sections.

Run your custom animation code to move the strip left.



my_scripts.js


test drive

Test Drive

After entering the code from the previous page to your files, open up the `index.html` page in your favorite browser to test the `randomize` function. Click the Randomize button 10 to 20 times to make sure you do a full test.

The randomizer works...

On the first few clicks, the randomizer function does what you asked it to do.

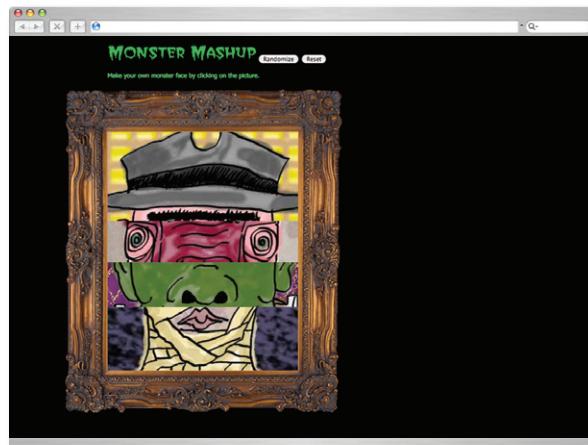

...for the first few clicks

After a few clicks, the randomizer keeps doing what you asked it to do.





We didn't code it to make the face's parts go blank. We set it to go to a random position! Did we go too far somehow?

You're right.

Those custom functions had unintended effects, but they likely did exactly what we wrote in the code. Let's have a look at what we might not have thought about.

The animate statement keeps sliding the image strip to the left, and it eventually moves it past what the user can see inside the picture frame. It's gone "off the grid," so to speak.

```
$ (this) .animate ({left: -= " +move_to + "px" } , 500);
```

Help! We fell off our picture frame!

If the user keeps clicking the Randomize button, it eventually pushes the image strip so far to the left, it won't appear on screen anymore.




BRAIN BARBELL

What do you need to do to keep the image strip from going off the grid, and instead landing on a random monster face part?

from where to there?

Move relative to the current position


To keep the image strip from going off the grid—but still falling correctly on a random monster face part—you need to move it *relative* to the *current position*, which means including the current position and some conditional logic. Let's break it down.

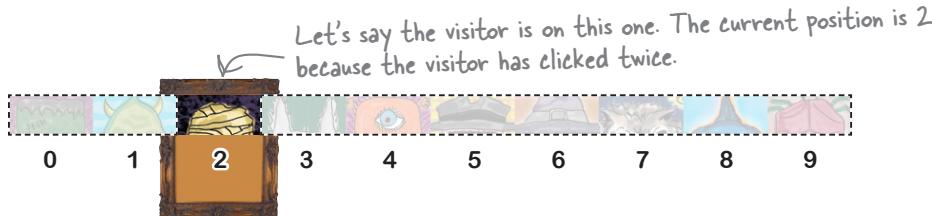

Then the user clicks on the Randomize button, which comes up with a random number between 0 and 9. Let's look at two different scenarios that could happen as a result.

Scenario 1: target > current

The getRandom function returns a value of 5. So the target_position variable gets set to 5, which means that it's *greater than* the current_position variable. We need to write conditional logic to handle this situation.

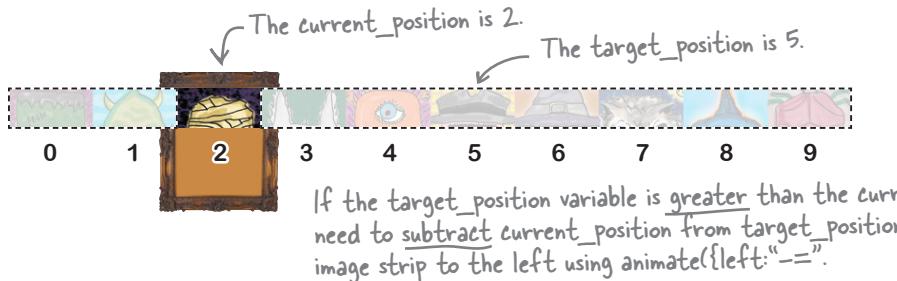


How many positions do we have to move the strip?

Subtract current_position from target_position, and you get 3. We need to move three positions to the left.

Scenario 2: target < current

The getRandom function returns a value of 1. The target_position variable is 1, which means that it's *less than* the current_position variable. Based on the conditional logic from Scenario 1, can you figure out what logic you need here?

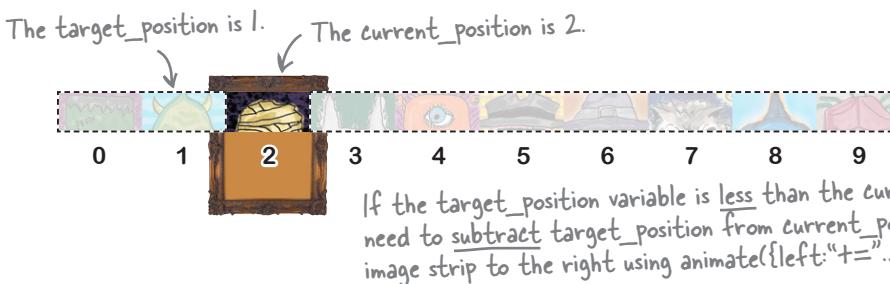

Subtract target_position from current_position, and you get 1. You need to move one position to the right.

Pool Puzzle



Your job is to take code snippets from the pool and place them into the blank lines in the code. You may **not** use the same snippet more than once, and you won't need to use all the snippets. Your **goal** is to make the randomizer function work the way it is intended to, so parts of the face doesn't go blank.

```
var w = 367;
var m = 10;


function getRandom(num) {
    var my_random_num = Math.floor(Math.random() * num);
    return my_random_num;
}

function randomize() {
    $(".face"). .....
        var target_position = getRandom(m);
        var current_position = clix[index] ;
        clix[index] = target_position;

        if(.....) {
            var move_to = (.....) * w;
            $(this).animate(.....);
        }else if(.....) {
            var move_to = (.....) * w;
            $(this).animate(.....);
        }else{
            // They are the same - Don't move it.
        }
    });
};


```

Note: each thing from the pool can only be used once!

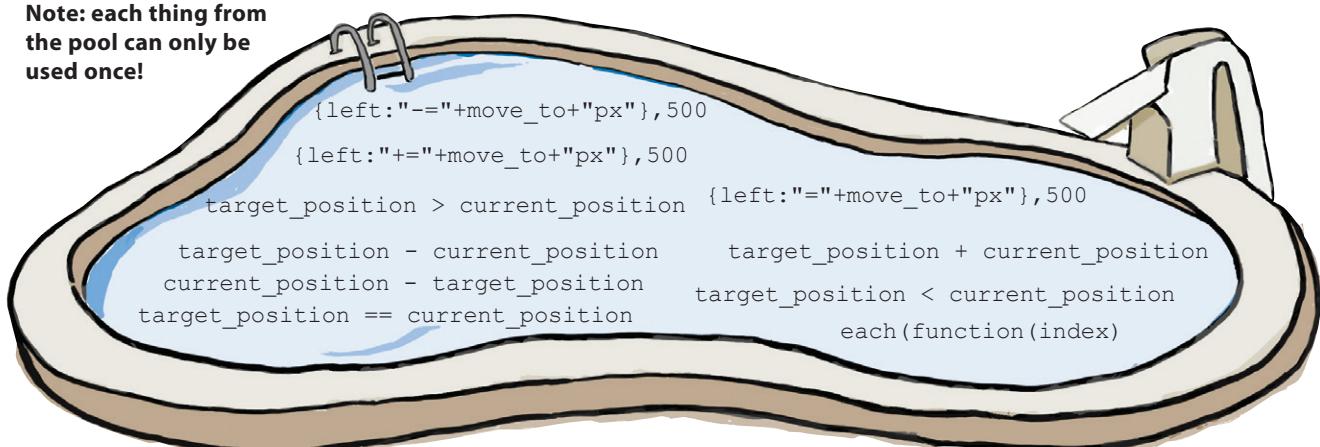

pool puzzle solution

Pool Puzzle Solution



Your job is to take code snippets from the pool and place them into the blank lines in the code. You may **not** use the same snippet more than once, and you won't need to use all the snippets. Your **goal** is to make the randomizer function work the way it is intended to, so parts of the face doesn't go blank.

```

var w = 367;
var m = 10;

function getRandom(num) {
    var my_random_num = Math.floor(Math.random() * num);
    return my_random_num;
}
function randomize(){
    $(".face").each(function(index){ ..... })
        var target_position = getRandom(m);


    If the target_position variable is
    more than the current_position...
        ...subtract target_position
        from current position.
    Move the image strip to the
    left. That means we need to
    use animate({left:"-="}).

    If the target_position variable
    is less than the current_position.
        subtract target_position from
        current position and...
        ...move the image strip to the right.
        That means we need to use
        animate({left:"+="} );
    });


    Run the following code
    for each element that's a
    member of the face class.
    var current_position = clix[index] ;
    clix[index] = target_position;

    if( target_position > current_position ) {
        var move_to = ( target_position - current_position ) * w;
        $(this).animate( {left:"-=" + move_to + "px"},500 );
    }else if( target_position < current_position ) {
        var move_to = ( current_position - target_position ) * w;
        $(this).animate( {left:"+=" + move_to + "px"},500 );
    }else{
        // They are the same - Don't move it.
    };
}

```

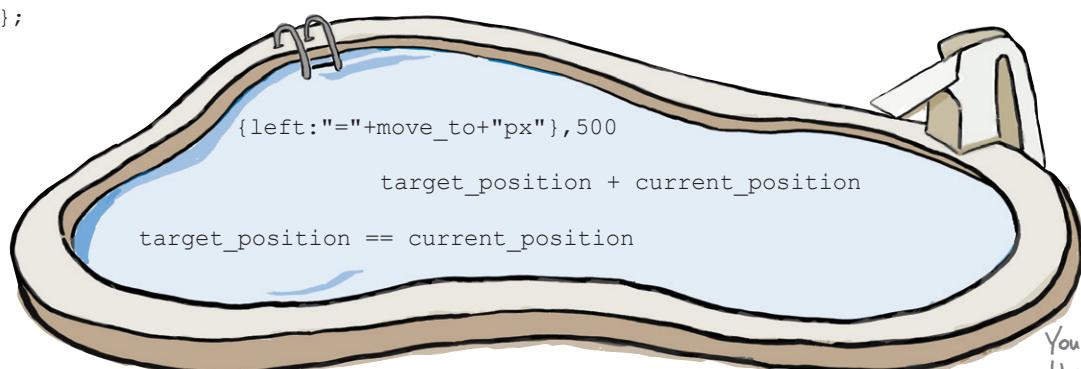

You didn't need
these snippets.

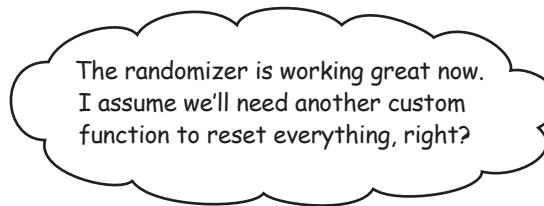**Exactly.**

Remember that reset button in the *index.html* file a few pages back? Now you just need to wire it up to a custom `reset` function.



jQuery Magnets

Put the code magnets in proper order to write the code for the reset button and build your custom `reset` function. We've done some of them for you.

```
$("#btnReset").click( reset );
```

```
function reset() {
```

```
}
```

```
$(".face")
```

```
});
```

```
clix[index] = 0;
```

```
$(this)
```

```
.each(function(index) {
```

```
.animate({left:"0px"},500);
```



jQuery Magnets Solution

And voilà! Just a couple of quick lines puts everything back in place to start over.

```
$("#btnReset").click( reset );
```

Wire up the reset custom function to the reset button.

```
function reset() {
```

Define the custom reset function.

```
$(".face")
```

```
.each(function(index) {
```

Run each so that the function resets each face section to 0.

```
clix[index] = 0;
```

Reset the clix array to 0.

```
$(this)
```

```
.animate({left:"0px"},500);
```

Rewind each image strip by setting it to an absolute position of 0 px for the CSS left property.

```
});
```

```
}
```

there are no
Dumb Questions

Q: Do all browsers have the `window` object?

A: Yes, all modern browsers have a `window` object you can interact with. Each `window` object, per tab on your browser, will also have a separate `document` object, into which your web page will get loaded.


Q: So, why do I have to move relative to the current position? Can't I just move to wherever the random number tells me to go?

A: That could work, except you'd have to reset your image back to the starting position, and then move it to wherever the random function says to move it to. That'll double the amount of code you'll have to write and maintain, and will slow down your application considerably.

Q: How does the `reset` function work?

A: The `reset` function simply loops through each element with the class of `face` and sets its `left` CSS property to 0. It sets each item in the `clix` array to be 0 as well—just as it was when we loaded the page.


Do this!



Below, you'll find all the code you've built in the last few pages. If you haven't done so already, add the bolded code to your *my_scripts.js* file and get ready to test all the new functionality you've built.

```

var w = 367; //width of the face strip
var m = 10; //number of the monster face strip we're on
$("#btnRandom").click( randomize );
$("#btnReset").click( reset );

function getRandom(num) {
    var my_random_num = Math.floor(Math.random() * num);
    return my_random_num;
}

function randomize() {
    $(".face").each(function(index) {
        var target_position = getRandom(m);
        var current_position = clix[index];
        clix[index] = target_position;
        if( target_position > current_position ) {
            var move_to = (target_position - current_position) * w;
            $(this).animate({left:"-= "+move_to+"px"},500);
        } else if( target_position < current_position ) {
            var move_to = (current_position - target_position) * w;
            $(this).animate({left:"+ "+move_to+"px"},500);
        } else{
            // They are the same - Don't move it.
        }
    });
}

function reset() {
    $(".face").each(function(index) {
        clix[index] = 0;
        $(this).animate({left:"0px"},500);
    });
}

```



my_scripts.js

nice work!



Test Drive

After entering the code from the previous page, open the *index.html* page up in your favorite browser to test the `randomize` and `reset` functions. Click the Randomize button 10 to 20 times to make sure you do a full test. Click the reset button intermittently too to make sure that's also working how you want it to.

It all works!


The monster face sections should fly both right and left now, which adds even more visual interest for your users.





jQuerycross

It's time to sit back and give your left brain something to do. It's your standard crossword; all of the solution words are from this chapter.

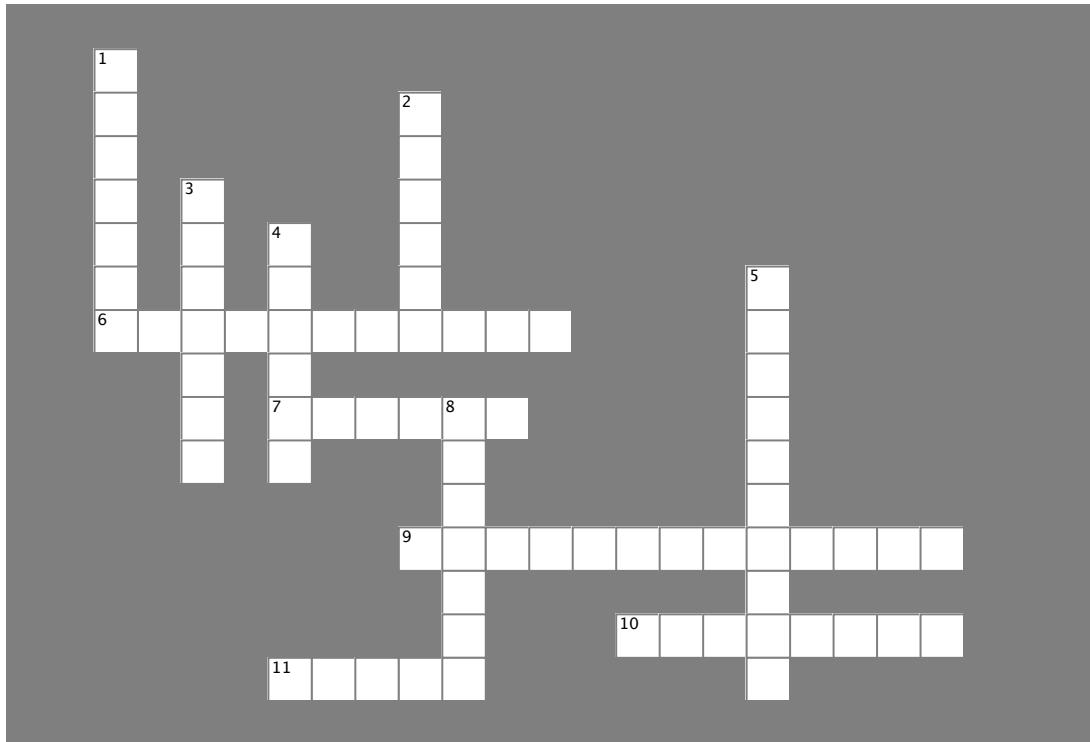

Across


6. Tells a function to run repeatedly with an interval of time between each repetition.
7. JavaScript event handler that detects when the window loses focus.
9. A JavaScript method used to cancel the period of time to wait between repetitions.
10. Used to "pass" variables or objects to a function. Hint: Think parentheses.
11. jQuery method that adds a pause between effects in a method chain.

Down

1. Event handler that detects when the window receives a click, keyboard input, or some other kind of input.
2. Functions that return values are sometimes referred to as _____ functions.
3. A property of the `window` object that lets you access the different URLs that the window has loaded over time.
4. The global object that's created every time the visitor opens a new window in her browser.
5. Use this JavaScript timer method when you want to set a period of time to wait until telling a function to run.
8. What some folks call a function that does one thing and does it well: a _____ function.



jQuerycross Solution

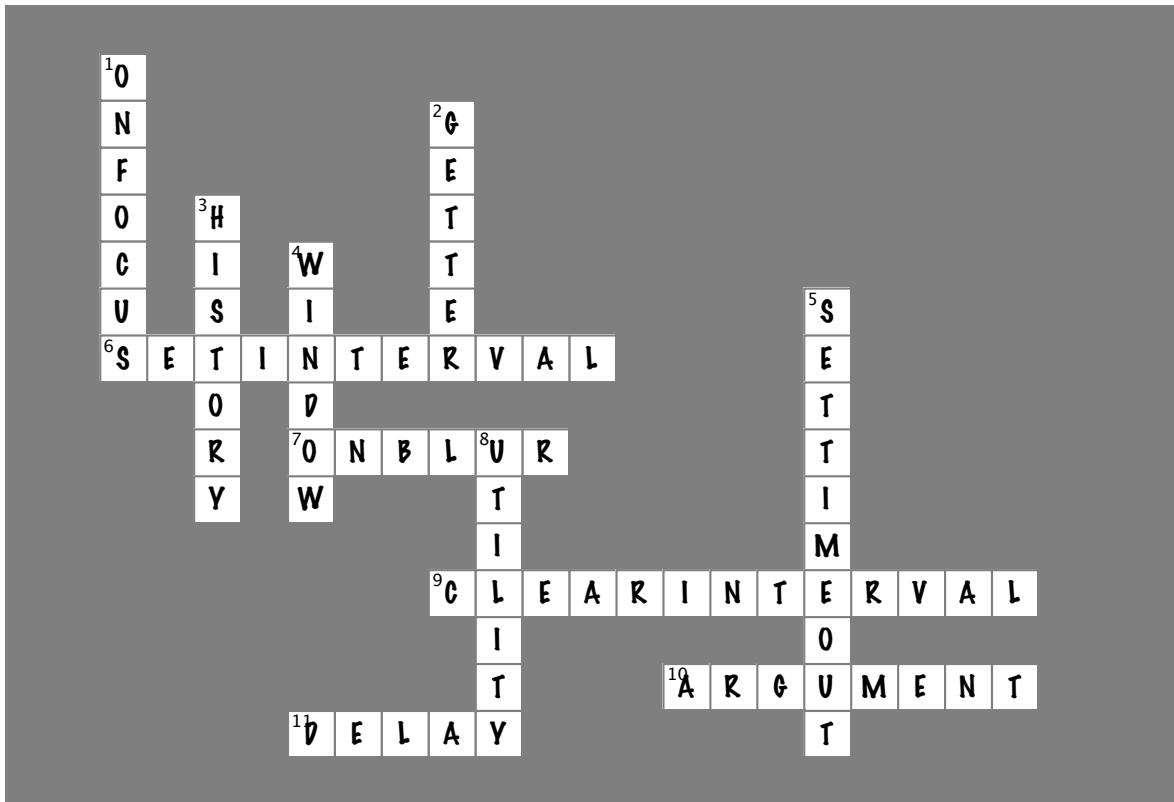

Monster Mashup v2 is a hit!



your jquery toolbox



Your jQuery Toolbox

You've got Chapter 7 under your belt and now you've added the **window object**, **timed functions**, and **custom functions** to your toolbox.

window object

This is the topmost object in JavaScript.

It has properties, event handlers, and methods that help you detect and respond to browser events.

onFocus tells you when a browser window is active.

onBlur detects when a window loses focus.

Timed functions

Methods available for the window object.

setTimeout waits a set period of time before telling a function to run.

setInterval runs a function repeatedly, with a certain amount of time in between.

clearInterval wipes clean the schedule of repeated function calls.

Optimized custom functions

Writing your own custom functions allows you to really start making interactive web pages that people will want to use.

But you can also get carried away, and it's important to look at how best to combine and optimize your functions so you're writing less code that is easier to maintain and debug.

8 jQuery and Ajax

Please pass the data



Using jQuery to do some cool CSS and DOM tricks is fun, but soon you'll need to read information (or data) from a server and display it. You may even have to update small pieces of the page with the information from the server, without having to reload the page. Enter Ajax. Combined with jQuery and JavaScript, it can do just that. In this chapter, we'll learn how jQuery deals with making Ajax calls to the server and what it can do with the information returned.

aloha real-time data!

Bring the Bit to Byte race into this century

From: Webville MegaCorps Marketing
 Subject: 42nd Annual Bit to Byte Race results page

Hey Web Design Team,

As you're all aware, every year we sponsor Webville's Annual Bit to Byte 10K run by providing the race results page. But our page is way behind the times, as we only update it after all the results are in. People want instant gratification, and with Twitter and Facebook, folks attending the race are beating us at providing real-time results.

So we've got a challenge for you with a sweet payoff. If you can update our Webville Results page by next week to provide real-time results, you'll get to hang out in the VIP section at the end of the race. (Oh, and did we mention the race is in Maui this year?)

Here's what we need:

- 1) The page should provide the option to show either male or female runners, or all participants at once.
- 2) It should provide automatic updates as runners cross the finish line.
- 3) People shouldn't have to refresh the page as the results update.
- 4) Lastly, we want to indicate on the page when it was last updated and the frequency of the updates, and to enable people the ability to start and stop the updates if they want.


It doesn't look super different from last year's page, so that would be a good place to start. This is a great event, so we can't wait to see what you come up with!

--

Dionah C. Housney
 Head of Marketing
 Webville MegaCorp


It looks like the web team is already set to go to Hawaii.... guess it's time to figure this out!

Dude, Maui! It'll be sweet if we get to go to the VIP party!

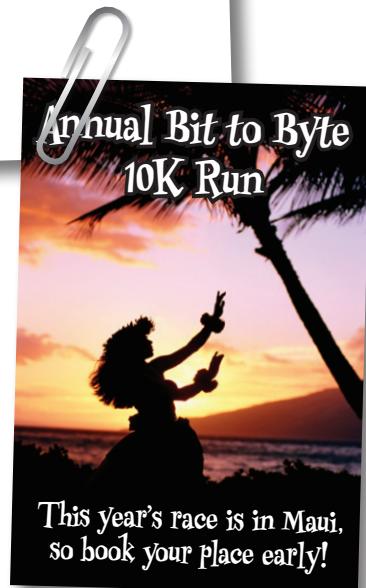


Looking at last year's page

Let's have a look at last year's page to see how it was set up and what it looked like, so we can understand better what is being asked by the marketing department.

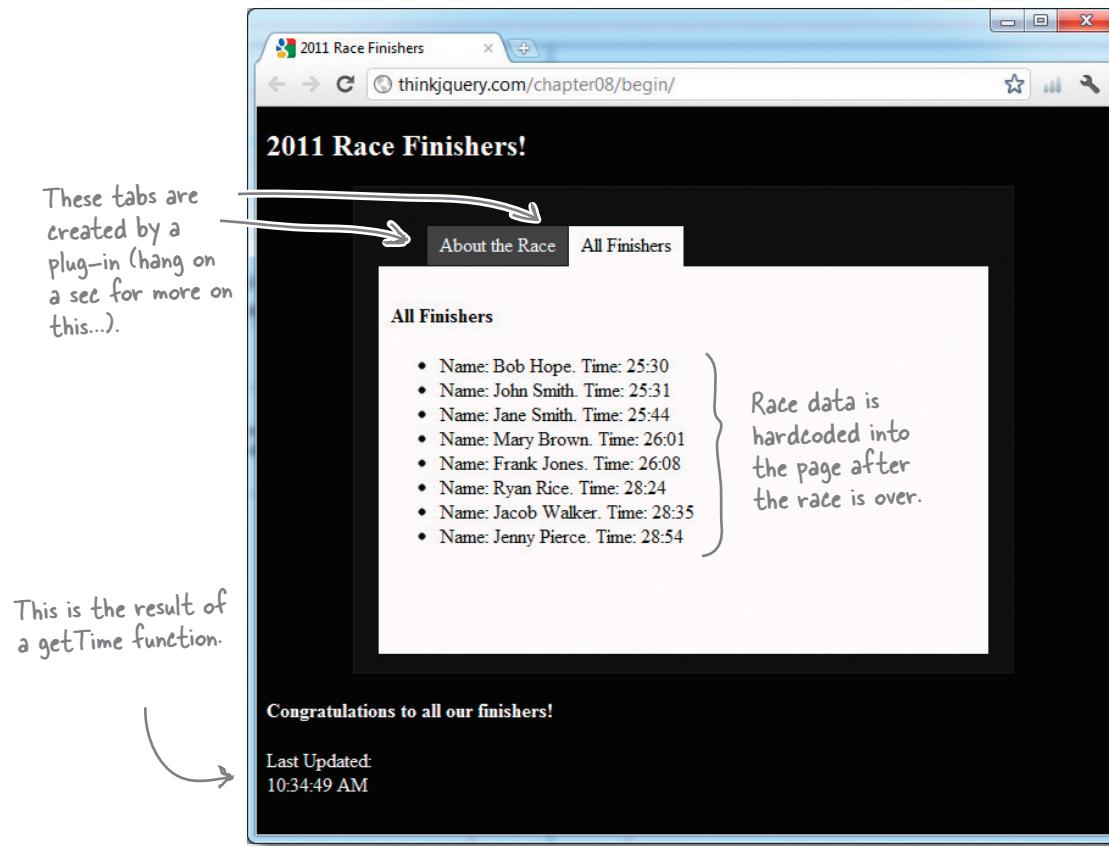

Configuring a plug-in

Plug-ins are *extensions* to the base jQuery library that improve functionality, or make specific functions or tasks easier. In the example above, in combination with our CSS, the `idTabs` plug-in converts our `ul` element into clickable tabs and tells the `a` links in our `lis` which `div` elements to show when they are clicked. This particular plug-in gives us a very easy-to-use navigation structure for our page, so we can keep different types of information visually separate but still use the same display area.

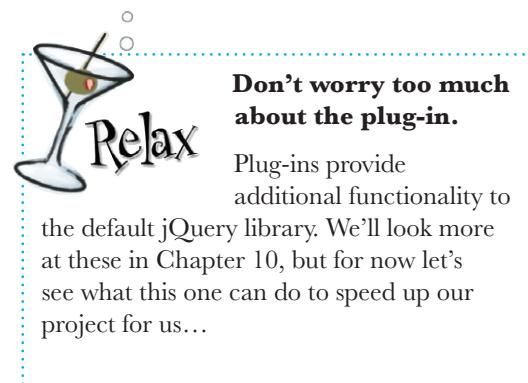

ready bake download



Ready Bake DOWNLOAD

Before we go on, let's look at last year's files to see how they set things up. The code should be in the *last_year.zip* file (along with all the other files you can download for this chapter from <http://thinkjquery.com/chapter08>). Here's a partial look at the three main files we'll need: *my_style.css*, *index.html*, and *my_scripts.js*.

```
body{
    background-color: #000;
    color: white;
}

/* Style for tabs */
#main {
    color:#111;
    width:500px;
    margin:8px auto;
}

#main > li, #main > ul > li
{ list-style:none; float:left; }

#main ul a {
    display:block;
    padding:6px 10px;
    text-decoration:none!important;
    margin:1px 1px 1px 0;
    color:#FFF;
    background:#444;
}
```

A CSS comment

From here, the rest of the CSS is dedicated to building tabs on the page.

```
#main ul a:hover {
    color:#FFF;
    background:#111;
}

#main ul a.selected {
    margin-bottom:0;
    color:#000;
    background:snow;
    border-bottom:1px solid snow;
    cursor:default;
}

#main div {
    padding:10px 10px 8px 10px;
    *padding-top:3px;
    *margin-top:-15px;
    clear:left;
    background:snow;
    height: 300px ;
}

#main div a {
    color:#000; font-weight:bold;
}
```



my_style.css

Create the links
that will be
converted into tabs
by the plug-in.

The div
elements to
hold the
Tab content

```
<div id="main">
    <ul class="idTabs">
        <li><a href="#about">About the Race</a></li>
        <li><a href="#finishers">All Finishers</a></li>
    </ul>
    <div id="about">
        <h4>About the race</h4>This race Bit to Byte Campaign!
    </div>
    <div id="finishers">
        <h4>All Finishers</h4>
        <ul id="finishers_all">
            <li>Name: Bob Hope. Time: 25:30</li>
            <li>Name: John Smith. Time: 25:31</li>
            <li>Name: Jane Smith. Time: 25:44</li>
            ...
        </ul>
    </div>
    ...
<script src="scripts/jquery-1.6.2.min.js"></script>
<script src="scripts/my_scripts.js"></script>
<script src="scripts/jquery.idTabs.min.js"></script>
```

A portion of last year's runners, hardcoded into the page. This must have been a pain to update...

Include the JavaScript files, as per usual. We use the same method for including plug-ins.



index.html

```
$(document).ready(function() {
    getTime(); ← Call our custom getTime function.
    function getTime(){ ← A new instance of the JavaScript Date object
        var a_p = "";
        var d = new Date();
        var curr_hour = d.getHours(); ← Methods of the Date object
        (curr_hour < 12) ? a_p = "AM" : a_p = "PM";
        (curr_hour == 0) ? curr_hour = 12 : curr_hour = curr_hour;
        (curr_hour > 12) ? curr_hour = curr_hour - 12 : curr_hour = curr_hour;
        var curr_min = d.getMinutes().toString();
        var curr_sec = d.getSeconds().toString(); } ← A JavaScript ternary operator
        (more on this in a bit)
        if (curr_min.length == 1) { curr_min = "0" + curr_min; }
        if (curr_sec.length == 1) { curr_sec = "0" + curr_sec; }
        $('#updatedTime').html(curr_hour + ":" + curr_min + ":" + curr_sec + " " + a_p );
    }
});
```



my_scripts.js

buh-bye hardcoded results

Getting dynamic

The marketing team wants the page to update in almost real time, so those hardcoded results in the HTML file have to go. And they only used JavaScript to update the time on the page! This is the perfect opportunity to take your jQuery to the next level. Welcome to the next generation of web *apps*, where jQuery, JavaScript, and a little bit of Ajax and XML can make your applications feel like *dynamic* (basically, the opposite of *static*), responsive desktop apps.

Ajax, which stands for “Asynchronous JavaScript and XML,” is a way of passing data in a structured format between a web server and a browser, without interfering with the website visitor. With Ajax, your pages and applications only ask the server for what they really need—just the parts of a page that need to change, and just the data for those parts that the server has to provide. That means less traffic, smaller updates, and less time sitting around waiting for page refreshes.

And best of all, an Ajax page is built using standard Internet technologies, things you have already seen in this book, or already know how to use, like:

- **HTML**
- **CSS**
- **JavaScript**
- **The DOM**

To use Ajax, we’ll look at a data format that’s been around for a while (XML) and jQuery’s method of handling Ajax requests, `ajax`.


When you use Ajax, your web pages only ask the server for what they really need, when (and where) they need it.

OLD web, meet the NEW web

Despite knowing some jQuery now, dealing with data threatens to drag us back into the days of the old web, where we had to refresh the whole page, or link to a completely separate page, in order to get some or all of the data to update. And then we'd be back to websites that seem sluggish, as the whole page has to be requested from the server each time. What's the point of learning a bunch of cool jQuery if handling data is just going to slow us down again?

Enter Ajax

Ajax allows you to exchange data with a server in a dynamic way. Using Ajax and some DOM manipulation, you can load or reload only a *portion* of the page with jQuery and JavaScript.

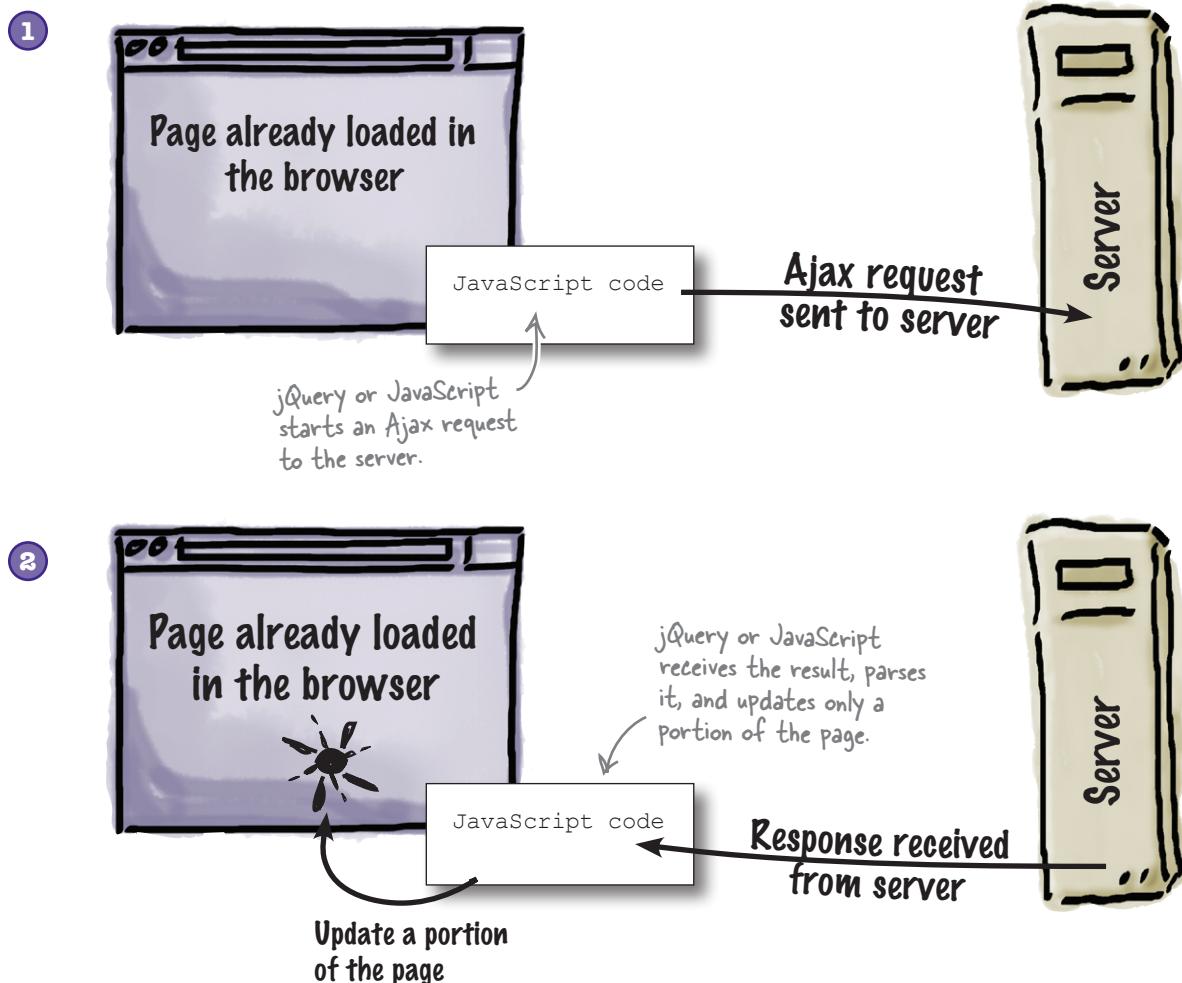

Understanding Ajax

As we mentioned earlier, Ajax is a way of passing data in a structured format between a web server and a browser, without interfering with the website visitor. But, really, it isn't one thing—it is a combination of different technologies used to build exciting, interactive web applications. The JavaScript portion allows it to interact with the DOM structure of your page. *Asynchronous* means it can happen in the background, without interfering with your page or a user interacting with your page. And the X is all about the data.

What is Ajax?

Asynchronous

JavaScript makes a request to the server, but you can still interact with the page by typing in web forms, and even click buttons—all while the web server is still working in the background. Then, when the server's done, your code can update just the part of the page that's changed. But you're never waiting around. That's the power of asynchronous requests!

A

J

A

X

JavaScript

JavaScript, as you already know well by now, is a scripting language used in web content development, primarily to create functions that can be embedded in or included from HTML documents and interact with the DOM.

XML, or eXtensible Markup Language, is a specification for storing information. It is also a specification for describing the structure of that information. And while XML is a markup language (just like HTML), XML has no tags of its own. It allows the person writing the XML to create whatever tags he needs.

But can't we just use
HTML? Why do we need
another markup language?

Yes, you could use HTML. But for the *transfer* of information, XML offers some unique benefits over its sister language, HTML. Let's have a look to see what those benefits are.



The X factor

XML is an acronym for eXtensible Markup Language. It offers a widely adopted, standard way of representing text and data in a format that can be processed without much human interaction. Information formatted in XML can be exchanged across platforms, applications, and even across both programming and written languages. It can also be used with a wide range of development tools and utilities. XML is easy to create and edit; all you need is a simple text editor, and the XML declaration at the top of the file. The rest is up to you!

XML doesn't DO anything

It may sound a little strange, but XML doesn't really *do* much itself. XML structures and stores information for transportation. In fact, XML is really a metalanguage for describing markup languages. In other words, XML provides a facility to define tags and the structural relationships between them. It is important to understand that XML is not a replacement for HTML. XML is a *complement* to HTML. In many web applications, XML is used to format data for transport, while HTML is used to format and display the data. Let's take a closer look at an XML file that contains data about some books.

```

<?xml version="1.0" encoding="utf-8"?>
<books> ← The root node or tag
  <book>
    <title>The Hitchhikers Guide to the Galaxy</title>
    <author>Douglas Adams</author>
    <year>1980</year>
  </book>
  <book>
    <title>The Color of Magic</title>
    <author>Terry Pratchett</author>
    <year>1983</year>
  </book>
  <book>
    <title>Mort</title>
    <author>Terry Pratchett</author>
    <year>1987</year>
  </book>
  <book>
    <title>And Another thing...</title>
    <author>Eoin Colfer</author>
    <year>2009</year>
  </book>
</books> ← Close the root node or tag.

```

The XML declaration. This should always be included. It defines the XML version of the document.

Children of the root node (opening and closing tags). In this case, we are describing books.

Other tags used to hold the data

XML is used to format data for transportation, while HTML is used to format and display data.



books.xml

there are no
Dumb Questions

Q: So the big deal about XML is that you can create your own tags?

A: Exactly! It's pretty convenient to be able to define elements and structure that's suited to your business. Even better, XML is a standard, so tons of people know how to work with it. That means your vocabulary is usable by lots of programmers, in client-side and server-side programs.

Q: Wouldn't it be easier to just make up our own data format?

A: It might seem that way at first, but proprietary data formats—ones that you make up for your own use—can really cause a lot of problems. If you don't document them, people may forget how they work. And if anything changes, you need to make sure everything is up-to-date: the client, the server, the database, the documentation... that can be a real headache.

Q: So are people really using XML as much as you make it seem?

A: Given its flexibility for creating whatever data structures you need, XML is used as a basis for many different types of markup languages around the Web. There are more than 150 different types of languages that use XML, ranging from RSS (RDF Site Summary aka Real Simple Syndication) for news or audio/video feeds; to KML (Keyhole Markup Language) for geographical information used in Google Earth; to OOXML (Office Open XML), a standard submitted by Microsoft for word processing files; spreadsheets, presentations etc.; to SVG (scalable vector graphics), which describes two-dimensional images; to SOAP (Simple Object Access Protocol), which defines methods of exchanging information over Web Services. Wow, that really is a lot of uses for XML!

Q: OK, I get why we should use XML, but doesn't it become a "proprietary data format" when we start declaring element names?

A: No, not at all. That's the beauty of XML: it's flexible. The server and the client need to be looking for the same element names, but you can often work that out at runtime.

Q: But aren't all web pages asynchronous, like when a browser loads an image while I'm already viewing the page?

A: Browsers are asynchronous, but the standard web page isn't. Usually, when a web page needs information from a server-side program, everything comes to a complete stop until the server responds... unless the page makes an asynchronous request. And that is what Ajax is all about.

Q: How do I know when to use Ajax and asynchronous requests, and when not to?

A: Think of it like this: if you want something to go on while your user's still working, you likely want an asynchronous request. But if your user needs information or a response from your app before continuing, then you want to make her wait. That usually means a synchronous request.

Q: Shouldn't I use XHTML to interact with XML?

A: Funny story: XHTML is XML. At its core, XHTML is not as similar to HTML as people think. XHTML is a stricter language when it comes to parsing, and originates from the same family as XML. But that doesn't mean it can parse it or interact with it any better than HTML can. This book's markup is actually using HTML5, which will encompass XHTML5 whenever the standard specifications get released.



I'm game to get going with Ajax, but we need to get our structure set up for that first, don't we? It's been that way every time before...

You're right.

Let's get that out of the way, so we can get on to adding some Ajax to our page...



HTML Code Magnets

Rearrange the magnets to complete the code to create two new tabs that can display different pieces of information: one for male finishers (with the ID of `male`) and one for female finishers (with the ID of `female`). You can remove the **About** tab, but keep the **All Finishers** tab. In each section, put an empty `ul` element that will contain your runners. Also, remove all the existing content from the `finishers_all` `ul` element.

```

<body>
  <header>
    <h2> _____ </h2>
  </header>
  <div id="main">
    <ul class="idTabs">
      <li><a href="#">Male Finishers</a></li>
      <li><a href="#female"> _____ </a></li>
      <li><a href="#all">All Finishers</a></li>
    </ul>
    <div id="male">
      <h4>Male Finishers</h4>
      <ul id="_____"></ul>
    </div>
    <div _____>
      <h4>Female Finishers</h4>
      <ul id="finishers_f"></ul>
    </div>
    <div _____>
      <h4>All Finishers</h4>
      <ul id="_____"></ul>
    </div>
  </div>
  <footer>
    <h4>Congratulations to all our finishers!</h4>
    <br>Last Updated: <div id="_____></div>
  </footer>
  <script src="scripts/jquery-1.6.2.min.js"></script>
  <script src="_____></script>
  <script src="scripts/jquery.idTabs.min.js"></script>
</body>
```



index.html

"scripts/my_scripts.js"

#male

"finishers_all"

2011 Race Finishers!

"updatedTime"

Female Finishers

finishers_m

id="female"

id="all"

HTML code magnets solution

HTML Code Magnets Solution

Now you should have two new tabs, one each for male and female runners.



index.html

```

<body>
    <header>
        <h2> 2011 Race Finishers! </h2>
    </header>
    <div id="main">
        <ul class="idTabs">
            <li><a href="#male">Male Finishers</a></li>
            <li><a href="#female">Female Finishers </a></li>
            <li><a href="#all">All Finishers</a></li>
        </ul>
        <div id="male">
            <h4>Male Finishers</h4>
            <ul id="finishers_m"></ul>
        </div>
        <div id="female">
            <h4>Female Finishers</h4>
            <ul id="finishers_f"></ul>
        </div>
        <div id="all">
            <h4>All Finishers</h4>
            <ul id="finishers_all"></ul>
        </div>
    </div>
    <footer>
        <h4>Congratulations to all our finishers!</h4>
        <br>Last Updated: <div id="updatedTime"></div>
    </footer>
    <script src="scripts/jquery-1.6.2.min.js"></script>
    <script src="scripts/my_scripts.js"></script>
    <script src="scripts/jquery.idTabs.min.js"></script>
</body>

```

Our list of finishers

Include a jQuery
plug-in to build
our tabs.



Test Drive

Update your *index.html* file with the code you completed in the magnets exercise and open it up in your favorite browser.

2011 Race Finishers! X

thinkjquery.com/chapter08/step1/

Male Finishers Female Finishers All Finishers

Male Finishers

Congratulations to all our finishers!

Last Updated:
11:21:29 PM

Awesome, that plug-in got things moving quick! I can already hear the waves crashing on the beach...



Nice work!

The page is starting to take shape. Now let's look at how we can go about getting data from the server so we can populate each of those tabs with some real race information.

time to GET serious

GETting data with the ajax method

You want data? jQuery and Ajax are primed to provide it for you. The jQuery Ajax method returns an object (you remember those from Chapter 6, right?) with data about the particular action you are trying to perform. The `ajax` method can accept many different parameters, and can POST data *to* or GET data *from* a server.

```
The jQuery shortcut → $ .ajax({ ← The jQuery ajax method
    url: "my_page.html" ← Run this function if the Ajax
    success: function(data) { ← method is successful. We'll put
        } ← more code in here in a bit.
    });
    } ; ← The data returned from
          ← the Ajax call
```

For a complete list of all the parameters available on this method, visit the jQuery docs site at <http://api.jquery.com/jQuery.ajax/>. There are also a series of jQuery convenience methods for dealing with Ajax calls. We'll get to those a bit later, we promise.

For now, just update your `my_scripts.js` file with this code, only including the new code in bold below.

```
$ (document) .ready(function() {
    $ .ajax({
        url: "finishers.xml",
        cache: false,
        dataType: "xml",
        success: function(xml) {
        }
    });
    } ;

    getTime();

    function getTime() {
        var a_p = "";
        var d = new Date();
    }
});
```



Load the `finishers.xml` file via Ajax.

This parameter caches the results locally. That can cut down on calls to the server.

The data type we're expecting to get back from the server

`my_scripts.js`



Test Drive

Update your `my_scripts.js` file with the code from the previous page. Then, download the sample XML file for this chapter from <http://thinkjquery.com/chapter08/step2/finishers.xml>, and save it in the same directory as your `index.html` file. When you've done this, open `index.html` in your browser, and open up the “Network” tab (in the developer tools in Google Chrome), or the “Net” tab (in Firebug for Firefox). Your XML file should be listed there, along with the other files from your page.

2011 Race Finishers!

Elements Resources Network Scripts Timeline Profiles Audits Console

Name Last Modified Headers Content Cookies Timing

```

<?xml version="1.0" encoding="utf-8"?>
<finishers>
  <runner>
    <name>John</name>
    <lname>Smith</lname>
    <gender>m</gender>
    <time>25:31</time>
  </runner>
  <runner>
    <name>Jacob</name>
    <lname>Walker</lname>
    <gender>m</gender>
    <time>25:54</time>
  </runner>
  <runner>
    <name>Mary</name>
    <lname>Brown</lname>
    <gender>f</gender>
    <time>26:01</time>
  </runner>
  <runner>
    <name>Lenny</name>
    <lname>Pierce</lname>
    <gender>f</gender>
    <time>26:04</time>
  </runner>
  <runner>
    <name>Frank</name>
    <lname>Jones</lname>
    <gender>m</gender>
    <time>26:08</time>
  </runner>
  <runner>
    <name>Bob</name>
    <lname>Hope</lname>
    <gender>m</gender>
    <time>26:38</time>
  </runner>
  <runner>
    <name>Jane</name>
    <lname>Smith</lname>
  </runner>

```

0 requests | 92.52KB transferred | Documents Stylesheets Images Scripts XHR Fonts WebSockets Other

But the XML is no good to me in the developer tools. How can I get to see it on the screen where I need it? And shouldn't I put something like the `$.ajax` call into a function?



Good point.

Now that we know we can load the XML file into the browser, we need to pick out the necessary text and display it on screen. We'll need a way to find *each* runner in order to add him or her to the correct list on the page. And yes, it's good practice to put the `ajax` calls into functions, so you can call them whenever you need them.



Watch it!

Ajax calls are subject to the same-origin policy!


The *same-origin policy* is a security concept for JavaScript and other client-side scripting languages. It allows scripts running on the page to access resources, like element properties and methods, that **originate from the same server**. It prevents scripts from accessing elements on pages that did not come from the same server.

Due to legacy compatibility, JavaScript includes are not subject to these checks, but the XML file in the example is. That means the XML file **must be on the same server as the page loading it**.

looping with find and each methods

Parsing XML data

We need a method to pick out each runner from our XML file and be able to display it on the screen. Luckily, jQuery supplies us with the `find` method, whose job it is to seek out elements that match whatever criteria we give it. `find` allows us to search through the descendants of elements in a structured, hierarchical set of information, like the DOM tree or an XML document, and construct a new array with the matching elements. The `find` and `children` methods are similar (we looked at the `children` method back in Chapter 4, when we were building the menu for the Webville Eatery), except that the latter only travels a single level down the DOM tree. And we might need to go further...

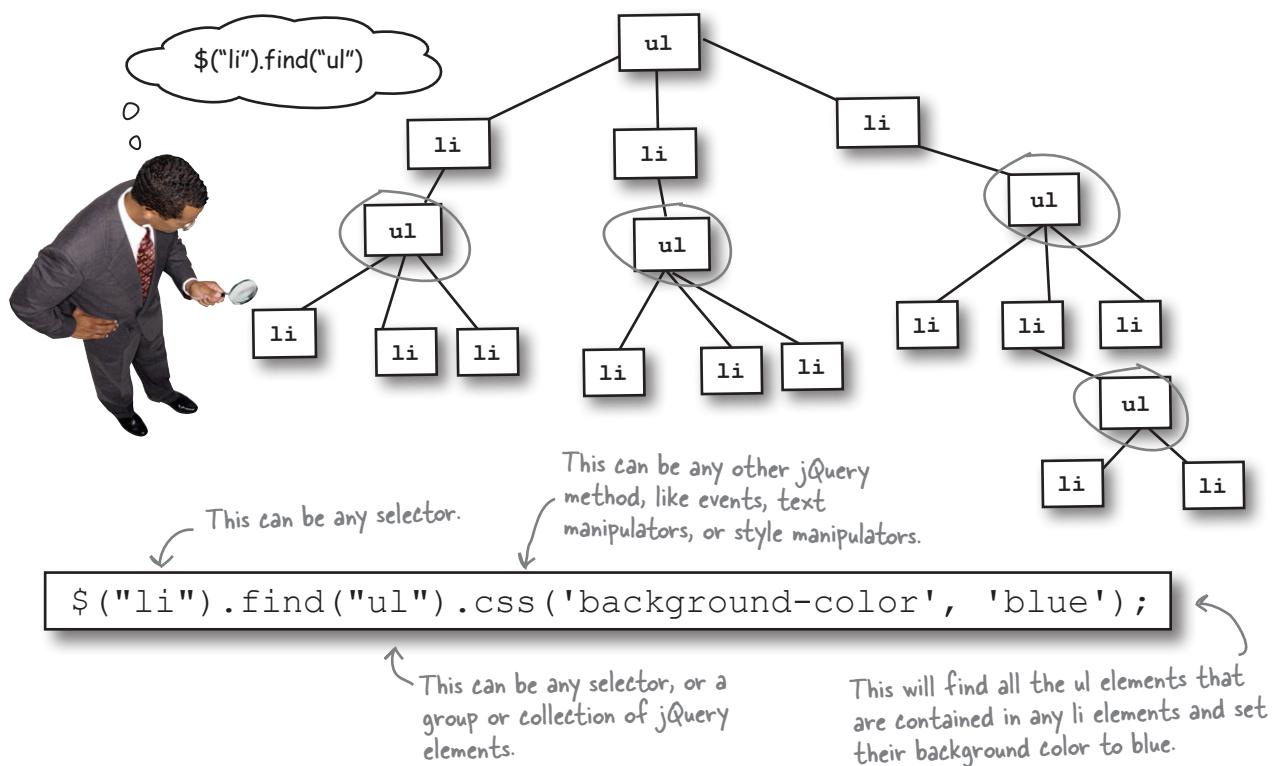

By combining the `find` method with the `each` method, we can search for a group of elements and interact with each one individually, using a loop.



Can you think of which pieces of our XML document we would need to interact with in order to display the individual runners on the screen?



jQuery Code Magnets

Rearrange the code magnets to create a function called `getXMLRacers` that will call the `ajax` method and load the `finishers.xml` file. Once the load is successful, empty all the lists that will hold the information, and then find each runner in the XML file and determine whether the runner is male or female. Append the runners to the appropriate list for their gender, and always add them to the `finishers_all` list. Then, call the `getTime` function to update the time on the page.

```

function _____
$.ajax({
  url: _____,
  cache: false,
  dataType: "xml",
  _____ function(xml) {
    $(______).empty();
    $('#finishers_f').______;
    $('#finishers_all').empty();
    $(xml).find_____(function() {
      var info = '<li>Name: ' + $(this).find_____.text() + ' ' + $(this).
      find("lname").text() + '. Time: ' + _____.text() + '</li>';
      if( $(this).find("gender").text() == "m" ) {
        $('#finishers_m').append_____
        ("runner").each
      }else if( $(this).find("gender").text() == "f" ) {
        _____.append(info);
      }else{
        _____.append(info);
      });
    });
  });
}

```

`$(this).find("time")`

`("fname").text()`

`.empty()`

`("runner").each`

`$('#finishers_f')`

`($('#finishers_m').append_____`

`_____.append(info);`

`){};`

`_____.append(info);`

`});`

`});`

`}`



my_scripts.js



jQuery Code Magnets Solution

Using `find` and `each`, you can loop through the `finishers.xml` file, check the gender, and add each runner to the appropriate tab in your web app.

```
function getXMLRacers() {
  $.ajax({
    url: "finishers.xml",
    cache: false,
    dataType: "xml",
    success: function(xml) {
      $('#finishers_m').empty();
      $('#finishers_f').empty();
      $('#finishers_all').empty();
      $(xml).find("runner").each(function() {
        var info = '<li>Name: ' + $(this).find("fname").text() + ' ' + $(this).find("lname").text() + '. Time: ' + $(this).find("time").text() + '</li>';
        if( $(this).find("gender").text() == "m" ) {
          $('#finishers_m').append(info);
        } else if ( $(this).find("gender").text() == "f" ) {
          $('#finishers_f').append(info);
        } else{
          $('#finishers_all').append(info);
        };
        getTime();
      });
    });
}
```

Empty all the ul elements so they can get updated data.

Loop through each runner element in the XML file.

Check the gender of each runner, so you can add it to the correct list.

Also, add each runner to the finishers_all list.

Call the getTime function to update the page with the last time the getXMLRacers function was called.

In this example, the line starting with “var info = ...” was too long for the page, so we had to let it run onto the next line. You won’t need to do that in your code.



my_scripts.js



Test Drive

Update your `my_scripts.js` file with the `getXMLRacers` function. Also, replace the call to the `getTime` function (in the document `.ready` section) with a call to the `getXMLRacers` function instead. The `getTime` function is now called inside this new function. Make sure you run all your code through your web server, so the URL should say `http://`, not `file://`. Again, make sure your XML file is on the same server as your HTML file, or you will encounter those pesky same-origin permission issues.

The screenshot shows a web browser window with the title "2011 Race Finishers". The URL in the address bar is "thinkjquery.com/chapter08/step3/". The page content is a dark-themed list of race finishers under the heading "All Finishers". The list includes:

- Name: John Smith. Time: 25:31
- Name: Jacob Walker. Time: 25:54
- Name: Mary Brown. Time: 26:01
- Name: Jenny Pierce. Time: 26:04
- Name: Frank Jones. Time: 26:08
- Name: Bob Hope. Time: 26:38
- Name: Jane Smith. Time: 28:04
- Name: Ryan Rice. Time: 28:24

Below the list, a message says "Congratulations to all our finishers!" and the last update time is listed as "Last Updated: 11:57:44 AM".

A thought bubble originates from a man sitting in a white chair, holding a yellow mug. He is looking up at the screen. The thought bubble contains the text:

Awesome, I have a function I can call to get my XML data. But shouldn't it run more than once if the page is to be automatically updated?

You are here ▶

Yes, it should.

Luckily, in the previous chapter, we've already seen how to schedule events to happen regularly on a page. Let's have a quick look at how to do that again, and what options we have this time...

all in good timing

Scheduling events on a page

In the last chapter, we saw that both JavaScript and jQuery offer timer methods that call functions that run based on time passing. JavaScript's window object has four timer methods for timed control: `setTimeout`, `clearTimeout`, `setInterval`, and `clearInterval`. jQuery provides the `delay` method, but it focuses on effects and offers no option for scheduling or repeating actions. So, that one won't help us here...

JavaScript timer methods

setTimeout

Use me when you want to set a period of time to wait until telling a function to run.

```
setTimeout (myFunction, 4000);
```

The function to call when the timeout duration has passed.

The timer delay (in milliseconds)

setInterval

I tell a function to run repetitively with an interval of time between each repetition.

```
setInterval (repeatMe, 1000);
```

The function to repeat after each interval is up.

The interval of time between function calls (in milliseconds)

jQuery's delay method

I add a pause between effects that are queued up in a chain of effects.

```
slideDown().delay(5000).slideUp();
```

When this chain runs, it's known in jQuery as an effects queue.

In this example, the delay method puts a five-second pause between the slideUp and slideDown effects.

Not so fast!

We can't always be so sure. `setInterval` normally would work to schedule regular events on a page, but when dependent on outside resources (like our data file), it can cause problems.

Watch it!

If you're waiting on information from another server, or waiting on user interaction, `setInterval` could call your function again before you're ready. Your functions may not always return in the order that you called them.

setInterval will run even if the function it is calling isn't finished yet.

Self-referencing functions


A *self-referencing* function calls itself during its normal operations. Such functions can be particularly useful when you need to wait for the function's currently running operation to complete before running it again. Combine this with a `setTimeout` call, and you can schedule a function to run but only keep going if the previous call to the function was successful. Otherwise, it won't reach the call to itself in the code, and hence it won't be called again.



Sharpen your pencil

Create a function called `startAJAXcalls` that gets called when the page is loaded and which will call the `getXMLRacers` function every 10 seconds. Define a variable at the start of the script file, inside the `$(document).ready` function, called `FREQ` and set it to the number of milliseconds we will need as a parameter for the frequency of our repeated calls to the `getXMLRacers` function. Use `setTimeout` to call the `startAJAXcalls` function to make it self-referencing, after the `getXMLRacers` function is complete. You'll also need to call the `startAJAXcalls` function directly in your code to start the timer.

```
$(document).ready(function() {  
    .....  
  
    function startAJAXcalls() {  
        .....  
        .....  
        .....  
        .....  
        .....  
        .....  
        .....  
        .....  
    }  
    getXMLRacers();  
    .....  
  
    function getXMLRacers() {  
        $.ajax({  
            url: "finishers.xml",  
            cache: false,  
        }  
    }  
});
```



my_scripts.js

sharpen solution

Sharpen your pencil

Solution

Set our FREQ variable to 10000, since the setTimeout function requires its parameter in milliseconds.

Since we wait until the last call to our function is finished, we use the setTimeout function.

Call the getXMLRacers function to make sure there is content on the page when it is loaded.

This solution uses `setTimeout` inside the `startAJAXcalls` function to call the `getXMLRacers` function to get our XML, plus a call to itself. This self-call will ensure that the next call will only happen when the last one has completed. This will guarantee that there is not a buildup of requests to the server if the network is slow, or if a response from the server does not come back before the next call is scheduled to be made.

```
$ (document) . ready (function () {
... var FREQ = 10000; .....
```

```
... function startAJAXcalls () {
...   setTimeout( function() { .....
```

```
...     getXMLRacers(); .....
```

```
...     startAJAXcalls(); .....
```

```
}, .....
```

```
FREQ); .....
```

Pass our variable in as a parameter.

```
}); .....
```

```
getXMLRacers (); .....
```

```
startAJAXcalls (); .....
```

Call our newly created function in order to start it.

```
function getXMLRacers () { .....
```

```
$.ajax ({ .....
```

```
url: "finishers.xml", .....
```

```
cache: false, .....
```



my_scripts.js

there are no
Dumb Questions

Q: Everything I've read about Ajax says I need to use the `XMLHttpRequest` object; is that right?

A: Yes, but not with jQuery. As a web programmer, you don't need to use that object. jQuery does it for you when you use the `ajax` method. Also, since Ajax calls can differ per browser, jQuery figures out the best way to do an Ajax request for each of your site visitors.

Q: What happens if the server returns an error or doesn't respond? Will it sit and wait forever?

A: No, the request won't wait forever. You can set a timeout as one of your parameters in your `ajax` call. Also, just like the `success` event parameter, which can run a function, there are others to handle `error`, `complete`, and many more. These events can be set as local events, when the `ajax` method is called, or as global events to trigger any handlers that may be listening for them.



Test Drive

Update your *my_scripts.js* file with the new code you just created. Also, don't forget to add a call to the new function just after your call to the `getXMLRacers` function at the bottom of your script. Then, view the page in your browser, and use the "Network" feature of Google Chrome or the "Net" feature of Firefox's Firebug to see the file get loaded every 10 seconds. Once you see this happening, update your XML file, using your favorite text editor, with the entry listed below and see your new runner appear on your page... (Don't forget to save the XML file after you've updated it!)

Add this runner to your XML file and save it. Watch him get loaded onto your page automatically.

```
<runner>
  <fname>Justin</fname>
  <lname>Jones</lname>
  <gender>m</gender>
  <time>29:14</time>
</runner>
```

Wow, this is really starting to look good!
Can we use something simpler to get the updated time for the page though?



who doesn't want more?


Getting more from your server

As we've seen so far, HTML is great for *displaying* information on a page and XML is great for *formatting data for transportation* to a page, but what if you need your page to actually **do** something, like tell the time or get data from a database? Sure, we could probably do some more fun things with jQuery and JavaScript, but why not use something designed for the job?


Server-side languages to the rescue!

There are several different types of server-side languages—like JSP, ASP, or Cold Fusion—but we're only going to focus on one for our purposes: PHP.

PHP (which stands for PHP: Hypertext Processor—yes, that's an acronym within an acronym; don't ask us why!) is a free, general-purpose, server-side scripting language used to produce dynamic web pages. Files that contain PHP code are run on the server, and produce HTML that is then provided to a browser to render. We'll look at PHP in a little more detail in the next chapter, but for now we'll see how it can help us with our “updated time” feature.

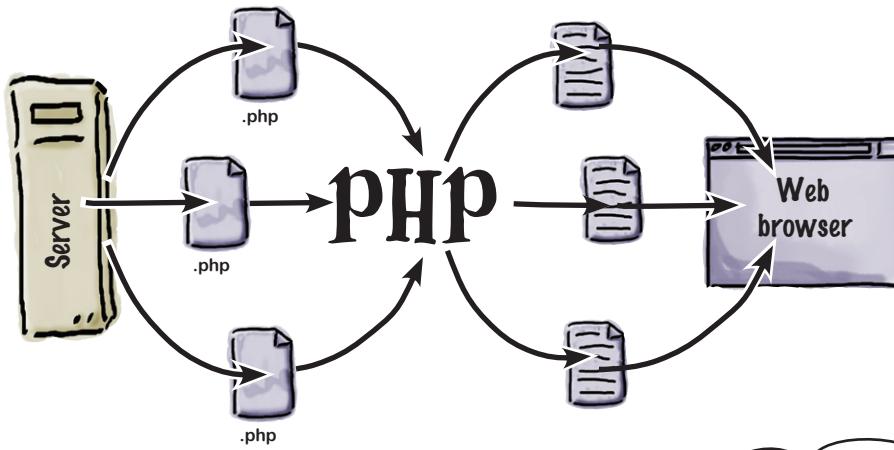

PHP is used to dynamically produce HTML, which is then displayed in the browser.

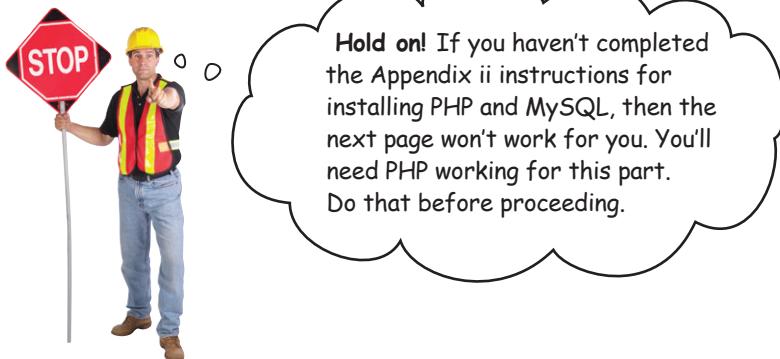

What time is it?

OK, we'll confess, there *is* already a JavaScript function we could use to get the time. But it is a large, complicated function for doing something so simple. Luckily, PHP gives us a very easy way of getting the time, using the `date` function. Just like the functions you have created up to this point, it takes multiple parameters and returns a different version of the date, depending on what parameters you pass in. The main parameter determines how you want the date to be displayed. Let's have a closer look:

```
Call the PHP date function.
date (string $format [, int $timestamp = time()])
PHP also uses the dollar sign, but only for variables.
Pass in a parameter for the format of the date you want returned. This is a string.
Anything inside the square brackets, [ and ], is an optional parameter.
Always end each line in PHP with a semicolon.
```

For a complete listing of the parameters of the `date` function, visit <http://php.net/manual/en/function.date.php>.

Do this!

Create a new file in the same folder as your `index.html` file, and call it `time.php`. Add the following code to your new `time.php` file.

The echo command tells PHP to write the next piece of information to the page.

The PHP opening tag. This tells the server where the PHP code it needs to parse is.

Set your default time zone for the date function to give you the correct time for your location.

The closing PHP tag

```
<?php
date_default_timezone_set('America/Los_Angeles');
echo date("F j, Y, g:i:s a");
```

Call the date function, with specific parameters to return the same date format as your JavaScript function.

A sample date format string:
 F - Full text month
 j - Day, without leading zeros
 Y - Four-digit year
 g - Hour - 12-hour format
 i - Minutes, with leading zeros
 s - Seconds, with leading zeros
 a - Lowercase am or pm



time.php

test drive

Test Drive

After you save your *time.php* file, bring it up in your browser to make sure the date is in the correct format. PHP code **must** run through your web server, so the URL should say *http://*, not *file://*. Also, make sure the URL is pointing to the server where you are developing your code.

The image shows a web browser window titled "thinkjquery.com/chapter08" with the URL "thinkjquery.com/chapter08/step5/time.php". The page content displays the text "July 13, 2011, 3:01:15 pm". A callout bubble from the text on the page points to a thought bubble above a cartoon character. The thought bubble contains the text: "I am SO ready to get rid of this pasty-white skin. PHP made the updated time bit a snap, but don't we have a few requirements we still haven't gotten to?" The callout bubble also contains the text: "With our little piece of PHP code, we get the time displayed on the screen. Much easier than all that JavaScript!"

Yeah, we're not getting on that plane quite yet. Let's see what's left to do:

- 1 We want to indicate on the page how recently the page was updated.**
- 2 We want to indicate the frequency of the updates.**
- 3 We want to give people the ability to stop and start the updates, should they so choose.**

Let's have a go at the first and second items on the list. We'll tackle them together since they are related.



Sharpen your pencil

Add a `` tag, with the ID of `freq`, in the footer of your `index.html` page. This will be used to indicate the result of a new function called `showFrequency`, which should display how often the page is updated. Also, create another function, called `getTimeAjax`, which will load the `time.php` file using the `load` method—a jQuery convenience method for Ajax. This method will take a URL as a parameter and write the result automatically into the `div` with the ID of `updatedTime`. Last, replace the call to the `getTime` function in `getXMLRacers` with this new `getTimeAjax` function.

```

<footer>
    <h4>Congratulations to all our finishers!</h4>
    .....
    <br><br>
    Last Updated: <div id="updatedTime"></div>
</footer>
<script src="scripts/jquery-1.6.2.min.js"></script>
<script src="scripts/my_scripts.js"></script>

```



index.html

```

function .....
    ..... "Page refreshes every " + FREQ/1000 + " second(s).";
}

```

```

.
.
.
```

```

function .....
$( ..... ).load( ..... );
}

```



my_scripts.js

sharpen solution

Now you'll have added a `` tag with the ID of `freq` in the footer of your `index.html` page to display how often the page is updated. You've also created a new `getTimeAjax` function, which loads the `time.php` file using the `load` Ajax convenience method, which will then write the result into the `updatedTime` div. You've also updated the `getXMLRacers` function to use the new `getTimeAjax` function instead of the JavaScript `getTime` function.

```

<footer>
  <h4>Congratulations to all our finishers!</h4>
  <span id="freq"></span> ← Add the span element to
  <br><br> display the frequency.
  Last Updated: <div id="updatedTime"></div>
</footer>
<script src="scripts/jquery-1.6.2.min.js"></script>
<script src="scripts/my_scripts.js"></script>

```



index.html

```

function showFrequency(){
  $("#freq").html("Page refreshes every " + FREQ/1000 + " second(s).");
}

```

Create two new functions, one to show the frequency, and the other to get the time from the server via Ajax.


Divide by 1,000 to convert milliseconds to seconds.

```
function getTimeAjax(){
```

```
  $('#updatedTime').load("time.php");
```

Output the result to the screen in the element `updatedTime`.

Load the `time.php` file using Ajax.




my_scripts.js



Test Drive

Update your `my_scripts.js` file with the new code you just created. Also, don't forget to add the new `span` element to your `index.html` file, and replace the call to the `getTime` function with the `getTimeAjax` function.

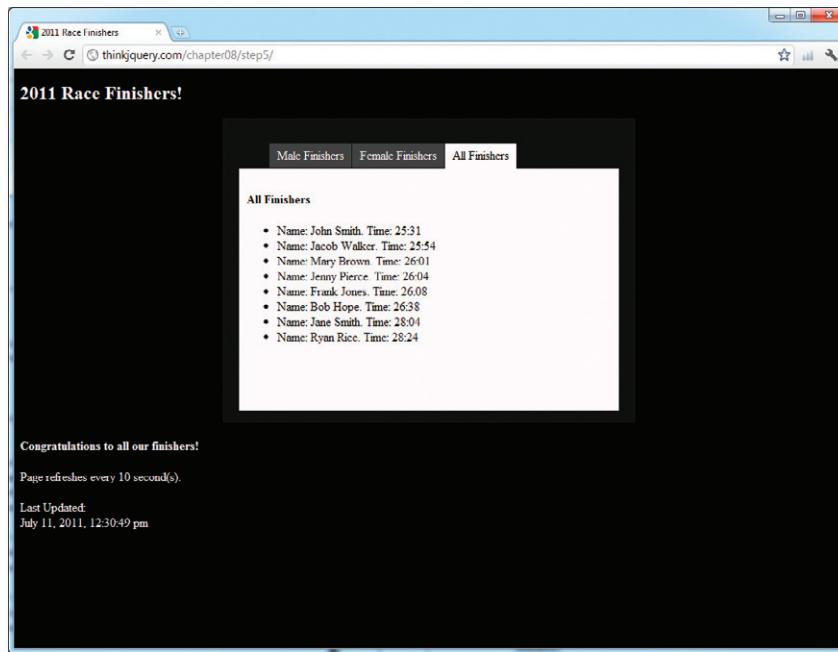

- ➊ We want to indicate on the page how recently the page was updated.
- ➋ We want to indicate the frequency of the updates.
- ➌ We want to give people the ability to stop and start the updates, should they so choose.



That's a tricky one.

We'll need to change the function to only run when certain conditions are met.



What feature have we seen so far that checks if conditions are met?

another conditional check

Turning off scheduled events on your page

Back in Chapters 5 and 7, we created a “monster” function by using `setTimeout` to continuously call the functions that produced the lightning effects. This led to some unexpected consequences—the page lost focus and the visual effects piled on top of one another when someone returned to the app.

However, since we already determined that we need to wait until the previous call to the function is finished, we can’t switch to using `setInterval` for these calls.

We need to come up with a better solution. And what better solution than one we’ve already seen? We can’t use the `window.onblur` and `window.onfocus` browser events, since we don’t want people to have to leave in order to stop the updating. But we have already seen, across several chapters, how to run code based on *conditional logic*, so let’s use that for our solution here as well.



BRAIN POWER

Can you think of which conditional logic structure we could use for this? (Hint: We’ve used it already to check the gender of the runners in the XML file.)

there are no Dumb Questions

Q: What other stuff, besides XML, can Ajax load into the page?

A: Using jQuery, you can load all sorts of information into the page. Like you’ve just seen, using the `load` method, you can load the results of a PHP file directly into your HTML element. Also, you can load other HTML files, JavaScript files, plain text, and JSON (JavaScript Object Notation) objects. We’ll look at JSON in the next chapter.

Q: What other convenience methods are there for Ajax in jQuery?

A: jQuery has five convenience or shorthand methods for Ajax: `get`, `getJSON`, `getScript`, `post`, and `load`. The first four are called using the jQuery object. But `load` can be called from any element—which will be the destination of the returned data.

Q: When should I use the `load` method and when should I use `ajax`?

A: The `load` method is designed for loading a particular piece of data into a specific place, like we do with our `getTimeAjax` function. The `ajax` method is much more complex and has many more purposes and parameters. It can be used to load other information or send data to the server for processing. We’ll see that more in the next chapter.



Sharpen your pencil

Create a global variable called `repeat`, with a default value of `true`. Create a function that will alter the `repeat` variable with the click of a new button, giving it the ID of `btnStop`. Set the HTML of the `span` element with the ID of `freq` to say "Updates paused." Also, create a button called `btnStart` that will set the `repeat` global variable to `true`, as well as call both the `startAJAXcalls` and the `setTimeout` functions if the `repeat` variable is true. Add the new buttons to the footer area of the page.

```


$(document).ready(function() {
    .....
    var FREQ = 10000;
    function startAJAXcalls() {
        .....
        setTimeout( function() {
            getXMLRacers();
            startAJAXcalls();
        },
        FREQ
        .....
    };
    .....
    $("#btnStop").click(function(){
        .....
        $("#freq").html( ..... );
    });
    ..... function() {
        .....
        startAJAXcalls();
        .....
    });
}
);

```

```

<footer>
    <h4>Congratulations to all our finishers!</h4>
    .....
    .....
    <br>
    <span id="freq"></span> <br><br>

```



my_scripts.js

sharpen solution

When finished, you should have a variable called `repeat` that will control whether or not the function will call itself again to get the XML file for updating. The value of this variable should be controlled by the `btnStop` and `btnStart` buttons, which are added to the footer area of the page. These buttons also set the text of the `freq` span element to show different messages depending on whether or not the page is being updated.

Set the variable to a default value of true so it'll update when the page loads.


Check if the repeat variable is true.

Set the variable to false when the `btnStop` button is clicked.

Set the variable back to true when the `btnStart` button is clicked. Also call the `startAJAXcalls` function to start getting the file again.

Add the new buttons to the footer area of the page.

```
$ (document) .ready(function() {
    var repeat = true;
    var FREQ = 10000;
    function startAJAXcalls() {
        if(repeat) {
            setTimeout( function() {
                getXMLRacers();
                startAJAXcalls();
            },
            FREQ
        )
    }
    ...
    $("#btnStop").click(function(){
        repeat = false;
        $("#freq").html("Updates paused.");
    });
    $("#btnStart").click(function(){
        repeat = true;
        startAJAXcalls();
        showFrequency();
    });
});
```



`<footer>`

```
<h4>Congratulations to all our finishers!</h4>
<button id="btnStart">Start Page Updates</button>
<button id="btnStop">Stop Page Updates</button>...
<br>
<span id="freq"></span> <br><br>
```



`my_scripts.js`



Test Drive

Update your *my_scripts.js* file and your *index.html* file with the new code you just created. Then, load the page in your favorite browser to make sure it all still works. Try out the new buttons to make sure they stop the Ajax requests. You will be able to tell in the “Network” tab in Google Chrome, or the “Net” tab in Firebug for Firefox.

2011 Race Finishers!

Male Finishers | Female Finishers | All Finishers

All Finishers

- Name: John Smith. Time: 25:31
- Name: Jacob Walker. Time: 25:54
- Name: Mary Brown. Time: 26:01
- Name: Jenny Pierce. Time: 26:04
- Name: Frank Jones. Time: 26:08
- Name: Bob Hope. Time: 26:38
- Name: Jane Smith. Time: 28:04
- Name: Ryan Rice. Time: 28:24

Congratulations to all our finishers!

Page refreshes every 10 second(s).

Last Updated:
July 14, 2011, 11:08:35 pm

This is gonna be the best team outing EVER!

It works!

Now you've got a page that can be updated in real time (by updating the XML file), and you've enabled users to start or stop the updates.



your jquery/ajax toolbox



Your jQuery/Ajax Toolbox

You've got Chapter 8 under your belt and you've added a little PHP, some XML, and a bunch of Ajax to your toolbox.

Ajax

A combination of technologies that allow you to update a portion of a web page without having to reload the whole page.

Makes calls to a backend server that can process data before sending it back.

jQuery implements Ajax functionality through the ajax method.

ajax() shortcuts

There are five shortcuts for ajax in jQuery, all configured to have different parameters by default, but ultimately calling the ajax method:

- \$.get
- \$.getJSON
- \$.getScript
- \$.post
- \$.load

XML

A strict yet flexible markup language used to describe data and data structure.

Can be used for information storage or for formatting data for transfer.

Used in many common web technologies like RSS, SOAP/Web Services, and SVG.

PHP

A server-side scripting language that lets you manipulate web page content on the server before a page is delivered to the client browser.

9 Handling JSON data

* Client, meet server *



As useful as reading data from an XML file was, that won't always cut the mustard. A more efficient data interchange format (JavaScript Object Notation, aka JSON) will make it easier to get data from the server side. JSON is easier to generate and read than XML, too. Using jQuery, PHP, and SQL, you'll learn how to create a database to store information so you can retrieve it later, using JSON, and display it on the screen using jQuery. A true web application superpower!

guess we should have checked with marketing...

Webville MegaCorp's Marketing Department doesn't know XML

From: Webville MegaCorps Marketing
Subject: Re: 42nd Annual Bit to Byte Race results page

Hey Web Design Team,

We really like the updates you've made to the website.

We have a problem though: nobody in our office knows XML! So we don't know how to add new finishers to the race website.

We've tried, but every time we get it wrong, it makes the website do some strange things... Finishers don't show, or fields disappear from the page even though they're in the XML file. It's very odd.

What we'd really like is some way to just type into a few boxes and click a button to add a finisher. Can you make this happen?

And if we make a mistake, can you make it so we don't break the whole site?

I know it's only three days until we all fly out to Hawaii, but we'd really like this working before we go. Do you think you can make it in time?

--
Dionah C. Housney
Head of Marketing
Webville MegaCorp



XML errors break the page

When there are errors in the XML, the logic that we wrote to read and parse that XML fails. These errors mainly happen when there are issues with the tags, like forgetting to close a tag or having the wrong case in the tag name. However, data in the tags can also cause XML some problems if it's not encoded for use in XML properly.

Wrong case in the <runner> tag

Wrong opening tag.

Another case issue with a <runner> tag

Opening the XML file in a web browser tells us where the errors are.

It looks like XML won't work for what we need. What other options do you know of for Marketing to add new runners?

```

<?xml version="1.0" encoding="utf-8"?>
<finisher>
  <runner>
    <g></fname>
    <lname></lname>
    <gender>m</gender>
    <time>25:31</time>
  </runner>
  <runner>
    <fname>Mary</fname>
    <lname>Brown</lname>
    <gender>f</gender>
    <time>26:01</time>
  </runner>
  <runner>
    <fname>Jenny</fname>
    <lname>Pierce</lname>
    <gender>f</gender>
    <time>26:04</time>
  </runner>
  <runner>
    <fname>Frank</fname>
    <lname>Jones</lname>
    <gender>m</gender>
    <time>26:08</time>
  </runner>
  <runner>
    <fname>Bob</fname>
    <lname>Smit</lname>
    <gender>f</gender>
  </runner>
  <runner>
    <fname>Ryan</fname>
    <lname>Rice</lname>
    <gender>m</gender>
    <time>24</time>
  </runner>
  <runner>
    <fname>John</fname>
    <lname>Smith</lname>
    <gender>m</gender>
    <time>25:31</time>
  </runner>
</finisher>

```

forms to the rescue

Collect data from a web page

Odds are, you've already thought of using an HTML **form**. With a form, you can collect all sorts of data and send it to the server for processing. Forms have several different types of elements used to collect various types of data. We'll look at forms in much more detail in Chapter 10, but for now, let's just use two of the most basic form elements: a text box and a drop-down list. You may be a pro at forms already, but let's just take a quick look so we know what we're dealing with here.

```

<input type="text" name="txtEmail" />
    ↑
    The <input> tag tells the
    form to expect information
    from this element.

    ↑
    The type tells the browser how
    to react when rendering it.

    ↑
    The closing tag
    for this element

    ↑
    The name of the
    element is sent to the
    server for processing.

<select name="truthiness">
    <option value="1">True</option>
    <option value="0">False</option>
</select>
    ↑
    The value of the chosen option is
    sent to the server.

    ↑
    The option element displays
    the list of options in a
    drop-down list.

    ↑
    The <select> tag tells
    the browser to render
    a drop-down list.
  
```

The `<input type="text" name="txtEmail" />` tag is annotated with arrows pointing to the `type` attribute and the `name` attribute. The `type` annotation says "The type tells the browser how to react when rendering it." The `name` annotation says "The name of the element is sent to the server for processing." The `<select name="truthiness">` tag is annotated with an arrow pointing to the `name` attribute. The `<select>` annotation says "The <select> tag tells the browser to render a drop-down list." The `<option value="1">True</option>` and `<option value="0">False</option>` tags are annotated with arrows pointing to the `value` attribute. The `value` annotation says "The value of the chosen option is sent to the server." The `</select>` tag is annotated with an arrow pointing to it. The `</select>` annotation says "The option element displays the list of options in a drop-down list."



That should work and be easy to do, since we've already figured out how to add tabs.

Then we can work on how we're going to store/retrieve that data to display in the Finishers lists.



Ready Bake HTML & CSS

Update your *index.html* file with an additional tab to add new finishers via a form. Also update the entry in your *my_style.css* file to make the element with the ID of main wider.



```
<ul class="idTabs">
    <li><a href="#male">Male Finishers</a></li>
    <li><a href="#female">Female Finishers</a></li>
    <li><a href="#all">All Finishers</a></li>
    <li><a href="#new">Add New Finisher</a></li>
</ul>

<div id="male">
    <h4>Male Finishers</h4><ul id="finishers_m"></ul>
</div>

<div id="female">
    <h4>Female Finishers</h4><ul id="finishers_f"></ul>
</div>

<div id="all">
    <h4>All Finishers</h4> <ul id="finishers_all"></ul>
</div>

<div id="new">
    <h4>Add New Finisher</h4>
    <form id="addRunner" name="addRunner" action="service.php" method="POST">
        First Name: <input type="text" name="txtFirstName" id="txtFirstName" /> <br>
        Last Name: <input type="text" name="txtLastName" id="txtLastName" /> <br>
        Gender: <select id="ddlGender" name="ddlGender">
            <option value="">--Please Select--</option>
            <option value="f">Female</option>
            <option value="m">Male</option>
        </select><br>
        Finish Time:
        <input type="text" name="txtMinutes" id="txtMinutes" size="10" maxlength="2" /> (Minutes)
        <input type="text" name="txtSeconds" id="txtSeconds" size="10" maxlength="2" /> (Seconds)
        <br><br>
        <button type="submit" name="btnSave" id="btnSave">Add Runner</button>
        <input type="hidden" name="action" value="addRunner" id="action">
    </form>
</div>
```

Add the new tab, called "Add New Finisher."

Add a new HTML form for collecting and posting data to the server.

The action tells the form where to be sent for processing.

The method determines how the data will be sent to the server.

A hidden HTML field. We'll use this more in a little bit.

```
#main {
    background:#181818;
    color:#111;
    padding:15px 20px;
    width:600px;
    border:1px solid #222;
    margin:8px auto;
}
```



index.html

test drive



Test Drive

Open up *index.html* in your browser and select the **Add New Finisher** tab to see the new form and fields added to your page.

2011 Race Finishers!

Male Finishers Female Finishers All Finishers Add New Finisher

All Finishers

First Name:

Last Name:

Gender:

Finish Time: (Minutes) (Seconds)

Add Runner

Congratulations to all our finishers!

Page refreshes every 10 second(s).

Last Updated:
July 31, 2011, 10:09:14 am

The new HTML form as it appears in the browser




Now that you've got a form in place to collect the data, how do you think we should go about storing and retrieving it?

What to do with the data

Now we need to send the data collected by the form to the server and store it somehow. To do that, we're going to use another language, PHP, to insert the data into a *database*. Don't worry! We'll get you up to speed on PHP and databases in a bit, but first let's focus on how we get our form data to the server.

There are two methods of sending the data to the server using HTTP: GET and POST. The main difference between GET and POST is how the data is sent to the server. GET will append the form field names and values onto the end of the URL as key/value pairs. PHP can read this information out of an associative array called `$_GET[]`, which is sent to the server when the form is submitted. The data is visible after the `?` in the URL.

POST sends the data—also in an associative array, but encoded differently—and is not visible to the end user in the URL. The `$_POST[]` associative array contains all the information from the form elements. This, like the `$_GET[]` array, is a series of key/value pairs of the form element names and values.

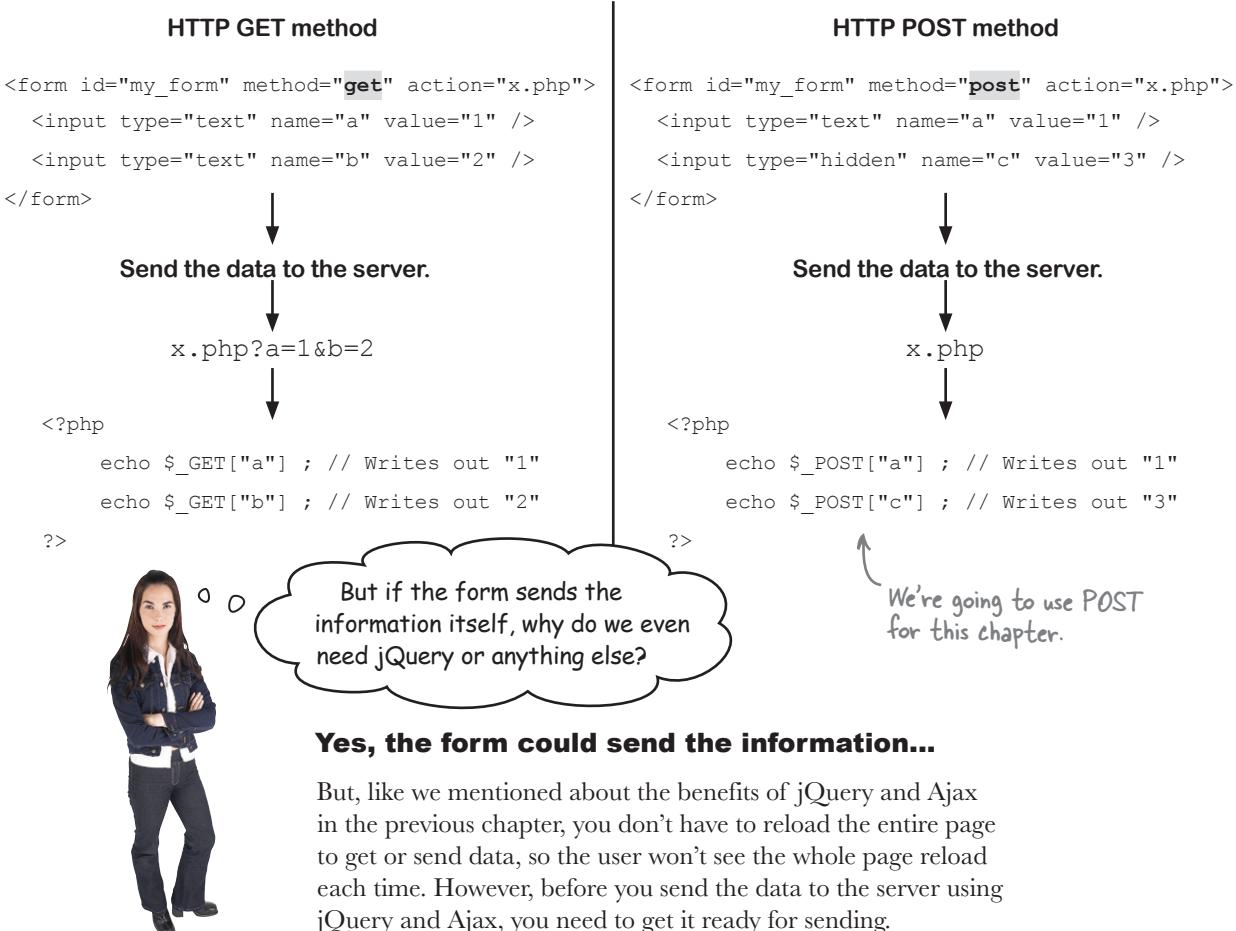

some serious serializing

Format the data before you send it

Before we can send information to the server (using Ajax), we need to do a little prepping to get it into a format that the Ajax call can send and the server will understand. To do this, we *serialize* our data into a single object, so the Ajax call can send it as one single package. jQuery offers two form helper methods for serializing data: `serialize` and `serializeArray`. The former will join all the inputs of your form into a single string of key/value pairs, separated by ampersands (`&`). The latter will create an associative array of key/value pairs, which is still a single object but is much more structured than the result of the simple `serialize` method. We'll take a look at both, but we're going to use `serializeArray` for our marathon data.

serialize

```
<form id="my_form">
  <input type="text" name="a" value="1" />
  <input type="text" name="b" value="2" />
  <input type="hidden" name="c" value="3" />
</form>

$( "#my_form" ).serialize();
```

The form ID selector The serialize method

End result

a=1&b=2&c=3

serializeArray

```
<form id="my_form">
  <input type="text" name="a" value="1" />
  <input type="hidden" name="c" value="3" />
</form>

$( "#my_form:input" ).serializeArray();
```

The form's ID selector, followed by the HTML element input filter. This tells the selector to only look at HTML elements of type "input."


Call the serializeArray method.

End result

```
[ {
  name: "a",
  value: "1"
},
{
  name: "c",
  value: "3"
}]
```

Send the data to the server

jQuery provides a shortcut method, `post`, dedicated to sending data to the server. The `post` method takes several parameters, including the URL you want to send your information to, the information you want to send, and a handler function that will run when the POST is complete.

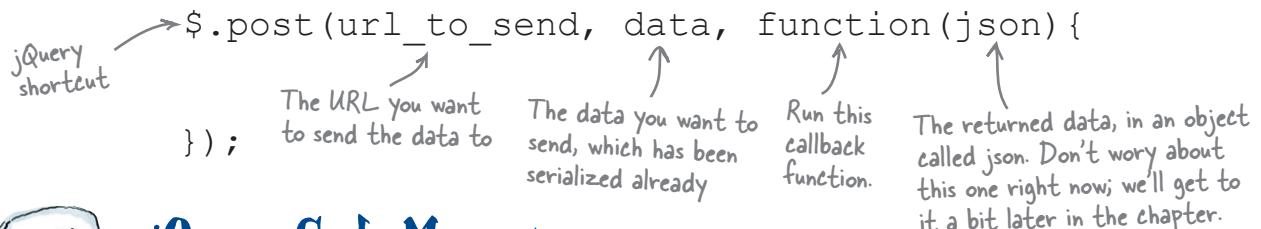

```

$.post(url_to_send, data, function(json) {
    ↑
    The URL you want to send the data to
    ↑
    The data you want to send, which has been serialized already
    ↑
    Run this callback function.
    ↑
    The returned data, in an object called json. Don't worry about this one right now; we'll get to it a bit later in the chapter.
})
  
```

The diagram shows a hand-drawn style illustration of a refrigerator with magnets on it, next to the title "jQuery Code Magnets". Above the code, arrows point from handwritten labels to specific parts of the `$.post` call:

- An arrow from "jQuery shortcut" points to the first part of the code: `$.post`.
- An arrow from "The URL you want to send the data to" points to the URL parameter: `url_to_send`.
- An arrow from "The data you want to send, which has been serialized already" points to the data parameter: `data`.
- An arrow from "Run this callback function." points to the function parameter: `function(json)`.
- An arrow from "The returned data, in an object called json. Don't worry about this one right now; we'll get to it a bit later in the chapter." points to the variable `json`.


jQuery Code Magnets



Create a click event listener on `#btnSave` that takes all the data in the form and serializes it. Then send this information to the server using a jQuery `post` method. Get the URL to post to from the `action` attribute of the form. Also, create a `clearInputs` function that sets all values of the form fields to blank, if the post is **successful**. You will also need to cancel the default submit action of the form (by returning `false`), using a `.submit` listener on the form with the ID of `addRunner`.

```

$( "#btnSave" ).click(function() {
  var data = $( "#addRunner :input" ).serializeArray();
  $.post($("#addRunner").attr('action'), _____, _____(json) {
    if (json.status == "fail") {
      alert(json._____);
    }
    if (json.status == _____) {
      alert(json.message);
      clearInputs();
    }
  }, "json");
});
function _____{
  $("#addRunner :input").each(function(){
    $(this).val('');
  });
}
$("#addRunner")._____(function(){
  return false;
});
  
```

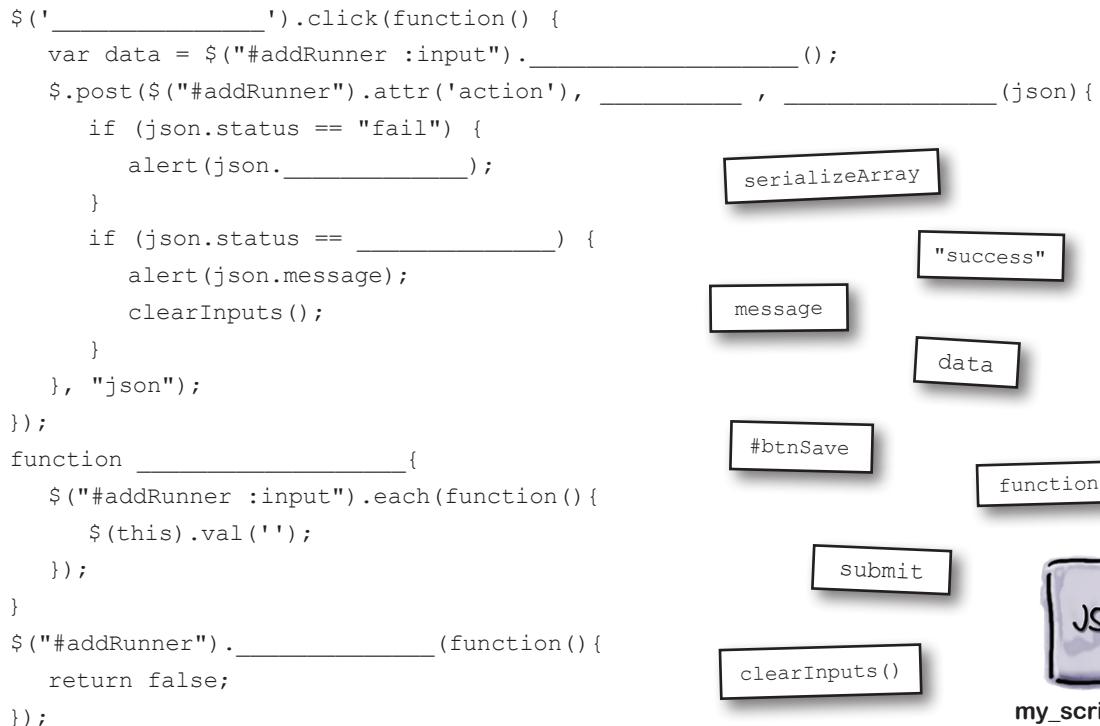

The code snippets are contained within a light gray box. To the right of the code, several labels are shown in boxes, connected by arrows to specific parts of the code:

- `serializeArray`: Points to the `serializeArray()` method call in the `var data` line.
- `"success"`: Points to the status code check in the `if (json.status == "success")` block.
- `message`: Points to the `message` alert in the `if (json.status == "success")` block.
- `data`: Points to the `data` parameter in the `$.post` call.
- `#btnSave`: Points to the `#btnSave` selector in the `$("#btnSave").click` line.
- `function`: Points to the `function` keyword in the `function _____{ ... }` block.
- `submit`: Points to the `submit` event in the `$("#addRunner").submit` line.
- `clearInputs()`: Points to the `clearInputs` function name in the `clearInputs();` line.
- `JS`: Points to the `.js` file extension in the `my_scripts.js` file icon.
- `my_scripts.js`: Points to the file icon at the bottom right.



jQuery Code Magnets Solution

Create a `btnSave` click action that takes all the data in the form and serializes it. Then send this information to the server using a `jQuery post` method. Get the URL to post to from the `action` attribute of the form. Also, create a `clearInputs` function that sets all values of the form fields to blank if the post is successful. You will also need to cancel the default submit action of the form, using a `.submit` listener on the form, with the ID of `addRunner`.


```
$(' #btnSave ').click(function() {
  var data = $('#addRunner :input').serializeArray();
  $.post($('#addRunner').attr('action'), data, function(json) {
    if (json.status == "fail") {
      alert(json.message);
    }
    if (json.status == "success") {
      alert(json.message);
      clearInputs();
    }
  }, "json");
});

function clearInputs() {
  $('#addRunner :input').each(function() {
    $(this).val('');
  });
}

$('#addRunner').submit(function() {
  return false;
});
```

Annotations:

- `serializeArray()`: Prepare all the form fields for sending to the server.
- `$(#addRunner).attr('action')`: Get the action attribute of the form you want to post.
- `if (json.status == "success")`: Check the return value from the server, set in the PHP code, to see if the POST was successful or not.
- `$(this).val('')`: Use an HTML element filter to access all the input fields in the form, and set them all to be empty.
- `return false;`: Cancel the default submit action of the form to allow the jQuery code in the button click event to take care of sending the data.



my_scripts.js



Test Drive

Your page isn't going to look any different with these recent additions. You should, however, update your `my_scripts.js` file with the code you just created. Then, open up your `index.html` page in a browser; open the “Network” tab (Chrome) or “Net” tab (Firebug); you should see the POST to the `service.php` file happening each time you press the `btnSubmit` button. There will be a **POST** listed in the **Request Method** section of the **Headers** tab. The **Form Data** will also be listed there. Now we just need a place to put it...


Store your data in a MySQL database

Relational Database Management Systems (RDBMS) are extremely organized applications designed to store, organize, and remember relationships between your various pieces of data.


Often called *database servers*, they come in various shapes and sizes (and costs). For our purposes, we'll use a free database server called **MySQL**. You communicate with a database server in a language it can understand, which in our case is **SQL**. A database server typically runs alongside a web server, sometimes on the same server, and they work in concert to read and write data and deliver web pages.

The “SQL” in MySQL stands for Structured Query Language.

MySQL stores data inside of database tables.

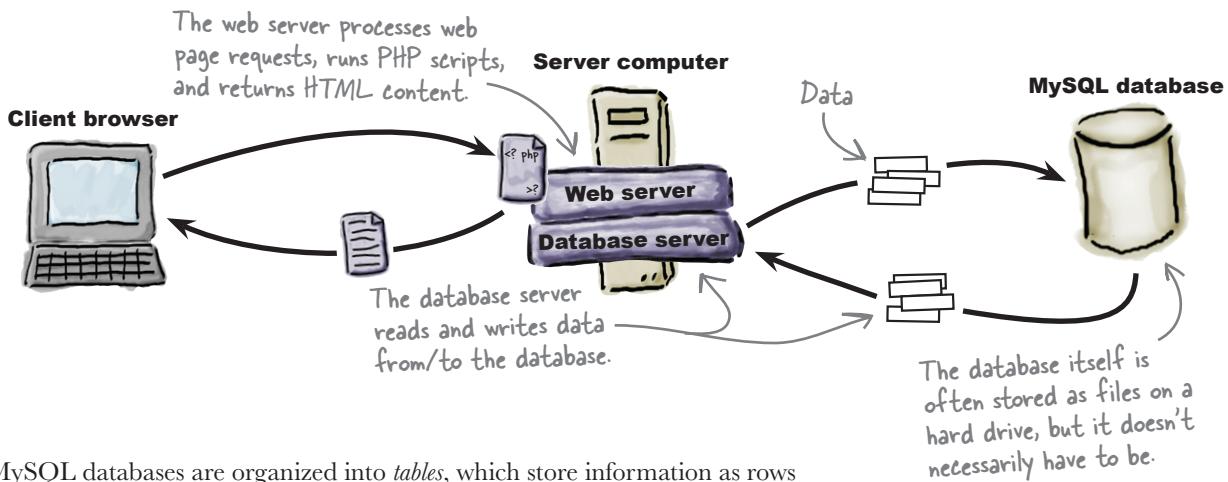

MySQL databases are organized into *tables*, which store information as rows and columns of related data. Most web applications use one or more tables inside a single database, sort of like different file folders within a file cabinet.

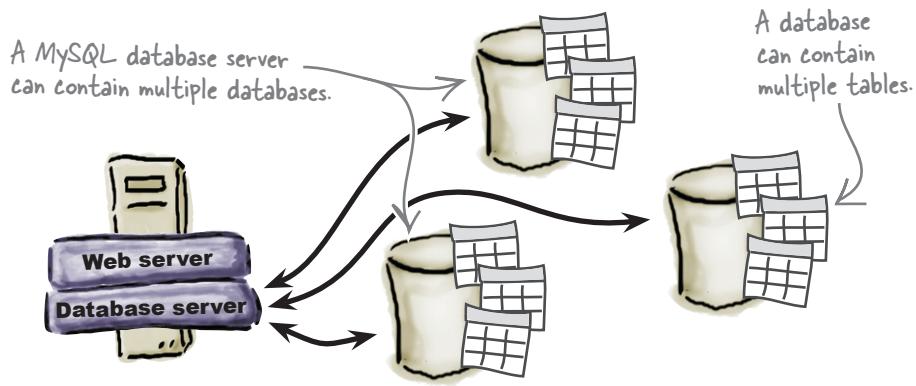

SQL is the query language used to communicate with a MySQL database.

fire up the database

Create your database to store runner info



Hey! Have you configured MySQL and PHP yet? Make sure you go through Appendix ii for installing and configuring PHP and MySQL before continuing.

All right, carry on. You'll be able to complete the chapter now.



To get your database, table, and users set up, we've written the SQL for you. Open up MySQL Workbench, open a new connection, and run the following SQL.

```
create database hfjq_race_info; ← Create a database called hfjq_race_info.
```

```
CREATE USER 'runner_db_user'@'localhost' IDENTIFIED BY 'runner_db_password';
GRANT SELECT,INSERT,UPDATE,DELETE ON hfjq_race_info.* TO 'runner_db_user'@'localhost';
```

```
use hfjq_race_info; ← Tell the script that the
                      next piece relates to
                      your new database.
```

```
CREATE TABLE runners(
    runner_id INT not null AUTO_INCREMENT,
    first_name VARCHAR(100) not null,
    last_name VARCHAR(100) not null,
    gender VARCHAR(1) not null,
    finish_time VARCHAR(10),
    PRIMARY KEY (runner_id)
);
```

Create a user, called runner_db_user, give it a password to log in with and allow that user to get, set, update, and remove data in the database.

Create a table called runners that holds all the information we want to remember about the people who finished the race.



Test Drive

Open up MySQL Workbench and open a connection to the server. Paste the SQL from the previous page into the Query pane and press the lightning icon to run the SQL code. You should get success messages in the Output pane at the bottom.

The screenshot shows the MySQL Workbench interface. In the top navigation bar, it says "SQL Editor (localhost)". The main area is titled "Query 1" and contains the following SQL code:

```

1 •  create database race_info;
2 •
3 •  CREATE USER 'runner_db_user'@'localhost' IDENTIFIED BY 'runner_db_password';
4 •  GRANT SELECT,INSERT,UPDATE,DELETE ON race_info.* TO 'runner_db_user'@'localhost';
5 •
6 •  use race_info;
7 •
8 •  CREATE TABLE runners(
9 |     runner_id INT not null AUTO_INCREMENT,
10 |     first_name VARCHAR(100) not null,
11 |     last_name VARCHAR(100) not null,
12 |     gender VARCHAR(1) not null,
13 |     finish_time VARCHAR(10),
14 |     PRIMARY KEY (runner_id)
15 );

```

Below the code, the "Output" tab is selected in the bottom navigation bar. It displays the execution log:

Action	Time	Action	Response	Duration / Fetch Time
1	22:36:02	create database race_info	1 row(s) affected	0.000 sec
2	22:36:02	CREATE USER 'runner_db_user'@'localhost' IDENTIFI...	0 row(s) affected	0.001 sec
3	22:36:02	GRANT SELECT,INSERT,UPDATE,DELETE ON race_i...	0 row(s) affected	0.000 sec
4	22:36:02	use race_info	0 row(s) affected	0.000 sec
5	22:36:02	CREATE TABLE runners(runner_id INT not null AUTO_INCREMENT,	0 row(s) affected	0.091 sec

A woman character is standing on the left, looking towards the screen. A thought bubble from her contains the text: "So, after all that, where's the data?"

We'll get to that next.

The SQL you just ran creates a database, creates a user, grants access to the database for the new user and creates a table to store the runner info. Let's see how you can put some data in there.




slot a goes in tab b...

Anatomy of an insert statement

There is one primary way of putting data into our database, another way to change/update it, and a third to get it back out again. We'll look at getting data out in a bit, but for now, let's focus on putting data **into** our database tables.

To put data into database tables, we use an `insert` statement.

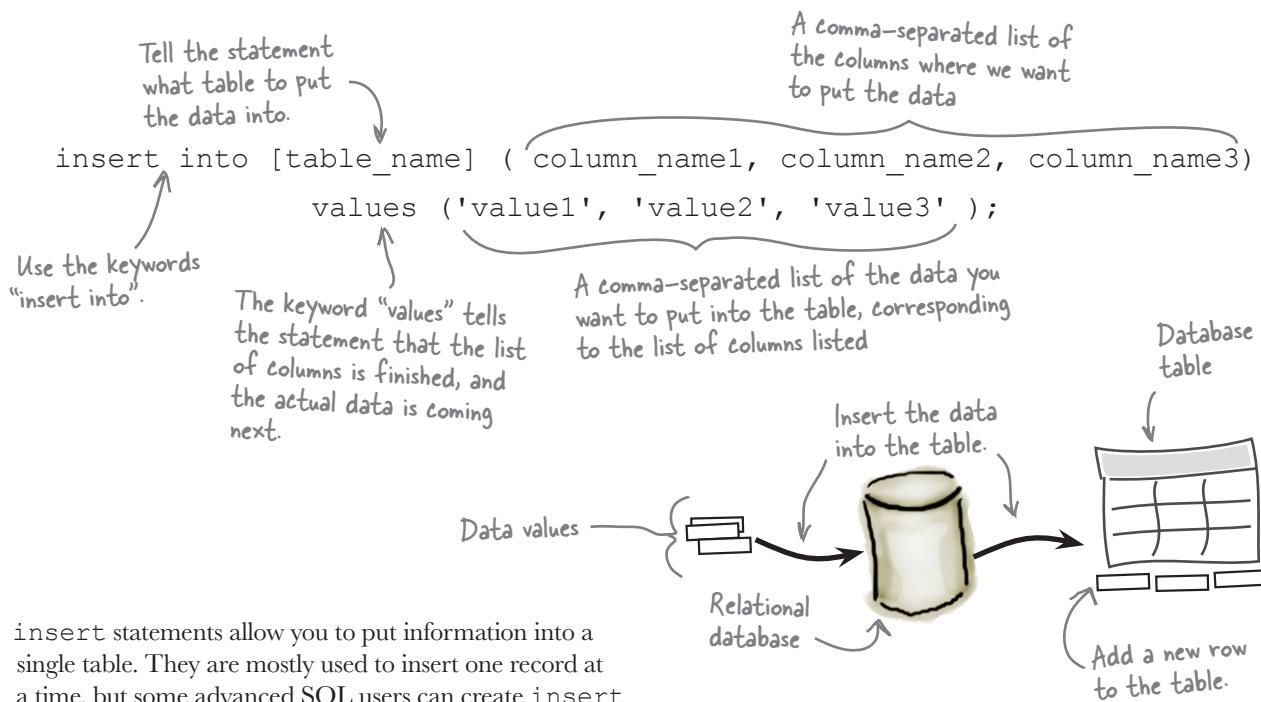

`insert` statements allow you to put information into a single table. They are mostly used to insert one record at a time, but some advanced SQL users can create `insert` statements that add multiple rows to the table. For our purposes, however, we'll stick to the one-at-a-time syntax.

It's recommended that you specify the columns in the order you want to insert your data, although it's not necessary. Not specifying the columns can lead to data issues, since it will automatically put the first value in the first column, the second value in the second column, etc. You'll need very intimate knowledge of your data tables to be confident of using this method.



The order of the column names and values matters!

The values must be listed in the exact same order as the columns. That's how the database knows where to put the data.



Write the SQL `insert` statements to insert the data you already have in your XML file into your database. You should insert one record at a time into the runners table you created earlier. We've done the first one for you.

```
insert into runners (first_name, last_name, gender, finish_time)
    values ('John','Smith','m','25:31') ;
```

exercise solution

Exercise
Solution

Now that you've written all the SQL necessary for inserting the runners into your database tables, open up MySQL Workbench and run your code.

```
insert into runners (first_name, last_name, gender, finish_time)
values ('John', 'Smith', 'm', '25:31') ;

insert into runners (first_name, last_name, gender, finish_time)
values ('Jacob', 'Walker', 'm', '25:54') ;

insert into runners (first_name, last_name, gender, finish_time)
values ('Mary', 'Brown', 'f', '26:01') ;

insert into runners (first_name, last_name, gender, finish_time)
values ('Jenny', 'Pierce', 'f', '26:04') ;

insert into runners (first_name, last_name, gender, finish_time)
values ('Frank', 'Jones', 'm', '26:08') ;

insert into runners (first_name, last_name, gender, finish_time)
values ('Bob', 'Hope', 'm', '26:38') ;

insert into runners (first_name, last_name, gender, finish_time)
values ('Jane', 'Smith', 'f', '28:04') ;

insert into runners (first_name, last_name, gender, finish_time)
values ('Ryan', 'Rice', 'm', '28:24') ;

insert into runners (first_name, last_name, gender, finish_time)
values ('Justin', 'Jones', 'm', '29:14') ;
```



But now that we have the runners in the database, how do we get them out again for our web app?

Time for a new language: PHP.

Don't worry! We'll give you just enough PHP chops to do all the server-side communication you need—including talking to a database server—and that's it.

Use PHP to access the data

PHP is a programming language, and it needs an environment to run in: a web server with PHP support. PHP scripts and web pages that rely on the scripts **must be placed on a real web server**, as opposed to just opening a script directly from a local filesystem.

If you do have a web server installed locally and it has PHP support, then you can test out PHP scripts directly on your local computer.


Web browsers know nothing about PHP and, therefore, have no ability to run PHP scripts.



Unlike HTML web pages, which can be opened locally in a web browser, PHP scripts must always be "opened" through a URL from a web server.

This PHP script is just a bunch of meaningless code to the web browser.

The web server understands this PHP code and runs the script!



Web servers with PHP support are equipped to run PHP scripts and turn them into HTML web pages that browsers can understand.

A quick way to tell if a web page is being delivered by a web server is to look for the URL starting with "http:". Web pages opened as local files always start with "file:".

PHP scripts must be run on a web server or they won't work.



There will be jQuery, we promise.

But first, let's look at how we get our PHP file to handle POST data, too, so it can write it into the database. We'll also look at some of the important things to remember when dealing with sending information to your server.



postal delivery

Handle POST data on the server

We've already looked at the special object created to handle the transportation of information from the form in the browser to the server: the `$_POST` object. It's an associative array of all the information you sent, using the *name* (not the *IDs*) of the HTML elements as the *key* for the associative array, and the information in the HTML element as the *value* of the associative array. The PHP code on the server reads the `$_POST` object and determines what information has been sent to the server.

You can get the information back *out* of this array by using the key you sent with it (the name of the HTML element). This will return the value in your PHP script.

```
echo $_POST ["txtFirstName"];
```

Write the value to the screen.

The name of the HTML element that collected data on the form


The name of the array automatically created to handle data sent using the POST method to a PHP file.




We're almost at the point where we can grab the data back out of the database and figure out how to display it in our Finishers lists. But first, we need a little more PHP to get us connected to the database...

Connect to a database with PHP

Remember how when you went through the PHP installation process, you selected a particular library near the end of the process?

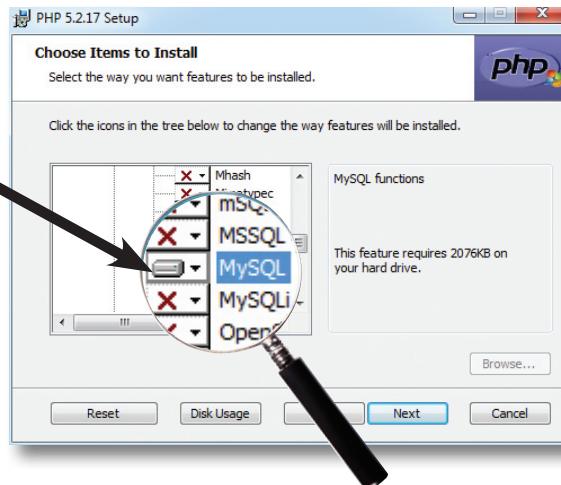

This library will enable PHP to talk to the MySQL database. We'll use this library to connect to the database we've created so we can start reading out the runner data.

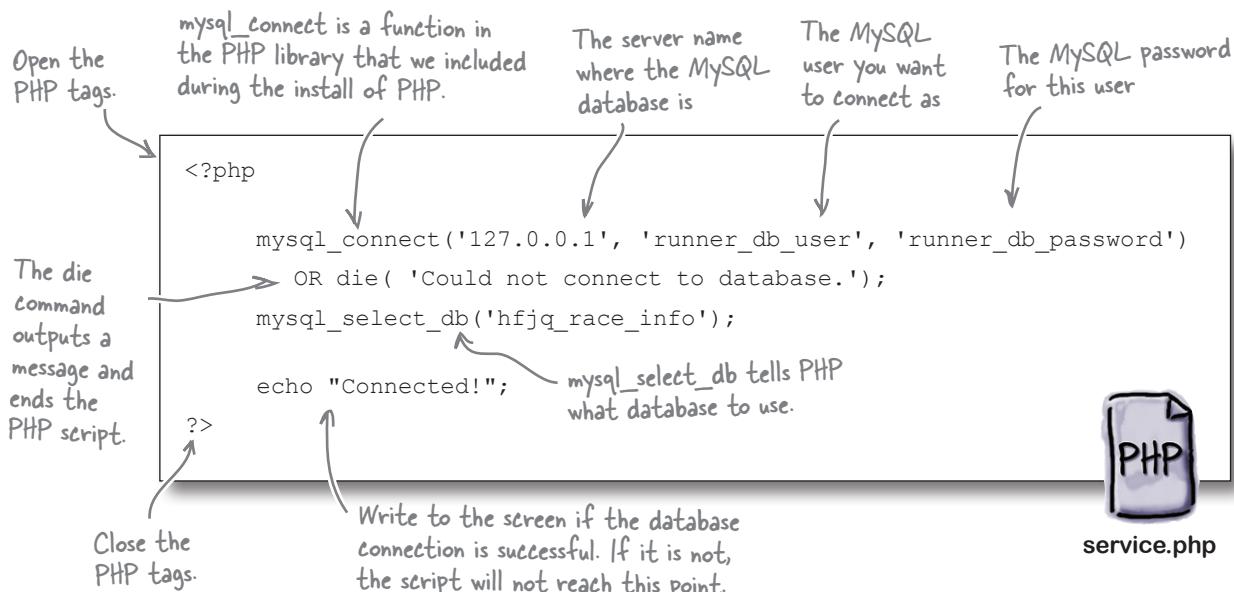

test drive

Test Drive

Open up your favorite text editor and add the code from the previous page. Save the file as `service.php` in the same directory as your `index.html` file for this chapter. Open `service.php` in your browser to see the results of your database query.

Don't forget, the PHP code **must** run through your web server, so the URL should say `http://`, not `file://`.

You're right.

Just like INSERT-ing, there's a special syntax for reading the data back out again. Let's look at how that works.

there are no
Dumb Questions

Q: Is MySQL Workbench the only way to interact with or manage a MySQL database?

A: No! There are other ways and other tools. PHPMyAdmin is a common, web-based tool used to manage MySQL databases. You can also use a terminal window to manage the database and the data from the command line.

Q: What other kinds of PHP libraries are there?

A: There are many different PHP libraries, for a wide variety of purposes. These range from SSL, Emailing (SMTP or IMAP), Compression, Authentication, other database connections, and many more. Type "PHP libraries" into your favorite search engine to see a list of available libraries.

Use select to read data from a database

To read data from databases, we use a `select` statement, and the data is returned in a *resultset*. The resultset is a collection of all the data you asked for in your `select` query. Using a `select` statement, you can also join several tables, so you can get data from more than one table in the same resultset.

For plenty more info on PHP, SQL, databases, and tables, pick up a copy of Head First PHP & MySQL.

```
select column_name1, column_name2 from table_name order by column_name1 asc
```

A comma-separated list of the columns that we want to pull the data from.

The "select" keyword kicks off the statement

Tell the statement what table to pull the data from.

The "from" keyword tells the statement that the list of desired columns is finished, and where to get the data that comes next.

The "order by" keyword, followed by one or more column names, sorts the returned data in whatever order we tell it.

The "asc" keyword tells "order by" how to order the results (asc for ascending, desc for descending).

The SQL select statement retrieves columns of data from one or more tables and returns a resultset.



Sharpen your pencil

Create a `select` statement for the data we need to display the runners on the website. You'll need to read out the `first_name`, `last_name`, `gender`, and `finish_time` from the `runners` table. Sort the data so it comes back ordered by `finish_time`, lowest to highest. If you need to, look back to page 336, where you created the table, so you can get the column names right.

sharpen solution

You've just created your very own SQL statement to retrieve the runners from your database.

The list of columns you need to select
 SELECT first_name, last_name, gender, finish_time FROM runners order by finish_time ASC
 How you want the data ordered
 The table where you want to get the data from

**Test Drive**

Using MySQL Workbench, run your `select` statement to see all your data as it will be returned to you in the resultset.

A screenshot of the MySQL Workbench interface. The left sidebar shows the schema structure with tables like race_info, runners, and test. The main window displays a query editor with the following SQL statement:

```
1 select first_name, last_name, gender, finish_time from runners;
```

Below the query, the results are shown in a table:

first_name	last_name	gender	finish_time
John	Smith	m	25:31
Jacob	Walker	m	25:54
Mary	Brown	f	26:01
Jenny	Pierce	f	26:04
Frank	Jones	m	26:08
Bob	Hope	m	26:15
Jane	Smith	f	28:04
Ryan	Rice	m	28:24
Justin	Jones	m	29:14

It's great that I can see the data in Workbench, but don't we need it on the web page?

**Yeah, we do.**

Let's look at how we can get information from the database for display on our page.

Get data with PHP

Up to now, we've looked at some very basic PHP and some not-so-basic PHP. We've seen how to write some basic information to the screen and how to connect to a database and write a `select` statement to get information out of a database. Now let's see how we can **get** information from a database and write that information to the screen.



PHP Code Magnets

Rearrange the magnets below to complete the PHP code that creates a function called `db_connection`, which manages the database connections. Also create a `$query` variable and set its value to be the `select` statement you wrote earlier that selects all the runners from the database. Then create a `$result` variable that will call the `db_connection` function, which passes the `$query` variable as a parameter. Last, using a `while` loop, go through each row of the resultset—which is an associative array—and print it to the screen.

```
<?php

$query = "SELECT first_name, last_name, gender, finish_time _____ runners
order by _____ ASC ";
$result = _____ ($query);

while ($row = mysql_fetch_array(_____, MYSQL_ASSOC)) {
    print_r(_____);
}

_____ db_connection(_____) {
    mysql_connect('127.0.0.1', 'runner_db_user', 'runner_db_password')
    OR _____ ('Could not connect to database.');
    _____ ('hfjq_race_info');

    return mysql_query($query);
}
?>
```

`$result`

`FROM`

`db_connection`

`function`

`die`

`mysql_select_db`

`$query`

`finish_time`



service.php



PHP Code Magnets Solution

With just a little bit of PHP, you're now grabbing the data from the database and getting the results returned in an array that can be displayed on your web page.

```
<?php

    $query = "SELECT first_name, last_name, gender, finish_time FROM runners
order by finish_time ASC ";
    $result = db_connection($query);

    while ($row = mysql_fetch_array($result, MYSQL_ASSOC)) {
        print_r($row);
    }

    function db_connection($query) {
        mysql_connect('127.0.0.1', 'runner_db_user', 'runner_db_password')
            OR die ('Could not connect to database.');
        mysql_select_db('hfjq_race_info');

        return mysql_query($query);
    }
?>
```



service.php

there are no
Dumb Questions

Q: So, can a `select` only pull all my information from a table? I see I can limit the columns I get back, but what about the rows?

A: Yes, you can limit the rows you get back, by using a `where` clause. We'll look at this a little bit more in Chapter 11, but you can pass in a filter condition in the `where` clause, and only get the rows that match your condition returned to you in a `select` statement.

Q: Can I only get data from one table at a time?

A: No, you can join as many tables as you'd like in your query, often by a common identifier, and also in the `where` clause. Joining many tables together can slow your database queries down a lot, so you need to be careful when doing it. For more information on this, look at Chapter 8 of *Head First PHP & MySQL* or Chapter 2 of *Head First SQL*.

Q: What database is on 127.0.0.1? I see my website on “localhost.” What’s the difference?

A: Good question, and the answer is nothing. 127.0.0.1 and localhost refer to the same thing—the computer/server you are currently working on.



Test Drive

Update your *service.php* file with the code you just created and then open it in your browser to see the results of your database query. Don't forget, the PHP code **must** run through your web server, so the URL should say *http://*, not *file://*.

```
Array ( [first_name] => John [last_name] => Smith [gender] => m [finish_time] => 25:31 ) Array ( [first_name] => Jacob [last_name] => Walker [gender] => m [finish_time] => 25:54 ) Array ( [first_name] => Mary [last_name] => Brown [gender] => f [finish_time] => 26:01 ) Array ( [first_name] => Jenny [last_name] => Pierce [gender] => f [finish_time] => 26:04 ) Array ( [first_name] => Frank [last_name] => Jones [gender] => m [finish_time] => 26:08 ) Array ( [first_name] => Bob [last_name] => Hope [gender] => m [finish_time] => 26:38 ) Array ( [first_name] => Jane [last_name] => Smith [gender] => f [finish_time] => 28:04 ) Array ( [first_name] => Ryan [last_name] => Rice [gender] => m [finish_time] => 28:24 ) Array ( [first_name] => Justin [last_name] => Jones [gender] => m [finish_time] => 29:14 )
```

The end result
of writing all
the data out to
the screen

Well, it's data all right, but it looks complex and confusing. Can we do anything to pretty it up a little?




Definitely.

What we see there is just a bunch of arrays written to the screen. They do contain the data we need, but not quite in the format we want. Luckily, there's an efficient method for arranging data in a format perfect for defining data structures.

an easier way

JSON to the rescue!

JSON, short for JavaScript Object Notation, is a lightweight data-interchange format. It is easy for humans to read and write. It is easy for machines to parse and generate. That's what makes it perfect for structuring and transferring data. It's based on a subset of the standard used to define JavaScript, and is language independent. That means it can be used with pretty much any programming language. It is more efficient at transferring data than XML, and is based on name/value pairs, like associative arrays. The values in JSON can be strings, numbers, arrays, objects, Boolean values (true or false) or null.

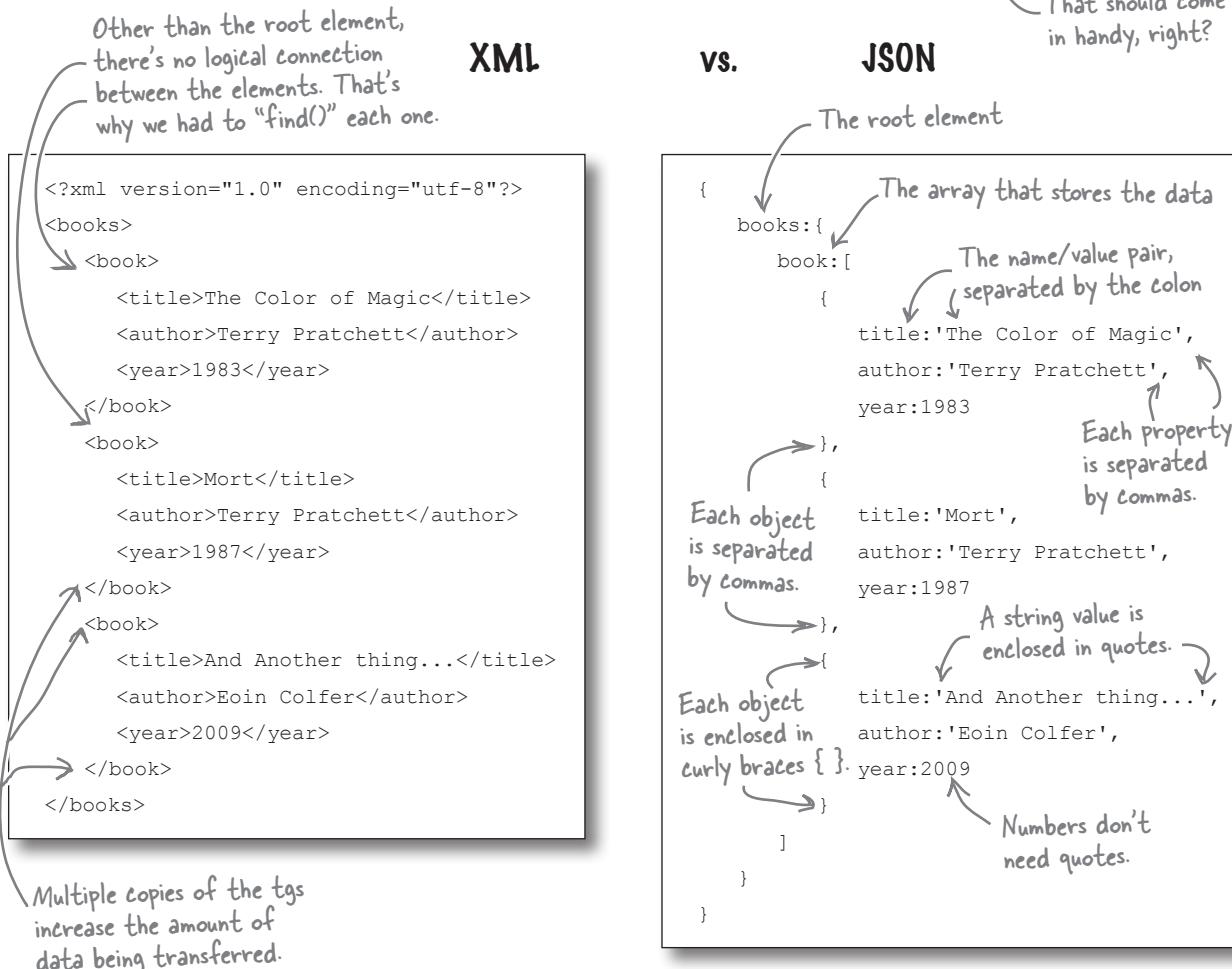

To access the information in the JSON object, you can use the same notation that you do for any other object: the dot (.) notation. Arrays inside the JSON object are like other JavaScript arrays and have the same properties, like `length`. In our example JSON object above, you would find out how many books were returned by using `books.book.length`. Different JSON objects will have different structures, so you might not need as many dots to access the array object.

jQuery + JSON = Awesome

Since JSON is so prevalent and easy to use, the good folks at jQuery built a special shortcut just for dealing with JSON data: the `getJSON` method.

```

    ↗ jQuery
    ↗ shortcut.
    ↗ Call the getJSON method.
    ↗ url_to_load
    ↗ The URL you want to
    ↗ load the data from
    ↗ ) ;
    ↗ Run this callback function.
    ↗ json
    ↗ The returned data, in an
    ↗ object called json (more on
    ↗ this in a sec).
  
```

`$.getJSON(url_to_load, function(json) {`

If this seems familiar, that's because it's almost the same as the `post` method we used earlier to get the data from the form. This simple method is a *shortcut* for the `ajax` method, with several parameters already set for you. To make this call without the shortcut, it would look like this:

```

$.ajax({
  url: url_to_load,
  dataType: 'json',
  data: json,
  success: function(json) {
    ;
  });
  
```



But the data we have isn't in JSON format, just a series of arrays. Can we turn those arrays into JSON?

Yes, we can.

As luck would have it, the PHP folks thought of this already. Let's have a look at a few more PHP basics, and then see how to combine those with other PHP functions to get our data in JSON.

break at your own risk

A few PHP rules...

Let's face it, nobody really likes a bunch of coding rules, but there are just a few more things about PHP—much of which are syntax—that we should take a look at to help you wrangle your data for jQuery. Thankfully, we've already seen many of these concepts in relation to JavaScript, so we'll keep this as quick and painless as possible...

PHP basics

1. All PHP code needs to be wrapped with <?php and ?> tags.
2. You can **intersperse PHP with HTML**, using the <?php and ?> tags around your PHP code
3. All lines of PHP code must **end with a semicolon (;**.

```
<div><span> Hello
<?php
    echo "Bob";
?>
</span></div>
```

Rules for variables

1. All variables **must** start with a **dollar sign (\$)**.
2. After that, they must contain **at least** one letter or underscore, and then any combination of letters, numbers, or underscores.
3. Dashes (-), spaces (), and **all special characters** (except for \$ and _) are **not allowed** in variable names.

```
<?php
$u = "USA"; // OK
$home_country = "Ireland"; // OK
$another-var = "Canada"; // Causes an error
??>
```

Rules for loops

1. PHP also contains **for**, **while**, and **do...while** loops—all with the **same syntax as JavaScript**.
2. PHP also contains an extra loop mechanism called the **foreach** loop, which will go through all the elements of an array one by one, using the **as** keyword until it reaches the end, and then stopping automatically.

```
<?php
for ($i = 1; $i <= 10; $i++) {
    echo $i;
}
while ($j <= 10) {
    echo $j++;
}
$a = array(1, 2, 3, 17);
foreach ($a as $v) {
    echo "Current value: $v.\n";
}
?>
```

A few (more) PHP rules...

There are a few more rules that will help us get the data we need, format it correctly, and get it onto our web pages.

Rules for arrays

1. You can create new arrays using the `array` keyword, similar to JavaScript.
2. You can access the array values using the index of the item, in **square brackets []**, like JavaScript. They are also **zero-indexed**, like JavaScript.
3. Arrays can also be **associative**, which means you can use a key to access the item in the array, instead of the index. These are called **key/value pairs**.
4. To assign a value to a key in an associative array, you use the **=> operator**.

```
<?php
$my_arr2 = array('USA', 'China',
'Ireland');
echo $my_arr2[2]; // Prints "Ireland"

$arr = array("foo" => "bar", 12 => true);
echo $arr["foo"]; // Prints "bar"
echo $arr[12]; // Prints true
?>
```

Rules for conditionals

1. The `if` statement has the **same syntax as JavaScript**, as does the `else` clause, and the `else if` clause.
2. The **comparison operators** are all the same as **JavaScript**.
3. **Logical operators** are also the same as in **JavaScript**, with the addition of descriptive words—`and`, `or`, `and not`—which can be used in place of the operators.

```
<?php
if ($x > $y) {
    echo "x is greater than y";
}
elseif ($x == $y) {
    echo "x is equal to y";
}
else {
    echo "x is smaller than y";
}
?>
```

Rules for writing to the screen

1. The keywords `echo` and `print` write to the screen.
2. You can write out the contents of an **array** using the `print_r` command.

```
<?php
echo "Bob";
print_r($my_arr2);
?>
```

just one array

Format the output using PHP

OK, now that we've got that out of the way, let's see what PHP can do for us! The `json_encode` function in PHP allows you to take an associative array and convert it into a JSON-encoded string of values.

```
Write the value out  
to whatever called the  
file—i.e., a browser or  
an ajax call, etc. → echo json_encode(array_name);  
Call this PHP function to encode  
the array in the JSON format. ↓  
Pass in an array  
to encode. ↓
```

But before we can encode the data, it must be in a single associative array.

We've already seen a method to loop through the resultset and see each associative array in there. What we need is a way to take each of these arrays and combine them into a single one. Using the PHP function `array_push`, we can add new items onto the end of an array.

```
Create a new, empty array. ↘  
$my_array = array();  
array_push($my_array, array('my_key' => 'my_val'));  
Call the array_push  
function with parameters. ↑  
Pass the destination array  
as the first parameter. ↑  
Pass in any information you  
want to add to the array. In  
this case, another associative  
array is getting added to  
the $my_array array. ↗  
A name/value pair being  
added to this array ↗
```



Geek Bits

The `json_encode` function only became available in PHP version 5.2. If you're using a version earlier than that, either update your version of PHP or type "json_encode PHP alternatives" into your favorite search engine, and you'll find out just how the folks at PHP created that function. That way, you can create your own so you can take advantage of its cool features.

there are no Dumb Questions

Q: Did the jQuery folks come up with JSON?

A: No. Douglas Crockford, Yahoo!'s JavaScript architect, invented JSON to be what he calls a "fat-free alternative to XML." He explains his reasons for that designation here: <http://www.json.org/fatfree.html>.

Q: Isn't JSON just JavaScript??

A: Yes and no. JSON is based on a subset of JavaScript, ECMA 262 Third Edition, but can be used by a multitude of languages for data transfer. To see the list of languages that use JSON, visit <http://www.json.org/>.

Q: So, if JavaScript and PHP have such a similar syntax, why can't I just use JavaScript to do what I need??

A: Like we've mentioned, PHP is a *server-side* scripting language, and can interact with the web server and databases on your behalf. The code is executed on the server, generating HTML, which is then sent to the client. JavaScript, on the other hand, only lives in your browser, and interacts *client side*.

Q: All right. What is PHP again?

A: PHP (recursive acronym for PHP: Hypertext Preprocessor) is a widely used, open source, general-purpose scripting language that is especially suited for web development and can be embedded into HTML.

Q: So where did PHP come from, then?

A: Good question. PHP first appeared back in 1994. It was created by Rasmus Lerdorf as a way of displaying his resumé online. He released the the source in June 1995, which allowed other developers to update and fix bugs. It has since taken off and is used in over 20 million websites around the world.



Relax

You've just put a bunch of new learning about PHP, MySQL, and JSON into your brain. We're about to dive into a big exercise to pull everything together, so take a quick break and have a cup of coffee, take a walk, or do something else to give your brain a rest and get ready for what's to come. When you're done, turn the page and dive in.

long exercise

Long Exercise

Update your *my_scripts.js* file with new function, called *getDBRacers*, which calls the *service.php* file. This call should return a JSON object and then should alert out the number of runners that were returned. Also update the *startAJAXCalls* timer to call this new function instead of the *getXMLRunners* function. Then, update *service.php* to send back the runners' retrieved data from the database, JSON-encoded.

```
function startAJAXcalls(){
    if(repeat) {
        setTimeout( function() {
            .....
            startAJAXcalls();
        },
        FREQ
    );
}
}

function getDBRacers() {
    $.getJSON(..... function(....) {
        .....(json.runners.....);
    });
    getTimeAjax();
}
```

**my_scripts.js**

```
<?php

    $query = "SELECT first_name, last_name, gender, finish_time FROM runners
order by finish_time ASC ";
    $result = .....($query);

    $runners = array();

    while ($row = mysql_fetch_array($result, MYSQL_ASSOC)) {
        .....($runners, array('fname' => $row['first_name'], 'lname' =>
$row['last_name'], 'gender' => $row['gender'], 'time' => $row['finish_time']));
    }
    echo .....(array("runners" => .....));
    exit;

    function db_connection($query) {
        mysql_connect('127.0.0.1', 'runner_db_user', 'runner_db_password')
            OR die(fail('Could not connect to database.'));
        mysql_select_db.....
        return mysql_query($query);
    }

    function fail($message) {
        die(json_encode(array('status' => 'fail', 'message' => $message)));
    }
    function success($message) {
        die(json_encode(array('status' => 'success', 'message' => $message)));
    }
?>
```



service.php

long exercise solution



LONG Exercise Solution


Your *my_scripts.js* file now has a new function, called *getDBRacers*, which calls the *service.php* file. There is no need for the old *getXMLRunners* function anymore, so you can get rid of that. The new function accepts JSON returned from the *service.php* file and alerts out the number of runners that was returned. The *startAJAXCalls* timer function has also been updated to call the new function. The *service.php* file has been updated to send back the runners retrieved from the database, JSON-encoded and ordered by *finish_time*, starting with the lowest first.

Use the *getJSON* jQuery method to call the *service.php* file.

```
function startAJAXcalls() {
    if(repeat) {
        setTimeout( function() {
            getDBRacers(); // Call the new function on a scheduled basis.
            startAJAXcalls();
        },
        FREQ
    );
    }
}

function getDBRacers () {
    $.getJSON("service.php", function(json) {
        alert(json.runners.length); // Like other arrays, this also has a length property.
        getTimeAjax();
    })
}

The json object contains an array called runners. It got this name from the json_encode method in PHP.
```



my_scripts.js

```

<?php
    The database query to
    get the runners
    ↓
    $query = "SELECT first_name, last_name, gender, finish_time FROM runners
    order by finish_time ASC ";
    $result = db_connection($query);

    $runners = array(); Create a new array to
    hold our returned values.
    ↓
    while ($row = mysql_fetch_array($result, MYSQL_ASSOC)) {
        ↓
        array_push($runners, array('fname' => $row['first_name'], 'lname' =>
        $row['last_name'], 'gender' => $row['gender'], 'time' => $row['finish_time']));
    }
    echo json_encode(array("runners" => $runners));
    exit;

    function db_connection($query) {
        mysql_connect('127.0.0.1', 'runner_db_user', 'runner_db_password')
        OR die('Could not connect to database.');
        mysql_select_db('hfjq_race_info');

        return mysql_query($query); ← Return the resultset to
        whatever called this function.
    }

    Handler functions to deal with
    errors or successes in our scripts
    ↓
    function fail($message) {
        die(json_encode(array('status' => 'fail', 'message' => $message)));
    }

    function success($message) {
        die(json_encode(array('status' => 'success', 'message' => $message)));
    }
?>

```



test drive

Test Drive

Update your *service.php* and *my_scripts.js* file with the code you just created, and open *index.html* in your browser. Open the “Network” tab in the Developer tools, and you’ll see the JSON information getting loaded in.

```

{
  "runners": [
    {"fname": "John", "lname": "Smith", "gender": "m", "time": "25:31"}, {"fname": "Jacob", "lname": "Walker", "gender": "m", "time": "25:54"}, {"fname": "Jenny", "lname": "Pierce", "gender": "f", "time": "26:04"}, {"fname": "Frank", "lname": "Jones", "gender": "m", "time": "26:08"}, {"fname": "Bob", "lname": "Hope", "gender": "m", "time": "26:38"}, {"fname": "Jane", "lname": "Smith", "gender": "f", "time": "28:04"}, {"fname": "Ryan", "lname": "Rice", "gender": "m", "time": "28:24"}, {"fname": "Justin", "lname": "Jones", "gender": "m", "time": "29:14"}
  ]
}
  
```

The function alerts out the number of records returned in the JSON object.

In the “Network” section of the browser tools, the JSON information is visible in the JSON tab.

Nice. Do we use **find** and **each**, like we did with the XML, to display it?



Not quite.

We know that we have the data in JSON format, since it was our own PHP code that created it. Now we’ll (finally) take a closer look at that JSON object we kept telling you we’d get to, so we can get the data back out.

Access data in the JSON object


The `json_encode` function in PHP allows us to convert an associative array into a JSON-encoded string of values. These values can then be accessed in JavaScript as associative arrays too, so we can loop through them and interact with them in the same way we interact with other arrays.

When we were using XML, we had to scan through the data to find the next runner. Then, once we found a runner, we again had to find if the runner was male or female. Remember that JSON object that gets returned from `json_encode`? With the JSON object, we can directly access its properties, using the dot (`.`) notation. It contains a single array, called `runners`, as a property. And, once we have the array, we can use the key of the associative array to know if the runner is male or female—which is much more efficient than looking for it each time.



Update your `getDBRunners` function to read the JSON object from `service.php`. Then, use conditional logic to decide which list the runner goes in. But watch out! Only do that if there are actually runners returned in the JSON object.

```
function getDBRacers() {
    $.getJSON( ..... , function(json) {
        if (json.runners..... > 0) {
            $('#finishers_m').empty();
            $('#finishers_f').empty();
            $('#finishers_all').empty();
            $.....(json.runners,function() {
                var info = '<li>Name: ' + this['fname'] + ' ' + this['lname'] + '. Time: ' +
this[.....] + '</li>';
                if(this['gender'] == 'm') {
                    $('#.....').append( info );
                }else if(this['gender'] == 'f') {
                    $('#finishers_f').append( ..... );
                }else{
                    $('#.....').append( info );
                }
            });
        }
    });
    getTimeAjax();
}
```



my_scripts.js

sharpen solution

Using conditional logic and the information returned in the JSON object, you can determine which list the runner should go in. Like before, the runners should also always be added to the `all_finishers` list.

```
function getDBRacers () {
    $.getJSON("service.php", function(json) {
        if (json.runners.length > 0) {
            $('#finishers_m').empty();
            $('#finishers_f').empty();
            $('#finishers_all').empty();
        }

        $.each(json.runners, function() {
            var info = '<li>Name: ' + this['fname'] + ' ' + this['lname'] + '. Time: ' + this['time'] + '</li>';
            if(this['gender'] == 'm') {
                $('#finishers_m').append( info );
            } else if(this['gender'] == 'f') {
                $('#finishers_f').append(info);
            } else{
                $('#finishers_all').append( info );
            }
        });
        getTimeAjax();
    });
}
```

Annotations:

- Get the information from the service.php file.
- Check if there is data in the runners array.
- Empty out the lists again.
- Check if the current object property of gender is m or f.
- Add the runner to the all_runners list.



my_scripts.js

**Geek Bits**

We can use `each` method to loop through all the elements in the array returned in the JSON object. This method is slightly different from the `(selector).each` method, since it can iterate over non-jQuery arrays, like our `runners` array.



Test Drive

Update the `getDBRacers` function in your `my_scripts.js` file. Then open up `index.html` and see your runners get loaded from a MySQL database, using Ajax, JSON, and PHP.

The screenshot shows a web browser window with the title "2011 Race Finishers". The URL in the address bar is "thinkjquery.com/chapter09/step4/". The page content includes a header with three tabs: "Male Finishers" (which is active), "Female Finishers", and "All Finishers". Below the tabs, under "Male Finishers", is a list of names and times:

- Name: John Smith. Time: 25:31
- Name: Jacob Walker. Time: 25:54
- Name: Frank Jones. Time: 26:08
- Name: Bob Hope. Time: 26:38
- Name: Ryan Rice. Time: 28:24
- Name: Justin Jones. Time: 29:14

A hand-drawn style callout bubble points from the right side of the list to the text "The runners' information retrieved from the database". At the bottom of the page, there are buttons for "Start Page Updates" and "Stop Page Updates", and a note that the page refreshes every 10 second(s). The last updated timestamp is July 31, 2011, 10:06:05 am.



nobody likes dirty data

Data sanitization and validation in PHP

With the increase of spam bots and hackers trying to get ownership of your dataset for nefarious purposes, you should never trust the data that is entered into a web form. It's **always** a good idea to *validate* and *sanitize* any data sent to your server before you insert it into your database. This ensures that you got the type of data you expected for a particular field (validation) **and** that the data you received doesn't contain anything that could be potentially dangerous to your server or database (sanitization). This can help protect you against issues like SQL injections, drive-by cross-site scripting issues, and lots of other nasty things you can find out more about online. For our application, we'll use some nifty PHP methods to clean up our data and make sure the correct data is used.

```
<?php
    htmlspecialchars($_POST["a"]); // Converts some special HTML entities in
                                    // a format that is safe for the database
    empty($_POST["b"]); // The "empty" method checks if the value is empty
    preg_match('', $var); // This is a "Regular Expression". It checks $var against a set pattern
?>
    Check if a string
    is empty or not. A regular expression matching function. The pattern
    matching using regular expressions can be very specific,
    so you can really control the type of data entered.
```

There are many other functions you could also look at for data sanitization; these include `htmlentities`, `trim`, `stripslashes`, `mysql_real_escape_string`, and many more. You can find a bunch more of these in Chapter 6 of *Head First PHP & MySQL*.

Use the same PHP file for multiple purposes

We've looked at the two ways of sending data to the server to be processed by PHP: POST and GET. In combination with some conditional logic, we can detect if there was a POST or a GET request to our PHP file and act accordingly. Remember that hidden field we added to our form a few pages ago?

```
<input type="hidden" name="action" value="addRunner" id="action">
```

We can watch for this value in the POST, and know that we posted a form. Then, we can run some data validation and sanitization functions to make sure we got all the data we want. Similarly, if we update the `getJSON` call to get the runners from the database with a URL parameter (for the `$_GET` PHP object), we can target just that code in the PHP file to run. That way, we'll only have one PHP file to maintain.

```
$.getJSON("service.php?action=getRunners", function(json) {
```

Use this to tell the PHP function to run the code associated with getting the runners from the database.

Ack! Everyone's clearing their desks and heading to the airport! So, we know how to complete the form now, right?





Ready Bake PHP

Update your *service.php* file with the following code. It will handle both the GET and POST of information. You'll also need to include the `db_connection`, `success`, and `fail` functions from before.

```
<?php
if ($_POST['action'] == 'addRunner') {
    $fname = htmlspecialchars($_POST['txtFirstName']);
    $lname = htmlspecialchars($_POST['txtLastName']);
    $gender = htmlspecialchars($_POST['ddlGender']);
    $minutes = htmlspecialchars($_POST['txtMinutes']);
    $seconds = htmlspecialchars($_POST['txtSeconds']);
    if(preg_match('/[^w\s]/i', $fname) || preg_match('/[^w\s]/i', $lname)) {
        fail('Invalid name provided.');
    }
    if( empty($fname) || empty($lname) ) {
        fail('Please enter a first and last name.');
    }
    if( empty($gender) ) {
        fail('Please select a gender.');
    }
    $time = $minutes.":".$seconds;
    $query = "INSERT INTO runners SET first_name='".$fname."', last_name='".$lname.',
    gender='".$gender."', finish_time='".$time."'";
    $result = db_connection($query);
    if ($result) {
        $msg = "Runner: ".$fname." ".$lname." added successfully";
        success($msg);
    } else {
        fail('Insert failed.');
        exit;
    }
} elseif($_GET['action'] == 'getRunners') {
    $query = "SELECT first_name, last_name, gender, finish_time FROM runners ORDER BY
    finish_time ASC ";
    $result = db_connection($query);
    $runners = array();
    while ($row = mysql_fetch_array($result, MYSQL_ASSOC)) {
        array_push($runners, array('fname' => $row['first_name'], 'lname' => $row['last_name'],
        'gender' => $row['gender'], 'time' => $row['finish_time']));
    }
    echo json_encode(array("runners" => $runners));
    exit;
}
}
```

Check if there was a value of addRunner POSTed to the server. This is our hidden field from earlier.

Data sanitization of the information in the `$_POST` array

Data validation ensures that something was entered.

Call the `fail` function, if the validation fails.

Tell the database to insert a new record...

...and check if it was successful or not.

Check if the `getRunners` value was sent in the URL string.

Get and return the runners.



hawaii, here you come...

```
function getDBRacers() {
    $.getJSON("service.php?action=getRunners", function(json) {
        if (json.runners.length > 0) {
            $('#finishers_m').empty();
            .
            .
            .
        });
        getTimeAjax();
    })
}
```



my_scripts.js

Do this!



Update the `getJSON` call to include a URL parameter called `action` with a value of `getRunners` to tell the `service.php` file to return the runners.



Test Drive

After updating your `service.php` and `my_scripts.js` files, open up `index.html` in your browser. You should see runners getting loaded in. You should also be able to add new runners to the list using the form on the new tab you created.

2011 Race Finishers!

Male Finishers Female Finishers All Finishers Add New Finisher

All Finishers

First Name:
Last Name:
Gender:
Finish Time: (Minutes) (Seconds)

Add Runner

Congratulations to all our finishers!

Start Page Updates Stop Page Updates
Page refreshes every 10 second(s).

Last Updated:
August 2, 2011, 10:37:58 pm


Awesome! Let's get on that plane and have a few more of these on the beach...





jQuerycross

It's time to sit back and give your left brain something to do. It's your standard crossword; all of the solution words are from this chapter.

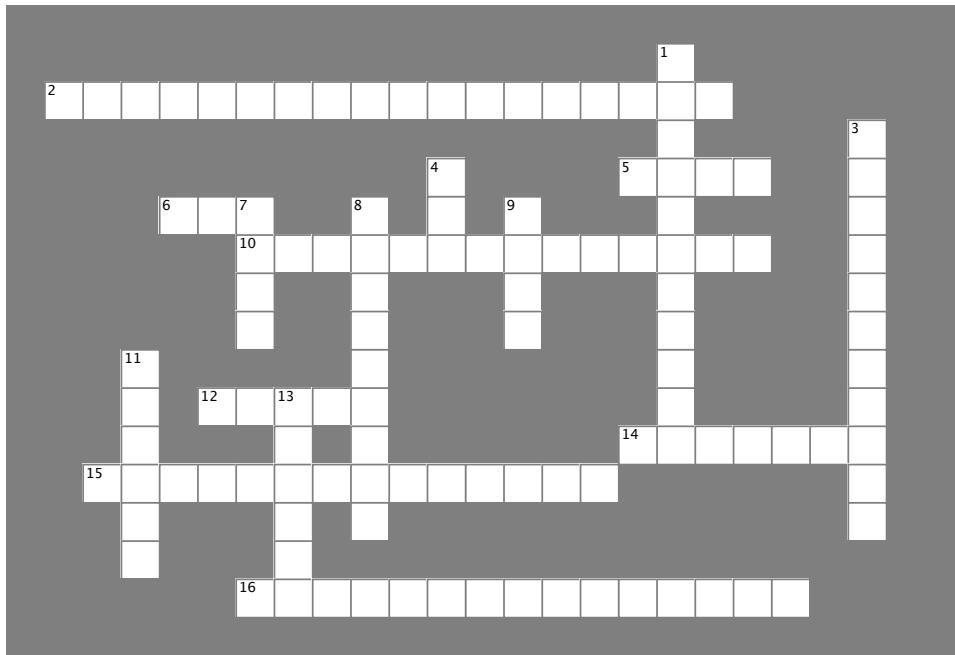

Across


2. _____ Management Systems (RDBMS) are extremely organized applications designed to store, organize, and remember relationships between your various pieces of data.
5. A jQuery shortcut method that's dedicated to sending data to the server. The method takes several parameters: URL, the information you want to send, and a handler function that will run after the data is sent.
6. Server-side scripting language often used to send data collected in a form to the server.
10. JSON = Java Script _____.
12. Popular, open source database server that you can download for free.
14. The jQuery shortcut for getting JSON information from a server.
15. Another jQuery form helper method that will create an associative array of key/value pairs (which happens to make for great structured storage).
16. SQL = _____ Language.

Down

1. A special type of array that holds its information in name/value pairs.
3. JSON and XML are two types of data-_____ formats that jQuery and PHP can pass back and forth to each other.
4. One of two methods used to send data to the server from an HTML form. This one will append the form field names and their values onto the end of the URL.
7. One of two methods used to send data to the server from an HTML form. This one also sends data, but doesn't make that data visible in the URL string.
8. The jQuery form helper method that will join all the inputs of your form into a single string of key/value pairs, separated by ampersands (&).
9. HTML element to use when you want to collect data on a web page and send it to a server for processing.
11. The SQL command used to put data *into* a table.
13. The SQL command to retrieve data *from* a database table.



jQuerycross Solution

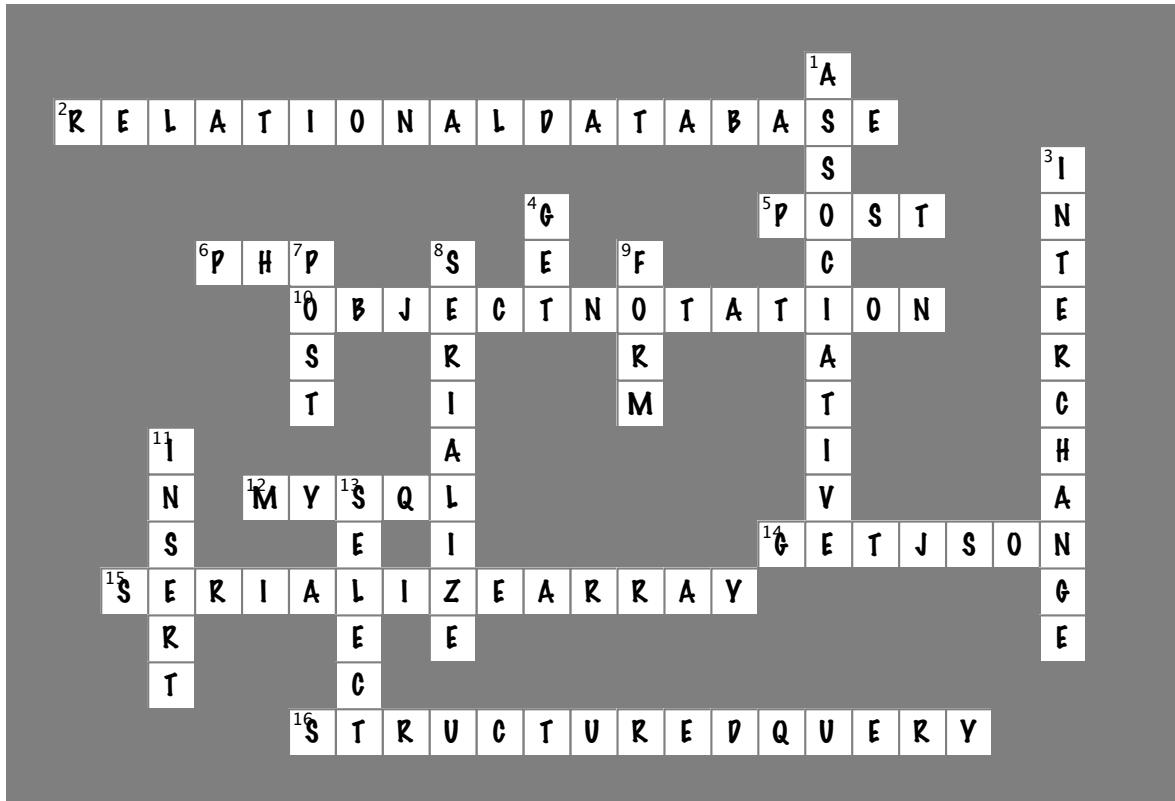



Your jQuery/Ajax/PHP/MySQL Toolbox

You've got Chapter 9 under your belt, and now you've added some basic PHP, MySQL, JSON, and more Ajax to your toolbox.

MySQL

Lets you store data in databases and tables and insert and retrieve information using the SQL language.

SQL

A query language for interacting with database applications like MySQL.

JSON

Use the `getJSON` function to get JSON-encoded data from a server. This returns a JSON object.

Data can be sent from a form using the `post` method. Before you send the data, you need to format it using `serializeArray`.

PHP

A server-side scripting language that lets you manipulate web page content on the server before a page is delivered to the client browser.

PHP script

A text file that contains PHP code to carry out tasks on a web server.

`<?php ?>`

These tags must surround all PHP code in your PHP scripts.

echo

The PHP command for sending output to the browser window. Its syntax is:
`echo 'Hello World';`

`$_POST`

A special variable that holds form data.

`json_encode`

This command takes an array and converts it to JSON-encoded data, requested by jQuery.

10 jQuery UI




The Web lives and dies by users and their data.

Collecting data from users is a big business and can be a time-consuming challenge for a web developer. You've seen how jQuery can help make Ajax, PHP, and MySQL web apps work more effectively. Now let's look at how jQuery can help us build the user interface for the forms that collect data from users. Along the way, you'll get a healthy dose of jQuery UI, the official user interface library for jQuery.

bigfoot might need more than a haircut

Cryptozoologists.org needs a makeover

Dr. Pattersby and Dr. Gimli are dedicated to collecting as much *cryptid* sighting data as possible from users around the world. Their website, cryptozoologists.org, is revered by professional and amateur cryptozoologists worldwide. The good doctors have another gig for you: update their very outdated Cryptid Sightings form.

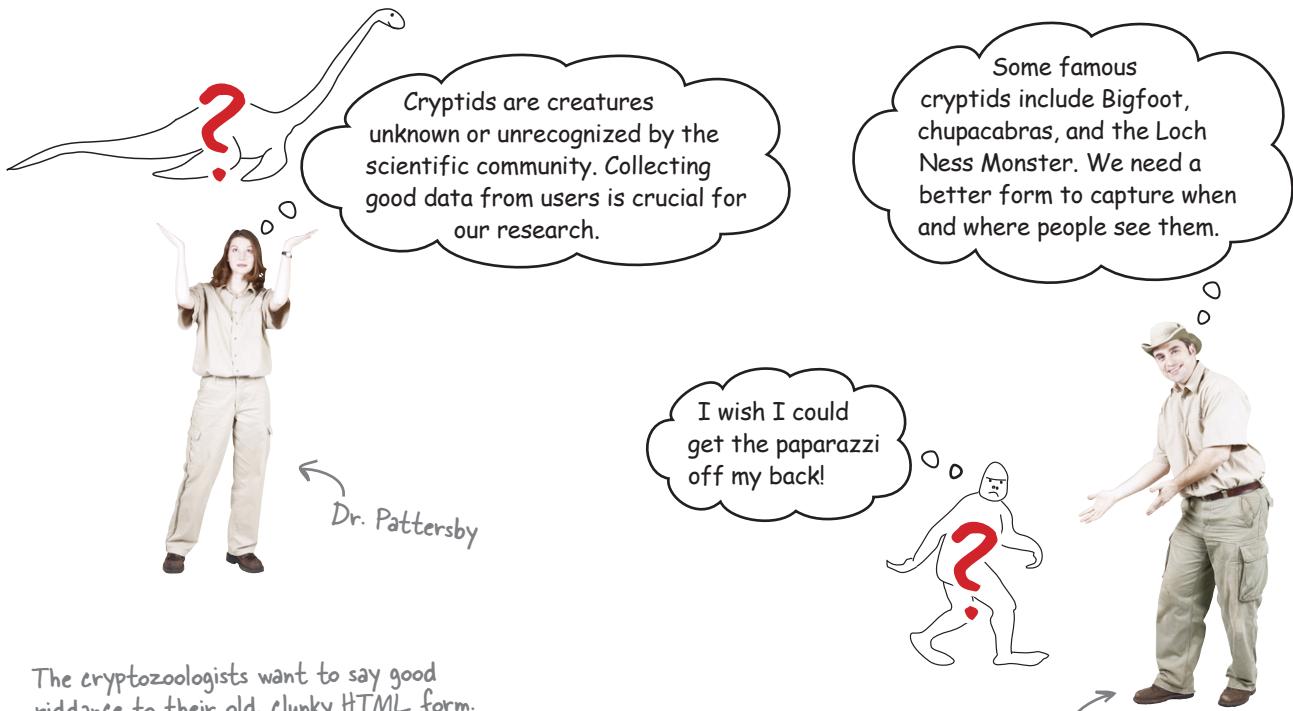

The cryptozoologists want to say good riddance to their old, clunky HTML form.

A screenshot of an old, clunky HTML form titled "Submit Your Cryptid Sighting". The form is filled with text and radio buttons. A large red "no" symbol is overlaid on the top left of the form. Arrows point from the text "The cryptozoologists want to say good riddance to their old, clunky HTML form." and the handwritten note "The look and feel of the form is not engaging. It looks like it's from the late 90s." to the form itself.

Submit Your Cryptid Sighting

Please provide the details of your cryptid sighting below along with your contact information.

Fill out the form below and click "Enter" to Submit

Date of Sighting: _____

Where You Saw the Creature: _____

Creature Type: Mammal Reptile Bird

Description of Creature: _____

The look and feel of the form is not engaging. It looks like it's from the late 90s.

There's nothing visual that assists the user in entering quality data, and HTML doesn't offer a lot of options for that. As a result, the doctors get a lot of junk data.

Pimp your HTML form

Below is a mockup of what our cryptozoologists want the new form to look like, along with a few extra notes.

Submit Your Cryptid Sighting

CRYPTID SIGHTING DATA

Date of Sighting:

Month											

In the current form, this is a text field, which gets us a lot of sloppy data. We want the user to pick from a pop-up calendar so that the data is as accurate as it can be.

Creature Type: We use radio buttons for this one on the current form; can we make them look more inviting?

Distance from Creature (estimate in feet):

Creature Weight:

Creature Height:

Color of Creature Hide/Fur/Covering:

R	<input type="text"/>	<input type="text"/>
G	<input type="text"/>	<input type="text"/>
B	<input type="text"/>	<input type="text"/>

How about a color mixer here? We'd like our users to click and drag to enter the numerical data fields. More accurate for us. Easier for our users.

SIGHTING LOCATION DATA


Latitude of Sighting Location:

Longitude of Sighting Location:

Enter your sighting data: Can you make the button look nice? The pill-shaped button on our current form makes it look like we're way out of date.



The cryptozoologists have asked for a tall order here. They want you to build a user interface like you would find in a desktop application. What do you think jQuery offers that can accomplish this?

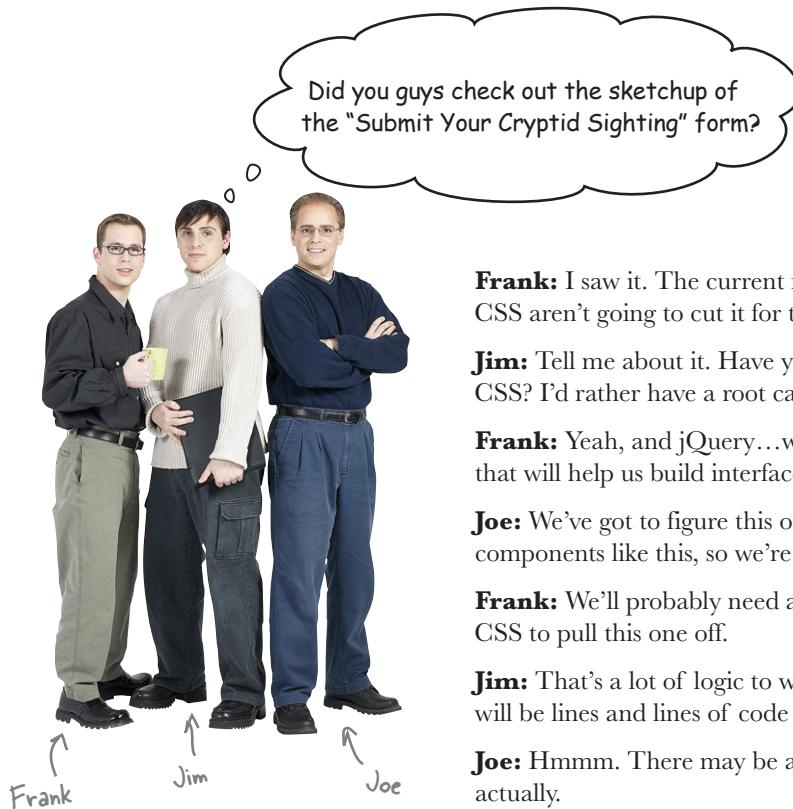cubicle conversation

Frank: I saw it. The current form is an HTML form, but HTML and CSS aren't going to cut it for the new form the cryptozoologists want.

Jim: Tell me about it. Have you ever tried to style form elements with CSS? I'd rather have a root canal.

Frank: Yeah, and jQuery...well, I haven't seen anything in jQuery that will help us build interface components like *that*.

Joe: We've got to figure this out, guys. Folks are used to fancy components like this, so we're going to have to find a way to build them.

Frank: We'll probably need a combination of JavaScript, jQuery, and CSS to pull this one off.

Jim: That's a lot of logic to write. Just the calendar pop up they want will be lines and lines of code and a bunch of complex CSS.

Joe: Hmm. There may be a jQuery plug-in for this kind of stuff, actually.

Jim: A plug-in, right! We used one a couple chapters back to create tabs for the Bit to Byte race results page. So there's more to plug-ins, huh?

Joe: Yeah, if jQuery doesn't offer something a developer needs, that developer can build a plug-in and release it to the jQuery community for it to use. This saves other developers tons of hours.

Jim: So some developer or dev team out there may have already dealt with this?

Frank: That would really save us some headaches.

Joe: Let's go poke around out at jQuery.com and see what we can find.



Wouldn't it be dreamy if
there were some sort of library of
jQuery interface plug-ins?
But I know it's just a fantasy...

Save coding headaches (and time) with jQuery UI

Fortunately for developers everywhere, jQuery has an official library of user interface plug-ins for just this kind of project. That library is called jQuery UI, and it offers three main types of plug-ins for the jQuery core: effects, interactions, and widgets.

Effects plug-ins

jQuery UI extends jQuery by adding more effects. Make your elements bounce, explode, pulsate, or shake. jQuery UI also includes *easing functions*, complex mathematical operations that make animations look more realistic.

Interaction plug-ins

Interactions add more complex behavior to web apps. You can enable users to interact with elements by making those elements draggable, droppable, or sortable, just to name a few of the options.

Widget plug-ins

A web widget is a self-contained component that adds functionality to your web app. Widgets save you tons of coding time and complexity while creating usable and responsive user interface elements.

We're going to focus mostly on widgets for our UI work in this chapter.

jQuery offers a plug-in architecture that allows web developers to extend (or add onto) the core jQuery library.



Test Drive

Try out some jQuery UI effects, interactions, and widgets by visiting the following URLs and doing what the instructions say.

URL	Instructions
http://jqueryui.com/demos/animate/#default	Click the Toggle Effect button.
http://jqueryui.com/demos/effect/default.html	Choose an effect from the drop-down list. Then click Run Effect.
http://jqueryui.com/demos/draggable/#default	Click and hold on the box that says "Drag me around." Then, drag your mouse to drag the box within the screen area provided.
http://jqueryui.com/demos/accordion/#default	Click on the different sections to see the accordion expand and contract.
http://jqueryui.com/demos/dialog/#animated	Click the Open Dialog button to see a custom jQuery UI dialog box. A lot better than a boring, old JavaScript alert box, no?



Match each jQuery UI plug-in to what type of plug-in it is and what it does. Hint: If you're not sure, spend some more time poking around the demo site from the Test Drive on the facing page.

Puff

Interaction: Makes a DOM element a target for draggable elements.

Autocomplete

Widget: Displays the current percentage of completion for some event.

Droppable

Effect: Makes an element appear to expand and dissipate into transparency, like smoke.

Explode

Widget: Provides a list of possible values when a user types into an input field.

Sortable

Effect: Makes an element appear to slide up or down like a window treatment.

Progressbar

Widget: Creates stacked and collapsible areas to organize web content.

Resizable

Effect: Makes an element appear to break into pieces and spread out in several directions.

Blind

Interaction: Makes an element sortable by dragging.

Accordion


Interaction: Gives an element draggable handles that allow a user to scale it.

who does what solution

* WHO DOES WHAT? *

SOLUTION

Match each jQuery UI plug-in to what type of plug-in it is and what it does.

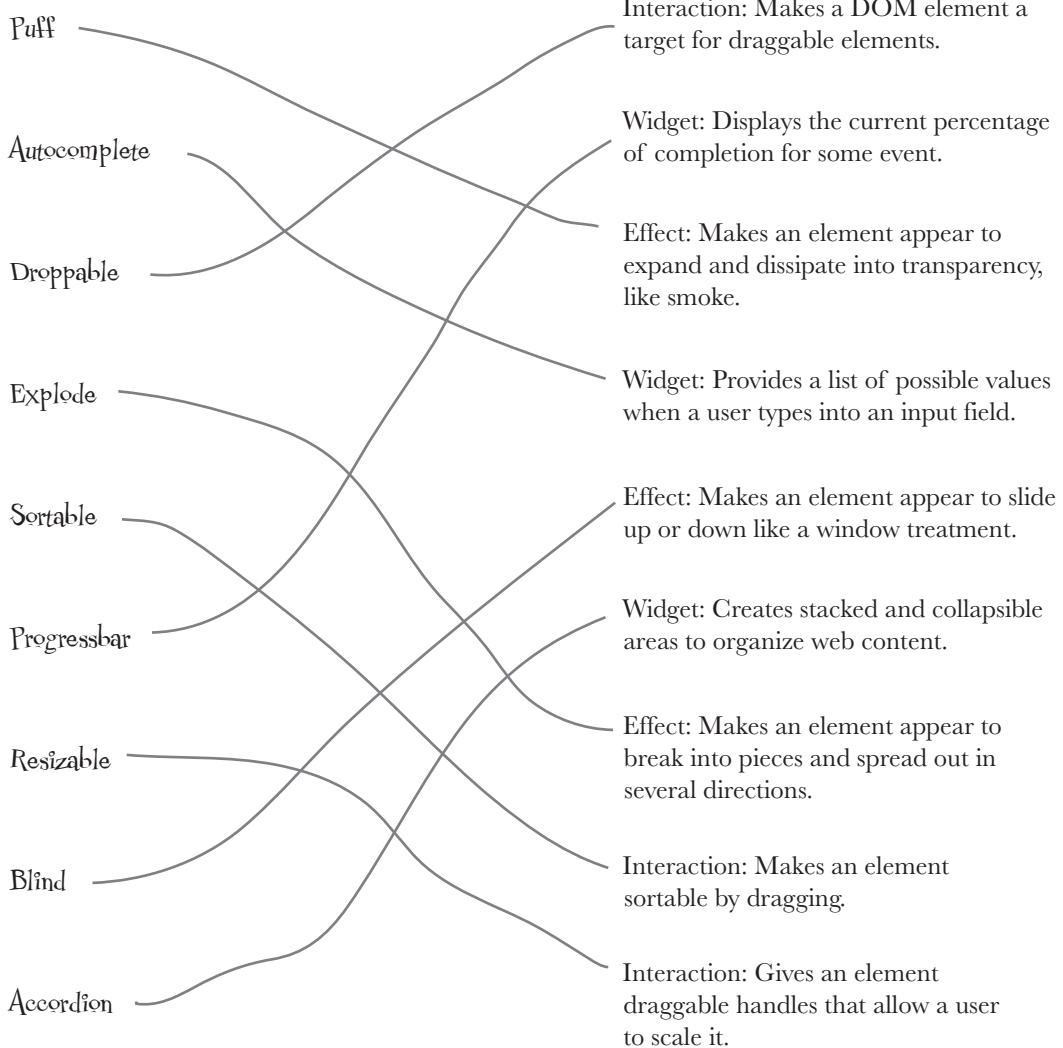

Do this! → Before we can do anything with jQuery UI, we need to configure the components we want, choose a theme, and download a copy of it. Follow the steps below:

1 Point your browser to the jQuery UI download page:

<http://jqueryui.com/download>

2 Choose the components you want to download.

UI Core A required dependency, contains basic functions and initializers.	<input checked="" type="checkbox"/> Core <input checked="" type="checkbox"/> Widget <input checked="" type="checkbox"/> Mouse <input checked="" type="checkbox"/> Position	Widgets Full-featured UI Controls - each has a range of options and is fully themeable.	<input checked="" type="checkbox"/> Accordion <input checked="" type="checkbox"/> Autocomplete <input checked="" type="checkbox"/> Button <input checked="" type="checkbox"/> Dialog <input checked="" type="checkbox"/> Slider <input checked="" type="checkbox"/> Tabs <input checked="" type="checkbox"/> Datepicker <input checked="" type="checkbox"/> Progressbar
---	---	---	--

We'll only need the UI core and widgets for this project, so select only the ones shown here.

3 Choose a theme for your download



Choose the Sunny theme for your download.

One of the best things about jQuery UI are its themes. The dev team for jQuery UI included all of the CSS for making a nice-looking interface. You can even create your own theme with jQuery UI's "theme roller." For a gallery of all the jQuery UI themes, visit the following URL:

<http://jqueryui.com/themeroller/#themeGallery>

4 Press the Download button.



So I'm all loaded up with jQuery UI! How do I start using it?




You just need to unzip the folder and include the library in a project folder.

Turn the page, and we'll have a look inside jQuery UI.

jquery UI structure

What's inside the jQuery UI package

After downloading and unzipping jQuery, you'll find that it's structured like this:

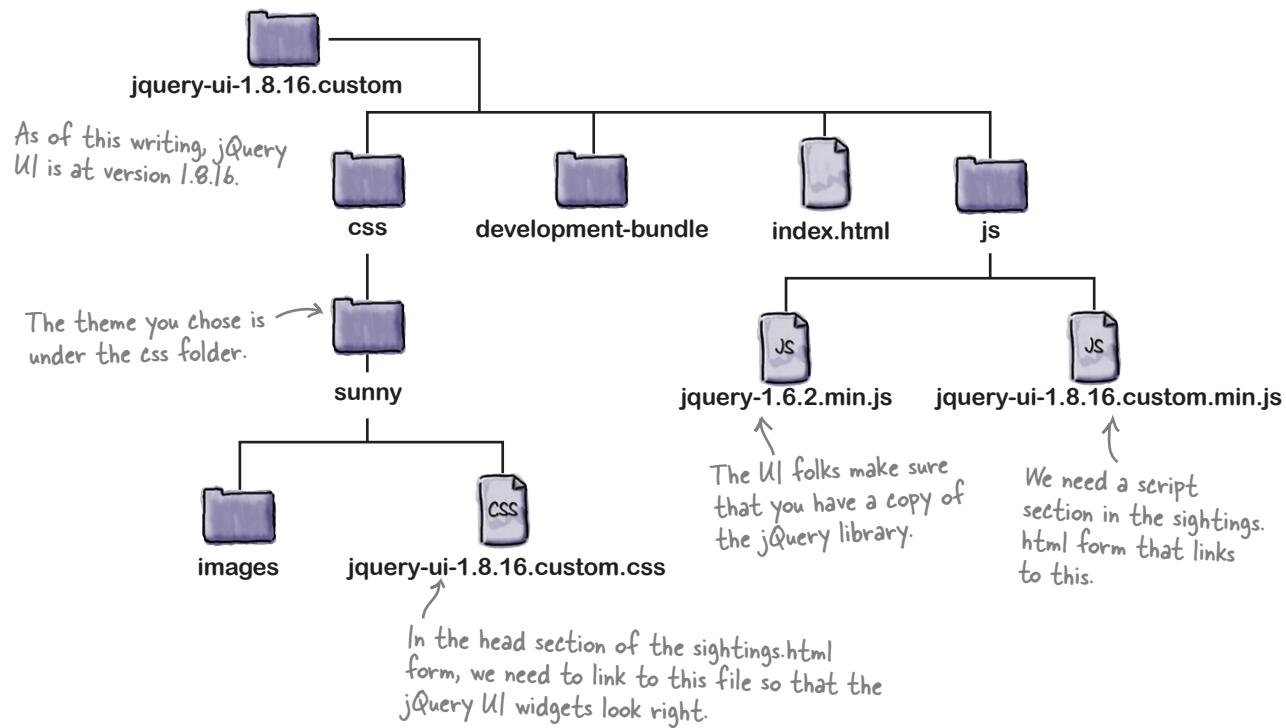

We've included the jQuery UI folder in the code folder you downloaded at the beginning of the book. You'll find it in the *end* folder inside the *ch10* folder.

Our project checklist

jQuery UI does a lot for you, but we've still got quite a few items to tackle in order to build the new form. Here's a checklist of what we need to do:

- 1. Build a datepicker for users to enter the date of the sighting.
- 2. Build more engaging radio buttons for users to choose the creature type.
- 3. Build number-entry sliders for users to enter distance from creature, creature weight, creature height, latitude, and longitude.
- 4. Build a color mixer interface component for the user to enter creature color.
- 5. Build a nicer-looking submit button for the sightings form.

Build a date picker into the sightings form

It's amazing how easy it is to put a jQuery UI widget into an HTML form. Let's start with the calendar datepicker:

- 1 Create a link to the jQuery UI CSS file:**


```
<link type="text/css" href="jquery-ui-1.8.16.custom/css/sunny/
jquery-ui-1.8.16.custom.css" rel="stylesheet" />
```

- 2 Create a <script> tag that points to jQuery UI.**

```
<script src="jquery-ui-1.8.16.custom/js/jquery-ui-1.8.16.
custom.min.js"></script>
```

- 3 Take a plain old HTML input field.**

```
<input type="text" name="sighting_date">
```

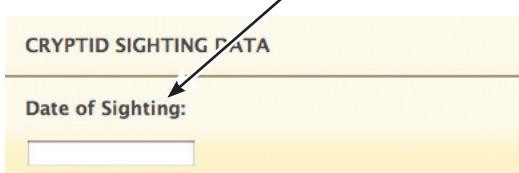

- 4 Add an ID of datepicker to the <input> tag.**


```
<input type="text" name="sighting_date" id="datepicker">
```

- 5 Create a JavaScript file and put the following code between the curly braces of the \$(document).ready(function() {}).**

```
$('#datepicker').datepicker();
```

- 6 Open the file in your favorite browser and click into the input field.**

That's it! You just added an interactive widget to the form.

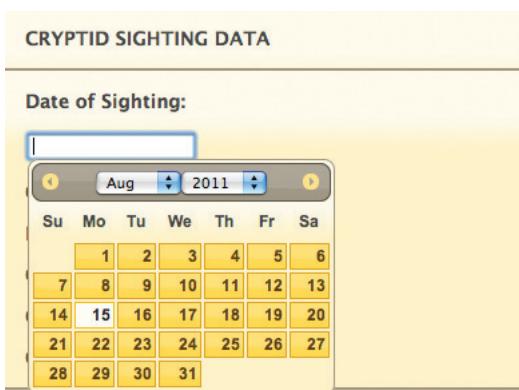


work smarter, not harder

jQuery UI behind the scenes

It may seem a bit like magic, but jQuery UI is really just a lot of well-designed and well-written jQuery code—code that *you* didn’t have to write. Let’s take a closer look at how it works.

- 1 Just like all the other jQuery code you’ve written, the datepicker uses a selector and a method.

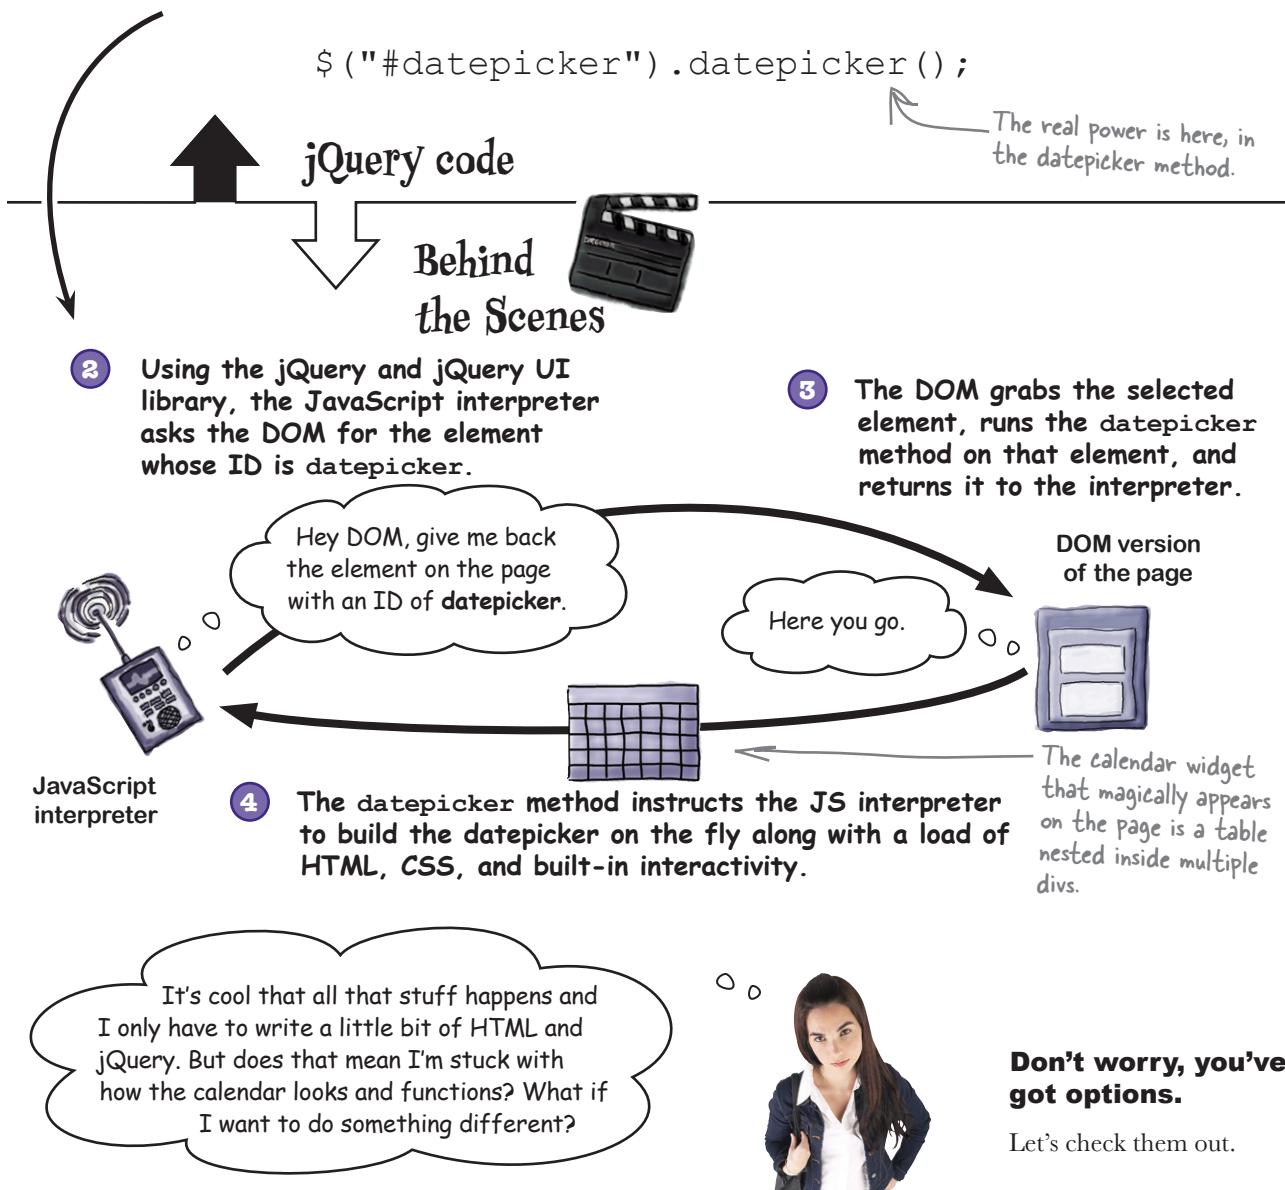

Widgets have customizable options

If you dig into the datepicker widget, you'll find that it's got a lot of rich features and options you can configure.



Customize the datepicker with options

Because jQuery UI is built on jQuery, you don't have to write much code to customize the datepicker widget to fit your needs. At the time of this writing, the datepicker has 46 different options you can set.

```
$("#datepicker").datepicker({
    stepMonths: 3
});
```

The datepicker widget comes with tons of configurable options. The stepMonths option lets you change how many months you want to hop.

If you start on August, when you press the "previous" or "next" button, you'll hop three months backward or three months forward.

```
$("#datepicker").datepicker({
    changeMonth: true
});
```

If you set the changeMonth option to true, the user can choose the month from a drop-down list.



Write the code that will let the user change both the month and the year of the datepicker widget using a drop-down. Hint: Put a comma between the options when you're setting more than one.

.....
.....
.....

exercise solution**Exercise Solution**

Write the code that will let the user change both the month and the year of the datepicker widget using a drop-down. Hint: Put a comma between the options when you're setting more than one.

```
$('#datepicker').datepicker({
    changeMonth: true, changeYear: true
});
```

**Ready Bake Code**

Find the file called *sightings_begin.html* in the *begin* folder under *ch10*. Save it as *sightings_end.html* into the *end* folder for Chapter 10. Add the bolded code below to your *sightings_end.html* and *my_scripts.js* files.

```
<head>
    <title>Submit Your Cryptid Sighting</title>
    <link rel="stylesheet" type="text/css" href="style/form.css" />
<link type="text/css" href="jquery-ui-1.8.16.custom/css/sunny/jquery-ui-1.8.16.
custom.css" rel="stylesheet" />
</head>
```

Near the top of the *sightings_end.html* file

We need to link to the jQuery UI CSS file so the widgets look right.

```
<h3>Date of Sighting:</h3>
<input type="text" name="sighting_date" id="datepicker" />
```

*sightings_end.html*

```
<script src="scripts/jquery-1.6.2.min.js"></script>
<script src="scripts/my_scripts.js"></script>
<script src="jquery-ui-1.8.16.custom/js/jquery-ui-1.8.16.custom.min.js"></
script>
</body>
</html>
```

We need to include the jQuery UI library to make all the cool UI features available.



Near the bottom of the *sightings_end.html* file

```
$ (document) .ready(function() {
    $('#datepicker') .datepicker({ changeMonth: true, changeYear: true});
}); //end doc ready
```

The datepicker code

*my_scripts.js*



Test Drive

After entering the code from the previous page, open *sightings_end.html* in your favorite browser to test the datepicker widget. Click the “next” and “previous” buttons and the month and year drop-down lists to make sure everything works.

The datepicker works!

The datepicker widget does what you want it to.

And the `changeMonth` and `changeYear` options are working, too.

Check it off

Checklist item 1 is done. Let's move on to checklist item 2.

- 1. Build a datepicker for users to enter the date of the sighting.
- 2. Build more engaging radio buttons for users to choose the creature type.
- 3. Build number-entry sliders for users to enter distance from creature, creature weight, creature height, latitude, and longitude.
- 4. Build a color mixer interface component for the user to enter creature color.
- 5. Build a nicer-looking submit button for the sightings form.

a button worth clicking

Styling up your buttons

What does “more engaging” really mean? It’s mostly a question of style: make a better-looking button, and people are going to want to click it. One super-useful widget in the jQuery UI library is the button widget. The button widget offers a button method to help you make more appealing form elements like submit buttons, radio buttons, and checkboxes.

Here's the HTML for a single button.

```
<input type="radio" id="radio1" name="radio" />
```

And the corresponding jQuery statement.

```
$( "#radio1" ).button();
```

This input will be updated when the user clicks.

The button widget styles the label to appear as a button.

The button method turns a plain old HTML radio button into a nice-looking, more interactive button.

Don't forget that the markup code for input buttons needs to be inside an HTML form tag.

Grouping button widgets

For building a grouped set of buttons, jQuery UI offers the buttonset method, which turns individual button elements into a group by referencing the container element for that group.

Put your radio button group inside a container element.

```
<div id="radio">
  <input type="radio" id="radio1" name="radio" />
  <label for="radio1">Choice 1</label>
  <input type="radio" id="radio2" name="radio" />
  <label for="radio2">Choice 2</label>
  <input type="radio" id="radio3" name="radio" />
  <label for="radio3">Choice 3</label>
</div>
```

In your jQuery code, select the container element.

```
$( "#radio" ).buttonset();
```

The buttonset method groups the buttons for you and runs the button method on each element.



jQuery UI Magnets

Put the code magnets in proper order to create a set of buttons for users to select the creature type that they saw. We put a few in for you.

```
<div id="type_select">
    <input type="radio" id="radio1" name="creature_type" />
    <label for="radio1">Chupacabras</label>
```




sightings_end.html

```
<input type="radio" id="radio2" name="creature_type" />
</div>
<label for="radio3">Loch Ness Monster</label>
$( "#type_select" ).buttonset();
<label for="radio4">Sasquatch</label>
<label for="radio2">Jersey Devil</label>
<input type="radio" id="radio4" name="creature_type" />
<input type="radio" id="radio3" name="creature_type" />
```



my_scripts.js



jQuery UI Magnets Solution

Now you've got a nice-looking set of buttons that match the overall theme for your form.

```
<div id="type_select">
    <input type="radio" id="radio1" name="creature_type" />
    <label for="radio1">Chupacabras</label>
    <input type="radio" id="radio2" name="creature_type" />
    <label for="radio2">Jersey Devil</label>
    <input type="radio" id="radio3" name="creature_type" />
    <label for="radio3">Loch Ness Monster</label>
    <input type="radio" id="radio4" name="creature_type" />
    <label for="radio4">Sasquatch</label>
</div>
```



sightings_end.html

In the code folder, you'll find that we added buttons for Yeti and Other too. We just ran out of space in this exercise.

```
$( "#type_select" ).buttonset();
```



my_scripts.js



Test Drive

Add the lines of code above to your *sightings_end.html* and *my_scripts.js* file. Then, open the page up in your favorite browser to make sure everything's working.

Creature Type:

Chupacabras Jersey Devil Loch Ness Monster Sasquatch Yeti Other

You took these plain old HTML radio buttons...

...and turned them into a nice-looking set of push buttons.


Wow, that was pretty easy. What's next on our list for the form?

- 1. Build a datepicker for users to enter the date of the sighting.
- 2. Build more engaging radio buttons for users to choose the creature type.
- 3. Build number-entry sliders for users to enter distance from creature, creature weight, creature height, latitude, and longitude.
- 4. Build a color mixer interface component for the user to enter creature color.
- 5. Build a nicer-looking submit button for the sightings form.


constrained data is cleaner

Control numerical entries with a slider

The plug-in for the jQuery UI slider gives you the power to build a slider interface that users can control with their mouse or keyboard. Sliders also help you control the numbers that users enter. As you've already seen, building widgets is a snap once you have the jQuery UI library. Building a slider widget is just as easy.

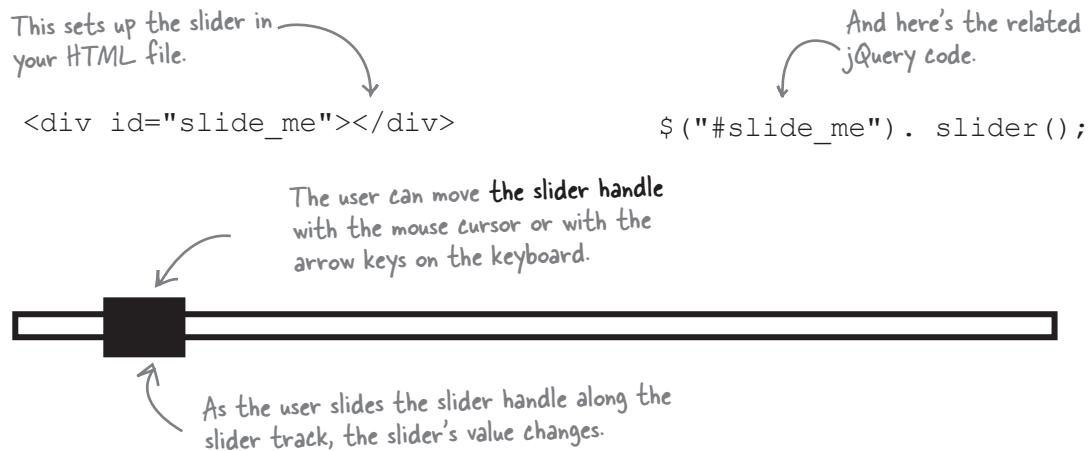

Sliders offer a bunch of customization options too. Let's say we need the user to enter a set of numbers. The lowest value we want users to enter is 0; the maximum value is 100. And we want the users to enter values in increments of 5. Here's how we can do that with the slider widget's options:

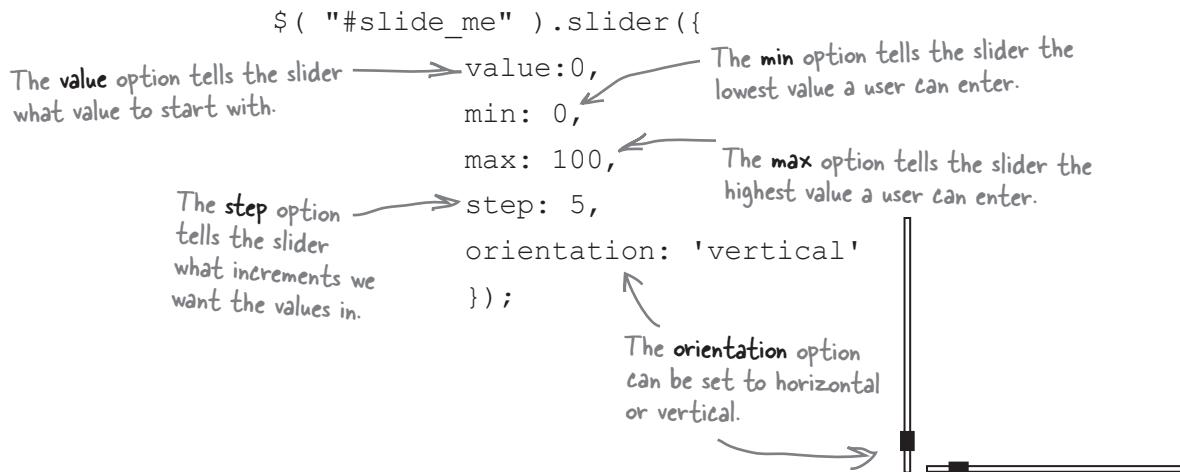




The slider widget's got some great options, but how do we get the value from the slider into a form input?

We have to connect the slider with one of the slider widget's event handlers.

We've seen some widget options, but we haven't yet explored another powerful feature of jQuery UI. Many jQuery components offer event handlers, and the slider is one of them. At the time of this writing, jQuery UI's slider widget offers five event handlers: `create`, `start`, `slide`, `change`, and `stop`. To connect the slider to a form input, let's try out the `slide` event handler.

The HTML for a slider widget

```
<input type="text" id="my_value" readonly="readonly"/>
<div id="slide_me"></div>
```

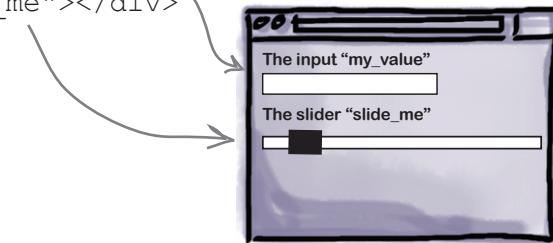

If you don't want the user to be able to type to enter a number, set the input to "readonly."

The jQuery script for a slider widget

This is the `slide` event handler. The user triggers the slide event when she moves the slide handle.

```
$( "#slide_me" ).slider({
  slide: function( event, ui ) {
    $( "#my_value" ).val( ui.value );
  }
});
$( "#my_value" ).val( $( "#slide_me" ).slider( "value" ));
```

The `slide` event is attached to a function callback. When the function runs, this sets the input with the jQuery `val` method.

When the user slides the slide handle, the function is called and the input is updated to the slider's value.



long exercise**LONG Exercise**

Fill in the blanks for the code for each input field the cryptozoologists want. They've left some notes on the slider options for you to set.

Distance from Creature (in ft.):

Starting value should be 0.

Minimum distance should be 0.

Maximum distance should be 500.


Use increments of 10 feet.

```
<h3>Distance from Creature (in ft.):</h3>
<input type="text" id="....." class="just_display" name="creature_distance"
       readonly="readonly"/>
    <div id="....."></div>
</div>
```



sightings_end.html

```
$( "#slide_dist" ).slider({
    .....
    .....
    .....
    .....
    slide: function( event, ui ) {
        $( "#distance" ..... )
    }
});
```



my_scripts.js

Creature Weight (in lbs.):
 Starting value should be 0.
 Minimum weight should be 0.
 Maximum weight should be 5,000.
 Use increments of 5 pounds.

Creature Height (in ft.):
 Starting value should be 0.
 Minimum height should be 0.
 Maximum height should be 20.
 Use increments of 1 foot.

```
<h3>Creature Weight (in lbs.):</h3>
<input type="text" id="weight" class="just_display" name="creature_weight"
       readonly="readonly"/>
<div id="....."></div>


<h3>Creature Height (in ft.):</h3>
<input type="text" id="height" class="just_display" name="creature_height"
       readonly="readonly"/>
<div id="slide_height"></div>
```



sightings_end.html

```
$( "....." ).slider({
  .....
  .....
  .....
  .....

  slide: function( event, ui ) {
    $( "....." ).val( ui.value);
  }
});
```



my_scripts.js

```
$( "#slide_weight" ).slider({
  .....
  .....
  .....
  .....

  slide: function( event, ui ) {
    $( "#weight" ).val( ui.value);
  }
});
```



my_scripts.js

long exercise solution



LONG Exercise SOLUTION

Fill in the blanks for the code for each input field the cryptozoologists want. They've left some notes on the slider options for you to set.

Distance from Creature (in ft.):

Starting value should be 0.

Minimum distance should be 0.

Maximum distance should be 500.

Use increments of 10 feet.

```
<h3>Distance from Creature (in ft.):</h3>
<input type="text" id="distance" class="just_display" name="creature_distance"
       readonly="readonly"/>
    <div id="slide_dist"></div>
</div>
</div>
```



sightings_end.html

```
$(`#slide_dist`).slider({  
    value: 0,  
    min: 0,  
    max: 500,  
    step: 10,  
    slide: function( event, ui ) {  
        $('#distance').val(ui.value);  
    }  
});
```



my_scripts.js

Creature Weight (in lbs.):
 Starting value should be 0.
 Minimum weight should be 0.
 Maximum weight should be 5,000.
 Use increments of 1 pound.

Creature Height (in ft.):
 Starting value should be 0.
 Minimum height should be 0.
 Maximum height should be 20.
 Use increments of 1 foot.

```
<h3>Creature Weight (in lbs.):</h3>
<input type="text" id="weight" class="just_display" name="creature_weight"
       readonly="readonly"/>
<div id="slide_weight"></div>

<h3>Creature Height (in ft.):</h3>
<input type="text" id="height" class="just_display" name="creature_height"
       readonly="readonly"/>
<div id="slide_height"></div>
```



sightings_end.html

```
$( "#slide_height" ).slider({
  value:0,
  min:0,
  max:20,
  step:1,
  slide: function( event, ui ) {
    $( "#height" ).val( ui.value );
  }
});
```



my_scripts.js

```
$( "#slide_weight" ).slider({
  value:0,
  min:0,
  max:5000,
  step:10,
  slide: function( event, ui ) {
    $( "#weight" ).val( ui.value );
  }
});
```



my_scripts.js

test drive

Test Drive

Add the code from the long exercise on the previous pages to your files. Then, open *sightings_end.html* in your favorite browser. Make sure to test the sliders using your mouse and keyboard (the left and right arrow keys should advance the slider by its increments).

Users can now enter the data by sliding the handles, and the cryptozoologists have much better data quality control.



You've got two more number sliders to build: latitude and longitude. Then you can check off another item from your project checklist!



But latitude and longitude have negative values and decimal intervals like 0.00001. Can the slider widget handle those kinds of numbers?

jQuery UI has you covered there, too.

The slider widget can deal with negative numbers and decimal numbers. You can enter negative numbers as values, as minimums, and as maximums. Give that a try below to see it in action.



Sharpen your pencil

Fill in the jQuery code to make the sliders for latitude and longitude work. The latitude slider should have a range of -90 to 90 with increments of 0.00001. The longitude slider should have a range of -180 to 180 with increments of 0.00001.

```
.....  
    value:0,  
.....  
.....  
.....  
slide: function( event, ui ) {  
    $( "....." ).val( ui.value);  
}  
});  
  
.....  
value:0,  
.....  
.....  
.....  
slide: function( event, ui ) {  
    $( "....." ).val( ui.value);  
}  
});
```



my_scripts.js

sharpen solution

Sharpen your pencil

Solution

Fill in the jQuery code to make the sliders for latitude and longitude work. The latitude slider should have a range of -90 to 90 with increments of 0.00001. The longitude slider should have a range of -180 to 180 with increments of 0.00001.

```
$( "#slide_lat" ).slider({
    value:0,
    min: -90,
    max: 90,
    step: 0.00001,
    slide: function( event, ui ) {
        $( " #latitude" ).val( ui.value );
    }
});

$( "#slide_long" ).slider({
    value:0,
    min: -180,
    max: 180,
    step: 0.00001,
    slide: function( event, ui ) {
        $( " #longitude" ).val( ui.value );
    }
});
```



my_scripts.js

So far, you've checked off quite a few items from the list:


- 1. Build a datepicker for users to enter the date of the sighting.
- 2. Build more engaging radio buttons for users to choose the creature type.
- 3. Build number-entry sliders for users to enter distance from creature, creature weight, creature height, latitude, and longitude.

What's up next? Now you need to build the cryptozoologists an interface that will allow users to enter the color of the creature they saw by using sliders that represent red, green, and blue.

- 4. Build a color mixer interface component for the user to enter creature color.


Computers mix color using red, green, and blue

The values of red, green, and blue each have a minimum of 0 and a maximum of 255. When each color is at its minimum—in other words, when red's value is 0, green's is 0, and blue's is 0—you get black. When each color is at its maximum—when red's value is 255, green's is 255, and blue's is 255—you get white.

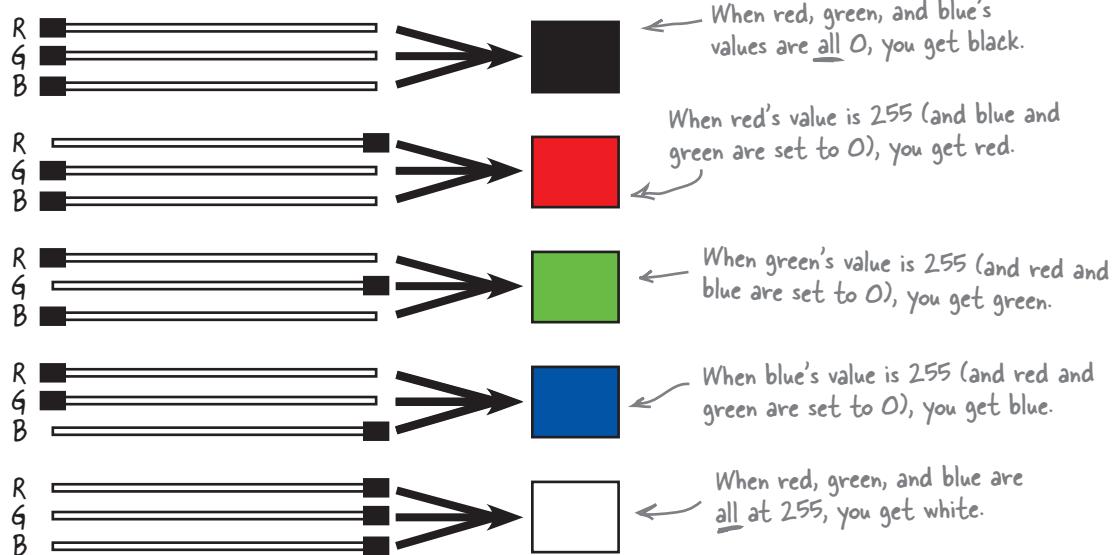

Your sliders need to do the same

So you need to build three different sliders: one for red, one for green, and one for blue. Then you'll combine each of the slider's values to become one color. Let's look at what we need each slider widget to do.

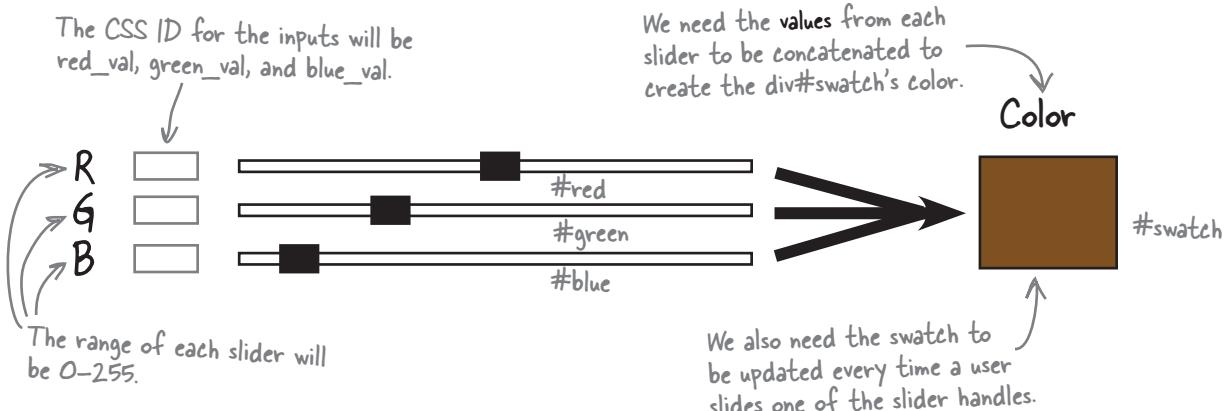

ready bake slider code



Ready Bake Code

Add the bolded code to your *sightings_end.html* and your *form.css* file. This will get your files set up to build the color picker.

```
//color slider styles
#slide_dist, #slide_weight, #slide_height {
    margin-bottom:14px;
}
```

```
#swatch {
```

```
    width: 75px;
    height: 75px;
    background-image: none;
```

```
}
```

```
#red .ui-slider-range { background: #ef2929; }
#red .ui-slider-handle { border-color: #ef2929; }
```

```
#green .ui-slider-range { background: #8ae234; }
#green .ui-slider-handle { border-color: #8ae234; }
```

```
#blue .ui-slider-range { background: #729fcf; }
#blue .ui-slider-handle { border-color: #729fcf; }
```

This CSS ID style defines the swatch that will show the color as the user changes the slider.



form.css

Each of these styles puts the color of the slider in the slider track.

<h3>Color of Creature (use the color sliders to enter):</h3> The input field that will hold the hex value of the color

Color (in hexadecimal):<input type="text" class="just_display" name="creature_color" id="color_val" readonly="readonly"/>

<div id="swatch" class="ui-widget-content ui-corner-all"></div>

The div for the color swatch

Red:<input type="text" class="just_display" name="creature_color" id="red_val" readonly="readonly"/>
<div id="red"></div>

The div for the red slider

Green:<input type="text" class="just_display" name="creature_color" id="green_val" readonly="readonly"/>
<div id="green"></div>

The div for the green slider

Blue:<input type="text" class="just_display" name="creature_color" id="blue_val" readonly="readonly"/>
<div id="blue"></div>

The div for the blue slider



sightings_end.html



Sharpen your pencil

The script below sets up the red, green, and blue color sliders. Read each line and think about what it might do based on what you already know about jQuery and jQuery UI. Then, write down what you think the code does. If you're not sure what a line does, it's perfectly OK to guess. We did one for you.

```
$("#red, #green, #blue").slider({
    orientation: "horizontal",
    range: "min",
    max: 255,
    value: 127,
    slide: refreshSwatch,
    change: refreshSwatch
});
```

Sets the slider range so the user can only select a maximum.

there are no Dumb Questions

Q: What's all that CSS that comes with jQuery UI?

A: The great thing about jQuery UI is that the developers have thought out a lot of the complex CSS so that you don't have to. You can learn about the CSS by looking through the file in the jQuery UI package under *jquery-ui-1.8.16.custom/css/sunny/jquery-ui-1.8.16.custom.css*. To read more about those CSS classes, visit jQuery UI's documentation at the following URL:
<http://jqueryui.com/docs/Theming/API>.

Q: You said we can make our own theme for jQuery UI. How do I do that?

A: You can easily create your own theme by using jQuery UI's theme roller. First, point your browser to the theme roller application here:

<http://jqueryui.com/themeroller/>

Then, click on the “Roll your own” tab. You'll see settings for things like font, click states, drop shadows, and overlay screen. Make your own custom changes, and the UI elements will change to reflect your design settings.

When you have your theme set how you want it, just click the Download Theme button, and you'll be taken to the Build Your Download page to create your own jQuery UI package. If you want to save your theme for later, just bookmark that Build Your Download page.

Q: I don't get the interactions widgets. What would I use those for?

A: Interactions allow you to create the kind of interactive functionality you would find in a desktop application.

Using the Draggable widgets, you can turn your elements into draggable components.

The Droppable widget can be a target for a droppable widget.

The Resizable widget turns your element into a scalable object whose size you can change by dragging on its corner, its right border, or its bottom border.

Selectables are widgets that turn your elements into selectable components. A site visitor can drag his mouse over those elements to select them just like he might select files on his desktop.

Sortables are widgets that can be interactively reordered by the user.

sharpen solution

Sharpen your pencil Solution



The script below sets up the red, green, and blue color sliders. Read each line and think about what it might do based on what you already know about jQuery and jQuery UI. Then, write down what you think the code does. If you're not sure what a line does, it's perfectly OK to guess. Here are our answers.

```
$("#red, #green, #blue").slider({
    orientation: "horizontal",
    range: "min",
    max: 255,
    value: 127,
    slide: refreshSwatch,
    change: refreshSwatch
});
```


Turns each of the divs for R,G,B into slider widgets.
 Makes them into horizontal sliders rather than vertical.
 Sets the slider range so the user can only select a maximum.
 Sets the max value to 255 to stick within the color limits.
 Sets the value so the slider handles are roughly in the middle.
 Calls a function named refreshSwatch when the user slides.
 Calls the same function when any value changes.

Build the refreshSwatch function

To finish our color mixer, we need a JavaScript function that will set and refresh the swatch. Here's a skeleton version of that function, along with some of the key questions to consider before fleshing it out to get it to do what you want.

```
function refreshSwatch() {
  var red = ???;
  var green = ???;
  var blue = ???;
  var my_rgb = ???;
  $("#swatch").???;
  $("#red_val").val(red);
  $("#blue_val").val(blue);
  $("#green_val").val(green);
  $("#color_val").val(my_rgb);
}
```

How will you get the values of each slider into each of these variables?
 We need to concatenate the RGB values in this variable so that we can set the color swatch.
 What jQuery method will let us set the color swatch's color?
 No big questions here. We can simply use jQuery's val method to set the input fields to show the value of the sliders as they change. That way, the user will know what the values are.

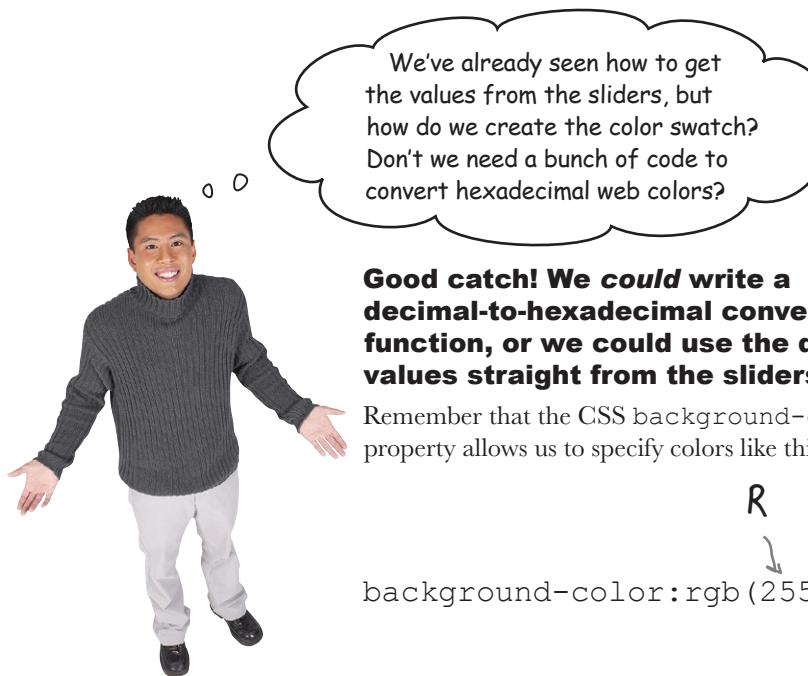

Good catch! We could write a decimal-to-hexadecimal conversion function, or we could use the decimal values straight from the sliders.

Remember that the CSS background-color property allows us to specify colors like this:

R G B
 ↓ ↓ ↓
 background-color:rgb(255,0,255)

But that's just a hint for one of the questions. To write the whole function, you'll have to do a little brain workout.



Exercise

Fill in the blank lines of code to finish off the refreshSwatch function.

```
function refreshSwatch() {
    var red = .....;
    var green = .....,;
    var blue = .....,;
    var my_rgb = .....;
    $("#swatch"). .....;
    $("#red_val").val(red);
    $("#blue_val").val(blue);
    $("#green_val").val(green);
    $("#color_val").val(my_rgb);
}
```

exercise solution**Exercise Solution**

Fill in the blank lines of code to finish off the `refreshSwatch` function.

```
function refreshSwatch() {
    var red = $('#red').slider('value');
    var green = $('#green').slider('value');
    var blue = $('#blue').slider('value');
    var my_rgb = "rgb(" + red + "," + green + "," + blue + ")";
    $('#swatch').$( "#swatch" ).css("background-color", my_rgb);
    $('#red_val').val(red);
    $('#blue_val').val(blue);
    $('#green_val').val(green);
    $('#color_val').val(my_rgb);
}
```

By concatenating the RGB values into this variable...

...we can set the CSS for the swatch to the combined values of the three colors.

**Ready Bake Code**

Update your `my_scripts.js` file to include the code for the color slider and `refreshSwatch` function on the previous pages. Add the lines below too. They will trigger the slider values to run the `refreshSwatch` function when the web page loads, which will start the web page with a colored swatch rather than an empty one.

```
$( "#red" ).slider( "value", 127 );
$( "#green" ).slider( "value", 127 );
$( "#blue" ).slider( "value", 127 );
```



Test Drive

Open *sightings_end.html* in your favorite browser. Make sure to test the sliders using your mouse and keyboard (the left and right arrow keys should advance the slider by its increments).

Submit Your Cryptid Sighting
Fill out the form below and click "Enter" to Submit

CRYPTID SIGHTING DATA

Date of Sighting:

Creature Type:

Chupacabras Jersey Devil Loch Ness Monster Sasquatch Yeti Other

Distance from Creature (in ft.):

0

Creature Weight (in lbs.):

Color of Creature (use the color sliders to enter):
Color (in hexadecimal): #7F7F7F

Red: 127

Green: 127

Blue: 127

This color slider rocks! Our research will be so much easier now.



The users can now enter data by sliding the slide handles, and the cryptozoologists have much better data quality control.

a final button

One last little thing...

There's just one item left on your checklist:

- 1. Build a datepicker for users to enter the date of the sighting.
- 2. Build more engaging radio buttons for users to choose the creature type.
- 3. Build number-entry sliders for users to enter distance from creature, creature weight, creature height, latitude, and longitude.
- 4. Build a color mixer interface component for the user to enter creature color.
- 5. Build a nicer-looking submit button for the sightings form.

You've used buttons already in this chapter and you've been using buttons since Chapter 1, so this one should be pretty easy for you!

there are no
Dumb Questions

Q: We used the `rgb` setting for `background-color` for the color slider we built. What if I want to make a color slider that uses standard hex notation for colors?

A: We tried to create the most elegant and simple code possible for the color slider. If you need a color slider that will collect data in hex color format, you're in luck.

You can use the sample code for a simple color picker provided at the jQuery UI site. Point your browser to the following URL:

<http://jqueryui.com/demos/slider/#colorpicker>

Now, find the View Source link under the demo color picker. Select and copy the HTML, CSS, and jQuery code in the text field and save it into a new document.

Make sure to link that document up to the appropriate CSS and jQuery files in your copy of the jQuery bundle. Voilà—you have a color picker that uses hex values for color.

Q: I need a form field that will suggest search terms as a user types. Does jQuery UI have anything for that?

A: Yes! One of jQuery's newest features, at the time of this writing (August 2011), is the Autocomplete widget, which displays suggestions for search terms as a user types into a form field.

Where do the search terms come from? You provide them in a JavaScript array, from a URL, or using a callback function that can grab the data from a server using the Ajax methods you learned in Chapters 8 and 9. For more information on this widget, visit jQuery UI's demo page here:

<http://jqueryui.com/demos/autocomplete/>

Q: Does jQuery UI provide any sort of form validation?

A: No. Unfortunately, jQuery UI does not provide form validation, but there is a jQuery plug-in that works well for validation. You can find the plug-in here:

<http://bassistance.de/jquery-plugins/jquery-plugin-validation/>

We talk more about that plug-in in Appendix i. Check there for more information.



Wait. Sure, we've used buttons since Chapter 1, but this is a jQuery UI button and an HTML form element.

OK, good point.

We've used jQuery's `click` method and jQuery UI's `button` method, but we haven't done much with *selecting form elements* like input submit buttons. Here's a quick guide on how to select those.



BULLET POINTS

- `$(".:input")` = Select all input elements
- `$(".:text")` = Select all elements of type `text`
- `$(".:radio")` = Select all input elements of type `radio`
- `$(".:checkbox")` = Select all elements of type `checkbox`
- `$(".:submit")` = Select all input elements of type `submit`
- `$(".:reset")` = Select all input elements of type `reset`
- `$(".:checked")` = Select all inputs that have been checked
- `$(".:selected")` = Select all inputs that have been selected
- `$(".:enabled")` = Select all inputs that are enabled
- `$(".:disabled")` = Select all inputs that are disabled
- `$(".:password")` = Select all inputs that are intended for passwords



Write the single line of code you need to add to `my_scripts.js` that will transform the pill button into a themed jQuery UI button.

.....

exercise solution**Exercise Solution**

Be sure to add this to your *my_scripts.js* file and test it out by opening *sightings_end.html* in your favorite browser.

```
$( "button:submit" ).button(); .....;
```

Submit Your Cryptid Sighting
Fill out the form below and click "Enter" to Submit

CRYPTID SIGHTING DATA

Date of Sighting:
10/20/1967

Creature Type:
 Chupacabras Jersey Devil Loch Ness Monster Sasquatch Yeti Other

Distance from Creature (in ft.):
120

Creature Weight (in lbs.):
150

Creature Height (in ft.):
8

Color of Creature (use the color sliders to enter):
Color (in hexadeciml): #7FA87F

 Red: 127 Green: 171 Blue: 127

CRYPTID LOCATION DATA

Latitude of Sighting:
41.40197

Longitude of Sighting:
-123.8098

We're so happy with
your work that we're
calling you back to help us
in the next chapter.



Yeah, thanks a lot!
Now we won't get any
peace and quiet!



Exercise

Your form looks great, but it doesn't actually *submit* any data at this point. However, you learned everything you need to do that back in Chapter 9, so take some time to think through how you could make this stylish form truly functional.

The *end* folder in the code you downloaded for this chapter contains all the code you need to get this up and working: *sightings.html*, *service.php*, and *sightings.sql*. You will have to do some work on your own to get it set up, but that's what being a web developer is all about, isn't it? We included the Ajax and JSON methods you learned in Chapter 9 so that the form you just built can submit data.

You need to do all of the setup on your own (i.e., run the *sightings.sql* script or create the database with the fields in that script yourself, and add the Ajax and JSON methods to your *my_scripts.js* file). You also need to add some records to the database before going on to Chapter 11. If you need a refresher on MySQL, PHP, and AJAX, feel free to go back to Chapters 8 and 9.

There's no solution to this exercise, but if you're having any issues, you can always jump on the forum for this book at www.headfirstlabs.com, and chat with the authors and other readers.



Your jQuery Toolbox

You've got Chapter 10 under your belt and now you've added jQuery UI to your toolbox.

jQuery UI

An official jQuery library that offers three main types of plugins for the jQuery core: effects, interactions, and widgets.

Widget

A self-contained component that adds functionality to your web app.

Saves you tons of coding time and complexity while creating usable and responsive user interface elements.

Button widget

Provides a button method to help you make more appealing form elements like submit buttons, radio buttons, and checkboxes.

Datepicker widget

The datepicker method instructs the JS interpreter to build the datepicker on the fly, along with a load of HTML, CSS, and built-in interactivity.

Comes with a host of customizable options, too.

Sliders

UI elements that users can manipulate with their mouse or keyboard, controlling the data that they enter.

Include five event handlers that you use to connect the slider to a form input: create, start, slide, change, and stop.

11 jQuery and APIs

Objects, objects everywhere

I wonder what I'll get
this year? I hope it's
another API...



As talented a developer as you are, you can't do it all alone...

We've seen how we can include jQuery plug-ins, like jQuery UI or the tabs navigation to help boost our jQuery app, without much effort. To take our applications to the next level, apply some of the really cool tools out there on the Internet, and use information provided by the big hitters—like Google, Twitter, or Yahoo!—we need something...more. Those companies, and many others, provide APIs (application programming interfaces) to their services so you can include them in your site. In this chapter, we'll look at some API basics and use a very common one: the Google Maps API.

a *cryptid* reunion

Where's ~~Waldo~~ Sasquatch?

Dr. Pattersby and Dr. Gimli want to add some more cool features to their website—think you're up to the task?

From: Dr. Gimli [gimli@cryptozoologists.org]

Subject: Some more updates to our site

Hey guys,

Thank you so much for helping make our website more user-friendly and easier to collect data about sightings. We've had a substantial increase in traffic, so we're really excited to look at all the data we're collecting.

We've had several requests to make the information more accessible to the masses. Lots of people are interested in the sightings data, so we'd like to give them a way to see what we've collected.

Here's what we need:


- 1) We'd like to be able to select a single sighting and view the information associated with it. Along with the information about the cryptid, we'd like to see the latitude/longitude information appear on a Google map.
- 2) When a point is displayed on the Google map, we'd like to be able to click it to see more information about the sighting.
- 3) We'd like to be able to select the creature type from a list and display all the creatures associated with that type from our database. We'd also like to see all the creatures with that type on a Google map, so we can find some sighting hotspots to examine more closely. Can all these points be clickable, as well as the list of creatures, so users can see more information about each one?

Not too much to ask, right, since we already have all the information stored?

Looking forward to hearing from you!

--

Dr. Gimli and Dr. Pattersby
cryptozoologists.org

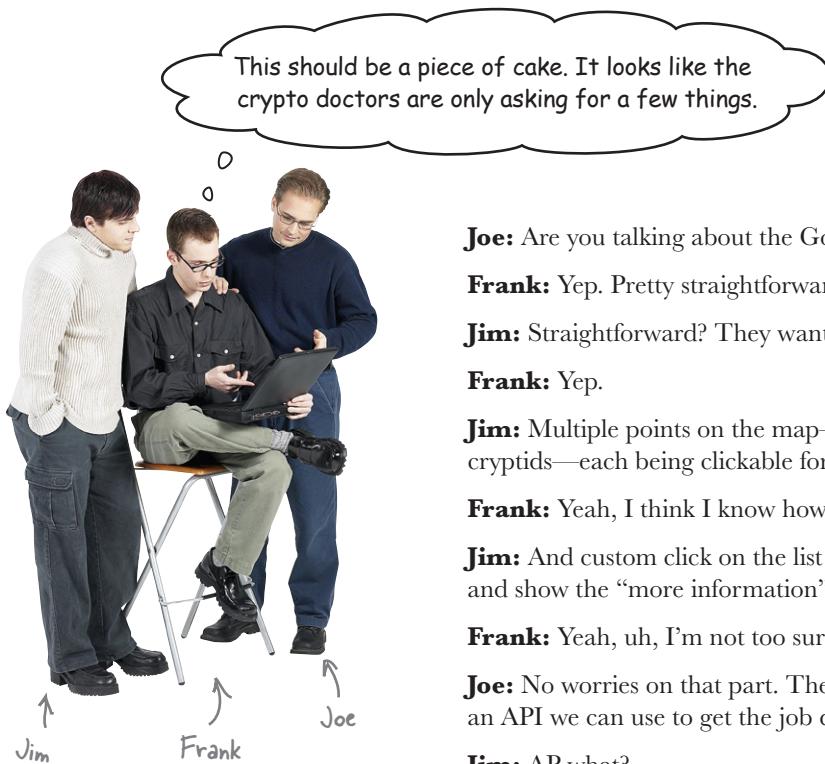

This should be a piece of cake. It looks like the crypto doctors are only asking for a few things.

Joe: Are you talking about the Google map we need to build?

Frank: Yep. Pretty straightforward...

Jim: Straightforward? They want a whole Google map!

Frank: Yep.

Jim: Multiple points on the map—one for each of their cryptids—each being clickable for more information...

Frank: Yeah, I think I know how to do that.

Jim: And custom click on the list to interact with the points and show the “more information” pop ups on the map.

Frank: Yeah, uh, I’m not too sure how to do that.

Joe: No worries on that part. The Google Maps folk provide an API we can use to get the job done.

Jim: AP what?

Frank: API. It’s short for *application programming interface*. It’s how companies like Google, Netflix, and Yahoo! enable us to use some of their cool tools on our own sites.

Jim: That does sound pretty cool, but will it give us all the pop ups and whatever else we need to put on the map?

Joe: Well, it *should*. Maybe we should look at the Google Maps API to see how it works.

The Google Maps API

For any API you want to use, you can look up documentation and get sample code online. We grabbed this sample from <http://code.google.com/apis/maps>.

```

var map;

function initialize() {
  var myLatlng = new google.maps.LatLng(40.720721,-74.005966);
  var myOptions = {
    zoom: 13,
    center: myLatlng,
    mapTypeId: google.maps.MapTypeId.ROADMAP
  }
  map = new google.maps.Map(document.getElementById("map_canvas"), myOptions);

  google.maps.event.addListener(map, 'zoom_changed', function() {
    setTimeout(moveToNewYork, 3000);
  });

  var marker = new google.maps.Marker({
    position: myLatlng,
    map: map,
    title:"Hello World!"
  });
  google.maps.event.addListener(marker, 'click', function() {
    map.setZoom(8);
  });
}

function moveToNewYork() {
  var NewYork = new google.maps.LatLng(45.526585, -122.642612);
  map.setCenter(NewYork);
}

```

OK, I recognize some variables and functions in there, but what's all that other stuff?



That's Google's code.

It's not as bad as it looks. Let's see what's going on in the code in a little more detail.

APIs use objects

Back in Chapter 6, we created our own JavaScript objects with properties and methods to store and use information as we saw fit. Many companies—like Google, Netflix, Microsoft, and Yahoo!—also create API objects to allow us to interact with their data. If you need a little reminder, feel free to hop back there to reacquaint yourself with objects and how they work.

```

var map;
var myLatlng = new google.maps.LatLng(40.720721, -74.005966);
var myOptions = {
  zoom: 13,
  center: myLatlng,
  mapTypeId: google.maps.MapTypeId.ROADMAP
}
map = new google.maps.Map(document.getElementById("map_canvas"), myOptions);

google.maps.event.addListener(map, 'zoom_changed', function() {
  setTimeout(moveToNewYork, 3000);
});

```

Annotations:

- Declare variables.
- Assign this variable to a new Google LatLng object..
- Set the map variable to be a new Google Maps object.
- Create an array to store some options for the map.
- Pass in some latitude and longitude values as parameters of our object.
- Tell the map to go in the map_canvas element.
- Add an event listener to our Google map.

```

var marker = new google.maps.Marker({
  position: myLatlng,           ← The LatLng object we declared above
  map: map,                      ← The Map object we declared above
  title: "Hello World!"
});

function moveToNewYork() {
  var NewYork = new google.maps.LatLng(45.526585, -122.642612);
  map.setCenter(NewYork);        ← Tell the map where to center itself.
}

```

Annotations:

- Declare a variable as a Marker object.
- Pass in values as parameters.
- The LatLng object we declared above
- The Map object we declared above
- Declare a function to call some more Google code.
- Create another LatLng object.
- Tell the map where to center itself.

why use objects?

So APIs do everything with objects?
Why would we use objects created
by somebody else?

Because it speeds everything up.

Like we saw back in Chapter 6, objects offer smarter storage. You use objects when you need to *store multiple variables* about a particular thing. An API is just a series of object *constructors* that allow you to create your own instances of other people's objects. Then, once you have an instance, you can use all the properties and methods associated with those objects in your code!

The complexities of creating a mapping application for everyone to use are exactly why Google uses objects in its API. That way, it can create objects with many different methods and properties for all the different elements you'd need to build a map.

From the code on the previous page, you can see that the `map` object has properties of `zoom`, `center`, and `mapTypeId`—plus many more that we haven't shown here. The map also has many methods, like `setCenter`.

 **Do this!** → Create a new page called `display_one.html` and save it in your project folder for this chapter.

**display_one.html**

```
<!DOCTYPE html>
<html>
  <head>
    <title>View Cryptid Sightings</title>
    <link type="text/css" href="style/form.css" rel="stylesheet"/>
    <link type="text/css" href="jquery-ui-1.8.16.custom/css/sunny/jquery-ui-1.8.16.custom.css" />
  </head>
  <body>
    <div class="ui-widget-header ui-corner-top form_pad">
      <h2>View Cryptid Sightings</h2>
    </div>
    <div class="ui-widget-content form_pad">
      <div id="map_canvas"></div> Create a place
      for our map to go. Include the Google Maps API.
    </div>
    <script src="http://maps.google.com/maps/api/js?sensor=false"></script>
    <script src="scripts/jquery-1.6.2.min.js"></script> Include the
    <script src="scripts/maps.js"></script> jQuery library.
    </body> Include a new maps.js file.
  </html>
```

Include Google maps in your page

First, make a copy of all the files you have from the end of the previous chapter. We'll use all the same files in this solution too, so we might as well pick up where we left off. All that code plus your new *display_one.html* file will give us two important new things:

- A div with the ID of `map_canvas`.
- The Google Maps API code, by adding `<script type="text/javascript" src="http://maps.google.com/maps/api/js?sensor=false"></script>`.

To include a Google map on that page, you'll need to create a *maps.js* file and add a function to it that calls the API code to build a map on the page.



jQuery Code Magnets

Rearrange the magnets to complete the code to create a function called `initialize`. This function will then create a new instance of the Google Maps `map` object, using some parameters defined in the code. The new `map` object will then be applied to the `map_canvas` element on the page. Also, update your existing *form.css* file to include some style definition for the map container.

```
$ (document) . ready . _____ {
    var _____
    function _____ {
        var latlng = new google.maps.LatLng. _____;
        var mapOpts = {
            _____: 13,
            center: latlng,
            mapTypeId: google.maps.MapTypeId. _____
        };
        map = _____google.maps.Map(document.getElementById(_____), mapOpts);
    }
    initialize();
});
```

```
#map_canvas {
    _____: left;
    height: 450px;
    width: _____
}
```




form.css



maps.js

(45.519098, -122.672138)
 "map_canvas"
 new
 450px;
 (function())



jQuery Code Magnets Solution

Rearrange the magnets to complete the code to create a function called `initialize`. This function will then create a new instance of the Google Maps `map` object, using some parameters defined in the code. The new `map` object will then be applied to the `map_canvas` element on the page. Also, update your existing `form.css` file to include some style definition for the map container.


```

$(document).ready( [function() {
    var [map];
    function initialize() {
        var latlng = new google.maps.LatLng. [45.519098, -122.672138];
        var mapOpts = {
            zoom: 13,
            center: latlng,
            mapTypeId: google.maps.MapTypeId. HYBRID
        };
        map = [new] google.maps.Map(document.getElementById("map_canvas"), mapOpts);
    }
    initialize();
});
```

```
#map_canvas {
    float: left;
    height: 450px;
    width: 450px;
}
```



form.css



maps.js

there are no
Dumb Questions

Q: What about that `LatLng` object and `mapOpts` property?

A: You can find more information about the API's objects, methods, and more at <http://code.google.com/apis/maps/documentation/javascript/reference.html>. This website offers some example code and more details about all the different objects and methods you'll need to interact with.


Q: Is Google Maps my only option for creating a map?

A: Definitely not! It is probably the most popular though, which is why we're using it here. Other companies like Yahoo!, Microsoft, MapQuest, and OpenLayers also offer Mapping APIs.



Test Drive

Update your `maps.js` file with the `initialize` function you put together with the magnets. Also, ensure that the `maps.js` file is included in `display_one.html`. Then, open up `display_one.html` in your browser. You should run all your code through your web server, so the URL should say `http://`, not `file://`.

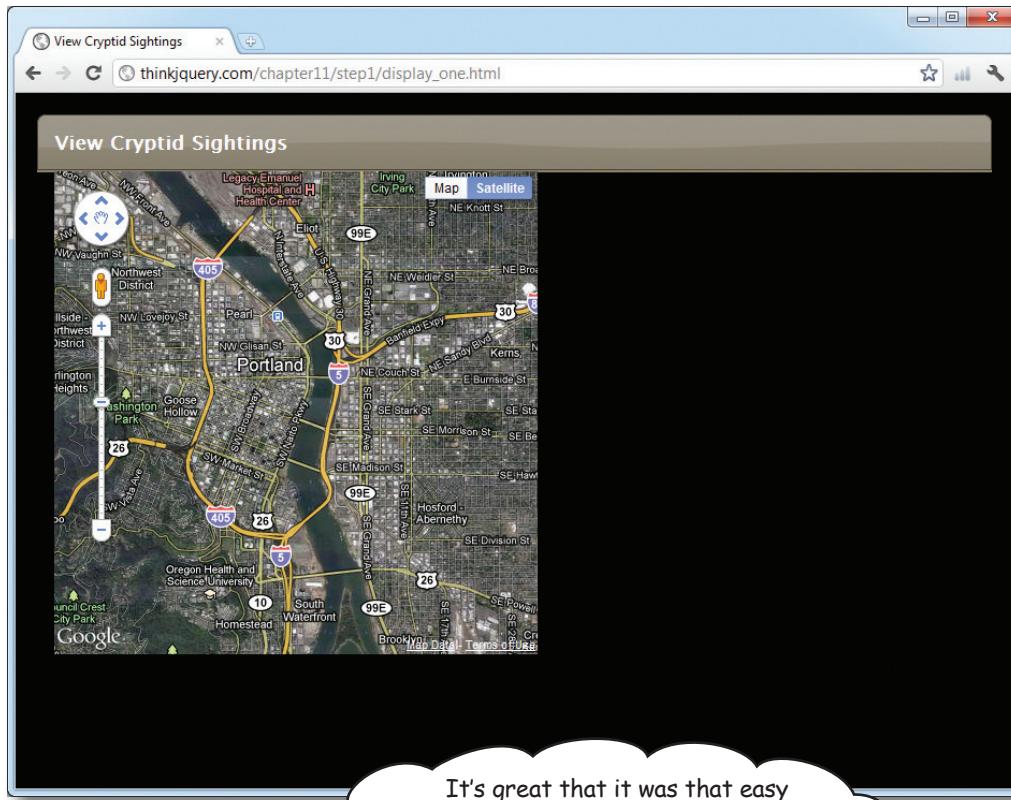

I'm great that it was that easy to get a map on the page, but I don't see any of the cryptid data yet. We need to get that out of the database, right?

Exactly.

Back in Chapter 9, you learned how we can get information from a MySQL database, using jQuery, Ajax, JSON, PHP, and MySQL. Although that's quite a list of technologies, it did exactly what we needed it to. Let's see how we can apply that here again.

some familiar friends


Getting JSON data with SQL and PHP

Chapter 9 showed how a SQL select statement could pull the information you wanted out of the database so that a PHP file could turn it into JSON and return it to our page, using Ajax.

You also learned how to use Ajax to get JSON-encoded information from a PHP file. For PHP to return JSON data, it was easy—the json_encode function, which accepted an array, gave back JSON-encoded data so that jQuery could interact with it.

```
$my_array = array();
array_push($my_array, array('my_key' => 'my_val'));

echo json_encode($my_array);
```

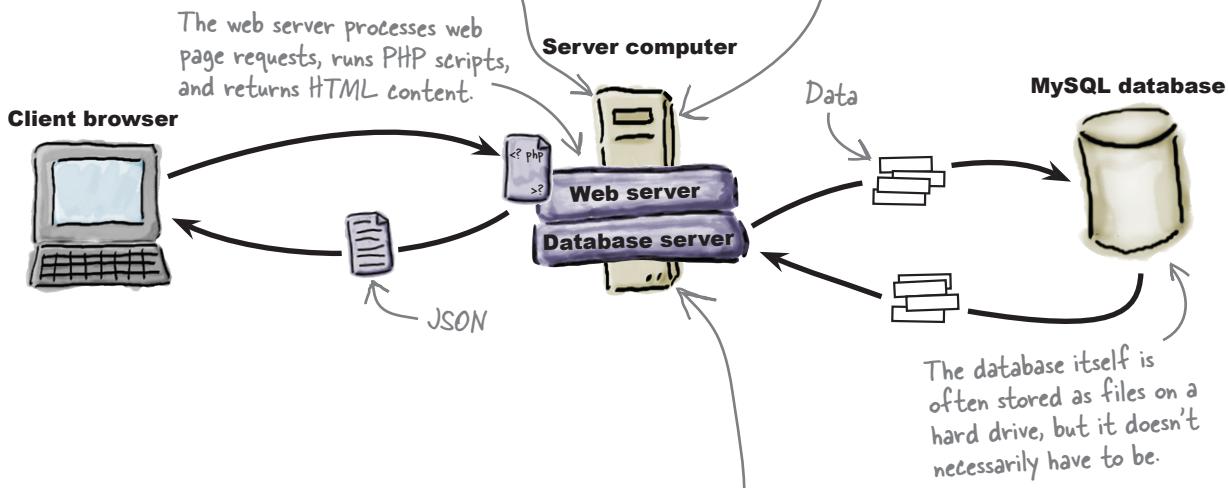

```
SELECT COLUMN_NAME1, COLUMN_NAME2 FROM TABLE_NAME order by COLUMN_NAME1 ASC
```


For this chapter, we've written all of the PHP and SQL for you. As long as you've got the MySQL database from Chapter 10, you're good to go! The rest of the SQL and PHP code are in the downloads for this chapter. Feel free to run them on your own server. You can download all the PHP and SQL in a single file from <http://thinkjquery.com/chapter11/end/service.zip>.



jQuery, HTML, and CSS Code Magnets

Rearrange the magnets to update your `display_one.html`, `forms.css`, and `maps.js` files to get your data via JSON and display it on the screen. Add a `div` and a `ul` element to hold the data, some CSS to style the list, and a function to get the data, via JSON, to add each cryptid to the list.

```
function getAllSightings() {
    $.getJSON("service.php?action=getAllSightings", _____) {
        if (_____length > 0) {
            $("#sight_list") _____;
            _____(json.sightings, function() {
                var info = 'Date: ' + this['date'] + ', Type: ' + this['type'];
                var $li = $("<li />");
                _____
                $li.addClass(_____);
                $li.attr('id', this['id']) ;
                $li.appendTo(_____);
            });
        }
    });
}
```



maps.js

```
<div class="ui-widget-content form_pad">
    <div id=_____></div>
    <div id="sight_nav">
        <ul id=_____>
        </ul>
    </div>
</div>
```



display_one.html

list-style:none;

"sight_list"

#sight_list"

function(json)

.empty()

\$.each

```
#sight_nav{
    float:left;
}
ul#sight_list{
    width:150px;
    padding:0px;
    margin:0px;
}
```



form.css

```
li.sightings {
    padding:4px;
    background:#7B7382;
    border:1px #000 solid;
    color:#fff;
}
```

background:#eee;

color:#000;

}



jQuery, HTML, and CSS Code Magnets Solution

Rearrange the magnets to update your `display_one.html`, `forms.css`, and `maps.js` files to get your data, via JSON, and display it on the screen.

Add a `div` and a `ul` element to hold the data, some CSS to style the list, and a function to get the data, via JSON, and add each cryptid to the list.

```
function getAllSightings() {
    $.getJSON("service.php?action=getAllSightings", function(json) {
        if (json.sightings.length > 0) {
            $("#sight_list").empty();
            $.each(json.sightings, function() {
                var info = 'Date: ' + this['date'] + ', Type: ' + this['type'];
                var $li = $("<li />");
                $li.html(info);
                $li.addClass("sightings");
                $li.attr('id', this['id']);
                $li.appendTo("#sight_list");
            });
        }
    });
}
```



maps.js

```
<div class="ui-widget-content form_pad">
    <div id="map_canvas"></div>
    <div id="sight_nav">
        <ul id="sight_list">
    </ul>
</div>
</div>
```



display_one.html

```
#sight_nav{
    float:left;
}

ul#sight_list{
    width:150px;
    padding:0px;
    margin:0px;
}

li.sightings {
    padding:4px;
    background:#7B7382;
    border:1px #000 solid;
    color:#fff;
    list-style:none;
}

li.sightings:hover {
    background:#eee;
    color:#000;
}
```



form.css



Test Drive

Update your `maps.js` file with the `getAllSightings` function you just completed. Also, add a call to this new function at the end of the `initialize` function. Then open up `display_one.html` in your browser. This assumes you've added some creatures to your database, back in Chapter 10; if not, be sure to do so now. Remember, you should run all your code through your web server, so the URL should say `http://`, not `file://`.

Screenshot of a web browser window titled "View Cryptid Sightings" showing a map of Portland, Oregon. The map includes major roads like I-405, I-5, and I-205, as well as local streets. A sidebar on the right lists cryptid sightings:

Date: 1933-08-04,	Type: Loch Ness Monster
Date: 1967-10-20,	Type: Sasquatch
Date: 2011-08-01,	Type: Chupacabras
Date: 2011-08-04,	Type: Chupacabras
Date: 2011-08-12,	Type: Loch Ness Monster
Date: 2011-08-13,	Type: Sasquatch
Date: 2011-08-13,	Type: Loch Ness Monster
Date: 2011-08-13,	Type: Yeti
Date: 2011-08-16,	Type: Sasquatch

A speech bubble from a character below the map says: "That's nice looking and all, but all this code still doesn't actually display anything on our map."

Right. We need to be able to add our cryptid data to the map.

Google Maps provides a very easy method to do this. Let's have a look at how that works.



make your mark(er)

Points on a map are markers

When it comes to putting points on a map, Google's got it down. However, Google doesn't call them points. It calls them *markers*. Markers are objects—just like everything else in the Google Maps API—and have their own methods and properties for interaction and manipulation.

```

    Define a new LatLng object
    from the Google Maps API. →
    var myLatLng = new google.maps.LatLng(45.519098,-122.672138);

    Define an object called my_marker as an
    instance of the Google Marker object. →
    var my_marker = new google.maps.Marker({
        position: myLatlng, ← The previously defined LatLng
        map: map,           object, as a parameter.
        title:"Hi! I'm a marker. Seen me around before?" ←
    });

    A predefined map object.
    You've already seen this in action. →
    Pass in arguments to set some properties of the my_marker object.
    Here, we've set the position of the marker, what map to add it to, and the title of the point.
  
```



Update your `getAllSightings` function to add a click event listener to the list item, *before* it gets added to the list. This click event should call a custom function, called `getSingleSighting`, which takes a single parameter—the ID of the clicked sighting. This new function should then load information about the clicked item and add it as a marker on the map, using its `latitude` and `longitude` properties.

```

function getAllSightings(){
    $.getJSON("service.php?action=getAllSightings", function(json) {
        if (json.sightings.length > 0) {
            $("#sight_list").empty();
            $.each(json.sightings, function() {
                var info = 'Date: ' + this['date'] + ', Type: ' + this['type'];
                var $li = $("<li />");
                $li.html(info);
                $li.addClass("sightings");
                $li.attr('id', this['id']);
                $li.click(function(){
                    _____ this['id'] );
                });
                $li.appendTo("#sight_list");
            });
        }
    });
}

function getSingleSighting(_____) {
    $.getJSON("service.php?action=getSingleSighting&id="+id, function(json) {
        if (json.sightings.length > 0) {

            var loc = new google.maps.LatLng(this['lat'], this['long']);
            var my_marker = new google.maps_____({
                _____ loc,
                map: map,
                title:this['type']
            });
            _____ setCenter(loc, 20);
        });
    });
}

```



sharpen solution

After you've completed the code, your list items will be clickable, which will then load data about the clicked cryptid and put it on the map.

```

function getAllSightings() {
    $.getJSON("service.php?action=getAllSightings", function(json) {
        if (json.sightings.length > 0) {
            $("#sight_list").empty();
            $.each(json.sightings, function() {
                var info = 'Date: ' + this['date'] + ', Type: ' + this['type'];
                var $li = $("<li />");
                $li.html(info);
                $li.addClass("sightings");
                $li.attr('id', this['id']);
                $li.click(function() {
                    getSingleSighting(this['id']);
                });
                $li.appendTo("#sight_list");
            });
        }
    });
}

function getSingleSighting(id) {
    $.getJSON("service.php?action=getSingleSighting&id=" + id, function(json) {
        if (json.sightings.length > 0) {
            $.each(json.sightings, function() {
                var loc = new google.maps.LatLng(this['lat'], this['long']);
                var my_marker = new google.maps.Marker({
                    position: loc,
                    map: map,
                    title: this['type']
                });
                map.setCenter(loc, 20);
            });
        }
    });
}

```





Test Drive

Update your *maps.js* file with the `getAllSightings` and `getSingleSighting` functions you just completed. Then open up *display_one.html* in your browser, using `http://` like before.

Date: 1933-08-04, Type: Loch Ness Monster
Date: 1967-10-20, Type: Sasquatch
Date: 2011-08-01, Type: Chupacabras
Date: 2011-08-04, Type: Chupacabras
Date: 2011-08-12, Type: Loch Ness Monster
Date: 2011-08-13, Type: Sasquatch
Date: 2011-08-13, Type: Loch Ness Monster
Date: 2011-08-13, Type: Yeti
Date: 2011-08-16, Type: Sasquatch



You've already nailed the first two requirements, so let's have a look at the final thing the doctors asked for.

- 3) We'd like to be able to select the creature type from a list and display all the creatures associated with that type from our database. We'd also like to see all the creatures with that type on a Google map so we can find some sighting hotspots to examine more closely. Can all these points be clickable, as well as the list of creatures, so users can see more information about each one?

ready bake creature drop-down

Multicreature checklist

Here's what we need in order to nail this last request:

1. A drop-down list with the list of creature types (selected from the database).
2. When the drop-down list changes, get a list of creatures from the database that match the selected type.
3. Display all the creatures returned from the database in the list and on the map.
4. Both the list and the map pointers should be clickable so users can get more information on the map to pop up.



**Ready Bake
Code**

Create a new page called *display_type.html* and save it in the same directory as the other HTML files for this project. This new file will display the list of creature types that can be selected. Then, once selected, all the creatures of that type will be displayed on the map. The structure and style of this new page is very similar to our old page, except for the addition of a `select` element with the ID of `ddlTypes`.

```
<!DOCTYPE html>
<html>
    <head>
        <title>View Cryptid Sightings</title>
        <link type="text/css" href="style/form.css" rel="stylesheet" />
        <link type="text/css" href="jquery-ui-1.8.16.custom/css/sunny/
jquery-ui-1.8.16.custom.css"/>
    </head>
    <body>
        <div class="ui-widget-header ui-corner-top form_pad">
            <h2>View Cryptid Sightings</h2>
        </div>
        <div class="ui-widget-content form_pad">
            <div id="map_canvas"></div>
            <div id="sight_nav">
                <select id="ddlTypes"> ← Add a drop-down list, to be
                    populated with creature types.
                    <option value="">-- Please Select --</option>
                </select>
                <ul id="sight_list"></ul>
            </div> ← Include the Google Maps API.
            <script src="http://maps.google.com/maps/api/js?sensor=false"></script>
            <script src="scripts/jquery-1.6.2.min.js"></script>
            <script src="scripts/maps.js"></script> ← Include the jQuery library.
        </div> ← Include the maps.js file.
    </body>
</html>
```



display_type.html



jQuery Code Magnets

Rearrange the magnets to complete the `getAllTypes` function. This function will call the `service.php` file (which should be included in your downloads for this chapter) to get a list of the different creature types in the database. These creature types should then be added to the drop-down list, with the ID of `ddlTypes`. Also, create an event listener on the drop-down list to listen for a `change` event and alert the selected value. Finally, since we're using the same `maps.js` file for our two HTML files, add some logic to the `initialize` function to check if the drop-down list exists. If it does, call the `getAllTypes` function. Otherwise, call the `getAllSightings` function.


```
function initialize() {
    .
    .
    map = new google.maps.Map(document.getElementById('map_canvas'), mapOpts);
    if ( $('#ddlTypes').length ) {
        _____
    } else {
        _____
    }
}

function getAllTypes() {
    $.getJSON("service.php?action=getSightingsTypes", function(json_types) {
        if ( _____creature_types.length > 0) {
            $.each(json_types.creature_types, _____
                var info = this['type'];
                var $li = _____
                    $li.html(info);
                    $li_____("#ddlTypes");
            });
        }
    });
}

$( "#ddlTypes" ).change(function() {
    if($(this).val() != "") {
        alert( $(this).val() );
    }
});
```

Magnets floating around the code:

- "map_canvas"
- json_types.
- function() {
- \$("#ddlTypes").
- getAllTypes();
- getAllSightings();
- \$.appendTo
- \$("<option />");



maps.js



jQuery Code Magnets Solution

Now you've got a drop-down list associated with your Google map, a function to grab the data (in JSON) on the selected creature types from the database, and an alert showing which creature type was selected.

```
function initialize() {
    .
    .
    map = new google.maps.Map(document.getElementById("map_canvas"), mapOpts);
    if ( $('#ddlTypes').length ) {
        getAllTypes();
    } else{
        getAllSightings();
    }
}

function getAllTypes() {
    $.getJSON("service.php?action=getSightingsTypes", function(json_types) {
        if ( json_types.creature_types.length > 0) {
            $.each(json_types.creature_types, function() {
                var info = this['type'];
                var $li = $("<option />");
                $li.html(info);
                $li.appendTo("#ddlTypes");
            });
        }
    });
}

$('#ddlTypes').change(function() {
    if($(this).val() != "") {
        alert( $(this).val() );
    }
});
```

Use the .length property to check for the existence of an element.

Get the types from the database, using JSON and PHP.

Set the text of the item in the dropdown list.

Add a listener for the change event on the drop-down list.

The value of the selected item on the list




maps.js



Test Drive

Update your `maps.js` file with the `getAllTypes` function and the event listener for the change event on the drop-down list. Also, update your `initialize` function with this new logic. Then open up `display_type.html` in your browser, again using `http://`.

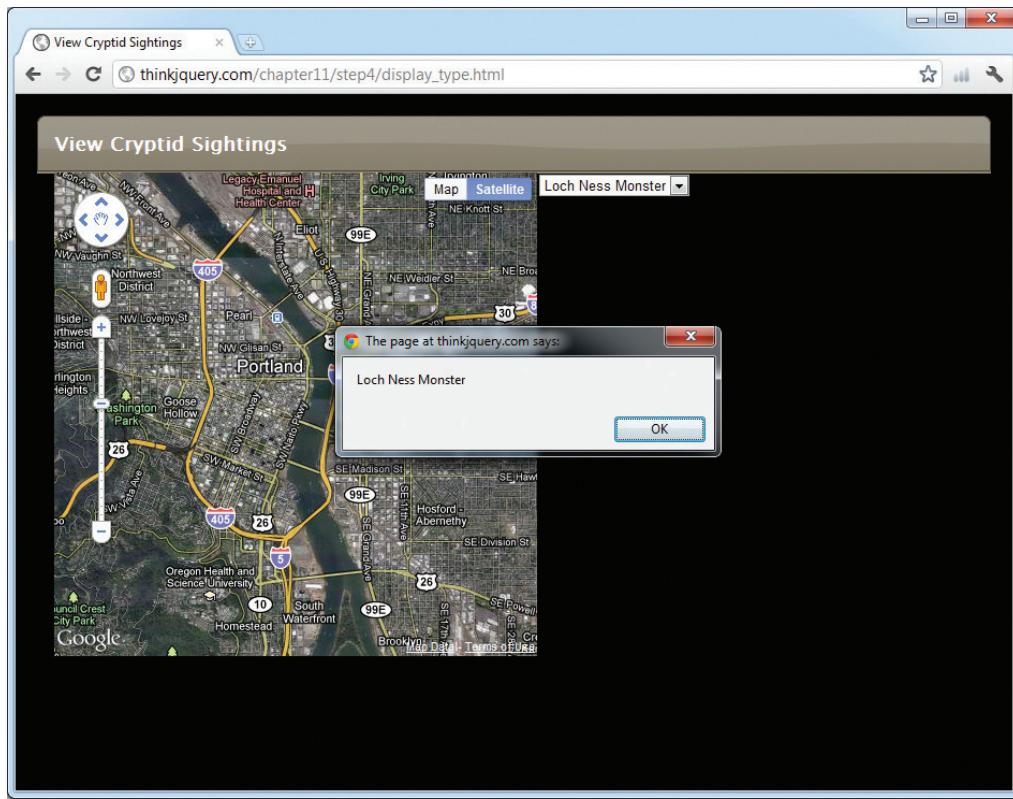

You're really cookin' now. You'll have this map finished up in no time! Time to cross off a couple of those requirements.

1. ~~A drop-down list with the list of creature types (selected from the database).~~
2. ~~When the drop-down list changes, get a list of creatures from the database that match the selected type.~~
3. Display all the creatures returned from the database in the list and on the map.
4. Both the list and the map pointers should be clickable so users can get more information on the map to pop up.

not so fast

Hey! Not so fast! When I select an item from the drop-down list, I don't see creatures. I only see an alert pop up. I don't think we're done with the second item yet!

You've got us there.

We need to update our code so we can get information from the database when the drop-down list is changed, instead of just showing the creature type in an alert box.

Then we can mark that one off the list. But while we're at it, we should be able knock off the third item on the list too. Roll up your sleeves—we're about to dive in and put this all together.



Long Exercise

Fill in the missing lines of code to create a `getSightingsByType` function. This function should accept one parameter: the creature type you are viewing. This function should get its data in JSON format, loop through all the returned creatures (if there are any), and add points for each one on the map. Also, create two more global variables: an array called `markerArray` and a new Google Maps `LatLngBounds` object called `bounds`. Also, create a function that clears the previous points, before adding any new ones, if the drop-down list is changed.

```
var markersArray = [];
var bounds = new google.maps_____;
function getSightingsByType(type) {
  $.getJSON("service.php?action=getSightingsByType&type="+type, function(json)
  {
    if (_____sightings.length > 0) {
      $('#sight_list').empty();
      $.each(json.sightings, function() {
        var loc = new google.maps_____([this['lat'], this['long']]);
        var opts = {
          map: map,
          position: _____
        };
      });
    }
  });
}
```

```
var marker = new google.maps_____ (opts);
markersArray.push(_____);
var $li = $("<li />");
$li.html('Date: ' + this['date'] + ', Type: ' + this['type']);
$li_____ ("sightings");
$li.appendTo("#sight_list");
bounds.extend(loc);
});
map.fitBounds(bounds);
}
});
});
$( '#ddlTypes' ).change(function() {
if($(this).val() != ""){
clearOverlays();
_____ ( $(this).val() );
}
});
function _____ {
if (markersArray) {
for (i in markersArray) {
markersArray[i].setMap(null);
}
markersArray.length = 0;
bounds = null;
bounds = new_____ LatLngBounds ();
}
}
}
```



maps.js

long exercise solution

LONG Exercise Solution

With the addition of the two new global variables and some other Google Maps functions, you can now add and remove markers from the map when the drop-down list is changed. As the markers are being added to the map, they are also added to the `markerArray` array and used to extend the map's bounds. This way, the map can autozoom to fit all the points, using the `fitBounds` function. The `getSightingsByType` function, now called on any change of the drop-down list, adds the markers to the map and adds the creature to the list on the page.

```

var markersArray = [];
var bounds = new google.maps.LatLngBounds(); ← A new LatLngBounds object
function getSightingsByType(type) {
    $.getJSON("service.php?action=getSightingsByType&type="+type, function(json) ← Get our data, with JSON.
    {
        if (json.sightings.length > 0) {
            $('#sight_list').empty();
            $.each(json.sightings, function() {
                var loc = new google.maps.LatLng(this['lat'], this['long']); ← Create a new Marker
                var opts = {                                object for each point
                    map: map,                                on the map.
                    position:loc
                };
                var marker = new google.maps.Marker(opts);
                markersArray.push(marker);
                var $li = $("<li />");
                $li.html('Date: ' + this['date'] + ', Type: ' + this['type']);
                $li.addClass("sightings");
                $li.appendTo("#sight_list");
                bounds.extend(loc); ← Add the current
                bounds.extend(loc); ← Lat/Long value to
                bounds.extend(loc); ← our bounds object.
            });
            map.fitBounds(bounds);
        }
    });
}

```

```

$( '#ddlTypes' ).change(function() {
    if( $(this).val() != "" ){
        clearOverlays();
        getSightingsByType( $(this).val() );
    }
});
function clearOverlays() {
    if (markersArray) {
        for (i in markersArray) {
            markersArray[i].setMap(null);
        }
    }
    markersArray.length = 0;
    bounds = null;
    bounds = new google.maps.LatLngBounds();
}

```

Before we get the data to add the markers to the map, remove all the old markers.

Pass the value of the drop-down list as a parameter to our function.

Remove the Marker from the map.

Reset the bounds variable too.



maps.js



Geek Bits


We've included a function called `clearOverlays` that will remove the previously added markers before adding the new ones. Google refers to anything added to a base map as an **overlay**, which can be a **Marker**, a **Line**, a **Polyline**, a **Polygon**, or many other types of objects.

test drive



Test Drive

Update your *maps.js* file with the new code you just created. Then, open up *display_type.html* in your browser and select some creatures from the list.

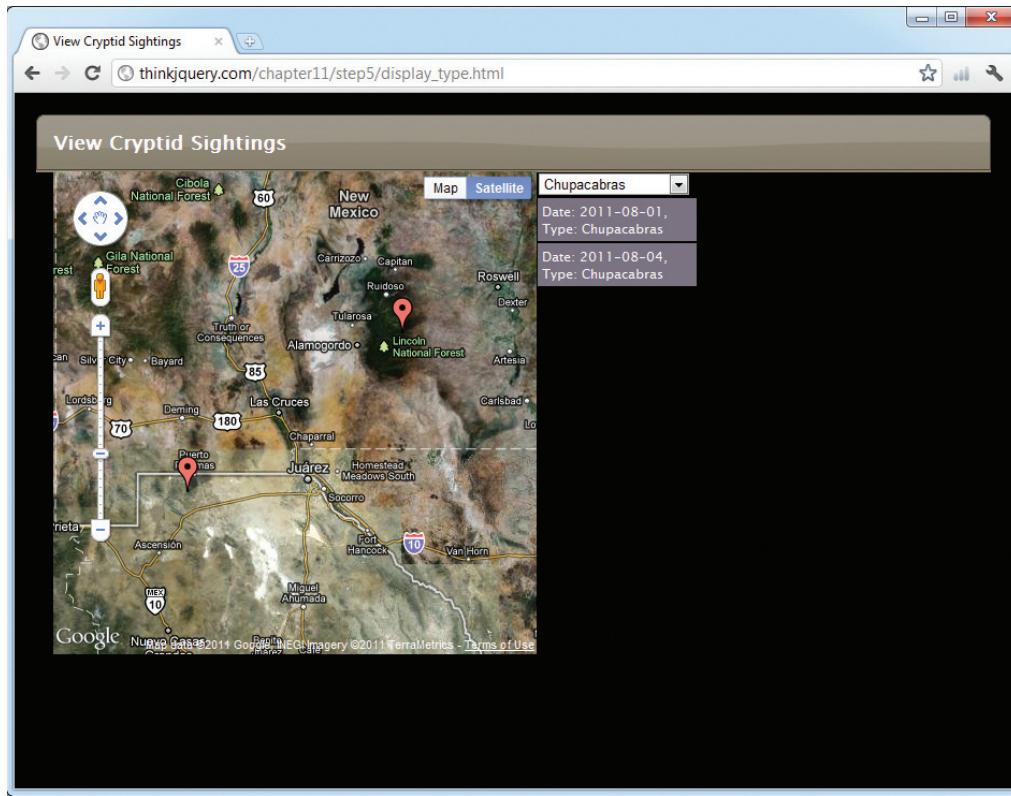

1. ~~A drop-down list with the list of creature types (selected from the database).~~
2. ~~When the drop down list is changed, get a list of creatures from the database that match the selected type.~~
3. ~~Display all the creatures returned from the database in the list and on the map.~~
4. Both the list and the map pointers should be clickable so users can get more information on the map to pop up.

So close...just one more item to go!



You already know how to make things clickable with jQuery. How will this help complete the final requirement on the list?

^{there are no} Dumb Questions

Q: So, is the Google Maps API free for me to use on my website?

A: Yes! Google makes the API freely available to everyone who wants to use it—personal or commercial—as long as they comply with the Terms of Service.

Q: I don't know if I comply or not. Where can I see the Terms of Service?

A: Simply browse to <http://www.google.com/apis/maps/terms.html> to view the full Terms of Service.

Q: Does the Google Maps API cover the whole world?

A: Not quite, but it's close. There are only a few countries that are not covered. Check out the Google Maps API site to find the list.

Q: Can I show maps on a mobile device, using the Google Maps API?

A: Yes, you can. At the time of publishing, version 3 of the Google Maps API has been released. It has been developed to cater to mobile devices with browsers capable of running JavaScript.

Q: But I'd rather write an app for that. Is the Google Maps API for me?

A: If you're writing for the Android or iPhone platforms, then yes. Google provides specific frameworks for both of these platforms for you to include in your app. If you're writing for another mobile platform, there is no specific framework yet, so you'll have to use the same as on your website.

Q: The full version of Google Maps lets me get directions. Can this API do that?

A: No, you cannot do that with this API. There is another API produced by Google, called the Google Directions API, that you can use to find the directions.

Q: What about finding places on a map by address?

A: In the business, they call this *geocoding*. Google has yet another API to do that: the Geocoding API. These are all part of the Google Maps API family. Also, luckily for you, whenever you request data from Google, it will return JSON data to you, which you already know how to handle!

Q: What else is in the Google Maps API family?

A: Both the Directions and Geocoding APIs belong to a subsection called the Maps API Web Service. Also in that sub-section are the Distance API, the Elevation API, and the Places API.

Q: There's even more?

A: Yup. There's also the Static Maps API for browsers that don't fully support JavaScript; Maps API for Flash; and even an Earth API, which lets you load a Google Earth viewer into your page to get 3D images of the globe, as well as take virtual tours and draw shapes over the terrain. This one requires the Google Earth plug-in to be installed too, though.

Q: So JavaScript aside, can I get APIs for any other languages?

A: Yes! There are countless numbers of APIs available—some free, some that require licensing. Chances are, if you're looking for a specific piece of functionality you don't want to write, there's probably an API for it somewhere.

back to clicking again

Listening for map events

We're almost at the end here, and by now you've seen a whole variety of events that jQuery and JavaScript provide for making fun, interactive web apps. Since the Google Maps API is just JavaScript (albeit very well written and efficient JavaScript), it too can utilize the browser's ability to listen for events and act accordingly.

And for the same reasons that jQuery added its own event listener creation functions, the folks on the Google Maps end of things have provided the capability to add event listeners through the API. This is because not all browsers deal with event listeners in the same way, so this ensures that the API can control how the listeners are added to the page. Let's have a look at adding an event listener for the **click** event to create a Google Maps pop up (also called an *InfoWindow*):

Define a variable with the content we would like to show.

```
var contentString = "This is an InfoWindow";
```

```
var my_infowindow = new google.maps.InfoWindow({  
    content: contentString  
});  
google.maps.event.addListener(my_marker, 'click', function() {  
    my_infowindow.open(map, my_marker);  
});
```

Create an instance of the Google Maps InfoWindow object.

Set the value of the content property of the InfoWindow object.

Tell the map to listen out for a click event on our marker object.

Run this code when the marker is clicked (open a pop-up window on the map).



Geek Bits

In the Google Maps API, almost all the different object types (**Map**, **Marker**, **Line**, **InfoWindow**, **TrafficOverlay**, **Polygon**, and more) have events associated with them. However, even if the events for the different objects have the same event ***name***, they may take different ***parameters***! Be sure to check the documentation for the object you want to use.



Fill in the missing pieces of code to complete the `getSightingsByType` function, which will add the click functionality to both the markers on the map and the items on the list. Also, create a global variable called `info_window`, which will be a new instance of the Google Maps `InfoWindow` object with the default content set to an empty string.

```

var info_window = new google.maps_____({content: ''});
function_____ (type) {
  $.getJSON("_____ action=getSightingsByType&type="+type, function(json) {
    if (json.sightings.length > 0) {
      $('#sight_list').empty();
      $.each(json.sightings, function() {
        var info = 'Distance: ' + this[_____] + '<br>' + ' Height: ' + this['height'];
        info += ', Weight: ' + this['weight'] + ', Color: ' + this['color'] + '<br>';
        info += 'Latitude: ' + this['lat'] + ', Longitude: ' + this[____];
        var loc = new _____(this['lat'], this['long']);
        var opts = {
          map: map,
          position:_____
        };
        var marker = new google.maps _____(opts);
        markersArray.push(marker);
        google.maps.event_____ (marker, 'click', function() {
          info_window.content = info;
          info_window.open(map, marker);
        });
        var $li = $("<li />");
        $li.html('Date: ' + this['date'] + ', Type: ' + this['type']);
        $li.addClass("sightings");
        $li_____ (function() {
          info_window.content = info;
          info_window.open(map, _____);
        });
        $li.appendTo("#sight_list");
        _____ extend(loc);
      });
      map _____ (bounds);
    }
  });
}

```



maps.js

sharpen solution

You've now updated the `getSightingsByType` function to display in list format and on the map, along with making the map markers and the list clickable.

```

var info_window = new google.maps.InfoWindow ({content: ''});
function getSightingsByType(type) {
  $.getJSON("service.php?action=getSightingsByType&type=" + type, function(json) {
    if (json.sightings.length > 0) {
      $('#sight_list').empty();
      $.each(json.sightings, function() {
        var info = 'Distance: ' + this['distance] + '<br>' + ' Height: ' + this['height'];
        info += ', Weight: ' + this['weight'] + ', Color: ' + this['color'] + '<br>';
        info += 'Latitude: ' + this['lat'] + ', Longitude: ' + this['long'];
        var loc = new google.maps.LatLng(this['lat'], this['long']);
        var opts = {
          map: map,
          position: loc
        };
        var marker = new google.maps.Marker(opts);
        markersArray.push(marker);
        google.maps.event.addListener(marker, 'click', function() {
          info_window.content = info;
          info_window.open(map, marker);
        });
        var $li = $("<li />");
        $li.html('Date: ' + this['date'] + ', Type: ' + this['type']);
        $li.addClass("sightings");
        $li.click(function() { ← Add an event listener item
          info_window.content = info;
          info_window.open(map, marker);
        });
        $li.appendTo("#sight_list");
        bounds.extend(loc);
      });
      map.fitBounds(bounds);
    }
  });
}

```

Add an event listener to the Marker, on the map, for the click event.

Add an event listener item on the list to open the InfoWindow on the map.




maps.js



Test Drive

Update your `maps.js` file with the new code you created on the previous page. Then, open up `display_type.html` in your browser and select a creature from the list. Click on the markers or the list to view more information about the creature.

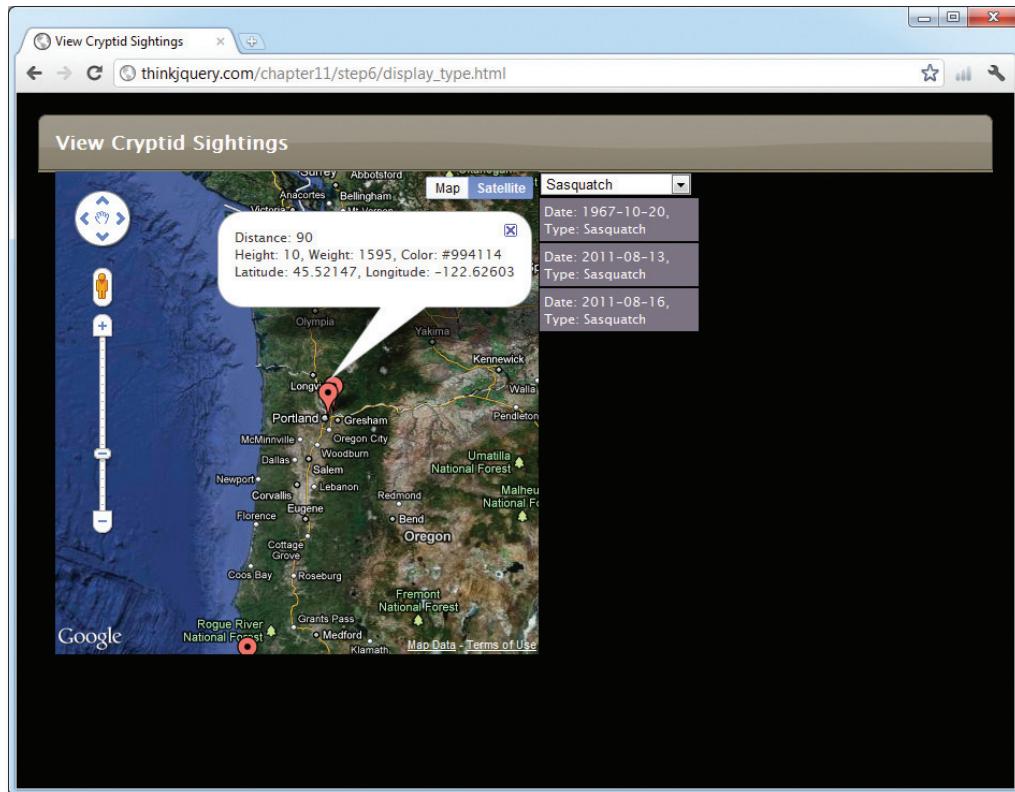

1. A drop-down list with the list of creature types (selected from the database, if possible).
2. When the drop-down list is changed, get a list of creatures from the database that match the selected type.
3. Display all the creatures returned from the database in the list and on the map.
4. Both the list and the map pointers should be clickable so users can get more information on the map to pop up.

you're a jquery rockstar

You did it!


In just a few short pages, you managed to put together a fully functional website, using code from several different languages—PHP, SQL, JavaScript, and jQuery—as well as pairing up the Google Maps API with Ajax and JSON to display some pretty complex data. No small feat!





APIcross

It's time to sit back and give your left brain something to do. It's your standard crossword; all of the solution words are from this chapter.

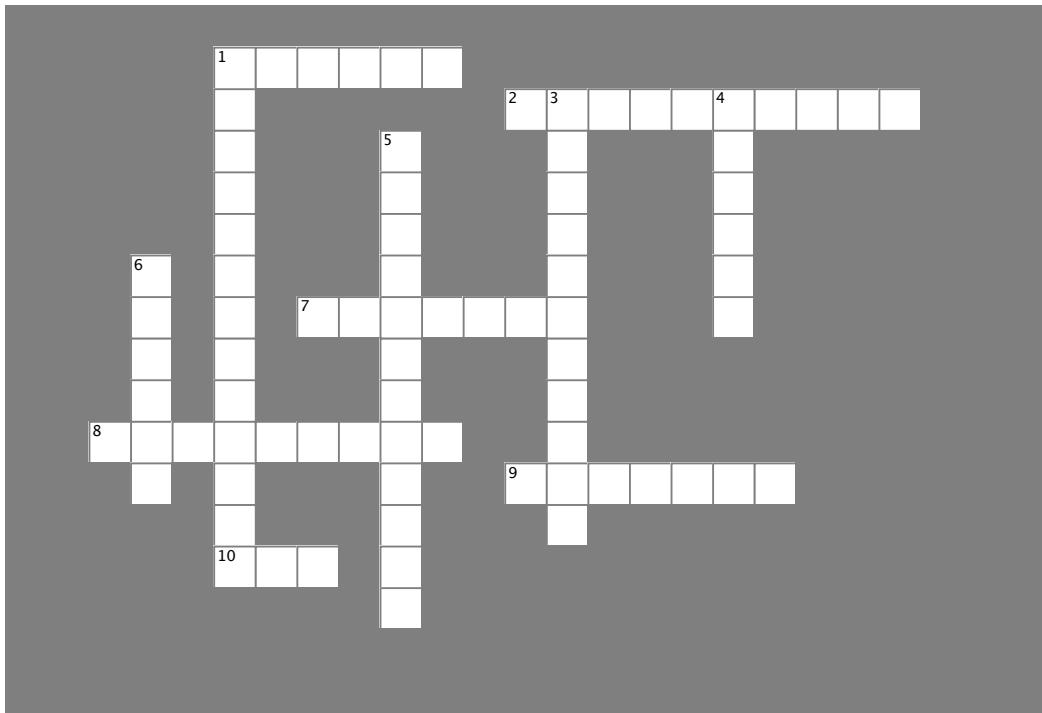

Across


- The code for a Google Maps API constructor that lets you put a point on a Google Map: `google.maps: new google.maps._____()`.
- The Google Maps API we used in Chapter 11 is written in this language.
- Once you have an instance of an API object, you can use all the properties and _____ associated with those objects in your code.
- API = Application Programming _____.
- We used this jQuery method to get data from the sightings database using JSON and PHP.
- Google Maps API object that has the following properties: `zoom, center, and mapTypeId`.

Down

- To include the GoogleMaps API in your web page, use this script tag: `<script src="http://_____._____.maps/api/js?sensor=false"></script>`.
- Google Maps API method that listens for a click event on a marker: `google.maps.event._____`.
- The jQuery event listener you used in this chapter. When the value of data in a field changes, this listener is triggered.
- An API is a series of object _____, allowing you to create your own instances of the API provider's objects.
- The Google Maps API object constructor that lets you pass the latitude and longitude as a parameter.



APIconsole Solution

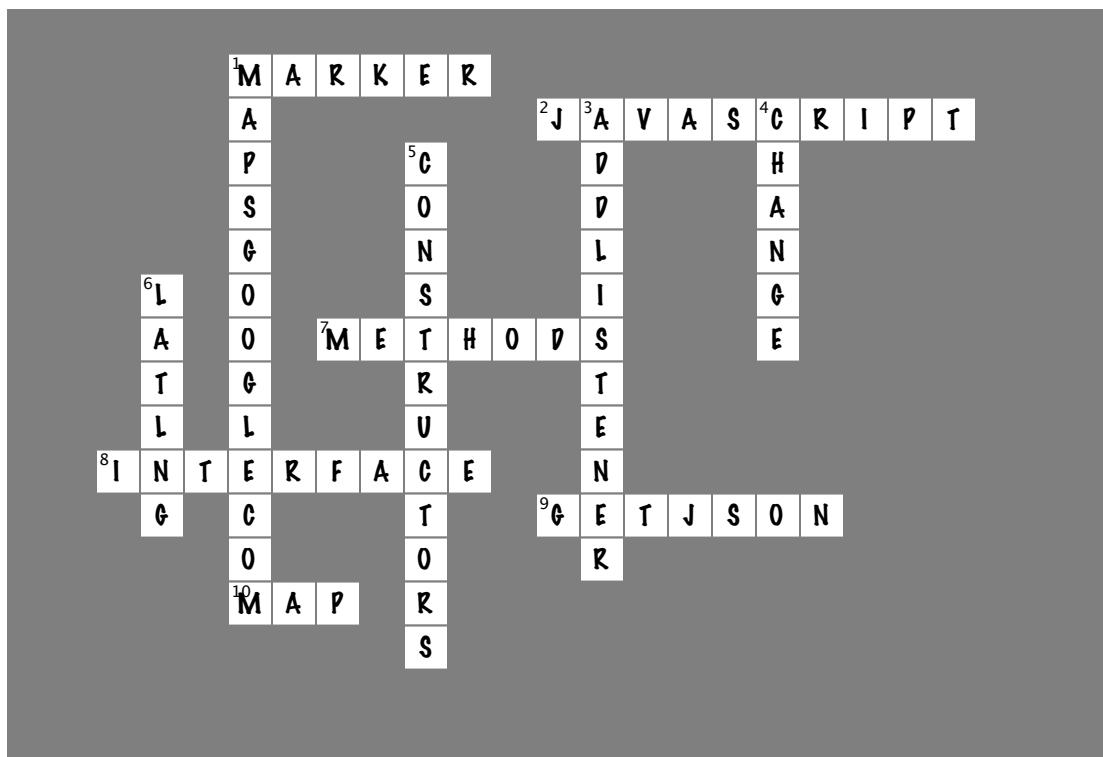



Your jQuery API Toolbox

You've got Chapter 11 under your belt and now you've learned how to pull together **jQuery with APIs (plus JavaScript, PHP, MySQL, Ajax, JSON, and more!).**

APIs

Application programming interfaces are really just code provided by other people (or companies) that you can tap into for their data, objects, and other services.

They provide a series of object constructors, allowing you to create your own instances of other objects. Once you have an instance, you can use all the properties and methods associated with those objects in your code.

hope to see you again soon

Leaving town...



It's been great having you in jQueryville!

We're sad to see you leave, but now that you have all the skills

you need to build your own cool jQuery-powered websites, we're sure you'd rather be doing that than hanging around here. It's been great showing you around the world of jQuery. Feel free to drop us a line or tell us about your cool new site at the Head First Labs: <http://headfirstlabs.com>.

appendix i: leftovers



The Top Ten Things (we didn't cover)



Even after all that, there's still plenty we didn't get around to. There are lots of other jQuery and JavaScript goodies we didn't manage to squeeze into the book. It would be unfair not to tell you about them, so you can be more prepared for any other facet of jQuery you might encounter on your travels.

every single thing

#1. Every single thing in the jQuery library

You probably realize by now that jQuery is a massive library. We tried to cover the main stuff that a person new to jQuery would need. You are now armed with all of this knowledge so you can go and check the rest of the library out.

jQuery methods

.add()	deferred.fail()	event.target
.addClass()	deferred.isRejected()	event.timeStamp
.after()	deferred.isResolved()	event.type
jQuery.ajax()	deferred.pipe()	event.which
.ajaxComplete()	deferred.promise()	jQuery.extend()
.ajaxError()	deferred.reject()	.fadeIn()
jQuery.ajaxPrefilter()	deferred.rejectWith()	.fadeOut()
.ajaxSend()	deferred.resolve()	.fadeTo()
jQuery.ajaxSetup()	deferred.resolveWith()	.fadeToggle()
.ajaxStart()	deferred.then()	.filter()
.ajaxStop()	.delay()	.find()
.ajaxSuccess()	.delegate()	.first()
.andSelf()	.dequeue()	.focus()
.animate()	jQuery.dequeue()	.focusin()
.append()	.detach()	.focusout()
.appendTo()	.die()	jQuery.fx.interval
.attr()	jQuery.each()	jQuery.fx.off
.before()	.each()	jQuery.get()
.bind()	.empty()	.get()
.blur()	.end()	jQuery.getJSON()
jQuery.browser	.eq()	jQuery.getScript()
.change()	.error()	jQuery.globalEval()
.children()	jQuery.error	jQuery.grep()
.clearQueue()	event.currentTarget	.has()
.click()	event.data	.hasClass()
.clone()	event.isDefaultPrevented()	jQuery.hasData()
.closest()	event.	.height()
jQuery.contains()	isImmediatePropagationStopped()	.hide()
.contents()	event.isPropagationStopped()	jQuery.holdReady()
.context	event.namespace	.hover()
.css()	event.pageX	.html()
jQuery.cssHooks	event.pageY	jQuery.inArray()
.data()	event.preventDefault()	.index()
jQuery.data()	event.relatedTarget	.innerHeight()
.dblclick()	event.result	.innerWidth()
deferred.always()	event.stopImmediatePropagation()	.insertAfter()
deferred.done()	event.stopPropagation()	.insertBefore()

#1. Every single thing in the jQuery library (continued)

jQuery methods (continued)

```
.is()
jQuery.isArray()
jQuery.isEmptyObject()
jQueryisFunction()
jQuery.isPlainObject()
jQuery.isWindow()
jQuery.isXMLDoc()
jQuery()
.jquery
.keydown()
.keypress()
.keyup()
.last()
.length
.live()
.load()
.load()
jQuery.makeArray()
.map()
jQuery.map()
jQuery.merge()
.mousedown()
.mouseenter()
.mouseleave()
.mousemove()
.mouseout()
.mouseover()
.mouseup()
.next()
.nextAll()
.nextUntil()
jQuery.noConflict()
jQuery.noop()
.not()
jQuery.now()
.offset()
.offsetParent()
.one()
.outerHeight()
.outerWidth()

jQuery.param()
.parent()
.parents()
.parentsUntil()
jQuery.parseJSON()
jQuery.parseXML()
.position()
jQuery.post()
.prepend()
.prependTo()
.prev()
.prevAll()
.prevUntil()
.promise()
.prop()
jQuery.proxy()
.pushStack()
.queue()
jQuery.queue()
.ready()
.remove()
.removeAttr()
.removeClass()
.removeData()
jQuery.removeData()
.removeProp()
.replaceAll()
.replaceWith()
.resize()
.scroll()
.scrollLeft()
.scrollTop()
.select()
.serialize()
.serializeArray()
.show()
.siblings()
.size()
.slice()
.slideDown()
```

```
.slideToggle()
.slideUp()
.stop()
jQuery.sub()
.submit()
jQuery.support
.text()
.toArray()
.toggle()
.toggle()
.toggleClass()
.trigger()
.triggerHandler()
jQuery.trim()
jQuery.type()
.unbind()
.undelegate()
jQuery.unique()
.unload()
.unwrap()
.val()
jQuery.when()
.width()
.wrap()
.wrapAll()
.wrapInner()
```

every single thing (cont'd)

#1. Every single thing in the jQuery library (continued)

jQuery selectors

All Selector ("*")	Has Attribute Selector [name]
Attribute Contains Prefix Selector [name ="value"]	:has() Selector
Attribute Contains Selector [name*="value"]	:header Selector
Attribute Contains Word Selector [name~="value"]	:hidden Selector
Attribute Ends With Selector [name\$="value"]	ID Selector (#id")
Attribute Equals Selector [name=="value"]	:image Selector
Attribute Not Equal Selector [name!="value"]	:input Selector
Attribute Starts With Selector [name^="value"]	:last-child Selector
:animated Selector	:last Selector
:button Selector	:lt() Selector
:checkbox Selector	Multiple Attribute Selector [name="value"]
:checked Selector	[name2="value2"]
Child Selector ("parent > child")	Multiple Selector ("selector1, selector2, selectorN")
Class Selector (*.class")	Next Adjacent Selector ("prev + next")
:contains() Selector	Next Siblings Selector ("prev ~ siblings")
Descendant Selector ("ancestor descendant")	:not() Selector
:disabled Selector	:nth-child() Selector
Element Selector ("element")	:odd Selector
:empty Selector	:only-child Selector
:enabled Selector	:parent Selector
:eq() Selector	:password Selector
:even Selector	:radio Selector
:file Selector	:reset Selector
:first-child Selector	:selected Selector
:first Selector	:submit Selector
:focus selector	:text Selector
:gt() Selector	:visible Selector

#2. jQuery CDNs

CDNs (*content delivery networks*, or *content distribution networks*) are large networks of servers, designed to store and deliver information—data, software, API code, media files or videos, etc.—making it easily accessible on the Web. Each server in the node contains a copy of the data that is being served out. When these nodes are strategically placed around a network—like the Internet—they can increase the speed of information delivery to many more people consuming this data. Windows Azure and Amazon CloudFront are examples of traditional CDNs.

A number of large enterprises provide hosted copies of jQuery on CDN networks that are available for public use. Below are links to the CDN-hosted copies of jQuery that you may hotlink to.

Google Ajax API CDN

-  <http://ajax.googleapis.com/ajax/libs/jquery/1.6.2/jquery.min.js>

Microsoft CDN

-  <http://ajax.aspnetcdn.com/ajax/jQuery/jquery-1.6.2.min.js>

jQuery CDN (via Media Temple)

-  <http://code.jquery.com/jquery-1.6.2.min.js> (Minified version)

-  <http://code.jquery.com/jquery-1.6.2.js> (Source version)

You can include these in your jQuery applications instead of downloading jQuery every time.

noConflict method

#3. The jQuery namespace: noConflict method

Many JavaScript libraries use \$ as a function or variable name, just as jQuery does. In jQuery's case, \$ is just an alias for jQuery, so all functionality is available without using \$. If we need to use another JavaScript library alongside jQuery, we can return control of \$ back to the other library with a call to \$.noConflict:

```
<script type="text/javascript" src="other_lib.js"></script>
<script type="text/javascript" src="jquery.js"></script>
<script type="text/javascript">
    $.noConflict();
    //Code that uses other libraries $ can follow here.
</script>
```

This technique is especially effective in conjunction with the .ready method's ability to alias the jQuery object, as within a callback passed to .ready we can use \$ if we wish without fear of conflicts later:

```
<script type="text/javascript" src="other_lib.js"></script>
<script type="text/javascript" src="jquery.js"></script>
<script type="text/javascript">
    $.noConflict();
    jQuery(document).ready(function($) {
        // Code that uses jQuery's $ can follow here.
    });
    // Code that uses other libraries $ can follow here.
</script>
```

You'll only need to use this if you plan to use other JavaScript libraries that use the \$ as a reference. You will **not** need this if you are only using jQuery on your page. Even if you include several plug-ins, you will **not** need this.

#4. Debugging your jQuery code

It is always useful to debug your code—especially if you’re working on a large-scale project, with many different types of objects, includes, or APIs. Oftentimes, you’ll need to know the content of an object or variable sent back to you, but don’t want to alert it out, or figure out how to get at all the properties of an object.

Enter some debugging plug-ins. These can help you look inside your objects so you can see when their properties change values, or track the changes of a variable over time. You can also see how it evolves throughout your application, or if it ever gets null values unintentionally. This can be very useful when you’re troubleshooting JavaScript or jQuery code.

Two of the debugging plug-ins we’ve found useful when coding in JavaScript and jQuery are Dump and VariableDebugger.

<http://plugins.jquery.com/project/Dump> (For seeing what your object contains.)

<http://plugins.jquery.com/project/VariableDebugger> (Similar, but displays info in pop up.)

There are several others, and there will be more and more over time, as well as improvements to these. We found these useful, but to look for some more that you might like better, go to the jQuery Plug-ins site (<http://plugins.jquery.com/>) and search for “debug.”

Of course, for everything else, there’s always the browser tools we’ve been using throughout the book.

queues

#5. Advanced animation: queues

Queues in jQuery are mostly used for animations. You can use them for any purpose you like. They are an **array of functions stored on a per-element basis**, using `jQuery.data`. They are first-in-first-out (FIFO). You can **add a function to the queue** by calling `.queue`, and you remove (by calling) the functions using `.dequeue`.

Every element can have **one to many queues of functions** attached to it by jQuery. In most applications, only one queue (called **fx**) is used. Queues allow a **sequence of actions to be called on an element asynchronously**, without halting program execution. The typical example of this is calling multiple animation methods on an element. For example:

```
$('#my_element').slideUp().fadeIn();
```

When this statement is executed, the element begins its sliding animation immediately, but the fading transition is placed on the fx queue to be called only once the sliding transition is complete.

The `.queue` method allows us to **directly manipulate this queue of functions**. Calling `.queue` with a callback is particularly useful; it allows us to place a new function at the end of the queue.

This feature is similar to providing a callback function with an animation method, but does not require the callback to be given at the time the animation is performed.

```
$('#my_element').slideUp();
$('#my_element').queue(function() {
    alert('Animation complete.');
    $(this).dequeue();
});
```

This is equivalent to:

```
$('#my_element').slideUp(function() {
    alert('Animation complete.');
});
```

Note that when adding a function with `.queue`, we should ensure that `.dequeue` is eventually called so that the next function in line executes.

In jQuery 1.4, the function that's called is passed in another function, as the first argument, that when called automatically dequeues the next item and keeps the queue moving. You would use it like so:

```
$("#test").queue(function(next) {
    // Do some stuff...
    next();
});
```

The default queue in jQuery is **fx**. It is used by `.animate` and all functions that call it by default.

NOTE: If you are using a custom queue, you must manually `.dequeue` the functions—they will not autostart like the default fx queue!

#6. Form validation

One **very** important feature we didn't have room for is **form validation**, on the **client/browser side**, using jQuery. In Chapters 9, 10, and 11, we saw a small piece of **server-side** validation, using PHP, before our data was inserted into our databases. This is also very important, and strongly advised. A malformed `insert` or `select` statement to your database could end up revealing much more about your data than you intended.

But back to the client-side validation...

There are many jQuery plug-ins dedicated to form validation. One of our favorites is the aptly named “validation” plug-in, found here: <http://docs.jquery.com/Plugins/validation>.

This plug-in will allow you to create a **series of rules** for each element on your form, so you can customize the validation, and **refine the data you want to accept in your form**. This includes everything from **minimum** or **maximum** field lengths, check for **required** fields, check if a **valid email address** is entered, and more. Here's some examples from the jQuery website:

Specifies a name element as required and an email element as required (using the shortcut for a single rule) and a valid email address (using another object literal).

```
$(".selector").validate({
    rules: {
        // simple rule, converted to {required:true}
        name: "required",
        // compound rule
        email: {
            required: true,
            email: true
        }
    }
});
```

Adds required and a minlength of 2 to an element and specifies custom messages for both.

```
$("#myinput").rules("add", {
    required: true,
    minlength: 2,
    messages: {
        required: "Required input",
        minlength: jQuery.format("Please, at least {0} characters
are necessary")
    }
});
```

#7. jQuery UI effects

The jQuery UI Effects library comes with some **extra animations**, not available in the regular jQuery library. These can be broken down into **three separate types of functionality**:

1 Color animations

Color animations extend the `animate` function to be able to animate colors as well. It's heavily used by the class transition feature, and it's able to color-animate the following properties:

```
backgroundColor
borderBottomColor
borderLeftColor
borderRightColor
borderTopColor
color
outlineColor
```

2 Class transitions

Class transitions extend the base class API to be able to animate between two different classes. The following jQuery methods are modified by jQuery UI to accept three additional parameters: `speed`, `easing` (optional), and `callback`.

```
addClass(class)
    Adds the specified class(es) to each set of matched elements.
removeClass(class)
    Removes all or the specified class(es) from the set of matched elements.
toggleClass(class)
    Adds the specified class if it is not present; removes the specified class if it is present.
switchClass(currentClass, newClass)
    Allows you to visually transition from one class to another.
```

3 Advanced easing

Advanced easing is included in the Effects core, and is a jQuery port of the easing functions written by Robert Penners, which were originally written in ActionScript for Flash. They are a series of mathematical equations designed to make the animation of objects smoother and more accurate. Here's a list of all the easing functions:

linear	easeInQuart	easeInExpo	easeInBack
swing	easeOutQuart	easeOutExpo	easeOutBack
jswing	easeInOutQuart	easeInOutExpo	easeInOutBack
easeInQuad	easeInQuint	easeInCirc	easeInBounce
easeOutQuad	easeOutQuint	easeOutCirc	easeOutBounce
easeInOutQuad	easeInOutQuint	easeInOutCirc	easeInOutBounce
easeInCubic	easeInSine	easeInElastic	
easeOutCubic	easeOutSine	easeOutElastic	
easeInOutCubic	easeInOutSine	easeInOutElastic	

#8. Creating your own jQuery plug-ins

Extending jQuery with plug-ins and methods is very powerful and can save you and your peers a lot of development time by abstracting your most clever functions into plug-ins.

Rather than writing a whole bunch of text about how to create a jQuery plug-in, we think it's best left to the experts over at jQuery. They have a very substantial and informative tutorial here: <http://docs.jquery.com/Plugins/Authoring>.

Here's a brief summary of what to keep in mind when developing your next jQuery plug-in:

- Always wrap your plug-in in `(function($) { // plugin goes here })(jQuery);`.
- Don't redundantly wrap the `this` keyword in the immediate scope of your plug-in's function.
- Unless you're returning an intrinsic value from your plug-in, always have your plug-in's function return the `this` keyword to maintain chainability.
- Rather than requiring a lengthy amount of arguments, pass your plug-in settings in an object literal that can be extended over the plug-in's defaults.
- Don't clutter the `jQuery.fn` object with more than one namespace per plug-in.
- Always namespace your methods, events, and data.
- `jQuery.fn` is pronounced "jQuery effin."

closures

#9. Advanced JavaScript: closures

Closures are a very complex topic within **JavaScript**, and were quite close to making it into the book proper. Although they didn't, we feel strongly about you needing to know about them, so we wanted to mention them here.

Closures are not hard to understand once you grasp the core concept. However, if you read some of the more detailed, technical descriptions, you might get very confused.

First, a definition (or two):

- ➊ A closure is the local variable for a function, kept alive after the function has returned.
- ➋ Whenever you see the function keyword within another function, the inner function has access to variables in the outer function.

Crazy, right?

Closures fully rely on the **scope** of variables and objects. The scope refers to where objects, variables, and functions are **created and accessible**, and in what **context** they are being called. Basically, objects, variables, and functions can be defined in either a **local** or **global** scope.

Local scope: The local scope is when something is defined and accessible only in a certain part of the code, like inside a function.

Global scope: As opposed to the local scope, when something is global is accessible from anywhere in your code.

Consider the following code:

```
function func1(x) {
    var tmp = 3;
    function func2(y) {
        alert(x + y + (++tmp));
    }
    func2(10);
}
func1(2);
```

#9. Advanced JavaScript: closures (continued)

The `tmp` variable is declared in **local** scope, inside the `func1` function. This will always alert 16, because `func2` can access the `x` (which was defined as an argument to `func1`), and it can also access `tmp` from `func1`.

That is **not a closure**. A closure is when you return the inner function. The inner function will close over the variables of `func1` before leaving.

Now consider:

```
function func1(x) {
    var tmp = 3;
    return function (y) {
        alert(x + y + (++tmp));
    }
}
var func2 = func1(2); // func2 is now a closure.
func2(10);
```

Again, `tmp` is in the **local scope**, but the `func2` function is in the **global scope**. The above function will also alert 16, because `func2` can still refer to `x` and `tmp`, even though it is no longer directly inside the scope.

However, since `tmp` is still hanging around inside `func2`'s closure, it is also being incremented. It will be incremented each time you call `func2`.

It is possible to create more than one closure function, either by returning a list of them or by setting them to global variables. All of these will refer to the same `x` and the same `tmp`; they don't make their own copies.


#10. Templates

jQuery templates are still in beta, but are a cool, upcoming feature that might help you build a more flexible site, without much HTML or jQuery. They are designed to **take data and bind it to some template markup**, so you can consistently use the same markup to display similarly related data.

Check them out here: <http://api.jquery.com/category/plugins/templates/>.

appendix ii: set up a development environment

Get ready for the big times

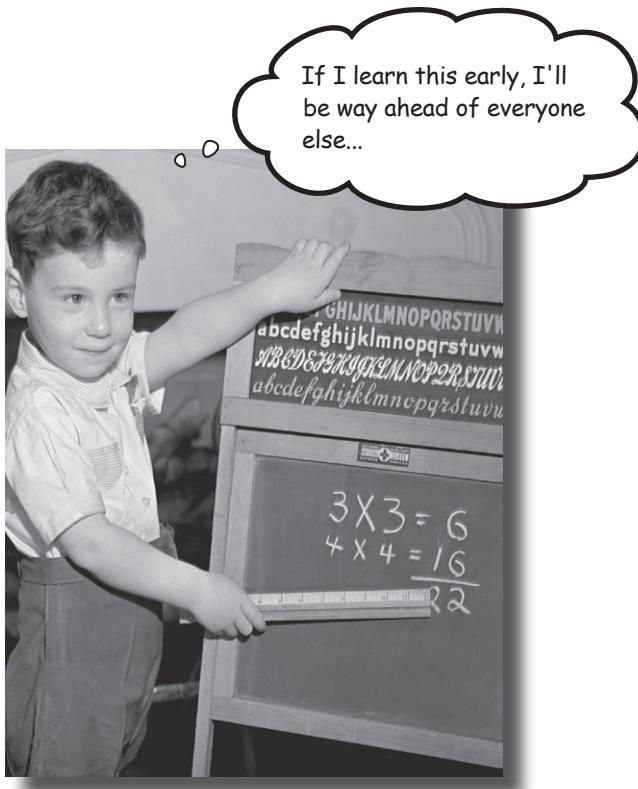

You need a place to practice your newfound PHP skills without making your data vulnerable on the Web. It's

always a good idea to have a safe place to develop your PHP application before unleashing it on the world (wide web). This appendix contains instructions for installing a web server, MySQL, and PHP to give you a safe place to work and practice.

Create a PHP development environment


Before you can put your finished application on the Web with your newfound jQuery and AJAX skills, you need to develop it. And it's never a good idea to develop your web application on the Web where everyone can see it. You can **install software locally that lets you build and test your application before you put it online.**

There are three pieces of software you'll need on your local computer to build and test PHP and MySQL applications:

1. A web server
2. PHP
3. A MySQL database server

PHP isn't a server; it's a set of rules that your web server understands that allow it to interpret PHP code. Both the web server and the MySQL server are executable programs that run on a computer.

Keep in mind that we're talking about setting up your **local computer** as a web server for PHP development. You'll ultimately still need an **online web server** to upload your finished application to so that other people can access and use it.

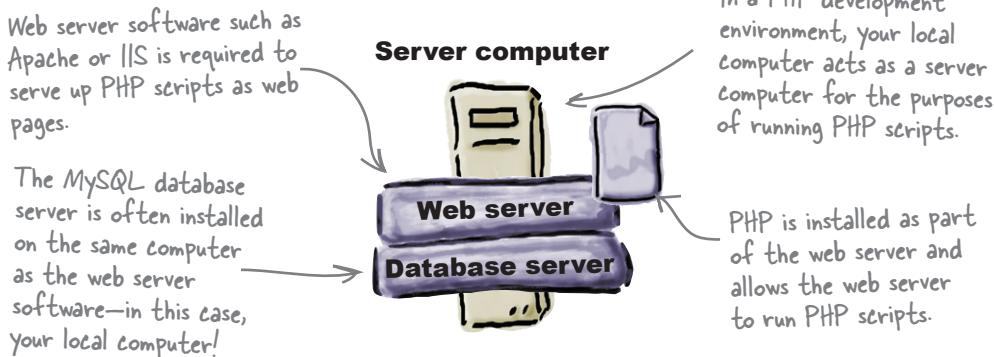

Find out what you have


Before trying to install any of the pieces of the PHP development puzzle, your best bet is to first evaluate what you already have installed. Let's take a look at the three pieces and how you can tell what's already on your system.

The platform of your local computer makes a big difference when it comes to what's already installed. For example, Mac OS X has a web server installed by default, while most Windows computers do not.

NOTE: This appendix covers Windows XP, Vista, Windows 7, and Windows Server 2003/2008. For Mac, it applies to Mac OS X 10.3.x or newer.

Do you have a web server?

You probably already have a web server if you are using a newer PC or Mac. To find out quickly on either system, open a browser window and type **http://localhost** in the address bar. If you get an introductory page, that means your web browser is alive and well on your local machine.



If you have a Mac or Windows machine with the Apache web server installed, you might see something like this.



If you have a Windows machine with IIS, you might see something like this.



Do you have PHP? Which version?

If you have a web server, you can check to see if you have PHP installed very easily, as well as which version you have. Create a new script named *info.php* and type this in it:

```
<?php phpinfo(); ?>
```

Save this file to the directory your web server uses. On Windows, it's typically:

C:\inetpub\wwwroot (for IIS)

or:

C:\Program Files (x86)\Apache Software Foundation\Apache2.2\htdocs (for Apache)

On the Mac, it's usually something like:

/Users/yourname/sites/

If you try to open this file in your browser by typing **http://localhost/info.php**, you'll see something like this if you have PHP installed:


Here's the version of PHP you have installed.



checking your mysql version

Do you have MySQL? Which version?

On Windows, you can tell by right-clicking on the Windows taskbar, selecting **Task Manager**, and selecting the **Services** tab. For more information, you can click the services button on Windows 7.

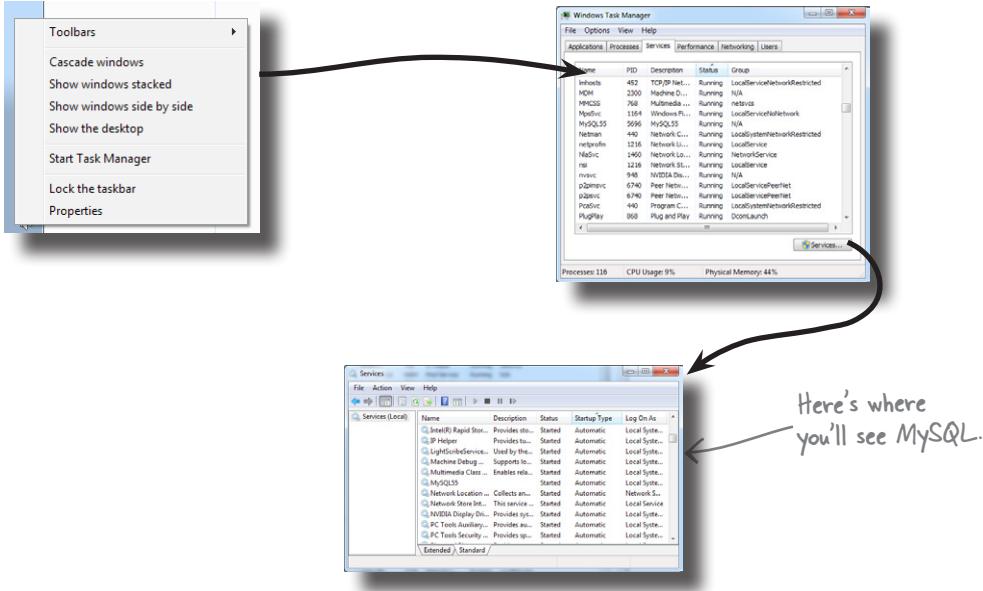

To determine whether you have MySQL on the Mac, open your terminal and type:

```
cd /user/local/mysql
```

If the command works, you have MySQL installed. To check the version, type:

```
mysql
```

If this command succeeds, it means MySQL is installed.

Here's the version of MySQL you have installed.

The MySQL terminal is also known as the MySQL "monitor."

```
$ cd /usr/local/mysql
$ mysql
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 3
Server version: 5.0.51b MySQL Community Server (GPL)

Type 'help;' or '\h' for help. Type '\c' to clear the buffer.
mysql>
```

Start with the web server


Depending on the version of Windows you have, you can download Microsoft's Internet Information Server (IIS), or the open source Apache web server. If you need a server on the Mac, you should probably go with Apache since it's already installed.

Here's a brief overview of installing Apache on Windows:


Head over to <http://httpd.apache.org/download.cgi>.

If you're using Windows, we suggest you download the `apache_2.2.19-win32-x86-no_ssl.msi` file. This will automatically install Apache for you after you download and double-click it.

*Grab this version
and double-click
it after you've
downloaded it.*

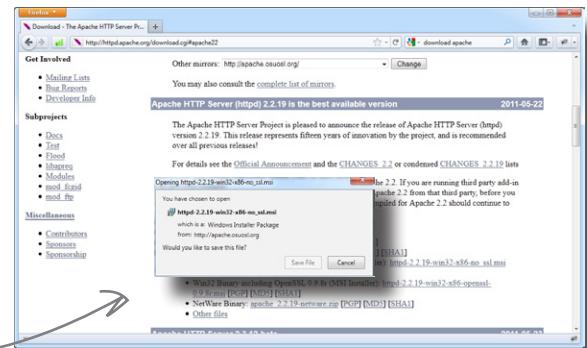

Next you'll see the Installation Wizard. Most of the instructions are straightforward, and you can accept the default choices.

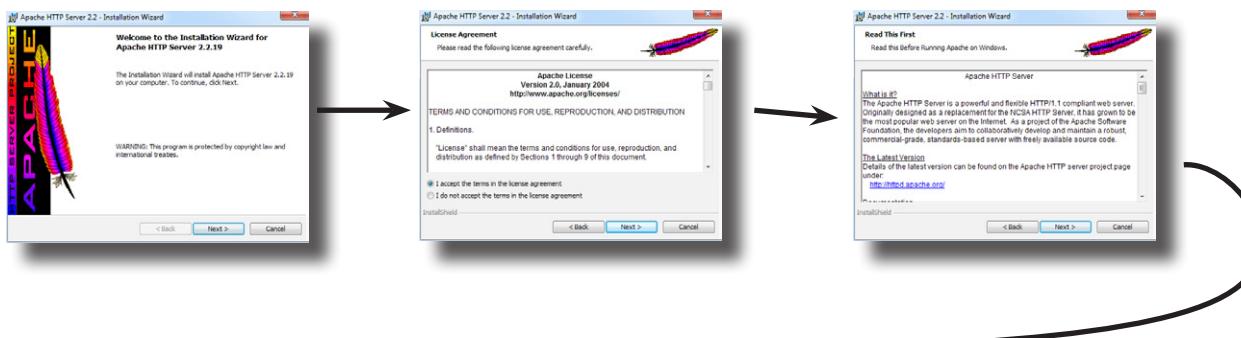

Choose the domain your computer is on. If you don't have one, you can enter **localhost**.


Your best bet is to choose the typical installation option.

You can usually choose the default directory for installation of the software.

installing php

Apache installation...concluded

You're nearly finished. Click **Install** and wait a minute or so for the installation to complete. That's it!

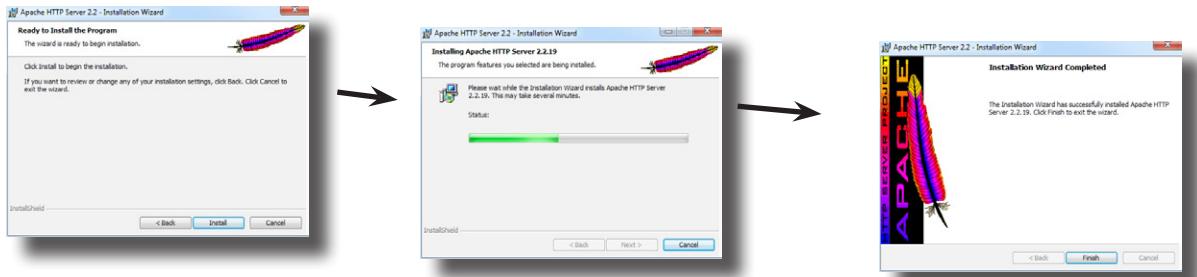

Your web server is set to start automatically when you start up your computer. But you can control it using the **Services** panel by stopping and starting it in the **Control Panel → Administrative Tools → Services** dialogue, where it will now show up as **Apache2.2**.

If these instructions don't work for you, try again, or type “Installing Apache on Windows” into your favorite search engine for more help.

PHP installation

Go to <http://www.php.net/downloads.php>, or <http://windows.php.net/download/>, if you are using Windows.

Just as with Apache, if you’re using Windows, we suggest you download the Windows installer version. If you’re using Apache, download the *php-5.2.17-Win32-VC6-x86.msi* file. If you’re using IIS, download the *php-5.3.6-Win32-VC9-x86.msi* file. This will automatically install PHP for you after you download and double-click it.

The image shows two parts of the PHP website and a file dialog:

- Left Side:** A screenshot of the PHP website (<http://windows.php.net/download/>) showing the "Windows Binaries" section. It lists "PHP 5.4" and "PHP 5.3 (5.3.14)" as available versions. A callout bubble points to the "PHP 5.4" link with the text: "This is the .msi Windows version download section."
- Right Side:** A screenshot of a Windows file dialog titled "Opening php-5.2.17-Win32-VC6-x86.msi". The dialog asks: "You have chosen to open php-5.2.17-Win32-VC6-x86.msi which is a: Windows Installer Package from: http://windows.php.net Would you like to save this file?" Buttons at the bottom are Save File and Cancel.
- Bottom Center:** A callout bubble points to the file dialog with the text: "Read the description of which version you should download."


After you've downloaded the file, double-click it. Click the **Run** button to begin the installation.

PHP installation steps


It starts with a basic setup.

Accept the License Agreement to continue.

Selecting the default installation folder is usually a good idea, but it depends on preference. Here, we choose C:\PHP.

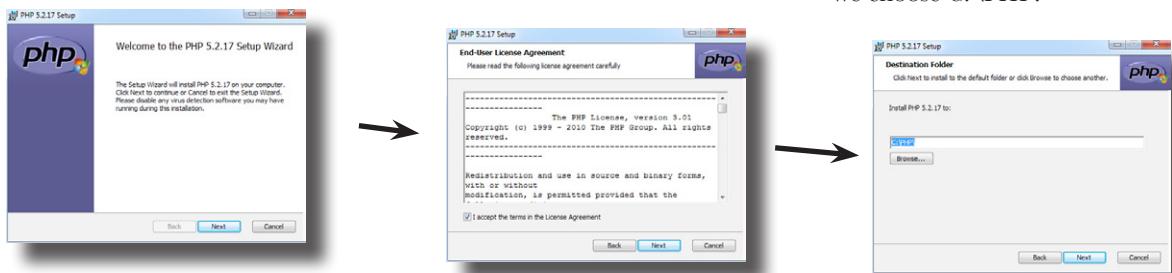

Be careful on this screen. If you're using Apache, select the right version. If you're using IIS, you will probably select the IISAPI module. Check with your particular software to determine exactly what you need. Here, we've chosen Apache 2.2, and need to give the path to our Apache install in the next screen.

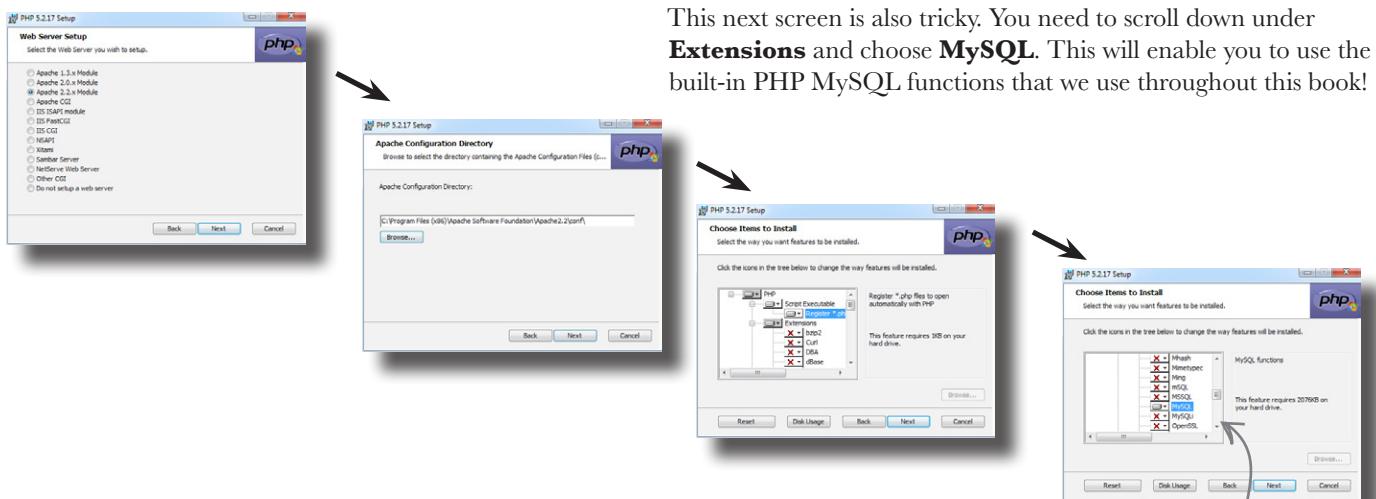


Scroll down below Extensions and click on MySQL. Click on the "Entire feature" choice.

installing mysql on windows

PHP installation steps...concluded

That's it. Click on **Install** and then **Done** to close the installer.

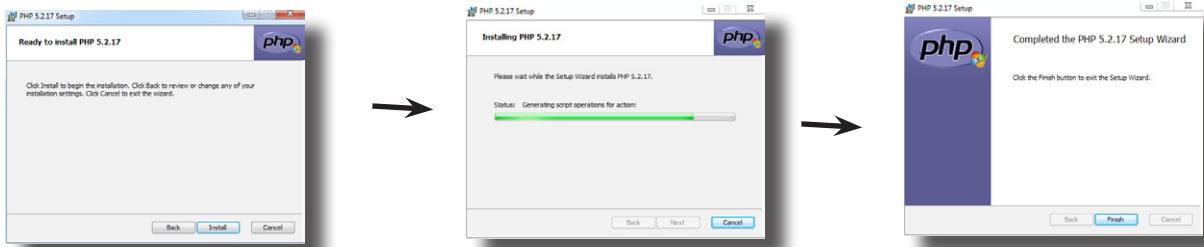

If you haven't done so already, create a new script named *info.php* and type this in it:

```
<?php phpinfo(); ?>
```

Save this file to the directory your web server uses. On Windows, it's typically:

C:\inetpub\wwwroot (for IIS)

or:

C:\Program Files (x86)\Apache Software Foundation\Apache2.2\htdocs (for Apache)

On the Mac, it's usually something like:

/Users/yourname/sites/

If you try to open this file in your browser by typing
http://localhost/info.php,
you'll see something like this if you have PHP installed:



If these instructions don't work for you, try again, or type "Installing PHP for Apache [or IIS] on Windows" into your favorite search engine for more help.

Installing MySQL

Instructions and troubleshooting

You still need MySQL, so let's work through downloading and installing it. The official name for the free version of the MySQL RDBMS server these days is **MySQL Community Server**.

The following is a list of steps for installing MySQL on Windows and Mac OS X. This is **not** meant to replace the excellent instructions found on the MySQL website, and **we strongly encourage you to go there and read them!** For much more detailed directions, as well as a troubleshooting guide, go here:

<http://dev.mysql.com/doc/refman/5.5/en/windows-installation.html>

Get version 5.5 or newer.

You'll also like the MySQL query browser, where you can type your queries and see the results inside the software interface, rather than in a console window.

Steps to install MySQL on Windows

1

Go to:


<http://dev.mysql.com/downloads/>

and click on the **MySQL Installer for Windows “Download the Beta”** download button. (Note: It was “Beta” at the time of this writing.)



2


Choose **Microsoft Windows** from the list.

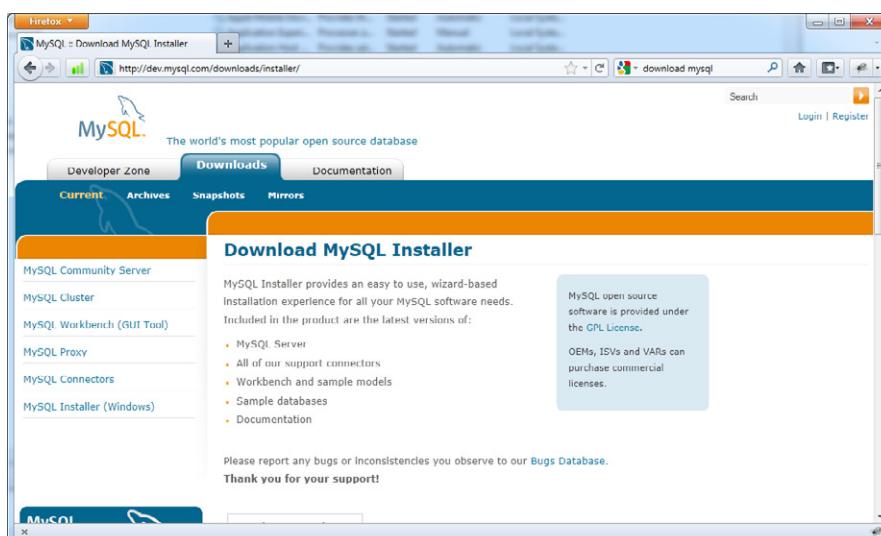


installing mysql on windows (continued)

Download your installer


- 3** Choose **Windows(x86, 32-bit), MSI Installer** from the list.

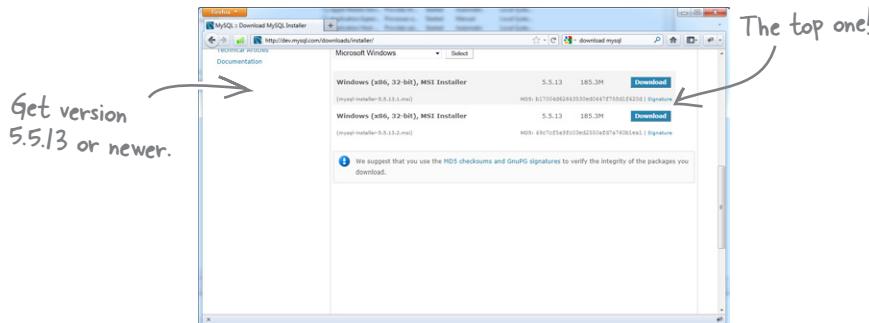

Click on **No thanks, just take me to the downloads!** unless you want to register for an account on the site, or already have one.

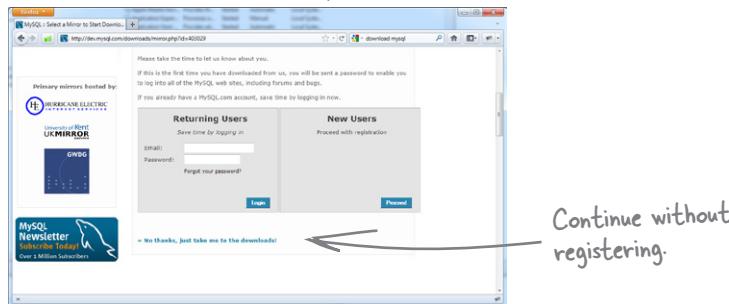


- 4** You'll see a list of locations that have a copy you can download; choose the one closest to you.
- 5** When the file has finished downloading, right-click on it and choose "Run as Administrator" to launch it, if you have Windows UAC enabled. At this point, you will be walked through the installation with the **Setup Wizard**. Click **Next**.

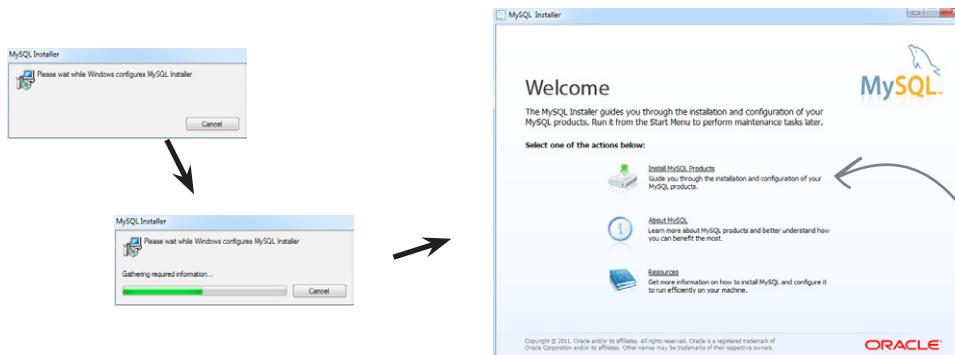

Pick a destination folder


6

Read and agree to the license terms and click **Next**.

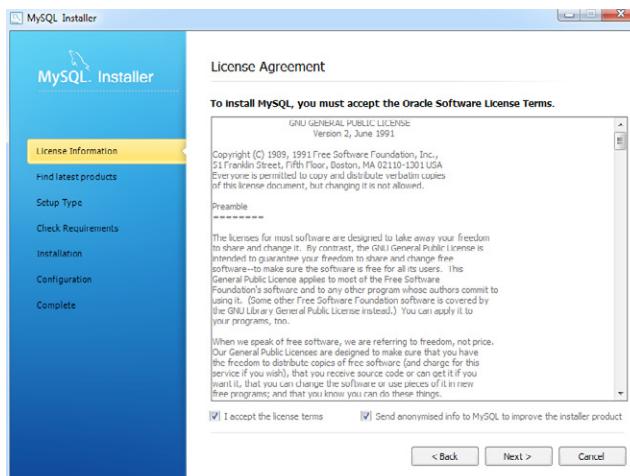


7

The next step will run an automatic update to make sure there are no newer versions. You can skip this by selecting the Skip Check box, but it is good practice to make sure your applications are up to date. After the update is complete, click **Next** to continue.

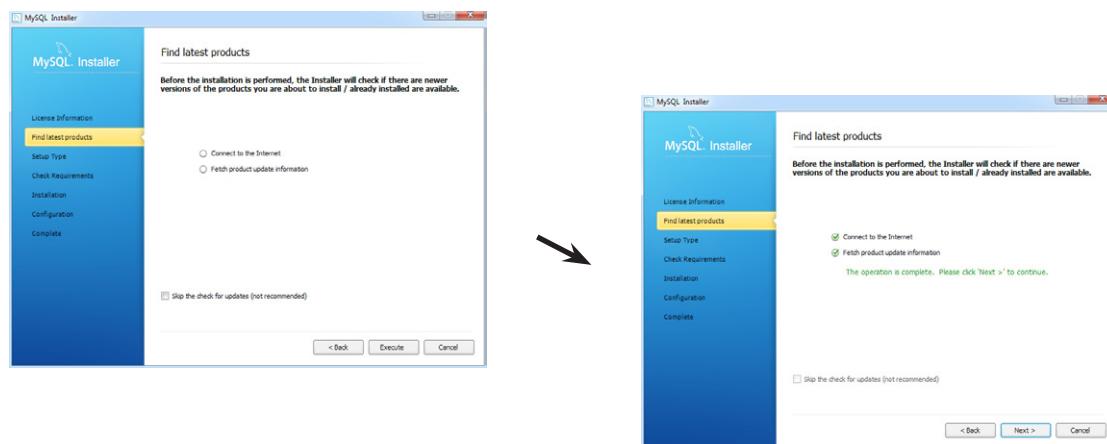


installing mysql on windows (continued)**8**


You'll be asked to choose a setup type for your installation. For your purposes, the **Developer Default** will be perfect. Also, leave the installation paths as the default ones set for you already and click **Next**.

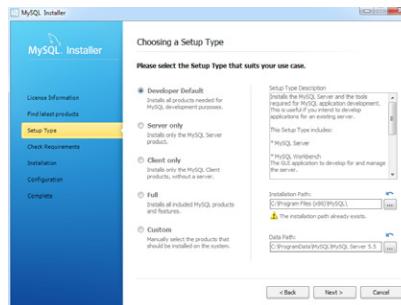**9**


Next, the installer will check your compatibility with the Microsoft .NET Framework 4 Client Profile. This is to run the MySQL Workbench application. If you are missing this, update your Windows instance at <http://update.microsoft.com/>.

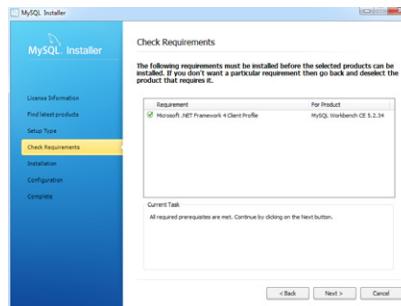**10**


The next screen will list all the features to be installed. Click **Execute** to start the installation.

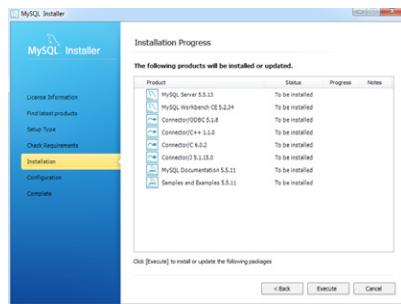


- 11** After all the services show a successful installation, click **Next** to access the configuration options for the MySQL service. Choose **Developer Machine** and click **Next**.

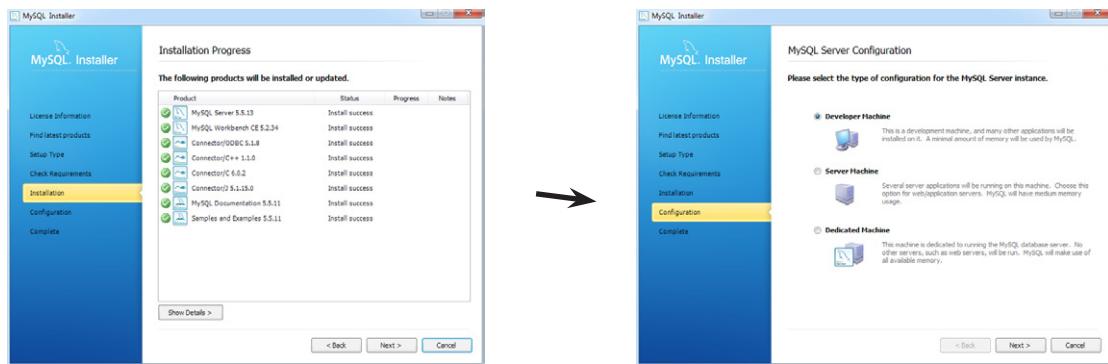

- 12** Make sure both the **Enable TCP/IP Networking** and **Create Windows Service** options are selected, and leave the default values in place. Enter a password for the root MySQL user into the boxes at the bottom and click **Next**.

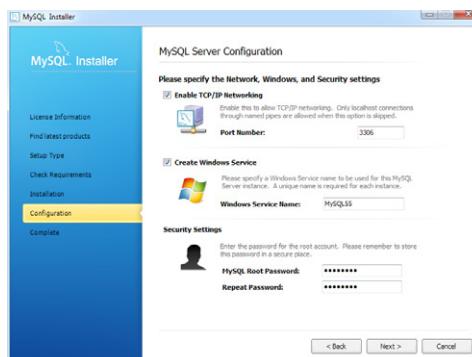

- 13** The installation should now be complete. If it doesn't start up automatically, open the MySQL Workbench from the **Start → All Programs → MySQL** menu.

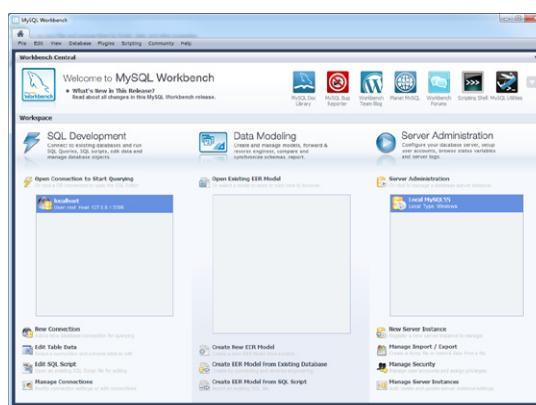

installing mysql on mac os x

Enabling PHP on Mac OS X

PHP is included on Macs with OS X version 10.5+ (Leopard), but it's not enabled by default. You have to access the main Apache configuration file and comment out a line of code in order to get PHP going. This file is called *http.conf*, and is hidden inside the Apache install folder.

You're looking for the following line of code, which has a pound symbol (#) in front of it to comment it out:

```
#LoadModule php5_module      libexec/apache2/libphp5.so
```

You need to remove the pound symbol and restart the server to enable PHP. The *http.conf* document is owned by “root,” which means you’ll have to enter your password to change it. You’ll probably also want to tweak the *php.ini* file so that Apache uses it. For more detailed information about how to carry out these steps and enable PHP, visit http://foundationphp.com/tutorials/php_leopard.php.

Steps to install MySQL on Mac OS X

If you are running Mac OS X server, a version of MySQL should already be installed.

Before you begin, check to see if you already have a version installed. Go to *Applications/Server/MySQL Manager* to access it.

1

Go to:

<http://dev.mysql.com/downloads/>

and click on the **MySQL Community Server** link.


For these instructions, we’re downloading the 32-bit version. Make sure you download the version relevant to your operating system.



You may have to scroll down a bit.


2

- Click on the **Mac OS X v10.6 (x86, 32-bit), DMG Archive** download button.

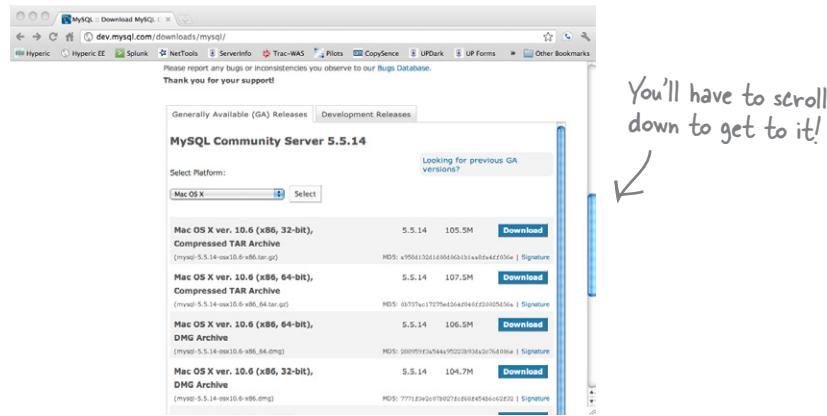


3

- Click on **No thanks, just take me to the downloads!** unless you want to register for an account on the site, or already have one.

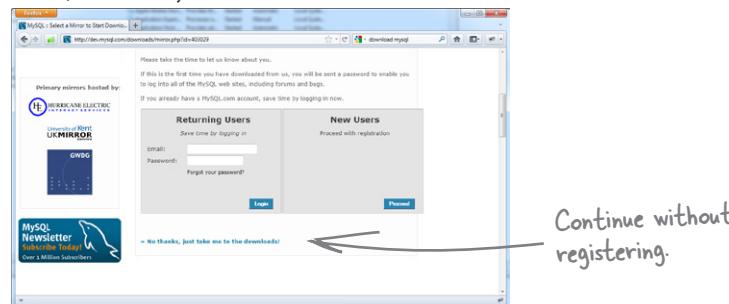

Click on a mirror that is nearest you, for faster downloads.

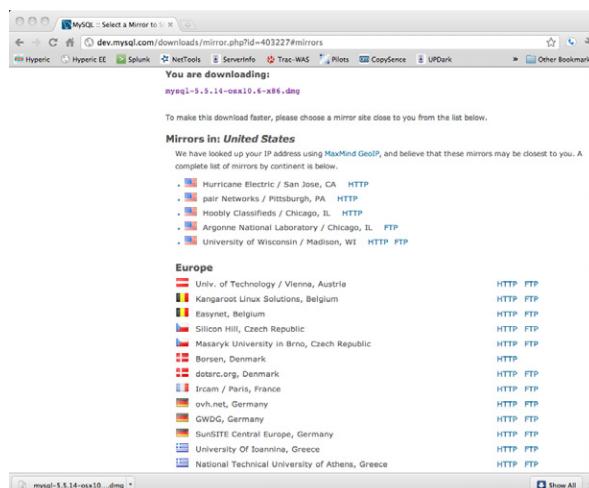

installing mysql on mac os x (continued)


Download your installer

4


Return to:

<http://dev.mysql.com/downloads/>

and click on **MySQL Workbench** (GUI tool).

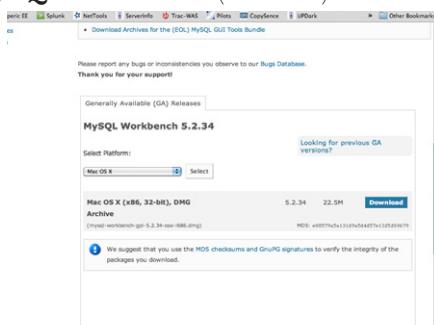


Click on **No thanks, just take me to the downloads!** unless you want to register for an account on the site, or already have one, and choose a mirror again.

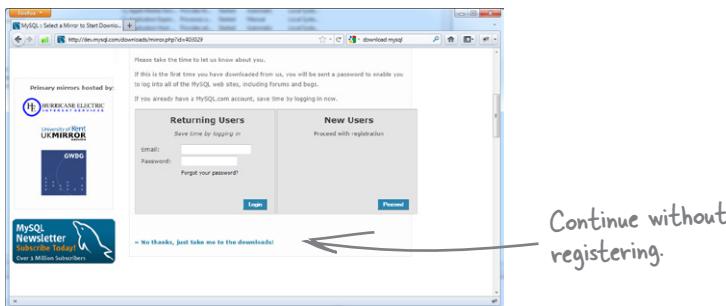

5


When both files have finished downloading, double-click on the *mysql-5.5.14-osx10.6-x86.dmg* file to mount the installer and then double-click on the *mysql-5.5.14-osx10.6-x86.pkg* file to start the package installer.

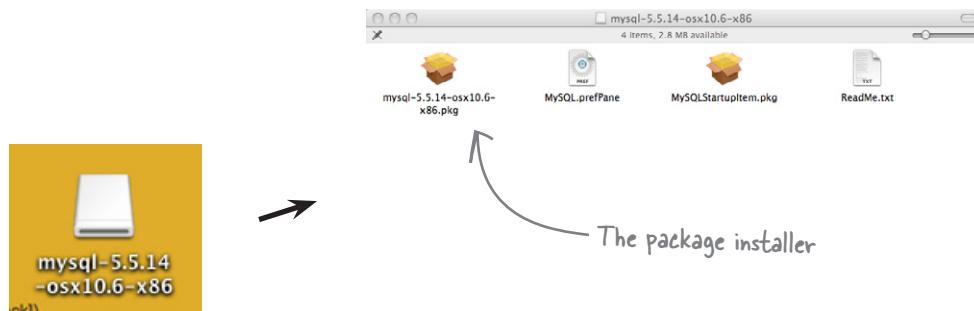

Run the package installer


6

The package installer should start. Click **Next** to continue to the **Read Me** page, and **Continue** to get to the **License** page.

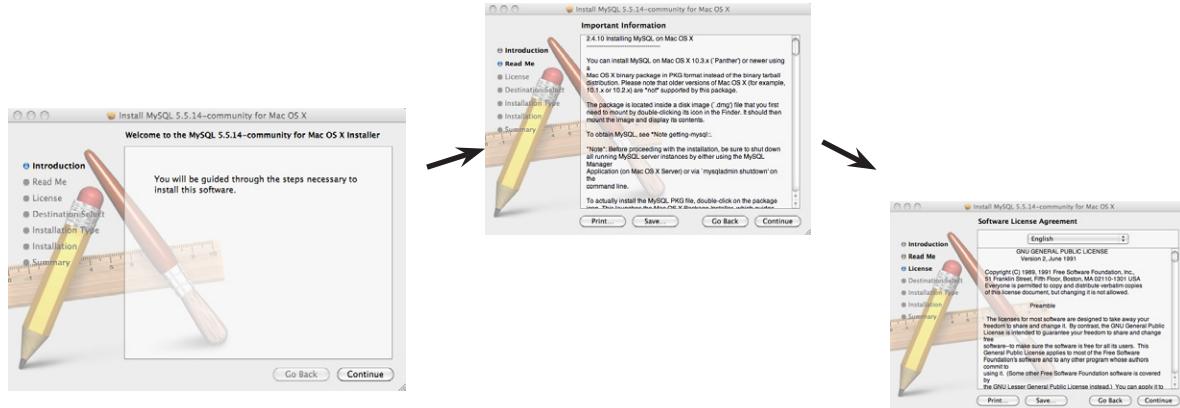


7

The next step will display this licensing information for MySQL. If you agree to the terms, click **Continue**, and then **Agree**. Select **Continue** again to install it in the default location.

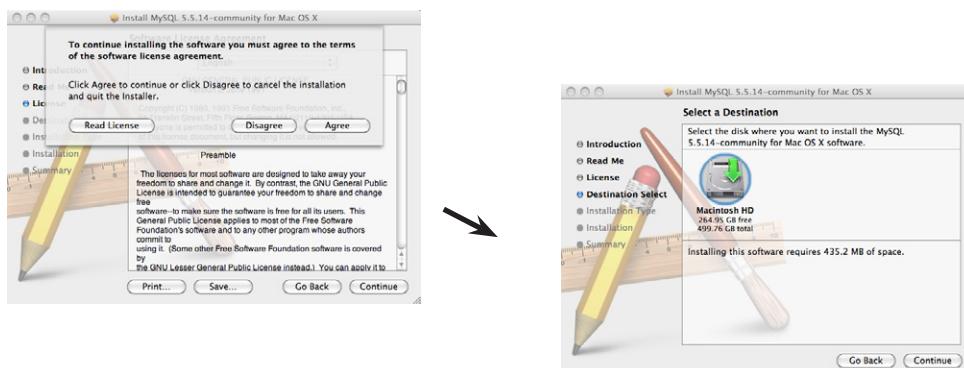


installing mysql on mac os x (continued)**8**


- Click **Install**, enter the username and password of an admin user, and press **OK** to begin the installation.

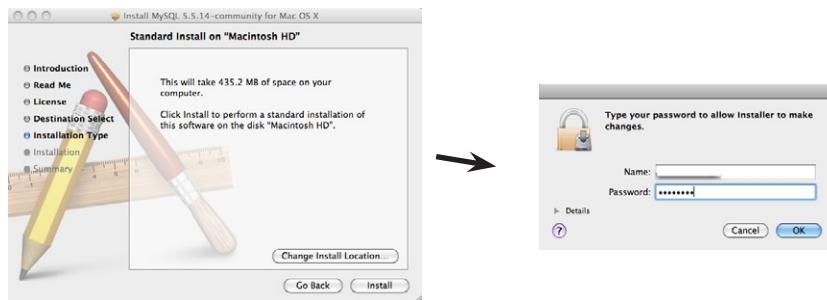


The installation should start, and give a success message when complete.

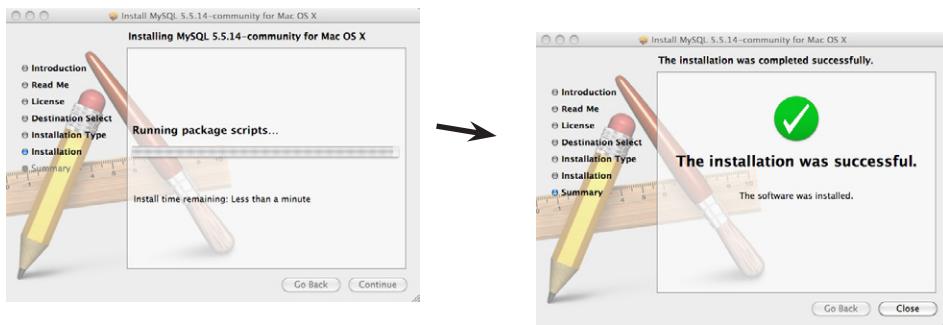
**9**

- Repeat the same steps for the *MySQLStartupItem.pkg* file.

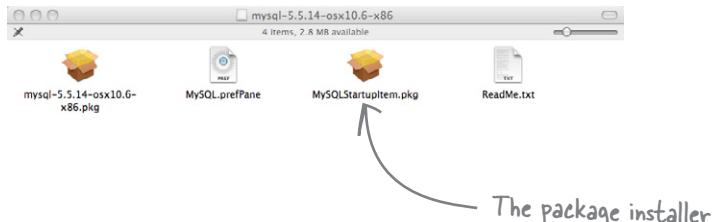


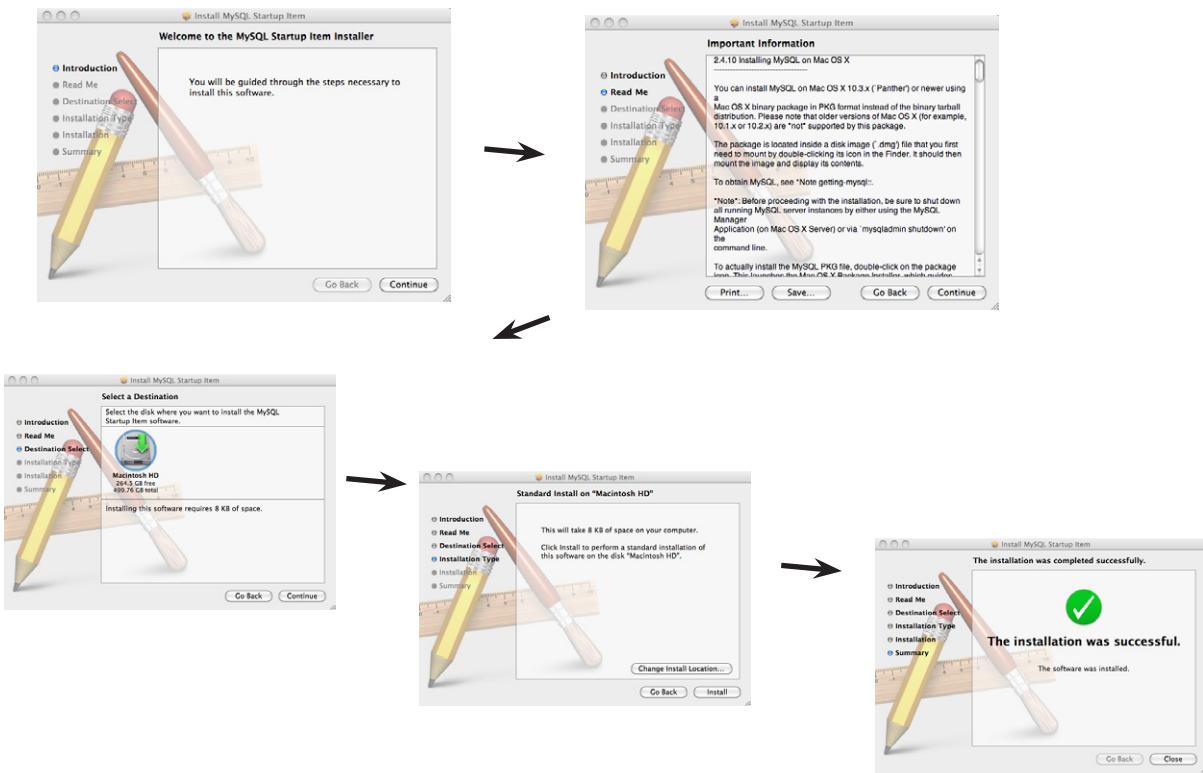set up a development environment**10**

Double-click on the **MySQL.prefPane**, also found in the *mysql-5.5.14-osx10.6-x86.dmg*, to install the MySQL Preference pane; then, click on **Start MySQL Server**.

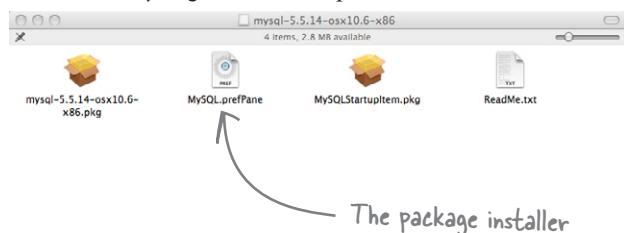


installing mysql on mac os x (continued)

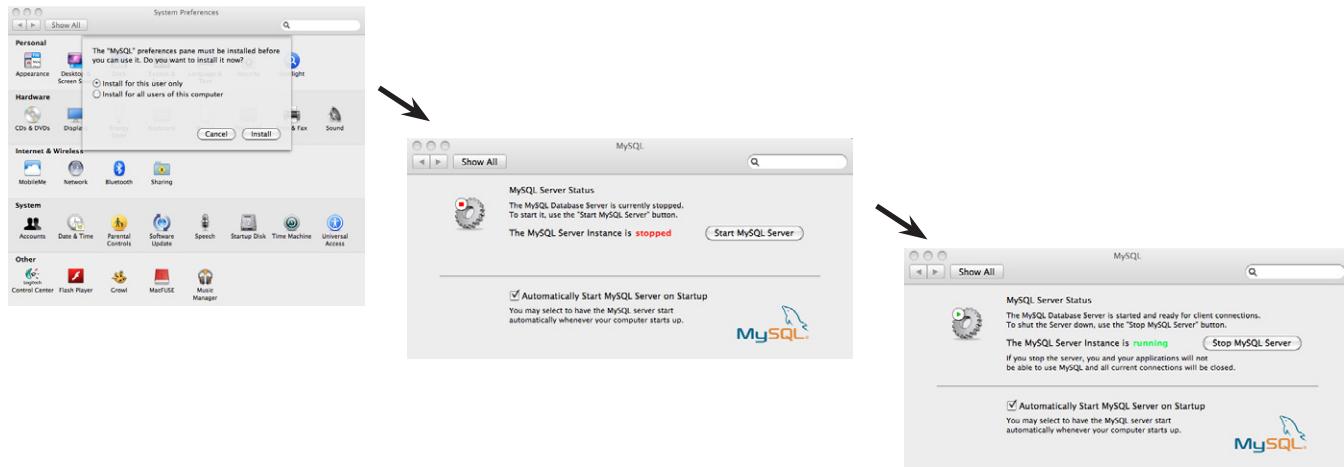

11

- Double-click on the *mysql-workbench-gpl-5.2.34.osx-i686.dmg* file that you also downloaded to start the installer for the MySQL Workbench tool.

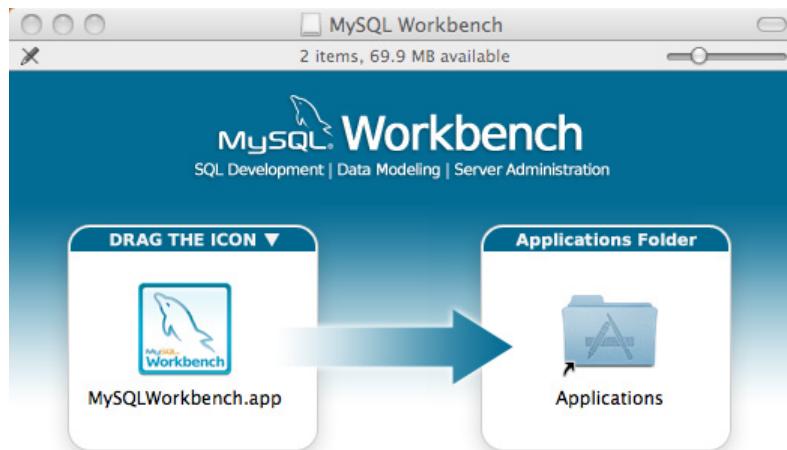


To install the applications drag the **MySQL Workbench** icon to your Applications folder.
You may then "Eject" and throw away this disk image.

Drag the *MySQLWorkbench.app* into your **Applications** folder.


Open up the Workbench tool from your **Applications** list.

set up a development environment**12**

Using the **Server Administration** panel, ensure that your server is running. If the panel is empty, click the **New Server Instance** option and select your running server.

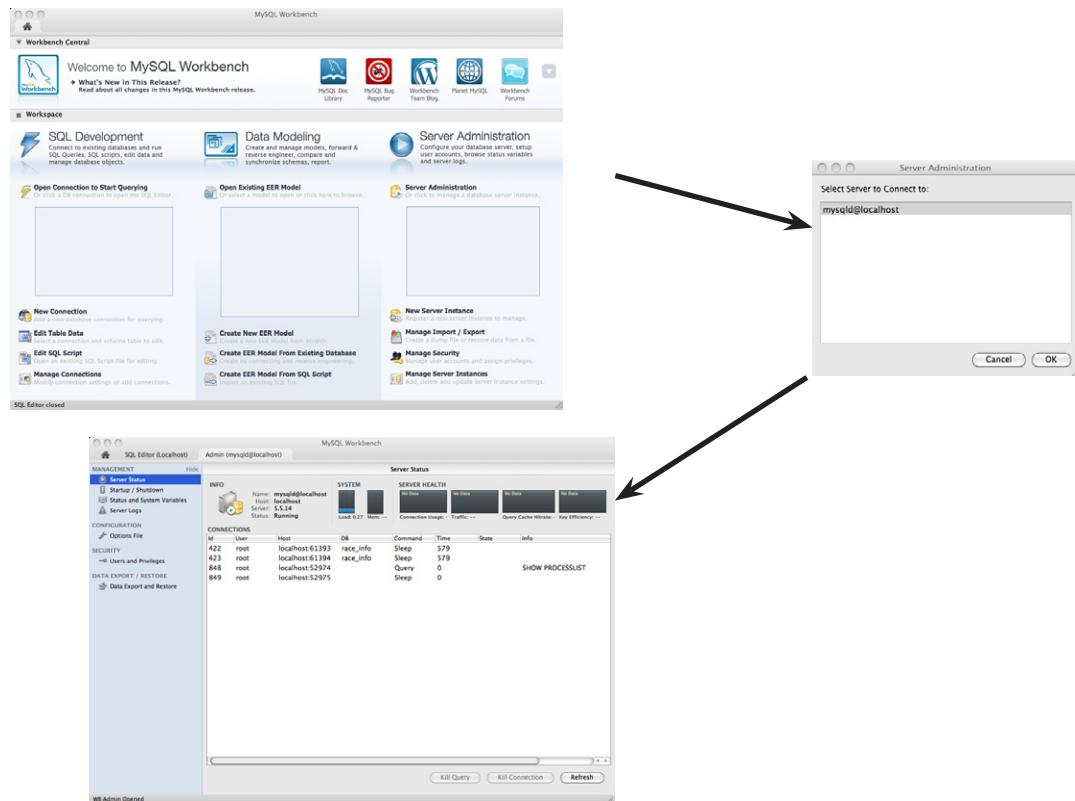**13**

Create a new connection in the **SQL Development** section by clicking **New Connection** and completing the screen that pops up. Then, double-click on your new connection to open it.

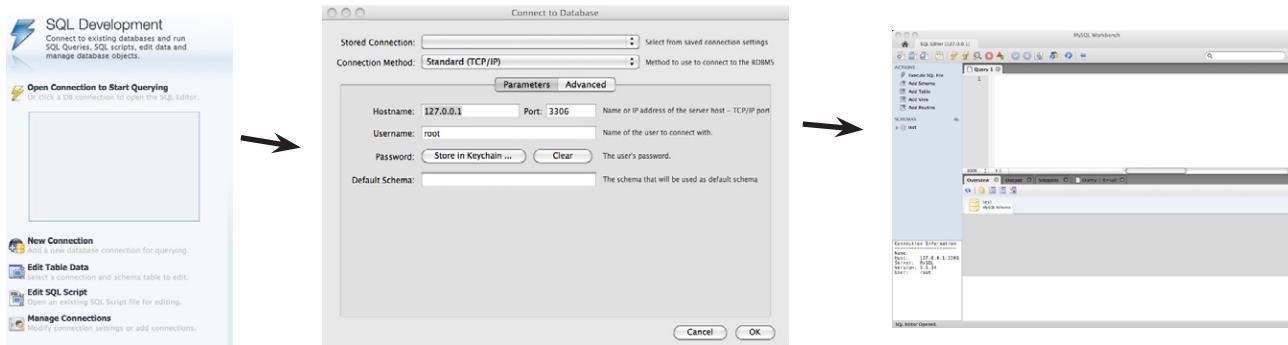

For more help on MySQL or MySQL Workbench, visit <http://dev.mysql.com/doc/>.

Index

Symbols

- `$.contains()` method 114
- `$` (dollar sign)
 - and array names 151
 - for PHP variables 352
 - for jQuery function shortcut 12, 19, 33
 - for variable storing elements 150
- `$_GET[]` associative array 331
- `$_POST[]` associative array 331
- `$_POST` object 342
- `$_POST` variable 369
- `$(this)` selector 63–64, 74, 88
- `&&` (and) operator 240
- `{ }` (curly braces)
 - for code block 25, 42
 - for function block 101
 - for loops 230
- `.(dot)` operator 221. *See also . (period)*
- `==` (equality operator) 109, 240
 - and if statement 239
- `=` (equals sign), for setting variable value 56, 105, 207
- `====` (exact equality operator) 240
- `>` (greater than) operator 240
- `>=` (greater than or equal to) operator 240
- `#` (hash mark)
 - for CSS id 13
 - for id selector 49
- `!=` (inequality operator) 240
- `<=` (less than or equal to) operator 240
- `!` (negation) operator 240
- `-=` operator 207
- `*=` operator 207
- `/=` operator 207
- `+=` operator 207
- `=>` operator, in PHP 353
- `||` (or) operator 240
- `()` (parentheses), for click method 42
- `.` (period)
 - to separate selector from method 25
 - to start CSS class 13, 48
- `<?php` and `?>` tags 343, 352, 369
- `+` (plus), for concatenation 57
- `“ ”` (quotation marks)
 - for text or HTML value 57
 - for selectors 15
- `;` (semicolon)
 - to end jQuery statement 16, 25
 - to end PHP line 315, 352
- `[]` (square brackets)
 - for array 225
 - for array item index 226
 - in PHP function 315

A

- absolute movement of elements 206
- absolute positioning of elements 180
- Accordion widget 378
- actions
 - of forms 329
 - repeating 229–230
- active state, for anchor element 21
- `addClass()` method 117, 118, 172
- addition operator (`+=`) 207
- advanced easing 456
- `a` element. *See* anchor element (HTML)

the index

after() method 159–160
 Ajax (Asynchronous JavaScript and XML) 291, 296–298, 324, 420
 components 298
 for loading information 320
 time for using 300
 ajax() method (jQuery) 296, 304
 getXMLRacers function call 307
 parameters 304
 testing 305
 timeout setting in 312
 alert function 42, 45, 50
 for checking discount variable 58
 for click event 80
 Amazon CloudFront 451
 anchor element (HTML)
 nested image 22
 states 21
 and (&&) operator 240
 animate element, position property and 181
 animate() method 182, 208, 214
 adding to script 209
 do-it-yourself effects with 199
 limitations 200
 style changes over time 202–204
 syntax 201
 with relative movement 208
 animation
 color 208, 456
 of elements 188
 method chains for combining 193
 option for turning off 208
 plug-ins for 376
 queues for 454
 anonymous functions 101, 102
 Apache web server 462
 installing on Windows 465–466
 APIs (application programming interfaces) 411, 413, 445
 Google Maps. *See also* Google Maps
 sample code 414
 object use by 415–416
 append() method 59, 74, 237

appendTo() method 237
 Apple's Safari 84
 layout engine 182
 apps, building without Flash 176
 arguments 106, 114
 arithmetic operators 207
 array_push() function (PHP) 354
 arrays 91, 151–152, 167, 174, 218, 252
 accessing 226
 adding and updating items 227–228
 blackjack data in 225–228
 creating 354
 each() method for loop through 168
 finding elements in 172
 JavaScript for emptying 246
 PHP rules for 353
 setting length to zero 246
 storing elements in 150, 152
 variable existence in 232
 writing contents of 353
 ASC keyword (SQL) 345
 assignment operator, = (equals sign) as 207
 associative arrays 331, 353
 combining into single array 354
 converting to JSON-encoded string 361
 asynchronous browsers 300
 Autocomplete widget 378, 406

B

background color, changing 16
 background-color property (CSS) 403
 before() method 159–160
 binding events to element 81, 85
 .bind() method 91
 Bit to Byte Race project
 getXMLRacers function 307–308
 repeated calls 312
 testing 309
 initial appearance 293–295
 requirements 292, 326

startAJAXcalls() function 311–312
 testing 305, 363

blackjack application 216–250
 adding excitement 250–251
 array for card deck 227–228
 arrays for organizing data 225–228
 code 233–234
 end() function 250
 function for event listeners 243–244
 hand object 237–238
 HTML and CSS code 236
 page setup 222
 reset feature for new game 245–248
 rules 216, 238

Blind effect 378

block-level element 50

blur() method 256

body element (HTML) 8

break command, for loops 237

browser cache 96

browser layout engine 182

browsers

- Ajax for passing data to 298
- asynchronous 300
- events 82
 - listeners 79
- JavaScript interpreter in 5
- onblur and onfocus to respond to events 259
- and PHP 341
- testing page in multiple 29
- viewport 7
- web page display 7
- and window object 256

browser wars 84

button elements 16, 79

buttons

- for interactive menu 133–134
 - actions 135–138
 - styling 386–389
- buttonset() method (jQuery UI) 386
- button widget 386, 410

C

calendar, for form data entry 373

case sensitivity

- of function names 102
- of variable names 60
- of XML tags 327

CDNs (content delivery networks) 451

chaining methods 142

checkForCode function 119–120
 testing 121

child of child element, selecting 67

children() method 140, 141, 144
 filter methods and 162

child selector 67

Chrome Developer 71

classes

- in CSS 13, 48, 119
- for interactive menu 130
- maximum 60
- name restrictions 60
- and selectors 52–54
- to specify div element for action 47

class selector 13, 14, 48
 combining with descendant selectors 67

class transitions 456

clearInputs() function 333

clearInterval() method 258, 263, 264, 310

clearOverlays() function 435

clearTimeout() method 258, 263, 310

clickable div element 24

clickable tabs, plug-in to convert ul element to 293

click event 42, 79
 adding to page 45
 handler function in 104
 limiting number 184
 limiting user to one 78
 for Monster Mashup 182–184
 testing 88–89

the index

click event listener
 adding to `getAllSightings()` function 425–426
 for sending form data 333–334

clickMe div element, style for 24

click-related functions, combining 270–272

client-side scripting 19

client-side validation 455

clip property (CSS) 180

closest method 148

closures 458–459

code block, {} (curly braces) for 25, 42

color
 animation 208, 456
 jQuery to change background 16

color mixer
 refreshSwatch function 402–404
 slider for 399–402, 406

columns in SQL database 338

comments 45
 in CSS 294

comparing values 244

comparison operators 240–242
 in PHP 353

concatenation 57
 testing 72

conditional logic 108, 109–111, 122, 239, 280
 for runners list 362
 operators for decision process 240–242
 PHP rules for 353
 for turning off scheduled events 320–322

contains method 111

Content Delivery Networks (CDNs) 451

convenience methods
 for Ajax in jQuery 320
 for binding events 81

counter, for array processing 168

create database statement (SQL) 336

CREATE TABLE statement (SQL) 336

CREATE USER statement (SQL) 336

Cryptid Sightings form. *See* sightings form

CSS (cascading style sheets) 4
 background-color property 403
 vs. DOM notation 208
 file example for page tabs 294
 in jQuery UI 401
 jQuery UI themes and 379
 limitations 3
 link to jQuery UI file 381
 methods to change 115–116
 properties 13, 188

CSS class 13, 48, 119

CSS id 13

CSS selectors 13
 in jQuery function 12
 vs. jQuery selector 14, 51

curly braces ({})
 for code block 25, 42
 for function block 101
 for loops 230

current position
 movement relative to 280
 setting 276

current property, `animate()` impact and 205

custom functions 100
 optimizing 290
 reset 283–285

D

data 57
 adding to Google Maps 423–426
 Ajax for passing in structured format 298
 arrays for storing 151–152
 collecting from web page 328–330
 formatting before sending to server 332
 getting from server 325
 MySQL database for storing 335
 objects for storing 218
 PHP to access 341, 347–349
 sanitization and validation in PHP 364–366
 sending to server 333–334

database. *See also MySQL database*
 connecting with PHP 343
 inserting data with PHP 331

database query 359

database servers 335

data structures 218

date() function (PHP) 315–316

Date object (JavaScript) 295

datepicker 410
 customizing with options 383
 for form 381
 testing 385

datepicker() method 382

db_connection() function (PHP) 347–349, 357, 359

deal() function 234

debugging jQuery code 453

decimal numbers, for slider widget 397

declaration for XML 299

declaring function 101, 103
 vs. named function expression 102

declaring variables 56, 186
 in loop 230

delay() method 263, 264, 310

dequeue() method 454

descendant selectors 67

detach() method
 testing for interactive menu 153
 vs. remove() 136–138

developer
 jQuery version for, vs. production version 19
 plug-in from 374

Developer Default setup type for MySQL install 472

development environment setup xxxii–xxxiii, 461–482
 MySQL database
 checking for install 464
 installing on Mac OS X 474–482
 installing on Windows 468–473

PHP 462–463
 install 466–468
 web server 465–466

die command (PHP) 343

discount code
 custom function to check for 112
 testing 121

discount variable
 testing concatenation 72
 testing display 61–63, 64

display property (CSS) 188
 of img element 22

Distance API 437

div element (HTML) 8, 39–40, 178, 179, 181
 action for specific 47–49
 clickable 24, 45, 182–184
 clickable tabs to display 293
 click event for 42
 for Google map 416
 for images 40
 left property 206
 for radio button group 386
 for tab content 295

divide operator (/=) 207

document loading, events for 82

document object 284

Document Object Model (DOM) 7, 8
 creating elements and adding events 81
 inserting HTML content into 159–160
 jQuery and 9–11, 19
 manipulating 174
 and selected elements 149
 traversal 140–144, 174
 vs. CSS notation 208
 web menu structure 126–129

document property of window object 258

document structure, HTML and 4

dollar sign (\$)
 and array names 151
 for PHP variables 352
 for jQuery function shortcut 12, 15, 19, 33
 for variable storing elements 150

DOM. *See Document Object Model (DOM)*

domain, for Apache install 465

DOM inspectors 71

the index

dot(.) notation
 for JSON object 350
 for getting properties 218
 dot(.) operator 221. *See also* period(.)
 do...while loops 229, 234, 237
 syntax 230
 downloading
 IIS (Internet Information Server) 465
 jQuery UI 379
 MySQL installer 470
 for Mac 476
 script blocking parallel 50
 Draggable widgets 401
 drop-down list in HTML form 328
 Droppable interaction 378
 Droppable widget 401
 Dump plug-in 453
 dynamic web pages
 PHP to create 314
 updates 296

E

each() method 91, 92, 114, 168
 and find() method 306
 looping through array elements with 362
 and this keyword 172
 Earth API 437
 easing functions 456
 echo command (PHP) 315, 342, 353, 369
 effects in jQuery UI 456
 effects plug-ins 376
 elements
 absolute vs. relative movement 206
 adding event listeners to 80
 animating 188
 binding events to 81, 85
 block-level 50
 emptying content 148
 id selector to match single 49
 index for list items 110
 length property to check for existence 430
 loop through group of 90

order of adding or removing 68
 positioning, absolute or relative 180
 relationships, and DOM traversal 141–146
 relative movement of 207
 removing from page 66
 replaceWith() method for changing 154–158
 selecting all on page 60
 storing
 in array 152, 167
 in variables 149–150
 wrapping inside another element 172
 element selector 13, 14
 Elevation API 437
 else clause (PHP) 353
 else if clause (PHP) 353
 else if statement 239
 else statement 109, 239
 empty() function (PHP) 364
 emptying array, JavaScript for 246
 empty method 148, 246
 end() function, for blackjack 250
 end parameter, of slice method 172
 eq() method 161
 equality operator (==) 109, 240
 and if statement 239
 equals sign (=), as assignment operator 56, 105, 207
 error
 in XML, and broken page 327
 server return of 312
 event handlers
 named functions as 103
 for slider widget 391
 event listeners 79, 85, 87
 behind the scene 80
 function for 243–244
 events 79, 122
 binding to elements 81, 85
 categories of 83
 development history 84–85
 functions in 83
 removing 86
 scheduling 310

triggering 82–83, 91
 turning off scheduled 320–322
 exact equality operator (==) 240
Explode effect 378
eXtensible Markup Language. *See* XML (eXtensible Markup Language)

F

fade effects 192, 214
fadeIn() method
 in method chain 193, 196
 parameters for 192
fade methods 27–28, 33
fadeOut() method 189
 in method chain 193, 196
fadeTo() method 189
fail function 357, 365
fields in HTML, hidden 329, 364
file, for jQuery code 93–95
filter() method 162
 filter methods 161–164, 174
find() method 172, 306, 361
Firebug for Firefox 71
 Net tab 305
Firefox (Mozilla) 84, 265
first() method 161
Flash, building app without 176
floor() method 71
focus
 change, and running functions 255
 window with 256
focus() method 256
folders, for jQuery library 93–95
font properties 200
footer of web page 317
foreach loop (PHP) 352
for...in loop 237
for loop 229, 234

in PHP 352
 syntax 230
formatting data
 before sending to server 332
 PHP for 354
form element (HTML) 328–330
 HTTP GET or POST methods 331
 input buttons in 386
 selecting input elements on 407
form events 82
forms 328–330
 Autocomplete suggestions for field 406
 distrusting data in 364
 planning 373–374
 validation 406, 455
FROM keyword (SQL) 345
function callback, slide event attached to 391
function expression 101, 103
function keyword 101, 194, 220, 224
 within another function, and variable access 458
functions 79, 100–108, 122, 148
 anonymous 101, 102
 call to itself 194
 for click event 42
 code line length 308
 combining click-related 270–272
 creating 101
 custom
 optimizing 290
 reset 283–285
 declaring 101, 103
 vs. named function expression 102
in events 83
 inside each() method 168
 named, as event handlers 103
 passing variables to 106
 repeated calls 312
 return value for 107, 114
 running, focus change and 255
 self-referencing 311–312
 syntax 101
 timed, for repeated action 194
 variable for return value 232
fx queue 454

the index

G

Gecko layout engine 182
 Geocoding API 437
`getAllSightings()` function 422, 423, 429–430
 adding click event listener 425–426
`getAllTypes()` function 429–430
 GET data, from `ajax()` method 304
`getDBRacers()` function 356–360, 358
 to read JSON object 361–362
`getJSON()` method 320, 351, 358, 369
 GET method
 for Ajax 320
 for HTTP, to send data to server 331
`getRandom()` function 120, 231, 234, 276, 277, 280
 creating 108
`getScript()` method for Ajax 320
`getSightingsByType()` function 432–435, 439–440
`getSingleSighting()` function 425–426
 “getters” 276
`getTimeAjax()` function 317–318
`getTime()` function 293
 calling 295
`getXMLRacers` function 307
 repeated calls 312
 testing 309
 global scope 458
`goLightning()` function 266, 268
 Google Ajax API CDN 451
 Google Chrome 84, 265
 Developer tools 305
 and jQuery 148
 layout engine 182
 Google Directions API 437
 Google Earth plug-in 437
 Google Maps
 adding data to 423–426
 documentation 418, 438
 event listeners 438
 including in web page 417–418

overlays 435
 points as markers 424
 sample code 414
 Terms of Service 437
 testing 419
 graphics. *See* images
 greater than operator ($>$) 240
 greater than or equal to operator (\geq) 240
 grouping button widgets 386

H

handler functions 83
 hash mark (#)
 for CSS id 13
 for id selector 49
 head element (HTML) 8
 height property (CSS) 190, 214
 hidden HTML field 329, 364
 hidden value for overflow property 180
 hide effect, slowing down 196
`hide()` method 188
 hiding span element, conditional logic for 109–110
 highlighting, hovering and 115–116
 history property of window object 258
`hit()` function 234
 hover event, adding 117–118
 hovering, and highlighting 115–116
 hover state, for anchor element 21
 HTML. *See also* Document Object Model (DOM)
 and document structure 4
 for slider widget 391
 inserting content into DOM 159–160
 limitations 3
 mixing with data 57
 PHP and 352
 separating jQuery code from 97–98
 tags inside variables 57
 XML and 299
 html element 8
`htmlspecialchars()` function (PHP) 364
 HTML string, in jQuery function 12

I

IDs

- in CSS 13
- and selectors 52–54
- to specify div element for action 47
- id selector 13, 14, 49
 - combining with descendant selectors 67

idTabs plug-in 293

if statement 109–111, 239

- `==` (equality operator) and 239
- ternary operator as alternative 244

if statement (PHP) 353

IIS (Internet Information Server) 462

- downloading 465

images

- basing display on game result 250
- div element for 40
- invisible 181
- properties for building path to 234

img element (HTML) 8

- in anchor element 22
- display property 22
- nesting 178
- sliding into view 26

inArray() method 231, 232

index of element 110, 114

- in array 151, 168, 226
- and eq() method 161
- in loop 230

index variable, for each function 172

inequality operator (`!=`) 240

infinite loops 255

info.php script 463

initialization of loop 229

initialize() function 417–418

input elements (HTML) 328

- datepicker for 381
- selecting on form 407

inserting

- data into database, PHP for 331
- HTML content into DOM 159–160

insert statement (SQL) 338–340

installing

- Apache on Windows 465–466
- MySQL database server
 - on Mac OS X 474–482
 - on Windows 468–473
 - PHP 466–468

instances of object 220

creating 221

interaction plug-ins 376, 401

interactive menu 124–138

- buttons 133–134
 - actions 135–138
 - “Restore Menu” button 160
- restoring entries 146–152, 163–170
- testing 139

interactivity 2

example 20–30

Internet Explorer (Microsoft) 84, 265

layout engine 182

invisibility, CSS for 22, 181

iteration 90. *See also* loops

J

JavaScript 5

- and Ajax 298
- emptying array 246
- for datepicker 381
- including files 295
- interpreter
 - and animation process 188, 202
 - and DOM 190

jQuery and 9, 19

- JSON and 355
- keywords, and variable names 60
- objects 252
- vs. PHP 355
- variables 56
- window object 284, 290
 - for timed effects control 256–259

jQuery 4, 5

- debugging code 453
- and DOM 9–11
- hosted copies on CDNs 451

the index

jQuery (*continued*)
 vs. JavaScript 19
 and JSON 351, 355
 methods 448–449
 production vs. developer versions 19
 selectors 13, 15, 33, 450
 vs. CSS selector 14, 51
 ; (semicolon) to end statement 16, 25
 separating code from HTML 93–95, 97–98
 for slider widget 391
 translation 16–18
 web resources on 84

jQuery CDN 451

jquery.com website 83

jQuery function
 \$ (dollar sign) for shortcut 12, 15, 19, 33
 contents 12

jQuery library
 folder for 93–95
 including 40

jQuery namespace, noConflict() method 452

jQuery plug-ins, creating 457

jQuery UI 371, 410
 behind the scenes 382
 CSS in 401
 download page 379
 effects 456
 package contents 380
 plug-ins 374, 376
 button widget 386
 customizable options for widgets 383–384
 slider widget 390–398
 testing effects 376
 themes 379
 creating 401

jQuery wrapper 12

.js extension 96

JSON (JavaScript Object Notation) 224, 325, 350–351, 369

 jQuery and 351, 355
 with SQL and PHP 420–422

json_encode() function (PHP) 354, 358, 361, 369, 420

K

keyboard events 82

key/value pairs
 for HTTP GET 331
 in PHP 353

keywords in JavaScript, and variable names 60

KML (Keyhole Markup Language) 300

L

languages
 markup 299
 server-side 19, 314

last() method 161

latitude, slider for 397–398

LatLng object (Google) 415, 418
 defining 424

left property, of div element 206

length of array, setting to zero 246

length property
 of array 225
 to check for element existence 430

Lerdorf, Rasmus 355

less than or equal to (<=) operator 240

libraries
jQuery
 folder for 93–95
 including 40
 PHP 344

li element (HTML) 8
 assigning class to 131–132
 replacing in unordered list 155–156

lightning effect 187
 adding functions to script 197
 image fade effect 192
 testing 269
 troubleshooting 254–255

link to jQuery UI CSS file 381

lists

- of elements, index of 110
- unordered 128–129
- .live() method 91
- loading information, using Ajax for 320
- local files, for web pages, vs. web server 341
- localhost 348, 463
- local scope 458
- logical operators 240–242
- longitude, slider for 397–398
- loops 229–230, 252
 - to change multiple elements 9, 90
 - declaring variables in 230
 - each() method for 168
 - and array elements 362
 - infinite 255
 - in PHP 352
 - syntax 230
 - types 237

M

Mac OS X

- default web server 462
- determining MySQL install status 464
- enabling PHP 474
- installing MySQL on 474–482
- many-to-one substitution 158
- map_canvas element 417–418
- map events, listening for 438
- map object
 - creating instance 417–418
 - properties and methods 416
- mapOpts property 418
- MapQuest 418
- Marker object (Google) 424
- markup languages 299
- max option for slider widget 390
- menus. *See* interactive menu

messages

- append() to insert 59
- concatenation when creating 57
- displaying for user 55–60
- removing 66

methods

- chaining 142
 - for combining effects 193
- for CSS changes 115–116
- of objects 219
- static 114
- Microsoft CDN 451
- Microsoft IIS (Internet Information Server) 462
 - downloading 465
- Microsoft Internet Explorer 84, 265
 - layout engine 182
- Microsoft, maps 418
- Microsoft .NET Framework 4 Client Profile 472
- milliseconds setting, for fade effect 192
- min option for slider widget 390
- mobile device, maps on 437
- Monster Mashup
 - click event 182–184
 - do-it-yourself effects 199
 - layout and positioning 178–180
 - lightning effect 187
 - testing 269
 - troubleshooting 254–255
 - project blueprint 177
 - randomize feature request 274–277
 - testing 278–280
 - testing 273, 286
- motion effects
 - with animate() method 199
 - relative to current position 280
- mouseenter event 117
- mouse events 82
- mouseleave event 117
- moveMe function 271–272
- moving through DOM 140–144

the index

Mozilla Firefox 84, 265
 multiply operator (*=) 207
 MySQL 369
 MySQL Community Server 468
 mysql_connect function (PHP) 343
 MySQL database
 for storing data 335
 managing 344
 MySQL database server 462
 checking for install 464
 downloading installer 470
 installing
 destination folder for 471
 on Mac OS X 474
 on Windows 468–473
 troubleshooting guide 468
 MySQL functions (PHP) 467
 MySQL query browser 468
 MySQL Workbench 336, 337, 472
 opening 473
 select statement to see resultset 346

N

named functions
 vs. declaring functions 102
 as event handlers 103
 name property of window object 258
 names
 \$ for array 151
 of classes 60
 of functions 101, 102
 of variables 56, 60, 105
 namespace 457
 name/value pairs, for JSON 350
 negation (!) operator 240
 negative numbers, for slider widget 397
 nested elements 15
 nested image, in anchor element 22
 Netscape Navigator 84

new keyword 220
 for array creation 225
 new() method 221
 next() method 140, 141
 in method chain 142
 noConflict() method 452
 not equal to operator (!=) 240
 not() method 162
 numbers
 in CSS property settings, animate() method and 200
 slider widget for entry control 390–398

O

object constructors 220
 objects 84, 218–221
 API use of 415–416
 building 219
 reusable 220
 interacting with 221
 one-time vs. reusable 224
 onblur event handler of window object (JavaScript) 256,
 258, 259, 266
 testing 259–260
 one-to-many substitution 158
 one-to-one substitution 165–166
 onfocus event handler of window object (JavaScript) 256,
 258, 259, 266
 testing 259–260
 OOXML (Office Open XML) 300
 opacity of HTML elements 27
 opacity property (CSS) 189, 214
 OpenLayers, mapping API 418
 optimizing custom functions 290
 option element (HTML), for drop-down list 328
 order by keyword (SQL) 345
 orientation option for slider widget 390
 or (||) operator 240
 overflow property 180
 overlays in Google Maps 435

P

package installer, for MySQL for Mac 477–479
 page load time, speeding up 50
 parallel downloads, script blocking 50
 parameters 106, 114, 197
 parentheses, for click method 42
 parent() method 140, 141, 145, 148
 in method chain 142
 parent selector 67
 parents() method 148
 filter methods and 162
 passing variables to function 106
 Penners, Robert 456
 period(.)
 to separate selector from method 25
 to start CSS class 13, 48
 PHP (PHP: Hypertext Processor) 314, 324, 369
 to access data 341, 347–349
 data sanitization and validation 364–366
 development setup 462–463
 enabling on Mac OS X 474
 for connecting to database 343
 for inserting data into database 331
 formatting output 354
 installation 466–468
 checking for 463
 library selection 343
 vs. JavaScript 355
 JSON with SQL and 420–422
 libraries 344
 MySQL functions 467
 rules 352–353
 PHPMyAdmin 344
 picframe div element 24
 pictures. *See* images
 Places API 437
 planning 178
 plug-ins 302, 376
 configuring 293
 creating 457
 debugging 453

plus sign (+), for concatenation 57
 pop-up window, for alert statement 42
 position of elements
 absolute or relative 180
 setting current 276
 position property (CSS) 182
 of animate element 181
 POST data
 ajax() method for 304
 on web server 342
 POST method 333
 for HTTP, to send data to server 331
 in Ajax 320
 p (paragraph) element (HTML) 8, 16
 changing HTML inside 9
 click event for 42
 preg_match function (PHP) 364
 prev() method 140, 141
 print command (PHP) 353
 print_r() command 353
 production version of jQuery, vs. developer version 19
 Progressbar widget 378
 project
 determining requirements 37–38
 planning 178
 structure 96

properties
 animate() method to change 201
 assigning value 224
 for building path to image 234
 of objects 218, 219
 accessing 221
 Puff effect 378

Q

querying 15
 queues for animation 454
 quotation marks (“ ”)
 for text or HTML value 57
 for selectors 15

R

radio buttons, div element for group 386
 random animation in Monster Mashup 275–277
`randomize()` function 277, 281–282, 285
`random()` method 71
 random number
 testing concatenation into discount variable 72
 variable to hold 57–58
 random number generator function 112
 RDBMS (Relational Database Management Systems) 335
`ready()` method 184–185, 452
 referencing variables 57
`refreshSwatch()` function (JavaScript), for color mixer 402–404
 regular expression matching function 364
 relationships of elements, and DOM traversal 141–146
 relative movement of elements 206, 207
 to current position 280
 relative positioning of elements 180
 reloading, changing web pages without 4
`removeClass` method 117
`remove()` method 74, 92
 in method chain 142
 for message 66
 order of calls and 68, 70
 troubleshooting 71
 vs. `detach()` 136–138
 removing events 86
 repeated actions 229–230
 timed function for 194
 repeated function calls 312
`replaceWith()` method 154–158, 165–166
 limitations 158
 replacing li elements in unordered list 155–156
`reset()` function 283–285
 Resig, John 19
 Resizable widget 378, 401
 restoring interactive menu entries 146–152, 163–170

resultset for SELECT statement 345, 346

return keyword 107

return value of function 114

 variable for 232

reusable objects

 building 220, 223–224

 vs. one-time 224

root node in XML 299

RSS (RDF Site Summary) 300

RSS (Real Simple Syndication) 300

running functions, focus change and 255

S

Safari (Apple) 84

 layout engine 182

same-origin policy, and Ajax calls 305

sanitizing data in PHP 364–366

scalable object, Resizable widget for 401

scale effects, with `animate()` method 199

scheduled events

 creating 310

 turning off 320–322

scope, global vs. local 458

screen display, PHP for writing to 353

script element (HTML) 4, 45

 for Google Maps API code 417

 for jQuery UI 381

 for link to script file 93

 location of 50

scripts

 adding `animate()` functions 209

 adding lightning effect functions to 197

 and web page changes 5–6

 folder for 93

Selectables widgets 401

selecting

 all elements on page 60

 elements using traversal methods 141–144

 filter methods to narrow 161–164

 input elements on HTML form 407

selector engine for jQuery 9
 selectors 33, 74, 130, 148
 \$ (this) 63–64
 CSS vs. jQuery 51
 for datepicker 382
 descendant 67
 in jQuery 13, 450
 .(period) to separate from method 25
 select statement (SQL) 345–346
 where clause 348
 <select> tag (HTML) 328
 self-executing functions 102
 self-referencing functions 311–312
 semicolon (;)
 to end jQuery statement 16, 25
 to end PHP line 315, 352
 serializeArray() method 332, 369
 serialize() method 332
 servers. *See also* web server
 CDNs and 451
 database 335
 error returned from 312
 formatting data before sending to 332
 sending data to 329, 333–334
 server-side languages 19, 314
 setInterval() method (JavaScript) 258, 263, 264, 265, 290, 310
 browser variations 265
 setTimeout() method (JavaScript) 196, 198, 255, 258, 263, 264, 290, 310, 312
 browser processing of 265
 showFrequency() method 317–318
 show() method 188
 siblings method 148
 sightings form 372–374
 code 384
 datepicker for 381
 getSightingsByType() function 432–435
 Google map 412–413
 multicreature checklist 428
 project checklist 380
 testing 389, 405, 427, 431
 slice() method 162, 172
 slideDown() method 26, 190
 slide effects 214
 and element height 190
 slider widget 410
 for color mixing 399–402
 for controlling numerical entries 390–398
 for longitude and latitude 397–398
 negative numbers and decimal numbers 397
 planning 373
 testing increments 396
 slideToggle() method 26, 28, 190
 slideUp() method 190
 for image 26, 52
 SOAP (Simple Object Access Protocol) 300
 Sortable widgets 378, 401
 span element (HTML) 317–318
 conditional logic to hide 109–110
 speed of fadeIn 27
 SQL (Structured Query Language) 335, 369. *See also* MySQL
 for database, table and users setup 336–337
 insert statement 338–340
 JSON with PHP and 420–422
 SELECT to read data from 345–346
 testing connection 344
 square brackets ([])
 for array 225
 for array item index 226
 in PHP function 315
 standards for browsers 84
 startAJAXcalls() function 311–312, 322, 356, 358
 start parameter, of slice method 172
 Static Maps API 437
 static methods 114
 static web pages 3
 step option for slider widget 390
 stopLightning() function 266, 268
 stop method 208
 storage space, creating 56
 storing elements in array 152

the index

structure of project 96
 styles 23
 class or ID and 60
 submit() listener 333
 substitution
 one-to-many or many-to-one 158
 one-to-one 165–166
 subtraction operator (=) 207
 success function 357
 sumCardTotal method 242
 SVG (Scalable Vector Graphics) 300
 switch method 244

T

tables in MySQL databases 335
 tags in XML 299
 Task Manager, Services tab 464
 templates for jQuery 459
 terminator 148
 ternary operator 244
 test condition in loop 229
 testing
 Bit to Byte race project 305
 click event 46, 88–89
 datepicker 385
 detach() method for interactive menu 153
 discount variable display 61–63, 64
 getXMLRacers function 309
 Google Maps API 419
 interactive menu 139
 lightning effect 269
 Monster Mashup 286
 onfocus and onblur event handlers 259–260
 random number concatenated into discount variable
 72
 sightings form 389, 405
 slider widget increments 396
 SQL database connection 344
 web page in multiple browsers 29
 text box in HTML form 328

text effects 200
 themes in jQuery UI 379, 380
 creating 401
 this keyword 63, 168, 209
 each() method and 172
 origin of use 71
 plug-ins and 457
 timed effects, window object to control 256–259
 timed functions 290
 for repeated action 194
 timeout
 interval 255
 setting in ajax() call 312
 Timeout() method 194
 timer for animation 202
 timer methods 263–265, 310
 of window object 256
 time zone, for PHP date function 315
 title element (HTML) 8
 toggle() method 188, 196
 transparency of HTML elements 27
 traversing DOM 140–144, 174
 Trident layout engine 182
 triggering events 82–83, 91
 .trigger() method 91
 troubleshooting lightning effect 254–255
 turning off animation, option for 208

U

ul element (HTML) 8
 plug-in to convert to clickable tabs 293
 UML (Unified Modeling Language) diagram 219,
 223–224
 unbind command 86
 “Undefined Index” error 226
 “undefined” value, function return of 114
 unnamed functions 101

unordered list 128–129. *See also* ul element (HTML)
 assigning class to items 131–132
 method chain to traverse 142
 replacing li elements in 155–156
 user interface. *See also* forms; jQuery UI
 slider widget for controlling numerical entries 390–398
 user requirements, determining 37–38
 utility function 276

V

validating
 data in PHP 364–366
 forms 406, 455
 val() method 391
 value
 for object property 218
 option for slider widget 390
 VariableDebugger plug-in 453
 variables 56, 148
 in anonymous functions 102
 vs. arrays 218
 assigning value to 207
 for clearInterval() method 264
 counter for array processing 168
 declaring 186
 in loop 230
 for return value of function 232
 for storing elements 149–150
 function keyword within another function and 458
 in array 225, 232
 in functions 105
 name restrictions 60
 passing to function 106
 in PHP 352
 referencing 57
 var keyword 56, 105, 219
 viewport of browser 7
 visibility of img element 22
 visual effects, example 20–30
 visual properties of elements 188

W

W3C (World Wide Web Consortium) 19
 Webkit browser layout engine 182
 web page power 2
 web pages
 adding message to 60
 broken from XML errors 327
 browser display 7
 browser request for 3
 changing without reloading 4
 collecting data from 328–330
 delivery by web server, vs. local files 341
 dynamic, PHP to create 314
 dynamic updates 296
 footer 317
 hidden structure 8
 including Google Maps 417–418
 PHP to write to 315
 scheduling events 310
 turning off 320–322
 scripts to change 5–6
 static 3
 tabs
 adding 329–330
 CSS file example 294
 testing in multiple browsers 29
 updating new data only 297
 web resources on jQuery 84
 web server
 determining existence of 463
 for PHP scripts 341
 for web pages, vs. local files 341
 local computer as 462
 POST data on 342
 setup 465–466
 where clause in SQL SELECT statement 348
 while loop 237, 359
 in PHP 352
 widget plug-ins 376, 410
 customizable options 383–384
 for interactions 401

the index

window, lost focus, and running functions 255

window object (JavaScript) 284, 290

for timed effects control 256–259

Windows Azure 451

World Wide Web Consortium (W3C) 19

X

XHTML 300

XML (eXtensible Markup Language) 298, 299–300, 324

declaration 299

errors and broken pages 327

file listing 305

vs. JSON 350

parsing data 306

server for file storage 305

XMLHttpRequest object 312

Y

Yahoo! 418

Z

zero-indexed arrays 226

zero, setting array length to 246