


使用 MySQL 創建 school

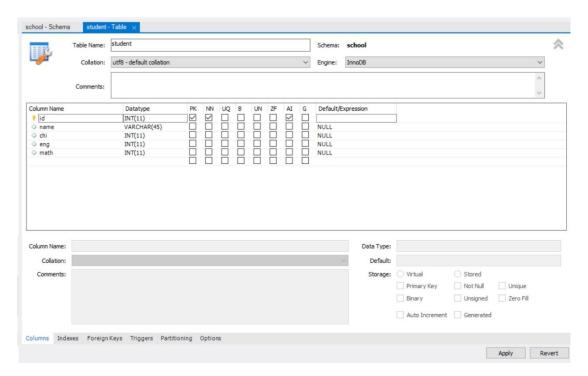

新增 student-Table

- ¬ B day5_hibernate_test
 - > 🔁 Deployment Descriptor: Archetype Create
 - →

 B

 B

 Java Resources
 - √

 // src/main/java
 - √ A Controller
 - > 🕖 Add.java
 - > 🕖 delete.java
 - > II query.java
 - > 🕖 update.java
 - V / DAO
 - > II implDao.java
 - > 🕖 test.java
 - v 🌐 model
 - > 🗾 student.java
 - student.hbm.xml
 - m hibernate.cfg.xml
 - x struts.xml

src

- v 🗁 webapp
 - > > WEB-INF
 - delete.jsp
 - ex2.jsp
 - ex3.jsp
 - index.jsp
 - a query.jsp
 - query2.jsp
 - update.jsp

WebContent

- v 🍃 lib
 - mysql-connector-java-5.1.47.jar
 - servlet-api.jar
 - web.xml


Lib




add




添加成功的提示框

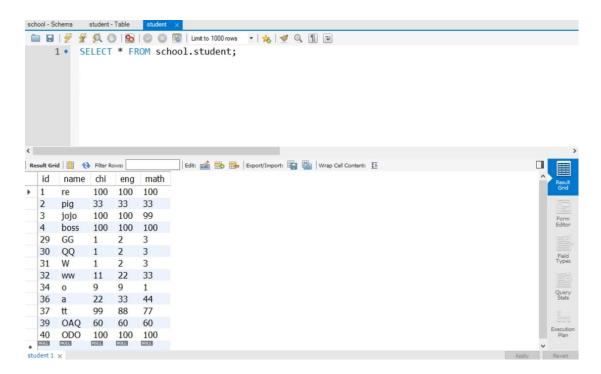

Sql 的狀態

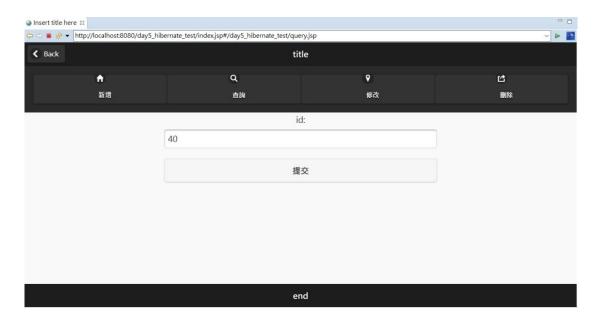


query

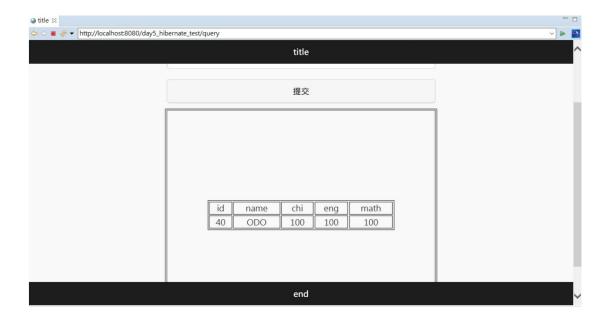


查詢 id:40 的資料




update(上)

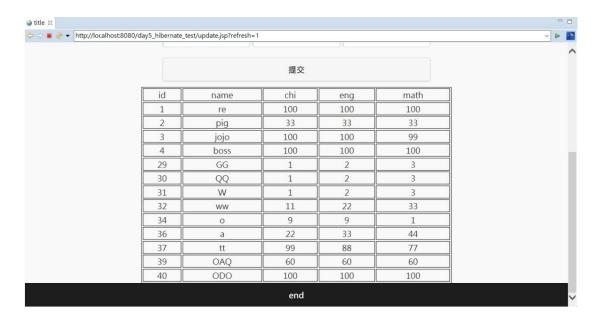

update2(下)

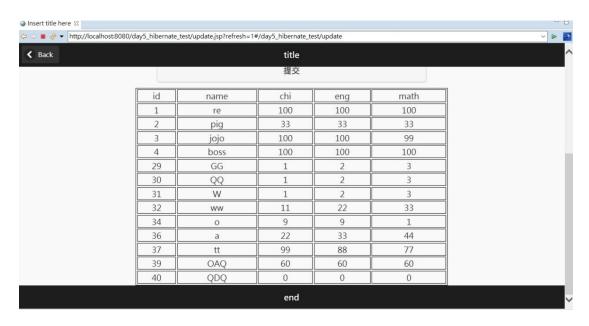

更新了 id:40 的資料後

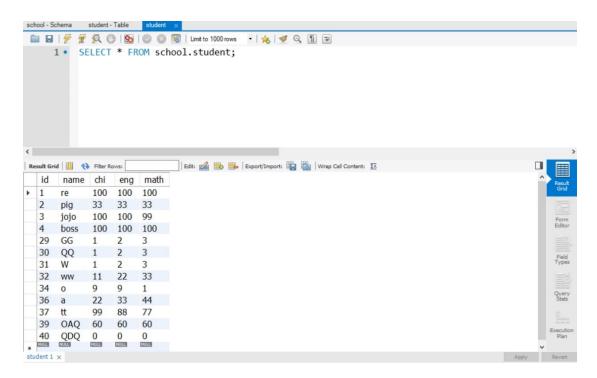


Sql 的狀態



delete



刪除了 id:31 的資料後

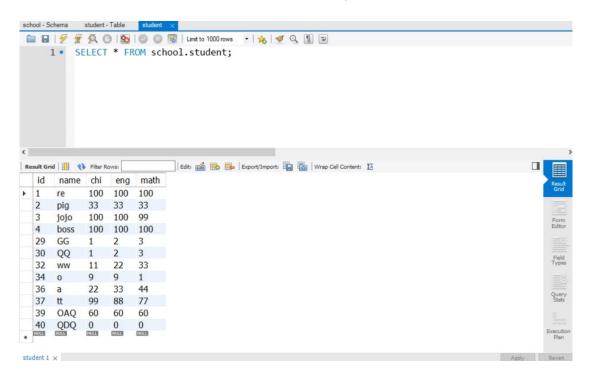

Sql 的狀態