

Post-survey Data Preparation Using Jamovi

Wenchao Ma



Enter data

- A codebook is a document describing each variable in your dataset.
- A codebook includes the following:
 - Variable names and labels.
 - Values/codes assigned to the variables and their labels.
 - Missing data codes.
 - Special instructions on how to use data.
 - Other relevant information.



Enter data

- **Variable names** must be unique and short. If you will analyze data with a statistical program, the variable names cannot contain spaces and special characters. Use underscores instead of spaces.
- **Variable labels** describe the meaning of variables. A good label is concise but descriptive.
- **Values and labels** represent the contents of a variable.
 - For example, 0=remote work and 1=onsite work.
 - As a general rule, give numeric codes to categorical variables, and assign a unique value to each category.




Enter data

- Missing data usually have special codes and should be indicated in the codebook.
- Missing data for continuous variables are represented with an impossible value such as -88, -99, or -999.
- Different missing data may use different values.




Open the data file

- SPSS:
 - > Open > Browse > course_survey.xlsx

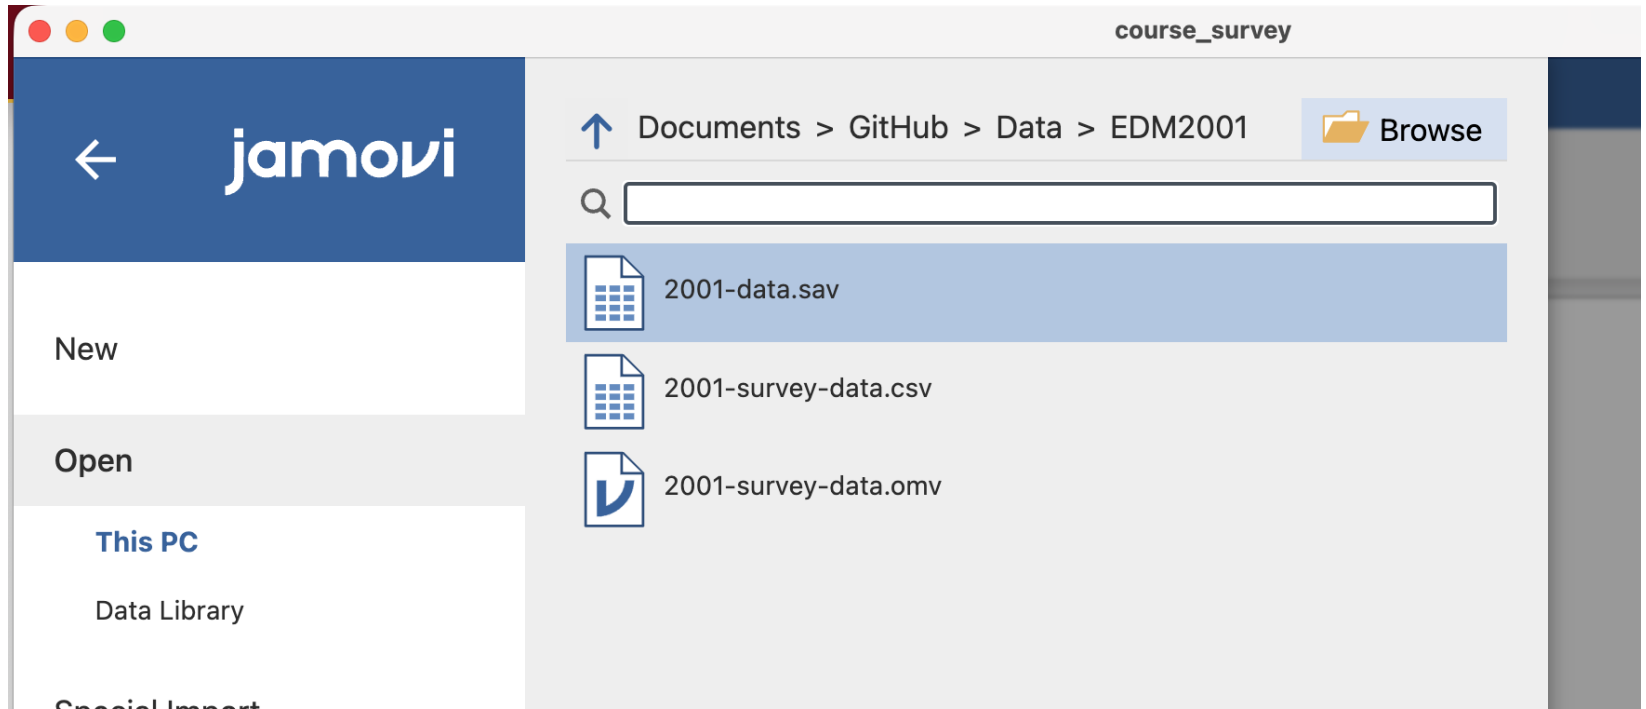


Variable Information: variable label

- Variables -> Description

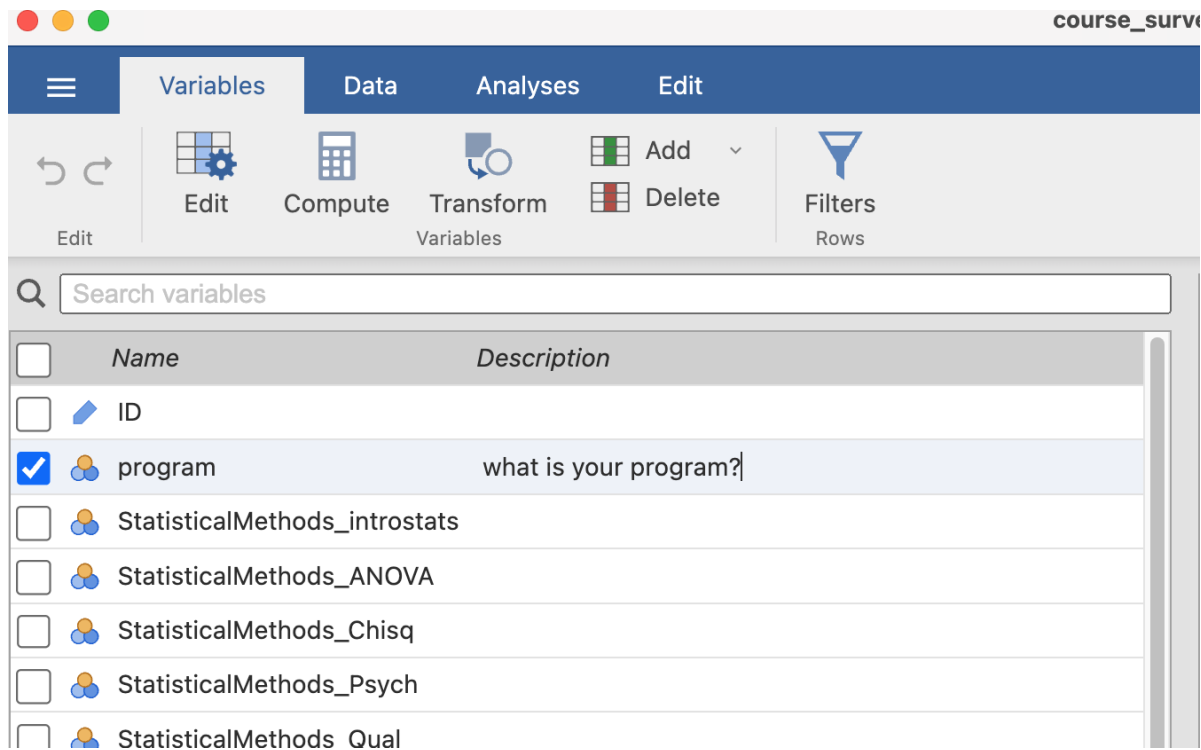


Variable Information

- Variables -> Edit
- Change variable name
- Change scale of measurement
- Add missing values

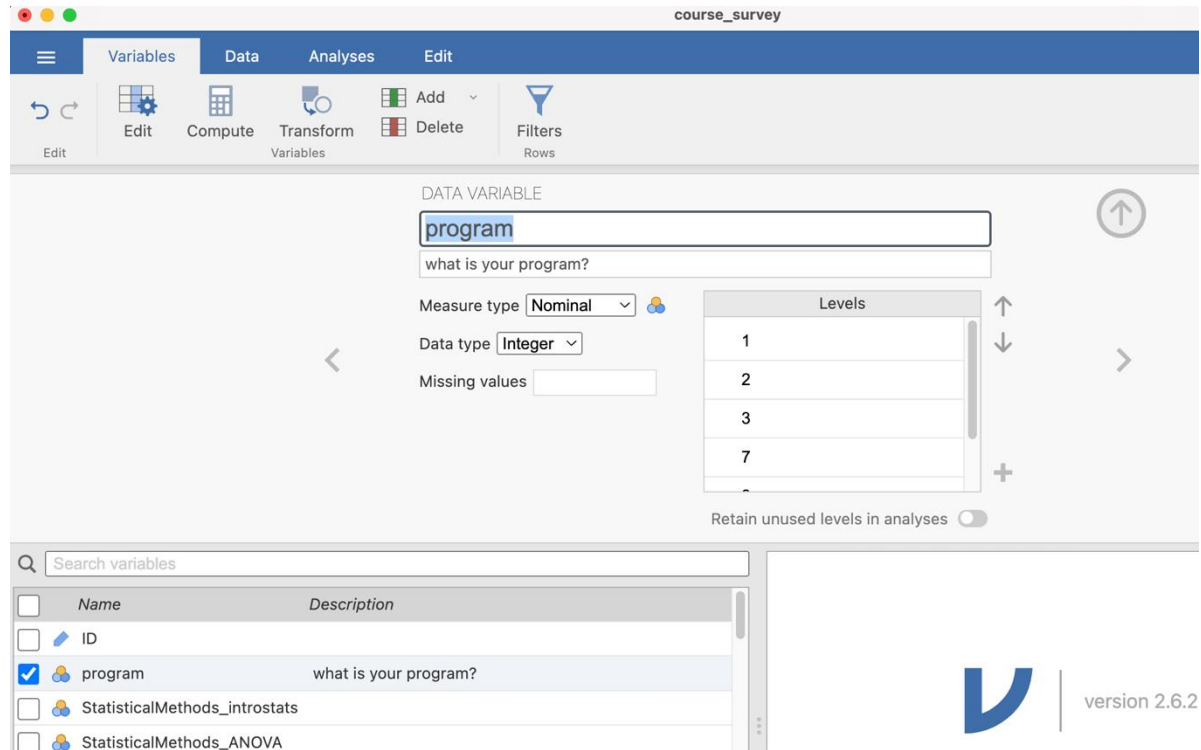


Variable Information

- Add variable labels

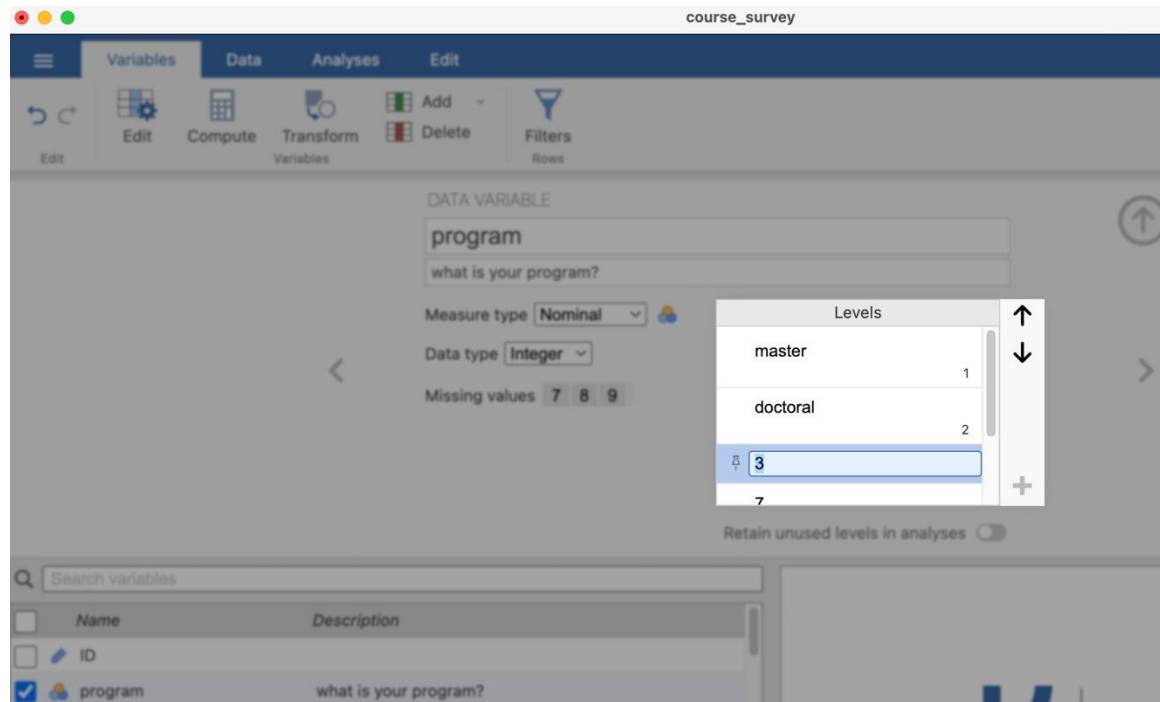

Frequency table and plots

- Analyses -> Exploration -> Descriptives

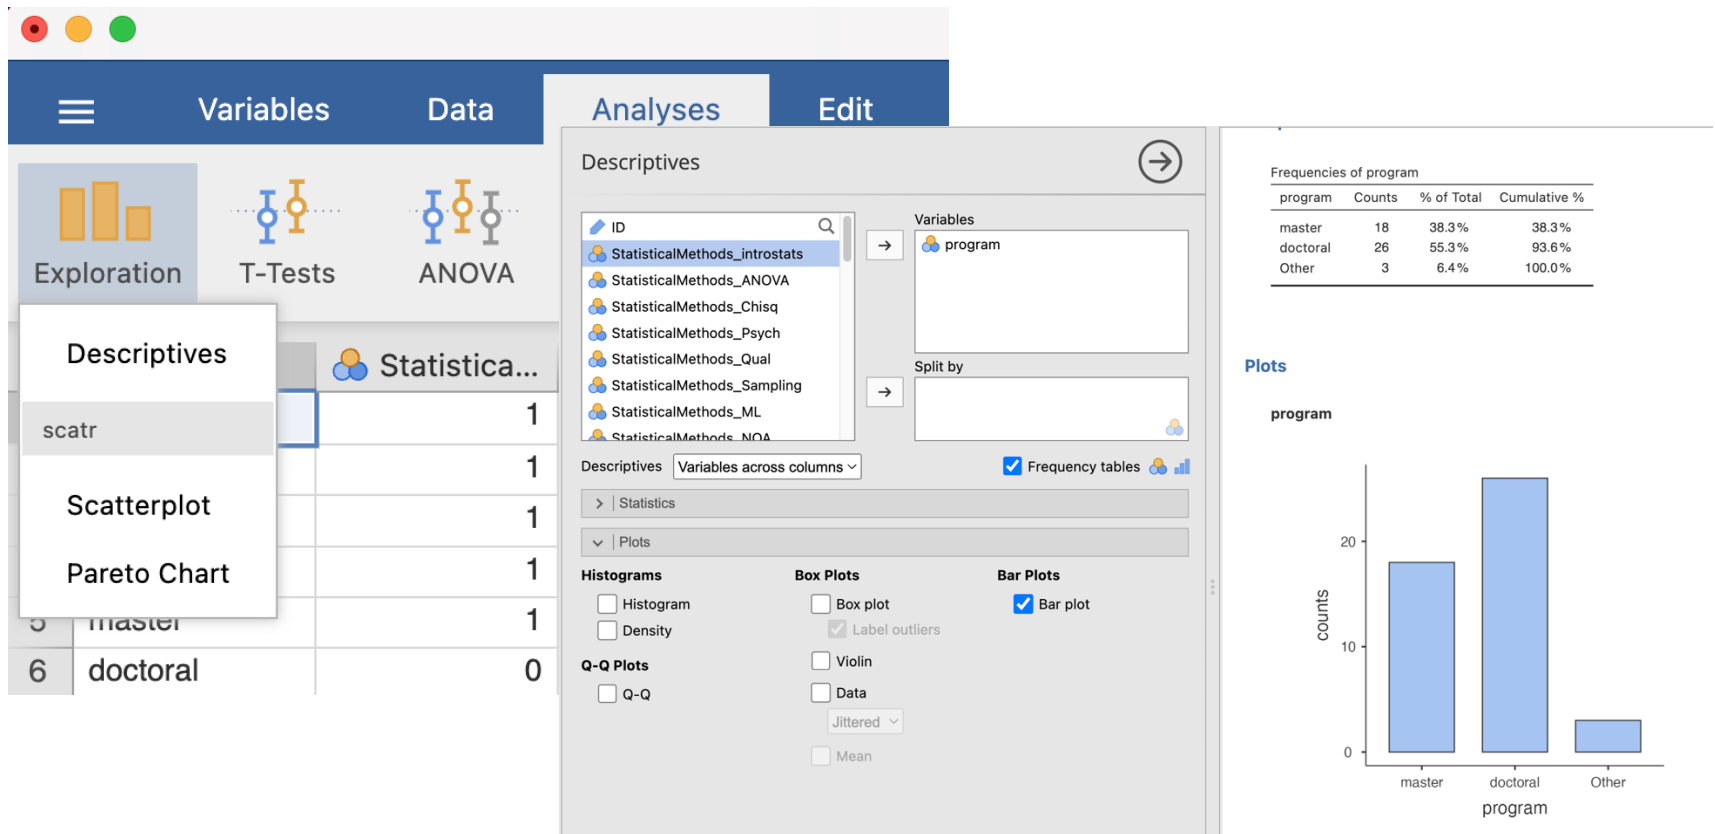

Bi-variable analysis

- Frequencies -> Contingency tables

The screenshot shows the SPSS menu structure for performing a chi-square test of association. The path is: **Analyse** > **Frequencies** > **Contingency Tables** > **Independent Samples** (which includes the χ^2 test of association).

The 'Contingency Tables' dialog box is shown. The variable 'program' is selected in the list on the left. In the 'Rows' section, 'StatisticalMethods_introstats' is selected. In the 'Columns' section, 'StatisticalMethods_NOA' is selected. The 'Counts (optional)' and 'Layers' sections are currently empty.

χ^2 Tests

	Value	df	p
χ^2	0.352	1	0.553
N	47		

Contingency Tables

Contingency Tables

StatisticalMethods_introstats	StatisticalMethods_NOA		Total
	Not selected	Selected	
Not selected	6	1	7
Selected	37	3	40
Total	43	4	47