

Politechnika Śląska  
Wydział Informatyki, Elektroniki i Informatyki

# Computer Programming

WinAuto

---

topic	Mouse and keyboard recording and playback software
year	2018/2019
date	29-06-2019
github	<b>(WinAuto on GitHub)</b>

---



# 1 Project's topic

The goal was to design a software that would allow the user to register his mouse and keyboard actions, that is: cursor movements and mouse/keyboard keypresses. Consequently, the user should be able to retrieve what has been recorded and replay the recording by simulating it. **WinAuto** provides a solution to this problem, and has some extra features.

## 2 Presentation, Analysis and Development

I have uploaded sample two minutes video to the streamable website to illustrate how the project works. (**Video URL Here**).

Deep throughout API analysis is contained within Technical Documentation pdf file.

The full process is divided into two parts. The first part ((**2**) menu) is the recording process, where: keyboard events, mouse events and the time duration between subsequent events are all registered. After the first part is done, the second part ((**3**) menu) can be executed, that is: replaying what has just been recorded.

I have chosen to use some of WinAPI library functions, such as:

`GetAsyncKeyState`, `SetCursorPos`, `SendInput`

hence the software is Windows platform only.

### Main issues:


- How to retrieve keyboard events in real time?
- How to synchronize it with retrieving mouse events?
- How to do both of the above while keeping things simple?
- Even if I know how to retrieve both in synchronized fashion, how do I replay it?
- How to replay it without major glitches? If recording is exactly 60 seconds, how do I make replay simulation exactly 60 seconds as well?
- How do I make things work well not in just one window, but in any window, or while swapping between windows, and such?
- Which data structure(s) to choose?

- How do I allow user to break out of the playback at any instant of time?
- How can I accurately simulate smooth cursor movement?
- Cannot I get better efficiency: time-complexity or space-complexity wise?
- Error handling?
- ...

## 2.1 Menu options

Menu is divided into:

- (1) Set hotkey
- (2) Create new recording
- (3) Playback the recording
- (4) Screensaver cursor animation
- (5) Exit

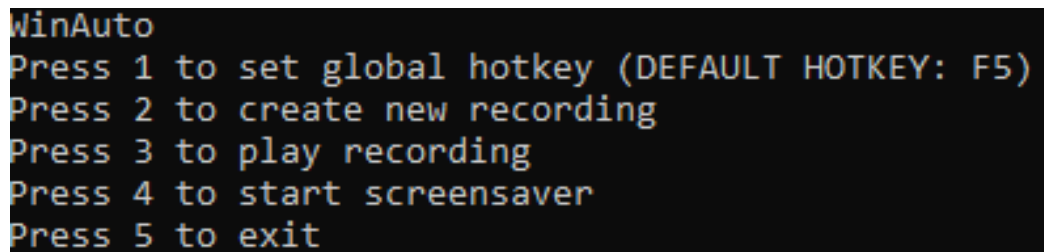

```
WinAuto
Press 1 to set global hotkey (DEFAULT HOTKEY: F5)
Press 2 to create new recording
Press 3 to play recording
Press 4 to start screensaver
Press 5 to exit
```

Figure 1: WinAuto's menu

## 3 Data structures

There are two major data structures.

### 3.1 Array

The *keys-pqueue* which is a simple array that works, in a sense, like priority queue. Each element of the array is a given key's key code (scan code).

When checking if there is currently (at an instant of time) a key being pressed, we first check the first element of the array, then the second, ..., then the last. Therefore, the first element has the highest priority to be checked and the last element has the lowest priority.

The first element has the highest statistical chance (based on my data presented below in *Figure 1*) to be pressed; the function ends (returns) in such a case and does not check further keys. If a keystroke is found, then the rest of the array is not iterated over (checked). The array should be filled in proper order for efficiency, then.

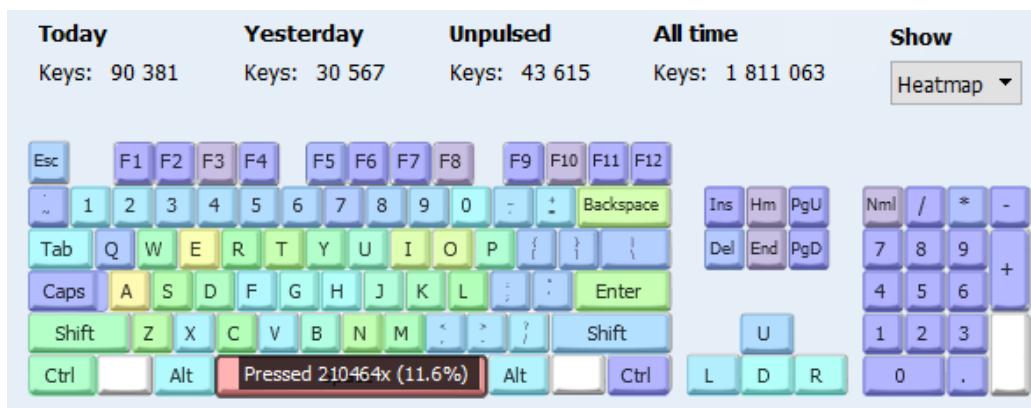


Figure 2: Heatmap based on nearly 2 000 000 keystrokes

I have filled the array according to the data I pulled off of WhatPulse software based on nearly 2000000 keystrokes, making the priority sorting greatly reliable for my needs.

The array contains 104 elements, thus 104 different keys are supported. Full list of supported keys is available in technical documentation.

### 3.2 Doubly Linked List with conditional cyclic property

The second, and **main** structure is **Doubly Linked List with a property that it conditionally becomes Cyclic Doubly Linked List**, working as a queue.

This is the main *engine* of the recording and playback engine.

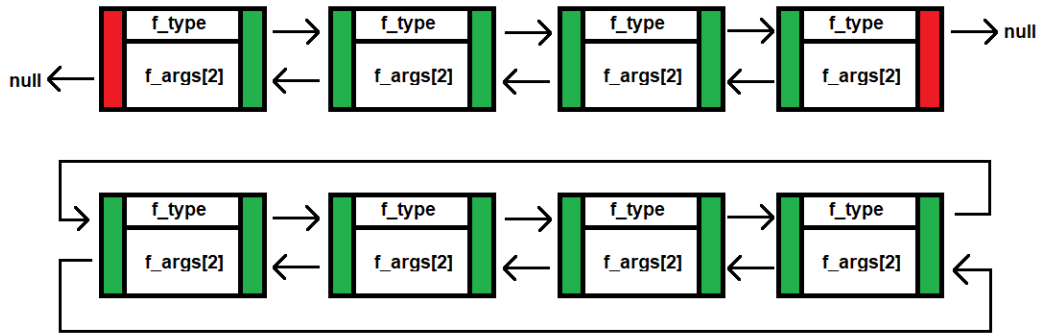


Figure 3: Doubly Linked List with Cyclic Property

This is a queue that keeps the *descriptions* of function calls to be executed during playback phase process. This is a queue that gets filled and gets iterated over during both recording and playback processes. It's a functions queue, or shortly: **f-queue**.

Putting pointers aside, each node consists of two members: *f-type* and *f-args[2]*.

The *f-type* describes function type. It attains only three values: 1, 2 or 3. If node is of type 1, then it means this node is a function-call description corresponding to Cursor's Position.

If above mentioned Node has *f-args* equal respectively to:

100, 950

then it means the cursor's position at the time of this Node insertion was at that position.

Also, it means that during the **playback phase** the cursor will be set to that position.

If the *f-type* is of value 2, it is a Node describing keystroke event. In such case only one argument from *f-args* array is needed, and it contains the *KEY-CODE* of the given key.

When recording and the key *A* is pressed, the Node of *f-type* 2 is inserted and it attains *f-args*: 65,  $-1$  respectively. 65 is the key-code of letter *A* and  $-1$  is neglected.

Furthermore, during *playback* phase (not the *recording* (filling queue, saving into file) phase) when iterating over the *f-queue* starting from the tail, and meeting the node of type 2, the program knows it has to be a keystroke and it checks for *f-args* value to know which keystroke should it be. Then, the keystroke is sent and it proceeds iterating over to the next Node.

The Node of type 3 corresponds to the delay in between keystrokes or mouse movements. The delay needs to be captured as well, otherwise during the playback everything would be executed instantly.

## 4 Algorithms

### 4.1 Brief Explanation

The program does **not** use any sorting algorithm like Merge Sort, which seeing the pseudocode is not the most difficult to implement. There simply were no usage at all for any sorting algorithms. However, I have introduced perhaps advanced algorithms. All of the code (*except for simple function ends-with-suffix, which I took from stackoverflow and slightly modified*) is written by me.

## 4.2 Key press

There are few algorithms. Mentioned above getting the key that is currently being pressed with the highest priority in optimized fashion based on array priority queue is one of them.

## 4.3 F-queue insertion and memory freeing

Filling the Nodes in main struct **f-queue** is another. The Nodes are filled in such a fashion, that the list's space complexity is as small as possible.

While this might seem counterintuitive, the user during the recording process is most likely idle and not taking any action. User does not always continuously move his mouse. Often the user might let off the cursor stay in one place, for half a second or for quite a lot of seconds. Keystrokes occur perhaps up to few times per second when typing.

That being said, every 10 milliseconds (for reasonable precision) program scans for new keystrokes or mouse movements, and most likely during consequent 10 milliseconds there were no new movements at all. Therefore most of the nodes would be of type 3 (sleep). That would quickly lead to very large number of nodes that would take large amount of memory.

**Two actions are taken in order to prevent nodes overflow:**

- if two consecutive nodes are of 3 sleep type, they are summed up together rather than adding brand new unnecessary node
- if there were no cursor movement during the consequent 10 milliseconds period, then the cursor did not move, so there is no need to insert new cursor's position

The memory is **freed** with a function that never uses any excessive if statement. Surely freeing the list of size  $n$  still takes  $O(n)$ , however the effective time complexity is slightly lower.



## 4.4 Extra Feature - ScreenSaver - Theory

The ScreenSaver is an extra feature I have added. All of its code is located in *smooth - cursor.c*.

The ScreenSaver (option 4 in program's menu) simply moves the cursor in random directions, in a smooth fashion. It has the ability to move the cursor with 1 frame per second or 150. It can move the cursor from point  $P_1(x_1, y_1)$  to point  $P_2(x_2, y_2)$  within different  $\Delta t$ , relatively short or relatively large duration.

Cursor moving from  $P_1$  to  $P_2$  in time  $\Delta t$  with precision  $FPS$  performs a jump (one cursor move) every:

$$t_{jump} = \frac{1000}{FPS} [\text{ms}]$$

and the total number of jumps  $n$  is defined as:

$$n = \frac{\Delta t}{t_{jump}} = \frac{\Delta t FPS}{1000}$$

.

The total distances cursor travels along  $x, y$  axes are  $\Delta x, \Delta y$  respectively, where:

$$\Delta x = |x_2 - x_1| \quad \wedge \quad \Delta y = |y_2 - y_1|$$

-> cursor's displacement is a non-negative value.

Lastly, the  $x_{jump}$  ( $y_{jump}$  is symmetrical) are defined respectively:

$$x_{jump} = \frac{\frac{1000}{FPS} \Delta x}{\Delta t} = \frac{t_{jump} \Delta x}{\Delta t} = \frac{\Delta x}{n}$$

The algorithm gets the screen's resolution using WINApi functions.

The screen saver is move-cursor-in-random-directions *fun* bonus feature. Potential application of this feature would be if the user had gotten away from the computer and didn't want anyone to interact with his computer. (it is practically impossible to move the cursor during this animation).

## 4.5 Playback of the Recording

Playback of the recording is simply iterating over the main struct, starting from the tail, and going towards the head direction. When iterating over new node it is parsed and proper function call is executed: *SetCursorPos*, *SendInput*, *Sleep* respectively for values 1, 2, 3 of *f-type* of current node.

## 4.6 Misc

The doubly linked list becomes cyclic list if the user wishes to playback the recording infinitely. In such a case, the only stop condition is pressing the hotkey. After pressing the hotkey, the cyclic list becomes doubly linked list again and memory is freed.

The *init-menu* is a function that controls the entire interface process, workflow of the program. It sends specific (i.e. error) menu flags to the function and works recursively. The flags are based on the previous' program behaviour and allow the program to print proper messages to the user.

# 5 External Specification

## 5.1 GUI

This is a command line program. The project's core is its engine. Surely GUI would increase its attractiveness, however it would not impact the core in any way. Hence it has been omitted. Conditional compilation with GUI version has been considered.

## 5.2 Switches

The program runs perfectly fine without any switches, however *-h* switch could be invoked to display help message.

```
Welcome to WinAuto
You chose -h flag

Option (1): choose the hotkey. This hotkey will be used in options (2), (3), (4)
Option (2): start the recording. Save as <file-name>.txt, for example test.txt. The file has to end with .txt
Use hotkey to stop the recording.
Option (3): start the playback of the recording created in (2). Load the recording with appropriate file name.
Choose number of cycles (repetitions) of the replay. If you wish to terminate the playback, press hotkey.
Option (4): extra feature. Choose arbitrary speed and minfps and start the screensaver.
You have to HOLD hotkey to terminate, not press

Option (5): to exit program

Press 1 to set global hotkey (DEFAULT HOTKEY: F5)
Press 2 to create new recording
Press 3 to play recording
Press 4 to start screensaver
Press 5 to exit
```

Figure 4: Program ran with -h switch

## 5.3 Input files

The program needs input **.txt** files in order to playback the recording. The **.txt** files are generated with the program.

Therefore, if user aims to create his own recordings within the (2) menu option, he does not need any external input files.

Further program executions, if provided with **.txt** files generated earlier, can directly lead to successful (3) menu option usage.

*WinAuto.exe -h* invokes short help message.

## 6 Internal Specification

Detailed information of every function and structure is contained within *Technical Documentation.pdf*.

## 7 Output, Errors, Warnings

### 7.1 File input error

Recording function (2) always generates well-working files. If a situation that the generated files are manipulated on or modified by the user outside of the application usage, the program should detect that the input file is incorrect. Such file is considered **corrupted**.

During the reading file phase (3) menu option, if a *.txt* file is found to be corrupted, the reading is immediately stopped and memory is freed.

## 7.2 Input file names

User can input file names when using (2) or (3) menu options. Files are considered good if and only if they exist, are accessible and not corrupted. File needs to end with **.txt** suffix and it is checked by the program if it does.

## 7.3 Scanf values

The program checks if scanf values match the expected values, and only such values are accepted.

## 7.4 Reading hotkey

Default hotkey is **F5**. User can always set up his own hotkey by using (1) menu option. The hotkey is being used within (2), (3), (4) menu options.

Blacklisted hotkeys are:

- Left mouse button (*keycode 1*)
- Right mouse button (*keycode 2*)
- Return button (*keycode 13*)
- Default hotkey itself (*keycode 116*)

When setting up a hotkey, it is remembered until the program ends or until next hotkey modification.

## 7.5 Program Errors

The program compiles without errors and warnings. No memory leaks were detected. The program should never crash during its execution.

## 8 Testing

The program has been tested mostly manually. Several testing functions are still located inside *tests* directory. Most testing functions are integrated within the program by now.

The accuracy of recording vs. playback has been measured, and it most often corresponds to about 2 percent off accuracy. It can be dependant on the user's CPU and how CPU heavy the recording is. (A lot vs. just a few operations)

The program does not take a big load of CPU because of being based on the *Sleep* function, which prevents CPU from going to 100 percent usage during heavy operations

## 9 Not featured

The program does support only keys located in the technical documentation. (*almost every single key from the standard keyboard*)

The program does not support using extra mouse buttons.

The program does not support holding multiple keyboard's buttons at the same time. It was never intended to. If two or more buttons are pressed simultaneously, the button with higher priority is chosen.

The program does not support prolonged keystrokes nor prolonged mouse clicks. All keystrokes are assumed to be instantaneous in time, brief.

The program should work fine when using several monitors, but has not been tested in that direction.

The program supports only Windows platform.

The program does not support extremely fast keyboard-typing, due to *GetAsyncKeyState*'s nature. It does support fast typing, just not extremely fast. Fast mouse movements are supported, though.

User should pay attention while switching windows during recording phase. During transition between windows (i.e: Google Chrome -> Notepad), the user should retain himself from doing heavy recording actions, like typing very fast. Very rarely small glitches happen.

## 10 Program's Applications

The program can find applications in anything that requires organized automation of the work process.

The (4) bonus feature can find a *fun* application and can be launched when going away from the Computer, if the user wishes not to be afraid that anybody would touch his computer while he is away.

The *Press hotkey to stop* console text can be removed and some combinations of keys can be disabled, thus making it fairly difficult to turn off the program without knowing what the hotkey is.

## 11 Conclusion

The program meets the requirements mentioned in the first **Project's Topic** section. It allows the user to record and simulate the recording afterwards, in a rather efficient manner. The program is considered finished.





