


the plan line the planner wrote, before any frame is read

```
check(c1, before(window("the first domino tips forward"),
                    window("the first domino triggers a chain reaction")))
```





first, both events must be confirmed to occur by the verifier that reads the frames;
only then do the two windows decide the order

what the two measurements returned, on the clip's own clock

A the first domino tips forward A [1.62, 1.67] s

B the first domino triggers a chain reaction B [2.33, 7.96] s

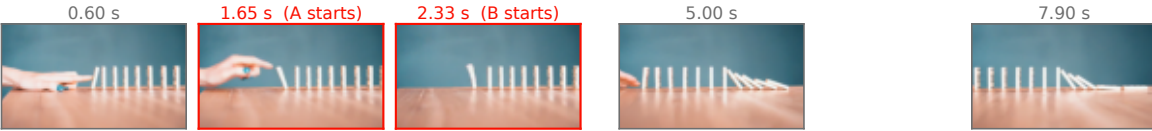

how the order was decided

tolerance = 25% of the shorter window = 0.01 s. A before B iff $A_end \leq B_start + tolerance$.
 $1.67 \leq 2.33 + 0.01 \rightarrow$ yes, so the claim is supported.

if neither direction passes, the windows carry no order and the claim remains unresolved.