



the plan line the planner wrote, before any frame is read

```
check(c1, before(window("the first domino tips forward"),
                      window("the first domino triggers a chain reaction")))
```



first, both events must be confirmed to occur by the verifier that reads the frames;
only then do the two windows decide the order

what the two measurements returned, on the clip's own clock

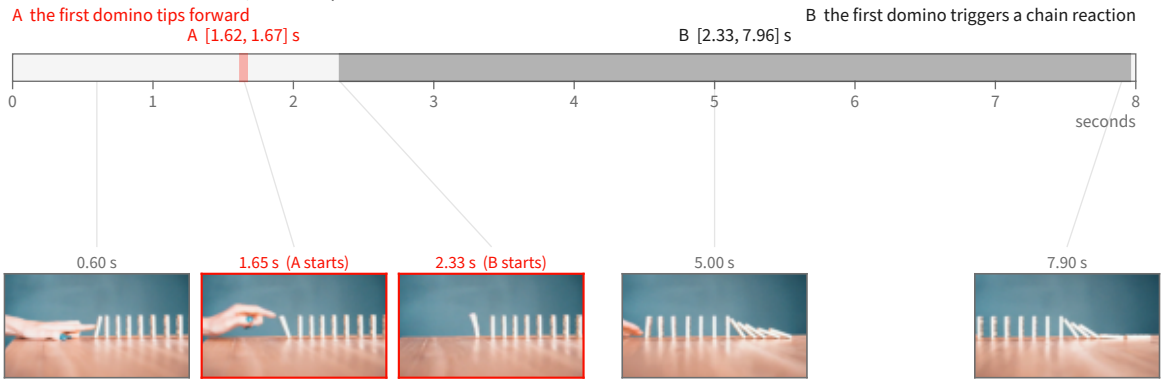

how the order was decided

tolerance = 25% of the shorter window = 0.01 s. does A end before B starts? $1.67 \leq 2.33 + 0.01 \rightarrow$ yes, so the claim is supported.

had the two windows overlapped within that tolerance, the order would carry no answer and the claim would be left unresolved rather than decided by a tie.