2.13

A.

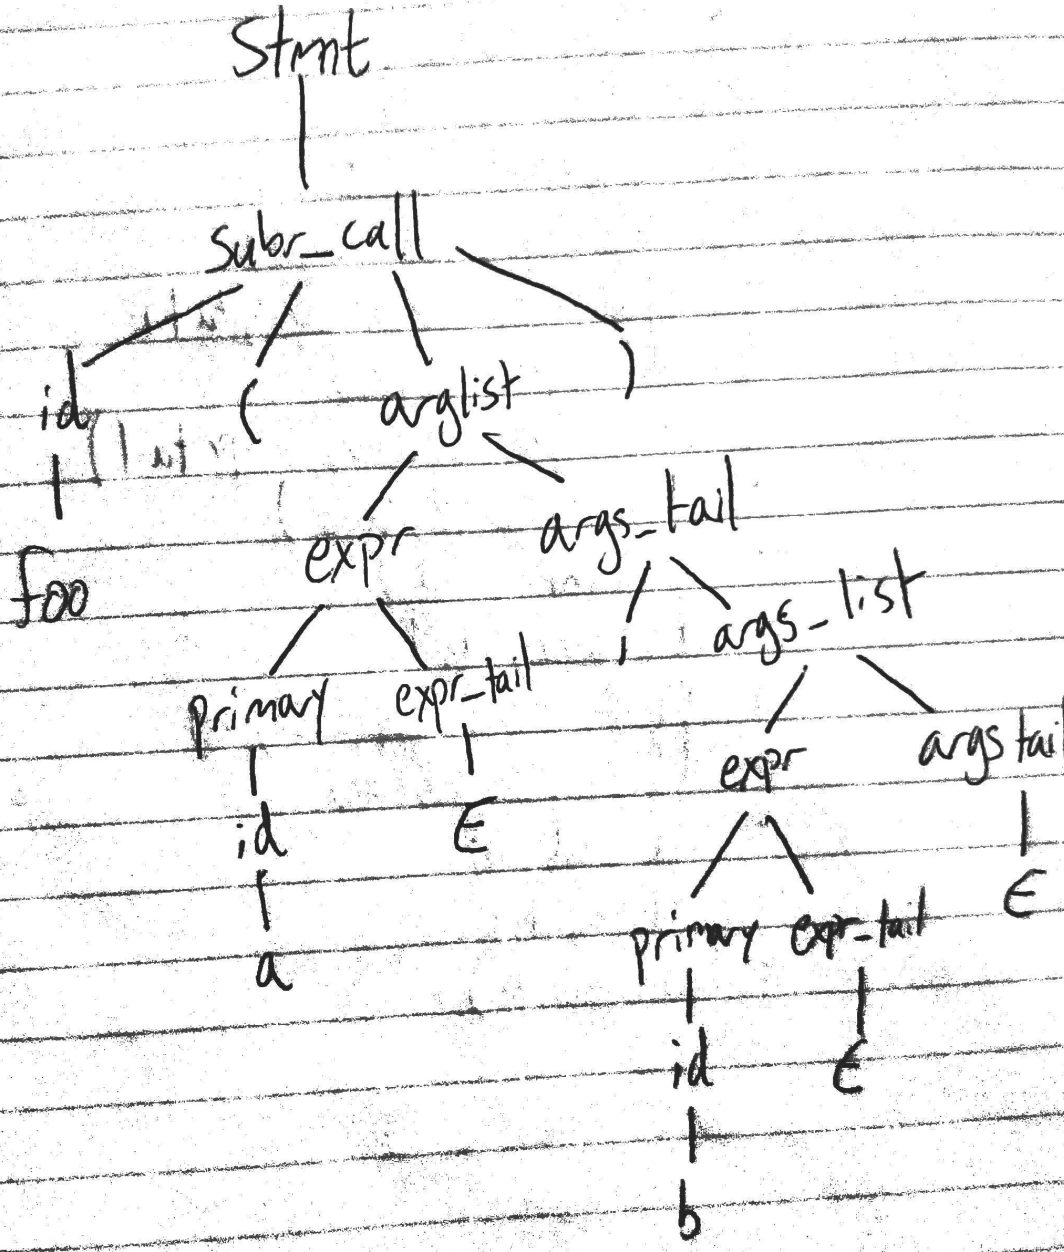
Stmt
subr_call
id
(
arglist
)
foo
expr
args_tail
primary
expr_tail
args_list
id
ϵ
expr
args tail
a
primary
expr_tail
ϵ
id
ϵ
b

2.13

B

Stmt → Subr_call
→ id (arglist)
→ id (expr argstail)
→ id (expr , arglist)
→ id (expr, expr argstail)
→ id (expr, expr)
→ id (expr, primary exprtail)
→ id (expr, primary)
→ id (expr, id)
→ id (expr, b)
→ id (primary exprtail, b)
→ id (primary, b)
→ id (id, b)
→ id (a, b)
→ foo (a, b)