


A few of our favourite tools

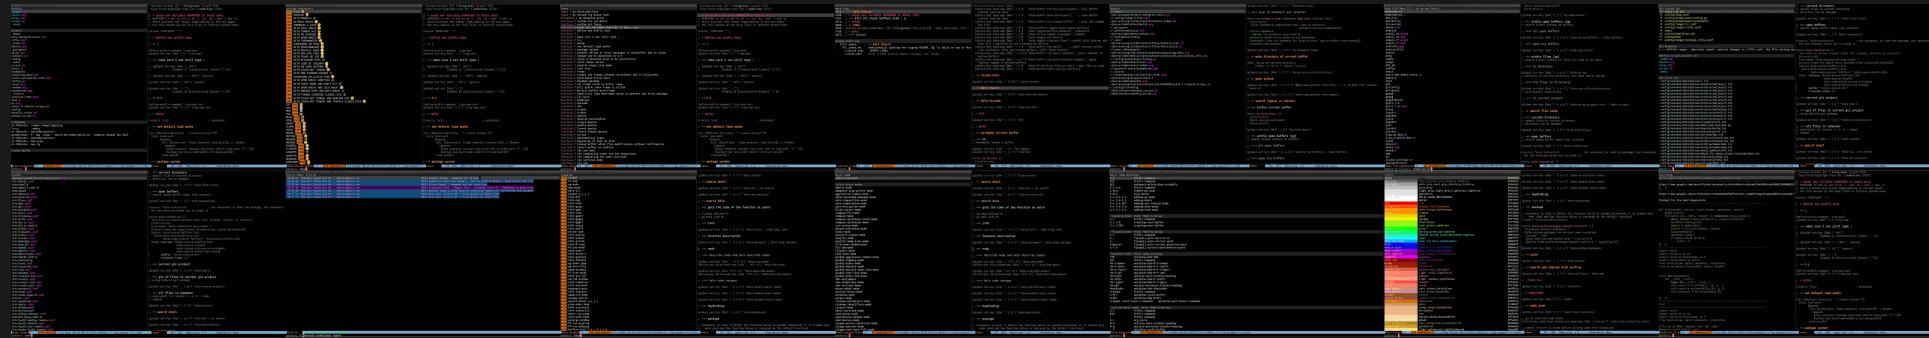

Marie-Hélène Burle & Alex Razoumov

training@westgrid.ca

March 16, 2022

lazygit

(Terminal UI for Git written in Go)

The screenshot shows the lazygit terminal UI with the following sections:

- Status:** Shows the current branch as `:0.0 marie - m`.
- Files - Submodules:** Lists files and submodules with their status (e.g., `?? .!home!marie!parvus!prog!mcuiul/main.tf`, `~undo-tree-.gz`).
- Unstaged Changes:** Shows modified files like `.emacs` with detailed commit history and code snippets.
- Local Branches - Remotes - Tags:** Shows the local branch is `* m :0.0`.
- Commits - Reflog:** Lists recent commits, including:
 - `3da3fb17 MB alias: add comment`
 - `16b91ba9 MB Add autotlock on/off to ssosf`
 - `1e3d8e58 MB alias: update pdff`
 - `1a226fd9 MB remove new line at end of .gitignore as that make it play well with`
 - `744bf634 MB update gitignore`
 - `9ce01fle MB alias: format + minor comment edit`
 - `e4525347 MB alias: update path`
 - `b01dc9cb MB alias: better alias for llpp (pdf) kbd`
 - `46c934e3 MB add alias for ebook kbd`
 - `eb38834b MB alias: big revamp of all clean functions`
 - `bfc548c8 MB alias: add alex function to send large file over the net`
 - `61071ef1 MB alias: fix wacom tablet code`
 - `74fdabd2 MB ranger: make all fz! commands to cycle`
 - `36c77004 MB xinitrc: better comments`
- Stash:** Shows 1 of 300 stashed changes.

At the bottom, there is a footer with keyboard shortcuts and a donation link:

1-5: jump to panel, [/]: scroll left/right, ctrl+g: cancel, ctrl+k/ctrl+j: scroll, q: quit, x: menu, ▲ ▼: navigate
Donate Ask Question 0.33

lazygit brings the ease of use of a visual Git tool to the command line

Unlike slow, buggy, & limited Git GUIs, it is nimble, portable, & super fast

In the following demo, as an additional visual goody, I will introduce **diff-so-fancy** to display the outputs of `git diff`

Bat

(“A cat clone with wings”)

```
File: /home/marie/parvus/prog/tdoc/djl/cjl/parallel/generic_loop/both.jl
```

```
1 #####  
2 # sequential  
3  
4 # run it with:  
5 # julia parallel.jl  
6 #####  
7  
8 using BenchmarkTools  
9  
10 function slow(n::Int, digits::String)  
11     total = 0.  
12     for i in 1:n  
13         if !occursin(digits, string(i))  
14             total += 1. / i  
15         end  
16     end  
17     println("total = ", total)  
18 end  
19  
20 @btime slow(Int64(1e9),"9")  
21
```

bat is a great tool to display the content of files in your terminal

The standard Unix utility for this task is **cat**, but bat adds a lot to it

Syntax highlighting...

...in a huge number of languages. See the impressive list with:

```
bat -L
```

```
cat /home/marie/parvus/prog/slides/static/files/tools/julia.jl
```

Syntax highlighting...

...in a huge number of languages. See the impressive list with:

```
bat -L
```

```
cat /home/marie/parvus/prog/slides/static/files/tools/julia.jl
```

```
#####
# sequential

# run it with:
# julia parallel.jl
#####

using BenchmarkTools

function slow(n::Int, digits::String)
    total = 0.
    for i in 1:n
        if !occursin(digits, string(i))
            total += 1. / i
        end
    end
    println("total = ", total)
end

@btime slow(Int64(1e9), "9")
```

Syntax highlighting...

...in a huge number of languages. See the impressive list with:

```
bat -L
```

```
bat /home/marie/parvus/prog/slides/static/files/tools/julia.jl
```

	File: /home/marie/parvus/prog/slides/static/files/tools/julia.jl Size: 472 B
1	#####
2	# sequential
3	
4	# run it with:
5	# julia parallel.jl
6	#####
7	
8	using BenchmarkTools
9	
10	function slow(n::Int, digits::String)
11	total = 0.
12	for i in 1:n
13	if !occursin(digits, string(i))
14	total += 1. / i
15	end
16	end
17	println("total = ", total)
18	end
19	
20	@btime slow(Int64(1e9), "9")

Smart behaviour with pager

Uses `less` by default with options -RFX

Very convenient: quits the pager automatically if the entire content fits on one script

Integration with Git

```
| File: /home/marie/parvus/prog/slides/static/files/tools/two_layer_net_tensor.py
| Size: 2.3 KB
|
1  import torch
2  from torchvision import datasets, transforms
3  from matplotlib import pyplot as plt
4
5  # To run on GPU, replace 'cpu' by 'cuda'
6  device = torch.device('cpu')
7  dtype = torch.float
8  epochs = 30
9
10 # * Prepare data
11
12 train = datasets.MNIST(
13     # './data',
14     '~/projects/def-sponsor00/data',
15     train = False,
16     download = False,
17     transform = transforms.Compose([
18         transforms.ToTensor(),
19         transforms.Normalize((0.1307,), (0.3081,))]))
20
21 test = datasets.MNIST(
22     # './data',
23     '~/projects/def-sponsor00/data',
24     train = False,
25     download = False,
26     transform = transforms.Compose([
27         transforms.ToTensor(),
28         transforms.Normalize((0.1307,), (0.3081,))]))
29
30 N, D_in, H, D_out = 60000, 784, 100, 10
31
32 x = train.data.view(60000, 784).type(dtype)
33 y = train.targets.unsqueeze(1).expand(60000, 10).type(dtype)
34
35 # Randomly initialize weights
36 w1 = torch.randn(D_in, H, device = device, dtype = dtype)
37 w2 = torch.randn(H, D_out, device = device, dtype = dtype)
38
39 + optimizer = torch.optim.Adam(model.parameters(), lr=learning_rate)
40 + for t in range(500):
41 +     # Forward pass: compute predicted y by passing x to the model.
42 +     y_pred = model(x)
```

Git diff

bat -d

```
File: /home/marie/parvus/prog/slides/static/files/tools/two_layer_net_tensor.py
Size: 2.3 KB

11
12     train = datasets.MNIST(
13     # './data',
14     '~/projects/def-sponsor00/data',
15     train = False,
16     download = False,
17     transform = transforms.Compose([
18         transforms.ToTensor(),
19     ])
20
21     test = datasets.MNIST(
22     # './data',
23     '~/projects/def-sponsor00/data',
24     train = False,
25     download = False,
26     transform = transforms.Compose([
27         transforms.ToTensor(),
28         transforms.Normalize((0.1307,), (0.3081,)))
29
30     N, D_in, H, D_out = 60000, 784, 100, 10
31
32
33     w2 = torch.randn(H, D_out, device = device, dtype = dtype)
34
35     optimizer = torch.optim.Adam(model.parameters(), lr=learning_rate)
36     for t in range(500):
37         # Forward pass: compute predicted y by passing x to the model.
38         y_pred = model(x)
39
40         # Compute and print loss.
41         loss = loss_fn(y_pred, y)
42         print(t, loss.item())
43
44         writer.add_scalar("training loss", loss, t)
45
46         # Before the backward pass, use the optimizer object to zero all of the
47         # gradients for the Tensors it will update (which are the learnable weights
48         # of the model)
49         optimizer.zero_grad()
50
51         # Backward pass: compute gradient of the loss with respect to model parameters
52         loss.backward()
53
54
55
56
```

Man page syntax highlighting

Even colourizes your man pages if you set the `MANPAGER` environment variable (e.g. in your `.bashrc`):

```
export MANPAGER="sh -c 'col -bx | bat -l man -p'"
```

Useful flags

```
bat -n          # Remove frame
```

```
bat -p          # Remove frame & line numbers
```

I personally have an alias for this: `alias rat='bat -p'`

```
bat -pp         # Remove frame & line numbers & don't use pager
```

```
bat -f          # Keep colour highlighting after piping
```

I made this the default behaviour for `bat` with the alias: `alias bat='bat -f'`

Fully customizable

The defaults are great, but if they don't suit you, you can change tab width, language, wrapping method...

```
bat --config-file           # Location of config file (if it exists)
```

```
bat --generate-config-file  # Create config file template
```

```
bat --list-themes          # List themes with examples
```

ripgrep

(A fast recursive alternative to grep)

```
13:57 m ✘ 1 ~/parvus/prog/slides rg tools
content/git_branches/_index.md
415:Many GUI applications for Git as well as powerful text editors such as Emacs and Vim offer merge tools

content/r_gis/_index.md
103:'basemaps' is not on CRAN and needs to be installed from GitHub thanks to `devtools`:
106:install.packages("devtools")
107:devtools::install_github("16EAGLE/basemaps")

content/r_gis_rc/_index.md
98:'basemaps' is not on CRAN and needs to be installed from GitHub thanks to `devtools`:
101:install.packages("devtools")
102:devtools::install_github("16EAGLE/basemaps")

content/help/_index.md
94:Take the time to look for the official documentation & other high quality sources for the languages & tools you use.

content/cli_tools/_index.md
2:title = "cli_tools"
7:href = "https://westgrid-cli.netlify.app/webinars/cli_tools/"
24:[[](/img/cli_tools/cli_title.png)
38:[![logo](/img/cli_tools/fzf.png)](https://github.com/junegunn/fzf)
510:[![logo](/img/cli_tools/autojump.png)](https://github.com/wting/autojump)
518:[![logo](/img/cli_tools/ranger.png)](https://github.com/ranger/ranger)
558:[[](/img/cli_tools/questions.png)

content/tools/_index.md
2:title = "tools"
7:href = "https://westgrid-cli.netlify.app/webinars/tools"
14:## <div style="line-height: 5rem; font-size: 4.2rem; color: black; text-shadow: 0 0 0.7rem white;">A few of our favourite tools</div>
35:{}
44:{}
66:cat /home/marie/parvus/prog/slides/static/files/tools/julia.jl
68:{}
85:bat /home/marie/parvus/prog/slides/static/files/tools/julia.jl
87:{}
103:{}
114:{}
199:{}
207:{}
215:{}
223:{}
231:{}
239:{}
247:{}
255:{}
263:{}
```

ripgrep provides the utility `rg`:
an alternative to grep very fast for recursive searches

What makes rg fast?

Uses parallelism

Uses Rust regex engine with finite automata, SIMD, & aggressive literal optimizations (*regular expressions follow the syntax of grep -E; see this & this for details*)

Let's test speed using **hyperfine** for benchmarking

fd

(Fast & friendly alternative to find)

```
08:38 m ~/parvus/prog/tdoc fd -e jl
dcl/ccl/getting_help/script.jl
dcl/ccl/getting_help/script_fixed.jl
djl/cjl/covid/covid.jl
djl/cjl/covid/covid_old.jl
djl/cjl/dagger/benchmark.jl
djl/cjl/dagger/dagger_oom.jl
djl/cjl/dagger/dagger_threads.jl
djl/cjl/flux/flux.jl
djl/cjl/intro/distributed.jl
djl/cjl/intro/intro.jl
djl/cjl/intro/live_code.jl
djl/cjl/intro/pi.jl
djl/cjl/intro/pi_parallel.jl
djl/cjl/intro/plots.jl
djl/cjl/intro/plots_bkup.jl
djl/cjl/intro/psort.jl
djl/cjl/intro/sort.jl
djl/cjl/intro/variables_types.jl
djl/cjl/jupyter/covid_jupyterdays.jl
djl/cjl/jupyter/hello.jl
djl/cjl/jupyter/literate_cleaned.jl
djl/cjl/jupyter/literate_example.jl
djl/cjl/jupyter/nbinclude.jl
```

fd has an intuitive syntax & is **super fast**

pass

(A command line password manager for Unix systems)

```
15:24 m ~ pass
Password Store
└── newsite.ca
    └── your@email
└── othersite.com
    └── userid
└── somesite.ca
    └── your@email
```

pass is a command line password manager using **GnuPG** for encryption

pass has a Git integration & several extensions

pass is easy to use in scripts or combined with other utilities

Main pass commands

TRAMP

(“A remote file editing package for Emacs”)

The **TRAMP** (Transparent Remote Access, Multiple Protocol) Emacs package allows to edit remote files as if they were local

You can thus use your init file & usual packages to write files on a remote machine or for another user (e.g. root)

You can also use Emacs GUI to edit remote files without efficiency loss

It is a convenient alternative to using Emacs on a remote host after you have sshed into it or to using `sudo emacs` to edit root files

Using TRAMP from within Emacs

Remote file

C-x C-f emacs /ssh:user@server:/home/user/path/to/file RET

Root

C-x C-f emacs /sudo::/path/to/file RET

Using TRAMP from the command line

Remote file

```
emacs /ssh:user@server:/home/user/path/to/file
```

Root

```
emacs /sudo::/path/to/file
```

Helm

("Incremental completion & selection narrowing framework")

```
C-j: Go to Line (keeping session)
H0 [emacs]
18: '(TeX-auto-global "~/emacs.d/auctex/")
316: '(global-aggressive-indent-mode t)
317: '(global-emojify-mode t)
318: '(global-emojify-mode-line-mode t)
319: '(global-git-commit-mode t)
320: '(global-undo-tree-mode t)
321: '(global-visual-line-mode nil)
692: '(org-cycle-global-at-bob t)
2181: '(outshine-org-style-global-cycling-at-bob-p t)
2260: '(smartparens-global-mode t)
2261: '(smartparens-global-strict-mode nil)
2335: '(writeroom-global-effects
2338: '(yas-global-mode)
2800: '(global-set-key (kbd "") 'ring-map)
2804:; (global-set-key (kbd "; SPC")
2807:; (global-set-key (kbd ";" ; SPC) 'ignore)
2809: (global-set-key (kbd ";" SPC) 'ignore)
2811: (global-set-key (kbd ""))
2817: (global-set-key (kbd "C-z") 'ring-map-two)
2877:; useful only when global-emojify-mode is nil
2934: (global-set-key (kbd "<kp-next>") #fix-word-downcase) ; F+1 (l=lower case)
2935: (global-set-key (kbd "<kp-left>") #fix-word-upcase) ; F+u (u=upper case)
2936: (global-set-key (kbd "<kp-down>") #fix-word-capitalise) ; F+k (k=capitalise)
2940: (global-set-key (kbd "; h 1") "*")
2942: (global-set-key (kbd "; h 2") "***")
2944: (global-set-key (kbd "; h 3") "****")
2946: (global-set-key (kbd "; h 4") "*****")
2948: (global-set-key (kbd "; h 5") "*****")
2950: (global-set-key (kbd "; h 6") "*****")
2952: (global-set-key (kbd "; h 7") "*****")
2954: (global-set-key (kbd "; h 8") "*****")
2963: (global-set-key (kbd "<f12> .") ".")
2964: (global-set-key (kbd "<f12> o") "o")
2965: (global-set-key (kbd "<f12> O") "o")
2969: (global-set-key (kbd "<f12> -") "-")
2973: (global-set-key (kbd "<f12> _") "-")
2977: (global-set-key (kbd "<f12> d") "o")
2981: (global-set-key (kbd "<f12> !") "i")
2982: (global-set-key (kbd "<f12> ?") "z")
2986: (global-set-key (kbd "<f12> ` o") "a")
2987: (global-set-key (kbd "<f12> ' c") "a")
2991: (global-set-key (kbd "<f12> \\" o") "aa")
2992: (global-set-key (kbd "<f12> \\" c") "aa")
2996: (global-set-key (kbd "<f12> \< \< o") "``")
2997: (global-set-key (kbd "<f12> \> \> c") "''")
3001: (global-set-key (kbd "<f12> \< o") "<")
3002: (global-set-key (kbd "<f12> \> c") ">")
3006: (global-set-key (kbd "<f12> a r") "r")
3007: (global-set-key (kbd "<f12> a l") "*")
pattern: global
('vertical-border (((type w32 tty)) (:inherit mode-line-inactive :foreground "firebrick4")))
(vimish-fold-face ((t (:background "gray15" :foreground "indianred"))))
(vimish-fold-overlay ((t (:background "MistyRose" :foreground "black"))))
(warning ((t (:foreground "red2" :weight bold))))
(whitespace-empty ((t (:background "light green" :foreground "gray10"))))
(whitespace-hspace ((t (:foreground "orange red"))))
(whitespace-lime ((t (:background "gray15"))))
(whitespace-space ((t (:foreground "olivedrab"))))
(whitespace-trailing ((t (:background "brown2"))))
(window-divider ((t (:foreground gray25))))
(yas-field-highlight-face ((t (:underline t)))))

;; * unset env variable MANPAGER in Emacs only
;; MANPAGER is set in zsh to sh -c 'col -bx | bat -l man -p'
;; which provides bat colour highlighting in the man pages
;; but this messes up the help files in inferior-python-mode
(setenv "MANPAGER" "")

;; * define new prefix keys

;; ** ;
(define-prefix-command 'ring-map)
(global-set-key (kbd "") 'ring-map)

;; *** make sure I can still type ;
;; (global-set-key (kbd "; SPC")
;;   (lambda () (interactive) (insert ";")))
;; (global-set-key (kbd ";" ; SPC) 'ignore)
;; (global-set-key (kbd ";" SPC) 'ignore)
;; (global-set-key (kbd ""))
;;   (lambda () (interactive) (insert ";")))

;; ** C-z
(define-prefix-command 'ring-map-two)
(global-set-key (kbd "C-z") 'ring-map-two)

;; * setup
(require 'org) ; necessary

;; ** set default load paths
helm occur* L14 (HF) [33] Candidate(s) C-h m:Help TAB:Act RET/f1/f2/f-n:NthAct C-!:Top.suspend C-h c: -[emacs] 61% 2800 Emacs-Lisp s U: /home/marie/.emacs
pattern: global
```

The **Helm** package provides an incremental completion & narrowing selection API for search applications in Emacs

Virtually every Emacs search application has built-in integration with Helm

Grep equivalent

```
C-j: Go to Line (keeping session)
H0 [emacs]
18: '(TeX-auto-global "~-emacs.d/auctex/")
316: '(global-aggressive-indent-mode t)
317: '(global-emojify-mode t)
318: '(global-emojify-mode-line-mode t)
319: '(global-git-commit-mode t)
320: '(global-undo-tree-mode t)
321: '(global-visual-line-mode nil)
692: '(org-cycle-global-at-bob t)
2181: '(outshine-org-style-global-cycling-at-bob-p t)
2260: '(smartparens-global-mode t)
2261: '(smartparens-global-strict-mode nil)
2335: '(writeroom-global-effects
2338: '(yas-global-mode)
2800: '(global-set-key (kbd "") 'ring-map)
2804::; (global-set-key (kbd ; SPC")
2807::; (global-set-key (kbd ; ; SPC) 'ignore)
2809: (global-set-key (kbd ; SPC) 'ignore)
2811: (global-set-key (kbd ; '))
2817: (global-set-key (kbd "C-z") 'ring-map-two)
2877::; useful only when global-emojify-mode is nil
2934: (global-set-key (kbd "<kp-next>") #fix-word-downcase) ; F+1 (l=lower case)
2935: (global-set-key (kbd "<kp-left>") #fix-word-upcase) ; F+u (u=upper case)
2936: (global-set-key (kbd "<kp-down>") #fix-word-capitalizes) ; F+k (k=capitalizes)
2940: (global-set-key (kbd ; h 1") "* ")
2942: (global-set-key (kbd ; h 2") "***")
2944: (global-set-key (kbd ; h 3") "****")
2946: (global-set-key (kbd ; h 4") "*****")
2948: (global-set-key (kbd ; h 5") "*****")
2950: (global-set-key (kbd ; h 6") "*****")
2952: (global-set-key (kbd ; h 7") "*****")
2954: (global-set-key (kbd ; h 8") "*****")
2963: (global-set-key (kbd "<f12> .") ".")
2964: (global-set-key (kbd "<f12> o") "o")
2965: (global-set-key (kbd "<f12> O") "o")
2969: (global-set-key (kbd "<f12> -") "-")
2973: (global-set-key (kbd "<f12> _") "-")
2977: (global-set-key (kbd "<f12> d") "o")
2981: (global-set-key (kbd "<f12> !") "i")
2982: (global-set-key (kbd "<f12> ?") "¿")
2986: (global-set-key (kbd "<f12> ' o") "a")
2987: (global-set-key (kbd "<f12> ' c") "a")
2991: (global-set-key (kbd "<f12> \' o") "a")
2992: (global-set-key (kbd "<f12> \' c") "a")
2996: (global-set-key (kbd "<f12> \< o") "a")
2997: (global-set-key (kbd "<f12> \> c") "a")
3001: (global-set-key (kbd "<f12> \< o") "c")
3002: (global-set-key (kbd "<f12> \> c") "c")
3006: (global-set-key (kbd "<f12> a r") "r")
3007: (global-set-key (kbd "<f12> a l") "l")
pattern: global
```

(vertical-border (((type w32 tty)) (:inherit mode-line-inactive :foreground "firebrick4"))))
(vimish-fold-face ((t (:background "gray15" :foreground "indianred"))))
(vimish-fold-overlay ((t (:background "MistyRose4" :foreground "black"))))
(warning ((t (:foreground "red2" :weight bold))))
(whitespace-empty ((t (:background "light green" :foreground "gray10"))))
(whitespace-hspace ((t (:foreground "orange red"))))
(whitespace-lime ((t (:background "gray15"))))
(whitespace-space ((t (:foreground "olivedrab"))))
(whitespace-trailing ((t (:background "brown2"))))
(window-divider ((t (:foreground "gray25"))))
(yas-field-highlight-face ((t (:underline t)))))

; * unset env variable MANPAGER in Emacs only
; MANPAGER is set in zsh to sh -c 'col -bx | bat -l man -p'
; which provides bat colour highlighting in the man pages
; but this messes up the help files in inferior-python-mode

(setenv "MANPAGER" "")

; * define new prefix keys

; ** ;

(define-prefix-command 'ring-map)
 (global-set-key (kbd "") 'ring-map)

; *** make sure I can still type ;

; (global-set-key (kbd ; SPC)
; (lambda () (interactive) (insert ";")))
; (global-set-key (kbd ; ; SPC) 'ignore)

(global-set-key (kbd ; SPC) 'ignore)

(global-set-key (kbd ; ')
 (lambda () (interactive) (insert ";")))

; ** C-z

(define-prefix-command 'ring-map-two)
 (global-set-key (kbd "C-z") 'ring-map-two)

; * setup

(require 'org) ; necessary

; ** set default load paths

(add-to-list 'load-path (concat (getenv "HOME") "/.emacs.d/elpa/")))

#helm occur* L14 (HF) [331 Candidate(s)] C-h m:Help TAB:Act RET/f1/f2/f-n:NthAct C-!:Tog.suspend C-h c: -[.emacs] 61% 2800 Emacs-Lisp s U: /home/marie/.emacs

Navigate mark ring

```
C-j: Show this line (keeping session)
mark-ring
3173: ;; ** helm kmacro
2788: ;; * unset env variable MANPAGER in Emacs only
5781: ;; *** kill all slack buffers with ; q
2819: ;; * setup
3060: ;; ** smex
5449: (deface my-shortcode-face `((t (:foreground "dim gray")) "Hugo shortcodes face")
3185: ;; * goto
5473: ;; **** global
global-mark-ring
3173: .emacs: ;; ** helm kmacro
176: index.md:   Additionally, quoting the ripgrep README, rg "is built on top of Rus-
 1:sketch.org: <EMPTY LINE>
 1:alias.zsh: # For a full list of active aliases, run `alias`"
      (with-eval-after-load 'helm
        (define-key helm-map (kbd "k") 'helm-buffer-run-kill-persistent) ; kill buffer
        without leaving helm
        (define-key helm-map (kbd "s") 'helm-buffer-save-persistent) ; save buffer
        without leaving helm
        (define-key helm-map (kbd "n") 'helm-buffer-run-rename-buffer) ; will not rename
        the file
        (define-key helm-map (kbd "h") 'helm-buffers-toggle-show-hidden-buffers)
        (define-key helm-map (kbd "d") 'helm-toggle-buffers-details) ; d=details
        (define-key helm-map (kbd "p") 'helm-ff-run-toggle-basename) ; p=path
        (define-key helm-map (kbd "a") 'helm-toggle-all-marks)
        (define-key helm-map (kbd "t") 'helm-toggle-truncate-line) ; useful with helm-mu and
        helm kill ring which do not truncate by default
        (define-key helm-map (kbd "=") 'helm-buffer-run-ediff) ; ediff current buffer
        with candidate. With two marked buffers, ediff those buffers
        (define-key helm-map (kbd "m m") 'helm-buffer-run-query-replace) ; query replace in
        marked buffers
        (define-key helm-map (kbd "m r") 'helm-buffer-run-query-replace-regexp) ; query
        replace regexp in marked buffers
        (define-key helm-map (kbd "r") 'helm-ff-run-find-file-as-root) ; open file as root
        (define-key helm-map (kbd "i") 'helm-buffers-mark-similar-buffers))

;; ** resume helm
(global-set-key (kbd "h SPC") 'helm-resume)

;; ** helm kmacro
(global-set-key (kbd "h k") 'helm-execute-kmacro)

;; ** helm-unicode
(global-set-key (kbd "h u") 'helm-unicode)

;; * fzf
(global-set-key (kbd "f s") 'fzf)

;; * goto
;; ** navigate current buffer
;; *** bm
;; bookmarks inside a buffer
(global-set-key (kbd "u") 'bm-toggle)
(global-set-key (kbd "e r") 'helm-bm)

(defun my-bm-next ()
  (interactive)
  (helm--advice-push-mark))
```

helm mark ring L1 (HF) [8 Candidate(s)] C-h m:Help TAB:Act RET/f1/f2/f-n:NthAct C-!:Tog.suspend C- .emacs 64% 3173 Emacs-Lisp s U: /home/marie/.emacs
pattern: █

Navigate kill ring

```
C-j: DoNothing (keeping session)
Kill Ring
go to repo /home/marie/pervus/ptmp/git_workshop_collab
https://www.google.com/search?q=button+quail+chicks&tbm=isch&ved=2ahUKEwjvptG06Mj2AhWbBDQI
[...]
https://www.google.com/url?sa=i&url=https%3A%2F%2Ftwitter.com%2Fthegallowboob%2Fstatus%2F1
(Except for the most degenerate

def train(model, device, train_loader, optimizer, epoch):
    model.train()
    for batch_idx, (data, target) in enumerate(train_loader):
        data, target = data.to(device), target.to(device)
        optimizer.zero_grad()
        output = model(data)
        loss = F.nll_loss(output, target)
        loss.backward()
        optimizer.step()
        if batch_idx % 10 == 0:
            print('Tr
[...]
import torch
import torch.nn as nn
import torch.nn.functional as F
import torch.optim as optim
from torchvision import datasets, transforms
from torch.optim.lr_scheduler import StepLR

class Net(nn.Module):
    def __init__(self):
        super(Net, self).__init__()
        self.conv1 = nn.Conv2d(1, 32, 3, 1)
        self.conv2 = nn.Conv2d(32, 64, 3, 1)
        self.dropout1 = nn.Dropout2d(0.25)

[...]
test
import torch
import torch.nn as nn
import torch.nn.functional as F
from torchvision import datasets, transforms
# To run on GPU, replace 'cpu' by 'cuda'
device = torch.device('cpu')
; '(window-divider ((t (:foreground "gray25"))))
; (yas-field-highlight-face ((t (:underline t)))))

;; * unset env variable MANPAGER in Emacs only
;; MANPAGER is set in zsh to sh -c 'col -bx | bat -l man -p'
;; which provides bat colour highlighting in the man pages
;; but this messes up the help files in inferior-python-mode
(setenv "MANPAGER" "")

;; * define new prefix keys
;; ** ;
(define-prefix-command 'ring-map)
(global-set-key (kbd ";") 'ring-map)

;; *** make sure I can still type ;
;; (global-set-key (kbd "; SPC")
;;                 (lambda () (interactive) (insert ";")))
;; (global-set-key (kbd "; ; SPC") 'ignore)
;; (global-set-key (kbd "; SPC") 'ignore)
;; (global-set-key (kbd "; '')")
;;                 (lambda () (interactive) (insert ";")))

;; ** C-z
(define-prefix-command 'ring-map-two)
(global-set-key (kbd "C-z") 'ring-map-two)

;; * setup
(require 'org) ; necessary
;; ** set default load paths
(let ((default-directory "~/emacs.d/elpa/"))
  (setq load-path
        (append
         (let ((load-path (copy-sequence load-path))) ; Shadow
           (append
            (copy-sequence (normal-top-level-add-to-load-path '(".")))
            (normal-top-level-add-subdirs-to-load-path)))
         load-path)))
;; ** package system
helm kill ring* L1 [15 Candidate(s)] C-h m:Help TAB:Act RET f1/f2/f-n:NthAct C-!:Tog.suspend C-h c:C - .emacs 61% 2788 Emacs-Lisp s U: /home/marie/.emacs
pattern: |
```

Navigate open & recent files

```
C-j: Show this buffer (keeping session)
Buffers
_index.md
sketch.org
alias.zsh
script.sh
.emacs

Recentf
.emacs
move-westgrid-users.csv
rifle.conf
_index.md
sketch.org
.gitignore
alias.zsh
contact.org
config
.zshrc
script.sh
julia.jl
bookmarks
upsaling_data.org
covid_vaccination_info.org
config.py
linux.org
random.org
passphrase.gpg
.xinitrc
fontlist-v330.json
test.R
mc.org
julia-11-shared-arrays.md
config
monthly_script.sh
weekly_script.sh

X Windows
st-256color ranger:image/logo/lwg
Emacs      .emacs
st-256color. marie@prosoitos:-
qutebrowser. 0 top Inbox - marie.burle@westgrid.ca - Compute Canada Inc Mail
st-256color. marie@prosoitos:-
st-256color. man grep
st-256color. man rg

Create buffer

helm-taskswitch* L1 [5 Buffer(s)] C-h m:Help TAB:Act RET/f1/f2/f-n:NthAct C-!:Tog.suspend C-h c:Con - .emacs 61% 2788 Emacs-Lisp s U: /home/marie/.emacs
pattern: |
```

'(window-divider ((t (:foreground "gray25"))))
'(yas-field-highlight-face ((t (:underline t)))))
;; * unset env variable MANPAGER in Emacs only
;; MANPAGER is set in zsh to sh -c 'col -bx | bat -l man -p'
;; which provides bat colour highlighting in the man pages
;; but this messes up the help files in inferior-python-mode
(setenv "MANPAGER" "")
;; * define new prefix keys
;; ** ;
(define-prefix-command 'ring-map)
(global-set-key (kbd ";") 'ring-map)
;; *** make sure I can still type ;
;; (global-set-key (kbd ";" SPC)
;; (lambda () (interactive) (insert ";")))
;; (global-set-key (kbd ";" ; SPC) 'ignore)
(global-set-key (kbd ";" SPC) 'ignore)
(global-set-key (kbd ";" '')
 (lambda () (interactive) (insert ";")))
;; ** C-z
(define-prefix-command 'ring-map-two)
(global-set-key (kbd "C-z") 'ring-map-two)
;; * setup
(require 'org) ; necessary
;; ** set default load paths
(let ((default-directory "~/emacs.d/elpa/"))
 (setq load-path
 (append
 (let ((load-path (copy-sequence load-path))) ; Shadow
 (append
 (copy-sequence (normal-top-level-add-to-load-path '(".")))
 (normal-top-level-add-subdirs-to-load-path)))
 load-path)))
;; ** package system

Navigate recent files

```
C-j: Show this file (keeping session)
Recentf
~/.emacs
~/parvus/ptmp/dl/move-westgrid-users.csv
~/config/ranger/rifle.conf
~/parvus/prog/slides/content/tools/_index.md
~/parvus/adm/notes/sketch.org
~/.gitignore
~/zsh/custom/alias.zsh
~/parvus/adm/notes/contact.org
~/config/bat/config
~/zshrc
~/parvus/prog/slides/static/files/tools/script.sh
~/parvus/prog/slides/static/files/tools/julia.jl
~/.emacs.d/bookmarks
~/parvus/prog/tm1/content/webinars/upscaling_data.org
~/parvus/adm/medical/vaccination/covid/covid_vaccination_info.org
~/config/qutebrowser/config.py
~/parvus/adm/notes/linux.org
~/parvus/adm/notes/random.org
~/password-store/passphrase.gpg
~/.xinitrc
~/.cache/matplotlib/fontlist-v330.json
~/parvus/prog/progtest/test.R
~/parvus/adm/notes/mc.org
~/parvus/prog/courses/content/julia202202/julia-11-shared-arrays.md
~/config/i3/config
~/hbin/btimers/monthly_script.sh
~/hbin/btimers/weekly_script.sh

(global-set-key (kbd " b s") 'bookmark-save)
;; *** jump to bookmark and recenter
(defun my-bookmark-jump (bookmark &optional display-func)
  (interactive
   (list (bookmark-completing-read "Jump to bookmark"
                                   bookmark-current-bookmark)))
  (unless bookmark
    (error "No bookmark specified"))
  (bookmark-maybe-historicize-string bookmark)
  (bookmark-jump-via bookmark (or display-func 'pop-to-buffer-same-window))
  (recenter-top-bottom))

(global-set-key (kbd " e k") 'my-bookmark-jump)
;; ** goto directory of current buffer
(fset 'my-go-to-current-directory
      [?M-x ?i ?d ?o . ? return return])
(global-set-key (kbd " C-l") 'my-go-to-current-directory)
;; ** goto github
(global-set-key (kbd " h v f") 'helm-open-github-from-file) ; v = version (for version
control)
(global-set-key (kbd " h v c") 'helm-open-github-from-commit)
;; ** search regexp in content
;; *** within current buffer
(defun my-helm-occur ()
  (interactive)
  (helm--advice-push-mark)
  (helm-occur))

(global-set-key (kbd " j") 'my-helm-occur)
;; *** within open buffers (ag)
;; search within content of buffers
;; *** all open buffers
(global-set-key (kbd " h a b") 'helm-do-ag-buffers) ; helm buffers
;; *** open org buffers
C-x C-l L1  [27 File(s)]  C-h m:Help TAB:Act RET/f1/f2/f-n:NthAct C-!:Tog.suspend C-h c:Conf
pattern:  Emacs  66%  3313  Emacs-Lisp  s U:  /home/marie/.emacs
```

Find file

```
,C-j: Hit1 Expand Candidate, Hit2 or (C-u) Find file (keeping session)
Read File Name (C-l: Go up one level)
/home/marie/
/home/marie...
.Rprofile
.Xauthority
.Xresources
.abcd.conf
.android
.aspell.en.prepl
.aspell.en.pws
.aspell.fr.prepl
.aspell.fr.pws
.authinfo.gpg
.bash_profile
.bashrc
.borg
.cache
.cargo
.cht.sh
.config
.emacs
.emacs-bmk-bmenu-state.el
.emacs.d
.fasd
.git
.gitconfig
.gitignore
.gnome
.gnupg
.googleearth
 gtkrc-2.0
 gtkrc-2.0.mine
.icons
.inputrc
.ipython
.julia
.jupyter
.less
.lessht
.lesskey
.llip_my_kbd.ml
.llip_original_kbd.ml
.local
.mbsyncrc
.smtp.log
.smtprc
.npm
.nv
.nvidia-settings-rc
.password-store
[Helm file completions* L1 [92 Candidate(s)] C-h m:Help C/M-RET:Empty TAB:Act RET/f1/f2/f-n:NthAct C- - |.emacs] 66% 3347 Emacs-Lisp s U: /home/marie/.emacs
Search in file(s): /home/marie/
```

```
(helm--advice-push-mark)
(helm-occur)

(global-set-key (kbd " ; j") 'my-helm-occur)

;; *** within open buffers (ag)
;; search within content of buffers

;; **** all open buffers

(global-set-key (kbd " ; h a b") 'helm-do-ag-buffers) ; helm buffers

;; *** open org buffers

(global-set-key (kbd " ; h a o") 'helm-org-rifle)

;; *** within files (ag)
;; search within content of files (no need to be open)

;; **** in directory

(global-set-key (kbd " ; h a d") 'helm-do-ag)
;; defaults to current directory, but path can be edited

;; **** org files in directory

(global-set-key (kbd " ; h a r") 'helm-org-rifle-directories)
;; with prefix: recursively

;; **** in current project

(global-set-key (kbd " ; h a p") 'helm-do-ag-project-root) ; helm project

;; ** search file names

;; *** current directory
;; search files in current directory
;; directory can be changed

(global-set-key (kbd " ; f f") 'helm-find-files)

;; *** open buffers
;; search among buffer names (not content)

(global-set-key (kbd " ; i") 'helm-taskswitch)

(require 'helm-taskswitch) ; not necessary to load the package, but necessary
for the function below not to break it

(defun helm-taskswitch ()
```

Locate

```
,C-j: helm-ff-kill-or-find-buffer-fname (keeping session)
Locate
/boot/grub/x86_64-efi/configfile.mod
/etc/abcde.conf
/etc/conf.d
/etc/daxctl.conf.d
/etc/dconf
/etc/dhcpcd.conf
/etc/e2scrub.conf
/etc/fuse.conf
/etc/gai.conf
/etc/grc.conf
/etc/healthd.conf
/etc/host.conf
/etc/i3status.conf
/etc/krb5.conf
/etc/ld.so.conf
/etc/ld.so.conf.d
/etc/libao.conf
/etc/libaudit.conf
/etc/libva.conf
/etc/locale.conf
/etc/makepkg.conf
/etc/man_db.conf
/etc/mdadm.conf
/etc/mke2fs.conf
/etc/mkinitcpio.conf
/etc/ndctl.conf.d
/etc/netconfig
/etc/nscd.conf
/etc/nsswitch.conf
/etc/ntp.conf
/etc/pacman.conf
/etc/request-key.conf
/etc/resolv.conf
/etc/resolv.conf.bak
/etc/resolvconf.conf
/etc/sensors3.conf
/etc/sudo.conf
/etc/sudo_logsrvd.conf
/etc/ts.conf
/etc/updatedb.conf
/etc/xattr.conf
/etc/R/Makeconf
/etc/R/javaconf
/etc/UPower/UPower.conf
/etc/X11/xorg.conf.d
/etc/audit/audisp-remote.conf
/etc/audit/auditd.conf
/etc/audit/zos-remote.conf
/etc/avahi/avahi-daemon.conf
helm locate* L1 [3496 File(s)] C-h m:Help TAB:Act RET/f1/f2/f-n:NthAct C-! :Tog.suspend C-h c:Conf
pattern: conf
;; *** current directory
;; search files in current directory
;; directory can be changed
(global-set-key (kbd "f f") 'helm-find-files)
;; *** open buffers
;; search among buffer names (not content)
(global-set-key (kbd "i") 'helm-taskswitch)
(require 'helm-taskswitch) ; not necessary to load the package, but necessary
for the function below not to break it
(defun helm-taskswitch ()
  "Use helm to switch between tasks (X11 windows, buffers or recentf)."
  (interactive)
  (run-hooks 'helm-taskswitch-open-hooks)
  (select-frame-set-input-focus (window-frame (selected-window)))
  (unless helm-source-buffers-list
    (setq helm-source-buffers-list
          (helm-make-source "Buffers" 'helm-source-buffers)))
  (helm :sources '(helm-source-buffers-list
                    helm-source-recentf
                    helm-taskswitch-source-x-windows
                    helm-source-buffer-not-found)
        :buffer "*helm-taskswitch*"
        :truncate-lines t))
;; *** current git project
(global-set-key (kbd "h p") 'helm-cmd-t)
;; *** git of files in current git project
;; using helm-ls-git package
(global-set-key (kbd "h g") 'helm-browse-project)
;; *** all files in computer
;; equivalent to: locate -i -e -A --regex
;; regexp
(global-set-key (kbd "h l") 'helm-locate)
;; ** search email
(global-set-key (kbd "m s") 'helm-mu) ; mu search
(global-set-key (kbd "m c") 'helm-mu-contacts)
;; search help
helm locate* L1 [3496 File(s)] C-h m:Help TAB:Act RET/f1/f2/f-n:NthAct C-! :Tog.suspend C-h c:Conf
pattern: conf
- Emacs 66% 3383 Emacs-Lisp s U: /home/marie/.emacs
```

Search objects in working environment

```
C-j: Show this entry (keeping session)
Imenu
Types / my-shortcode-face
Types / my-nested-org-block-face
Variables / aw-dispatch-alist
Function / custom-set-variables
Function / custom-set-faces
Function / unset-env-variable MANPAGER in Emacs only
Function / define-new-prefix-keys
Function /
Function / make-sure-I-can-still-type ;
Function / C-z
Function / setup
Function / set-default-load-paths
Function / package-system
Function / prevent-series-of-error-messages-in-minibuffer-due-to-slack
Function / change-yes-no-questions-to-y-n
Function / allow-a-selected-area-to-be-overwritten
Function / start-emacs-server
Function / emojiify-emacs-lisp-mode
Function / font-size
Function / frame
Function / create-new-frames-without-scrollbar-and-in-fullscreen
Function / my-disable-scroll-bars
Function / disable-menubar
Function / set-frame-title-to-buffer-name
Function / kill-buffer-when-frame-is-killed
Function / my-kill-buffer-with-frame
Function / explicitly-load-helm-mode-early-to-prevent-new-error-message
Function / fix-word
Function / headings
Function / unicode
Function / dot
Function / m-dash
Function / n-dash
Function / degree
Function / Spanish-punctuation
Function / single-quotes
Function / double-quotes
Function / French-quotes
Function / French-single-quotes
Function / arrows
Function / mathematical-signs
Function / beginning-of-text-on-line
Function / reload-buffer-after-file-modification-without-confirmation
Function / revert-buffer-no-confirm
Function / ido-and-smex
Function / ido-completing-read-and-ido-ubiquitous
Function / ido-completing-for-some-functions
Function / ido-vertical-mode
Function / fix-ido
;; * unset-env-variable MANPAGER in Emacs only
;; MANPAGER is set in zsh to sh -c 'col -bx | bat -l man -p'
;; which provides bat colour highlighting in the man pages
;; but this messes up the help files in inferior-python-mode
(setenv "MANPAGER" "")
;; * define-new-prefix-keys
;;
(define-prefix-command 'ring-map)
(global-set-key (kbd ";") 'ring-map)

;; *** make-sure-I-can-still-type ;
;; (global-set-key (kbd "; SPC")
;;                 (lambda () (interactive) (insert ";")))
;; (global-set-key (kbd "; ; SPC") 'ignore)
;; (global-set-key (kbd "; SPC") 'ignore)
;; (global-set-key (kbd "; ;") (lambda () (interactive) (insert ";")))

;; ** C-z
(define-prefix-command 'ring-map-two)
(global-set-key (kbd "C-z") 'ring-map-two)

;; * setup
(require 'org) ; necessary
;; * set-default-load-paths
(let ((default-directory "~/emacs.d/elpa/"))
  (setq load-path
        (append
          (let ((load-path (copy-sequence load-path))) ; Shadow
            (append
              (copy-sequence (normal-top-level-add-to-load-path '(".")))
              (normal-top-level-add-subdirs-to-load-path)))
          load-path)))
;; * package-system
helm-imenu* L6 (HF) [100 Candidate(s)] C-h m:Help TAB:Act RET/f1/f2/f-n:NthAct C-!:Tog.suspend C-h c: - .emacs 61% 2788 Emacs-Lisp s U: /home/marie/.emacs
pattern: 
```

Search in Git repo

```
,C-j: Diff (keeping session)
Git status (m)
M .aspell.en.pws
M .config/lipp.conf
M .config/qutebrowser/config.py
M .config/qutebrowser/quickmarks
M .config/ranger/rc.conf
M .config/ranger/rifle.conf
M .emacs
M .zsh/custom/alias.zsh
?? .config/bat/
?? .config/ranger/initial_rifle.conf

Git branches
* m: a4141ef ranger: important commit: massive changes to rifle.conf: the file setting op

Buffers in git project (m)
_index.md
sketch.org
alias.zsh
script.sh
.emacs

Git files (m)
.config/autokey/data/phrase/1.txt
.config/autokey/data/phrase/archive/smileys/1.txt
.config/autokey/data/phrase/archive/smileys/2.txt
.config/autokey/data/phrase/archive/smileys/3.txt
.config/autokey/data/phrase/archive/smileys/4.txt
.config/autokey/data/phrase/archive/smileys/5.txt
.config/autokey/data/phrase/archive/smileys/D.txt
.config/autokey/data/phrase/archive/smileys/P.txt
.config/autokey/data/phrase/archive/smileys/o.txt
.config/autokey/data/phrase/archive/animal/pp.txt
.config/autokey/data/phrase/archive/animal/sc.txt
.config/autokey/data/phrase/archive/animal/st.txt
.config/autokey/data/phrase/archive/animal/ts.txt
.config/autokey/data/phrase/craigslist/cl.txt
.config/autokey/data/phrase/date_and_time/day.py
.config/autokey/data/phrase/expression/eg.txt
.config/autokey/data/phrase/expression/er.txt
.config/autokey/data/phrase/acronym/hpc.txt
.config/autokey/data/phrase/archive/animal/vta.txt
.config/autokey/data/phrase/archive/animal/vtu.txt
.config/autokey/data/phrase/archive/names/dov.txt
.config/autokey/data/phrase/archive/names/mag.txt
.config/autokey/data/phrase/email_address/sfu.txt
.config/autokey/data/phrase/emoji_for_emacs_slack_reactions/boo.txt
.config/autokey/data/phrase/expression/bcp.txt
.config/autokey/data/phrase/expression/btw.txt
.config/autokey/data/phrase/acronym/DHSI.txt

helm lsgit* L1 [10 Candidate(s)] C-h m:Help TAB:Act RET/f1/f2/f-n:NthAct C-!:Tog.suspend C-h c:Conf - |.emacs 66% 3383 Emacs-Lisp s U: /home/marie/.emacs
pattern: 
```

Manage major/minor modes

```
C-j: Describe major mode (keeping session)
Major mode
emacs-lisp-mode

Active minor modes
abbrev-mode
adaptive-wrap-prefix-mode
aggressive-indent-mode
async-bytecomp-package-mode
auto-composition-mode
auto-compression-mode
auto-encryption-mode
blink-cursor-mode
company-flx-mode
company-mode
company-quickhelp-local-mode
company-quickhelp-mode
crm-custom-mode
delete-selection-mode
eldoc-mode
electric-indent-mode
emojiify-mode
emojiify-mode-line-mode
file-name-shadow-mode
flx-ido-mode
flyspell-mode
font-lock-mode
global-aggressive-indent-mode
global-company-mode
global-eldoc-mode
global-emojiify-mode
global-emojiify-mode-line-mode
global-font-lock-mode
global-undo-tree-mode
ido-everywhere
ido-ubiquitous-mode
ido-vertical-mode
mouse-wheel-mode
outline-minor-mode
outshine-mode
pyvenv-mode
rainbow-delimiters-mode
rainbow-identifiers-mode
recentf-mode
shell-dirtrack-mode
show-paren-mode
smartparens-global-mode
smartparens-mode
telega-active-locations-mode
telega-patrons-mode
telega-root-auto-fill-mode

;; Helm Describe Modes* L1 [Candidate(s)] C-h m:Help TAB:Act RET/f1/f2/f-n:NthAct C-!:Tog.suspend C- .emacs '' 67% 3422 Emacs-Lisp s U: /home/marie/.emacs
pattern:
```

Search help files

```
,C-j: Toggle describe command (keeping session)
Commands
helm-ff-RET
helm-ff-TAB
helm-ag-mode
helm-epa-mode
helm-mark-all
helm-locate C-x c l
helm-info-bfd
helm-info-cpp
helm-info-ksha
helm-info-gzip
helm-info-wget
helm-info-libc
helm-info-gperf
helm-info-gpgme
helm-info-gpprt
helm-info-sieve
helm-info-ediff
helm-world-time
helm-info-nettle
helm-info-eshell
helm-info-gccint
helm-info-R-lang
helm-follow-mode
helm-sexp-eval-i
helm-info-dired-x
helm-info-gettext
helm-info-libidn2
helm-ag-mode-jump
helm-ag-this-file
helm-swap-windows
helm-ff-icon-mode
helm-info-gsl-ref
helm-narrow-window
helm-info-readline
helm-info-autoconf
helm-keyboard-quit
helm-info-libtasn1
helm-adaptive-mode
helm-manage-advice
helm-select-xfont C-x c F
helm-grep-mode-jump
helm-info-transient
helm-info-inetutils
helm-cmd-t-run-grep
helm-info-nxml-mode
helm-enlarge-window
helm-ff-run-grep-ag
helm-ff-run-pdfgrep
helm-buffers-list C-x c C-x C-b
helm apropos* L1 [100 Candidate(s)] C-h m:Help TAB:Act RET/f1/f2/f-n:NthAct C-!:Tog.suspend C-h c:Con - .emacs '' 67% 3422 Emacs-Lisp s U: /home/marie/.emacs
pattern: helm
```

(global-set-key (kbd "h l") 'helm-locate)
;; ** search email
(global-set-key (kbd "m s") 'helm-mu) ; mu search
(global-set-key (kbd "m c") 'helm-mu-contacts)
;; ** search help
;; *** goto the code of the function at point
;; already defined M-.
;; go back with M-,
;; *** info
(global-set-key (kbd "h h i") 'helm-info) ; helm help info
;; *** function description
(global-set-key (kbd "h a") 'helm-apropos) ; helm help apropos
;; *** mode
;; **** describe mode and helm describe modes
(global-set-key (kbd "<f1> m") 'describe-mode)
(define-key direfd-mode-map (kbd "<f1> m") 'describe-mode)
(global-set-key (kbd "<f1> m") 'helm-describe-modes)
(define-key direfd-mode-map (kbd "<f1> m") 'helm-describe-modes)
;; *** helm mode manager
(global-set-key (kbd "h m s") 'helm-switch-major-mode)
(global-set-key (kbd "h m e") 'helm-enable-minor-mode)
(global-set-key (kbd "h m d") 'helm-disable-minor-mode)
;; *** keybinding
(global-set-key (kbd "h b") 'helm-descbinds)
;; *** package
;; necessary to load it before the function below is loaded (otherwise it is loaded only
;; when used and the function below is replaced by the default function)

Search key bindings

```
C-j: helm-descbinds-action:describe (keeping session)
Major Mode Bindings:
C-x Prefix Command
ESC Prefix Command
DEL backward-delete-char-untabify
C-x C-a Prefix Command
C-M-q indent-pp-sexp
C-M-x eval-defun
C-x C-a C-c edebug-go-mode
C-x C-a C-l edebug-where
C-x C-a RET edebug-set-initial-mode
C-x C-a C-n edebug-next-mode
C-x C-a C-s edebug-step-mode

`tracking-mode' Minor Mode Bindings:
C-c Prefix Command
C-c C-@ tracking-next-buffer
C-c C-SPC tracking-next-buffer

`flyspell-mode' Minor Mode Bindings:
C-c Prefix Command
C-,
C-.
<ignore>
C-c $ flyspell-correct-word-before-point

`outshine-mode' Minor Mode Bindings:
TAB outshine-kbd-TAB
ESC Prefix Command
<M-S-down> outshine-kbd-M-S-<down>
<M-S-left> outshine-kbd-M-S-<left>
<M-S-right> outshine-kbd-M-S-<right>
<M-S-up> outshine-kbd-M-S-<up>
<M-down> outline-next-visible-heading
<M-left> outshine-kbd-M-<left>
<M-right> outshine-kbd-M-<right>
<M-up> outline-previous-visible-heading
<backtab> outshine-kbd-<backtab>
<remap> Prefix Command
C-M-i outshine-cycle-buffer
M-RET outshine-kbd-M-RET
<remap> <self-insert-command> outshine-self-insert-command

`outline-minor-mode' Minor Mode Bindings:
C-c Prefix Command
ESC Prefix Command
;
C-;
M-n outline-next-visible-heading
M-p outline-previous-visible-heading
: [
outshine-cycle-buffer
helm-descbinds* L1 [11 Candidate(s)] C-h m:Help TAB:Act RET/f1/f2/f-n:NthAct C-!:Tog.suspend C-h c:Conf
pattern: 
```

Search in emails

```
C-j: helm-mu-persistent-action (keeping session)
Search email with mu
22-02-21 Mountain Conditions Re... mhburtle@gmail.com
22-02-06 Mountain Conditions Re... mhburtle@gmail.com
22-02-04 Mountain Conditions Re... mhburtle@gmail.com
22-01-28 Mountain Conditions Re... mhburtle@gmail.com
21-05-06 Mountain Conditions Re... mhburtle@gmail.com
20-11-12 Mountain Conditions Re... mhburtle@gmail.com
20-11-12 Mountain Conditions Re... mhburtle@gmail.com
[MCR] Asulkan Valley - Sapphire Col to Dome
[MCR] Avalanche Conditions Summary - Central Selkirk Ranges - Observation from this
[MCR] Slocan Ranges - Snowpack and ski conditions
[MCR] Avalanche Crest - Rogers Pass - Avalanche Crest #3 - Something to keep in mi
[MCR Regional Summary] ACMG Mountain Conditions Report for the Rockies and Columbia
[MCR] Balu Pass, Glacier NP - Crusts galore at Rogers Pass
[MCR] Balu Pass, Glacier NP - Crusts galore at Rogers Pass

helm mu  [[Mu Process Finish- (7 results)]]
pattern: f:mountain conditions report
```

Select colour

```
C:\ Kill entry in RGB format. (keeping session)
Colors
black          black                                #000000
dim gray       dim gray,dim grey,DimGray,DimGrey   #696969
dark gray      dark gray,dark grey,DarkGray,DarkGrey #a9a9a9
gray           gray,gray                            #bebebe
light gray     light gray,light grey,LightGray,LightGrey #d3d3d3
gainsboro      gainsboro                           #dcdcdc
white smoke    white smoke,WhiteSmoke               #f5f5f5
white          white                                #ffffff
red            red                                  #ff0000
orange red     orange red,OrangeRed                #ff4500
dark orange    dark orange,DarkOrange              #ff8c00
orange         orange                               #ffa500
gold           gold                                 #ffd700
yellow         yellow                              #ffff00
chartreuse     chartreuse                           #7fcf00
lawn green     lawn green,LawnGreen                #7cf000
green          green                               #00ff00
spring green   spring green,SpringGreen            #00ff7f
medium spring green medium spring green,MediumSpringGreen #00fa9a
cyan           cyan                                #00ffff
deep sky blue  deep sky blue,DeepSkyBlue          #00bfff
blue           blue                                #0000ff
medium blue    medium blue,MediumBlue              #0000cd
dark violet    dark violet,DarkViolet             #9400d3
dark magenta   dark magenta,DarkMagenta          #8b008b
magenta        magenta                             #ff00ff
dark red       dark red,DarkRed                  #8b0000
brown          brown                               #a52a2a
firebrick      firebrick                           #b22222
indian red     indian red,IndianRed              #cd5c5c
light coral    light coral,LightCoral             #f08080
salmon         salmon                              #fa0072
light salmon   light salmon,LightSalmon           #ffa07a
tomato         tomato                             #ff6347
coral          coral                               #ff7f50
dark salmon    dark salmon,DarkSalmon             #e9967a
rosy brown     rosy brown,RosyBrown              #bc8f8f
sienna         sienna                             #a0522d
saddle brown   saddle brown,SaddleBrown          #8b4513
chocolate      chocolate                           #d2691e
peru           peru                               #cd853f
sandy brown    sandy brown,SandyBrown            #f4a460
burlywood      burlywood                           #deb887
tan            tan                                #d2b48c
navajo white   navajo white,NavajoWhite          #ffdead
wheat          wheat                             #f5de83
dark goldenrod dark goldenrod,DarkGoldenrod      #b8860b
goldenrod      goldenrod                           #daa520
light goldenrod light goldenrod,LightGoldenrod    #eedd82

;; *** keybinding
(global-set-key (kbd "h m s") 'helm-switch-major-mode)
(global-set-key (kbd "h m e") 'helm-enable-minor-mode)
(global-set-key (kbd "h m d") 'helm-disable-minor-mode)

;; *** package
(global-set-key (kbd "h b") 'helm-descbinds)

;; necessary to load it before the function below is loaded (otherwise it is loaded only
;; when used and the function below is replaced by the default function)
(require 'helm-system-packages)

(defun helm-system-packages-pacman-uninstall (_)
  "Uninstall marked candidates."
  (helm-system-packages-run-as-root-over-installed
   "pacman" "-Rsn"
   (when helm-current-prefix-arg "--recursive")
   (unless helm-system-packages-pacman-confirm-p "--noconfirm")))

;; *** color
(global-set-key (kbd "h h p") 'helm-system-packages)

;; ** search web engines with surfraw
(global-set-key (kbd "h c") 'helm-colors)

;; * helm M-x
(global-set-key (kbd "h w") 'helm-surfraw) ; helm web

;; * helm M-x
(global-set-key (kbd "M-x") 'helm-M-x)

;; * undo/redo
(global-set-key (kbd "C-l") 'undo)

;; ** undo tree
(global-set-key (kbd "s-t") 'undo-tree-visualize)

;; go to selected undo state
(define-key undo-tree-visualizer-mode-map (kbd "<return>") 'undo-tree-visualizer-quit)
;; cancel (return to state before calling undo-tree-visualize)
(define-key undo-tree-visualizer-mode-map (kbd "q") 'undo-tree-visualizer-quit)

helm colors| L1 [100 Candidate(s)] C-h m:Help TAB:Act RET/f1/f2/f-n:NthAct C-!:Tog.suspend C-h c:Conf - emacs 67% 3456 Emacs-Lisp S-U: /home/marie/.emacs
```

Select emoji

```
,C-j: Insert Character (keeping session)
unicode-characters
FACE PALM 🤡
FACE MASSAGE 🩺
FACE WITH MONOCLE 😎
FACE WITHOUT MOUTH 😐
FACE THROWING A KISS 💋
FACE WITH COLD SWEAT 😂
FACE WITH COWBOY HAT 😎
FACE WITH OK GESTURE 🤗
FACE WITH OPEN MOUTH 😋
FACE WITH THERMOMETER 😃
FACE SCREAMING IN FEAR 😱
FACE WITH HEAD-BANDAGE 😷
FACE WITH MEDICAL MASK 😷
FACE WITH ROLLING EYES 😳
FACE WITH TEARS OF JOY 😊
FACE WITH PLEADING EYES 😕
FACE WITH LOOK OF TRIUMPH 😇
FACE WITH NO GOOD GESTURE 🤪
FACE WITH STUCK-OUT TONGUE 😜
FACE WITH ONE EYEBROW RAISED 😏
FACE SAVOURING DELICIOUS FOOD 😋
FACE WITH OPEN MOUTH VOMITING 🤯
FACE WITH PARTY HORN AND PARTY HAT 😈
FACE WITH OPEN MOUTH AND COLD SWEAT 😂
FACE WITH UNEVEN EYES AND WAVY MOUTH 😥
FACE WITH FINGER COVERING CLOSED LIPS 🤰
FACE WITH STUCK-OUT TONGUE AND WINKING EYE 😜
FACE WITH STUCK-OUT TONGUE AND TIGHTLY-CLOSED EYES 😏
CAT FACE 😺
COW FACE 😶
DOG FACE 😶
FOX FACE 😶
BEAR FACE 😶
FROG FACE 😶
ANGRY FACE 😠
CLOWN FACE 😢
DIZZY FACE 😴
HORSE FACE 😮
CRYING FACE 😢
DRAGON FACE 😶
HUSHED FACE 😵
FEARFUL FACE 😴
FLUSHED FACE 😵
GIRAFFE FACE 😶
HAMSTER FACE 😶
HUGGING FACE 😊
CONFUSED FACE 😕
;; * unset env variable MANPAGER in Emacs only
;; MANPAGER is set in zsh to sh -c 'col -bx | bat -l man -p'
;; which provides bat colour highlighting in the man pages
;; but this messes up the help files in inferior-python-mode
(setenv "MANPAGER" "")
;; * define new prefix keys
;;
(define-prefix-command 'ring-map)
(global-set-key (kbd ";") 'ring-map)

;; *** make sure I can still type ;
;; (global-set-key (kbd "; SPC")
;;                 (lambda () (interactive) (insert ";")))
;; (global-set-key (kbd "; ; SPC") 'ignore)
;; (global-set-key (kbd "; SPC") 'ignore)
;; (global-set-key (kbd "; ''") 'ignore)
;; (lambda () (interactive) (insert ";"))

;; ** C-z
(define-prefix-command 'ring-map-two)
(global-set-key (kbd "C-z") 'ring-map-two)

;; * setup
(require 'org) ; necessary
;; ** set default load paths
(let ((default-directory "~/emacs.d/elpa/"))
  (setq load-path
        (append
          (let ((load-path (copy-sequence load-path))) ;; Shadow
            (append
              (copy-sequence (normal-top-level-add-to-load-path '(".")))
              (normal-top-level-add-subdirs-to-load-path)))
          load-path)))
;; ** package system
helm-unicode-search* L1 [100 Candidate(s)] C-h m:Help TAB:Act RET/f1/f2/f-n:NthAct C-!:Tog.suspend C- - .emacs 61% 2788 Emacs-Lisp s U: /home/marie/.emacs
pattern: face
```

Questions?