

Tamper Switch

SS-072Q / SS-073Q

Manual



- Used in alarm systems with normally-closed or normally-open circuits
- Silver-plated contact ensures reliability and long-term operation
- Small size makes it easy to hide and install
- UL Listed for supplementary protection

Specifications:

Model	SS-072Q	SS-073Q
Plunger pushed in	Contact closed	Contact open
Plunger released	Contact open	Contact closed
Contact rating	0.5A@24VDC	
Enclosure	High-impact plastic resin	
Dimensions	2 3/4" x 1 1/16" x 5/8" (70x28x16 mm)	
Weight	0.6-oz (18g)	

Installation:

Please read manual before the installation.

IMPORTANT: When mounting the tamper switch, keep in mind that the switch must be depressed at least 1/4" (6mm) distance to activate the switch.

1. Decide the appropriate position for the SS-072Q / SS-073Q.
NOTE: The switch must be positioned so that it will be depressed at least 1/4" (6mm) to activate.
2. Drill the three holes necessary for the SS-072Q / SS-073Q to be mounted firmly in place. The diameter of the hole is 1/8" (3mm). Screws should be selected according to your personal preference and need.
3. Connect the wires to the switch terminals depending on the installation type as shown in one of the three examples below.

Overview:

Fig. 1 – Used inside cabinet or drawer when cabinet or drawer is pulled open

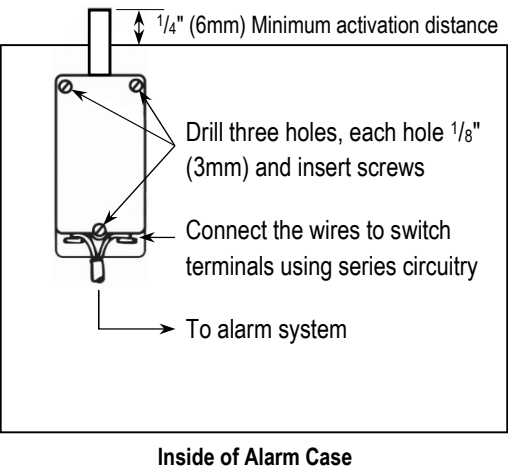


Fig. 2- Case against wall

Use two tamper switches (SS-072Q wired in series or SS-073Q wired in parallel) to protect against the forced removal of the case from the wall and the forced removal of the case's cover or lid.


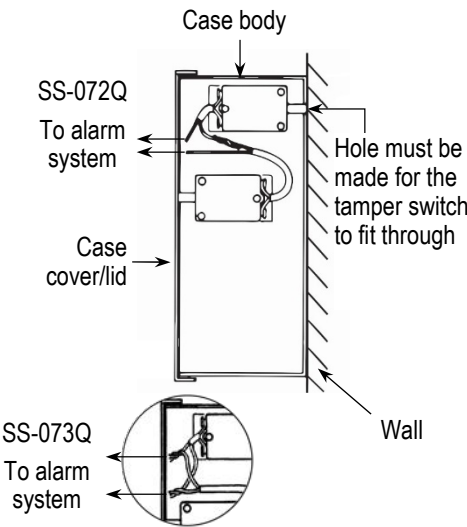


Fig. 3 – Used inside box when top is opened upward or lifted off

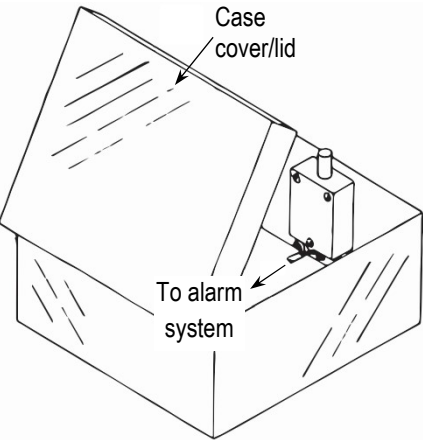

California Proposition 65 Warning: These products may contain chemicals which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

WARRANTY: This SECO-LARM product is warranted against defects in material and workmanship while used in normal service for one (1) year from the date of sale to the original customer.

NOTICE: The SECO-LARM policy is one of continual development and improvement. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is also not responsible for misprints. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. Copyright © 2024 SECO-LARM U.S.A., Inc. All rights reserved.

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606 Website: www.seco-larm.com
Phone: (949) 261-2999 | (800) 662-0800 Email: sales@seco-larm.com