

Customer facing (for cross session)

2018/7/27

Author Details	
First Name	
Surname	
Job Title	
Organization	

General Details

Scenario Name	Scenario1
Run Name	res.lrr
Run Date	2018/7/27 10:10
Period	2018/7/27 10:10 - 2018/7/27 10:19
Run Duration	9 minutes and 2 seconds
PC Project Name	

Executive Summary

Conclusions

Business Process

Run Name	Group Name	Script Name	Concurrent Vusers	% of Total Vusers	Transactions per Hour	Start Time	Think Time	Pacing	Browser Cache
res.lrr	SmartGarden2	SmartGarden2	50	100	662.4	2018/7/27 10:10	Replay as recorded	As soon as possible	
		Total:	50	100%					

Script: SmartGarden2

Description:

#	Transaction
1	vuser_end_Transaction
2	vuser_init_Transaction

Workload Characteristics

Measurement	res.lrr
Max Running Vusers	50
Average Hits per Second	1.4
Total Hits	780
Total Passed Transactions per Second	0.2
Total Passed Transactions per Minute	11
Total Transactions Number	2



Color	Graph	Scale	Measurement	Graph's Minimum	Graph's Average	Graph's Maximum	Graph's Median	Graph's Std. Deviation
	Running Vusers	1	Run	0.000	25.733	50.000	30.000	17.808
	Total Transactions per Second	1	Fail	0.000	0.358	10.000	0.000	1.807
	Total Transactions per Second	1	Pass	0.000	0.184	10.000	0.000	1.295

Performance Overview

Measurement	Value
Run Name	res.lrr
Weighted Average of Transaction Response Time	0
Total Passed Transactions	100
Total Failed Transactions	195
Transactions Success Rate, %	33.9
Total Errors per Second	0.4
Total Errors	195

HTTP Responses Summary

HTTP Response Name	Total	Per Second
HTTP_200	585	1.1
HTTP_302	195	0.4


Transaction Summary

Filter Transaction End Status= (Pass)

Run Name	Transaction Name	Minimum	Average	Maximum	Std. Deviation	90%	Pass Count	Fail Count	Stop Count
res.lrr	vuser_end_Transaction	0	0	0	0	0	50	0	0
res.lrr	vuser_init_Transaction	0	0	0	0	0	50	0	0

Running Vusers

Title Running Vusers
Current Results D:\LRtest\SmartGarden2\res\res.lrr
Filters Vuser Status = (Run)
Group By
Granularity 16 Seconds

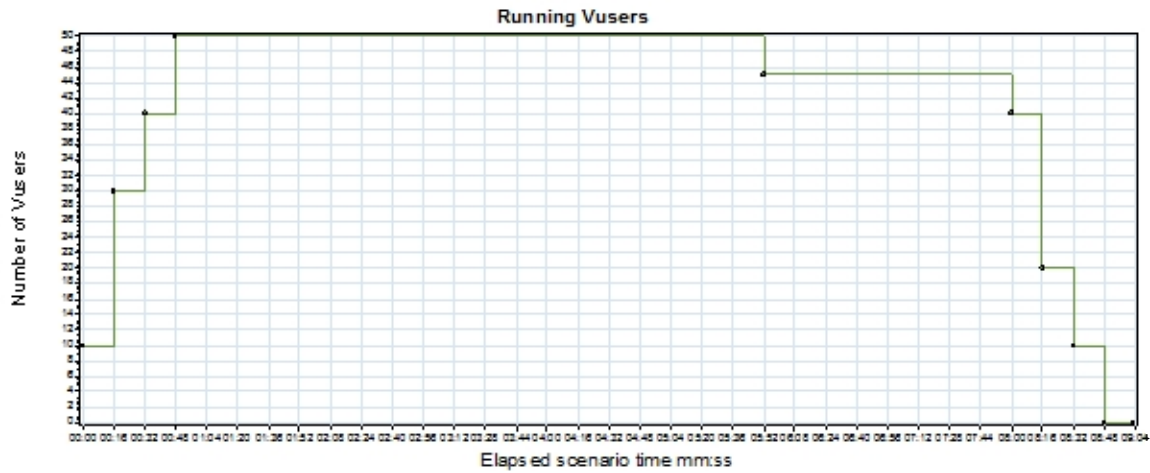

Color	Scale	Measurement	Graph Minimum	Graph Average	Graph Maximum	Graph Median	Graph Std. Deviation
	1	Run	0.000	24.500	50.000	30.000	17.951

Description: Displays the number of Vusers that executed Vuser scripts, and their status, during each second of a load test. This graph is useful for determining the Vuser load on your server at any given moment.

Hits per Second

Title

Hits per Second

Current Results

D:\LRtest\SmartGarden2\res\res.lrr


Filters

None

Group By

Granularity

16 Seconds

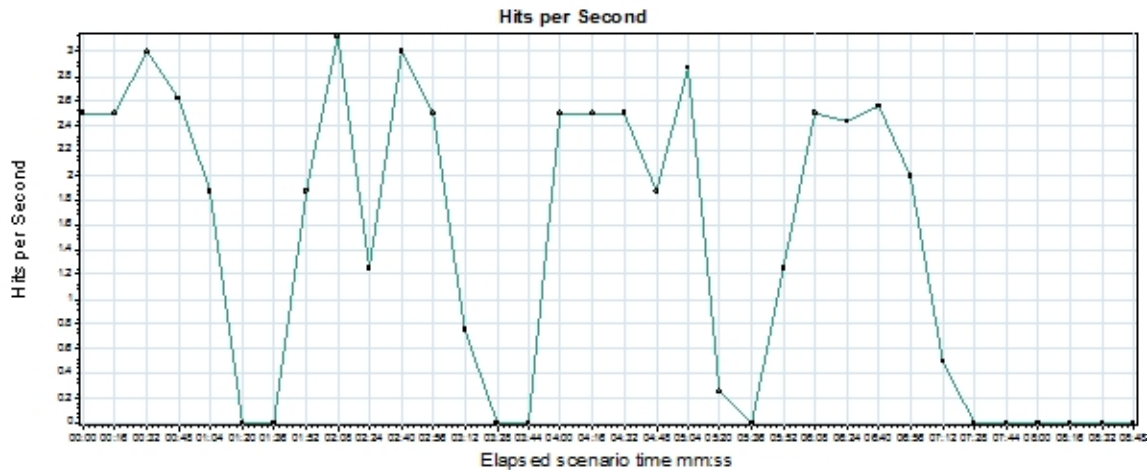

Color	Scale	Measurement	Graph Minimum	Average	Graph Maximum	Graph Median	Graph Std. Deviation
	1	Hits	0.000	1.436	3.125	1.875	1.186

Description: Displays the number of hits made on the Web server by Vusers during each second of the load test. This graph helps you evaluate the amount of load Vusers generate, in terms of the number of hits.

Throughput


Title Throughput

Current Results D:\LRtest\SmartGarden2\res\res.lrr

Filters None

Group By

Granularity 16 Seconds

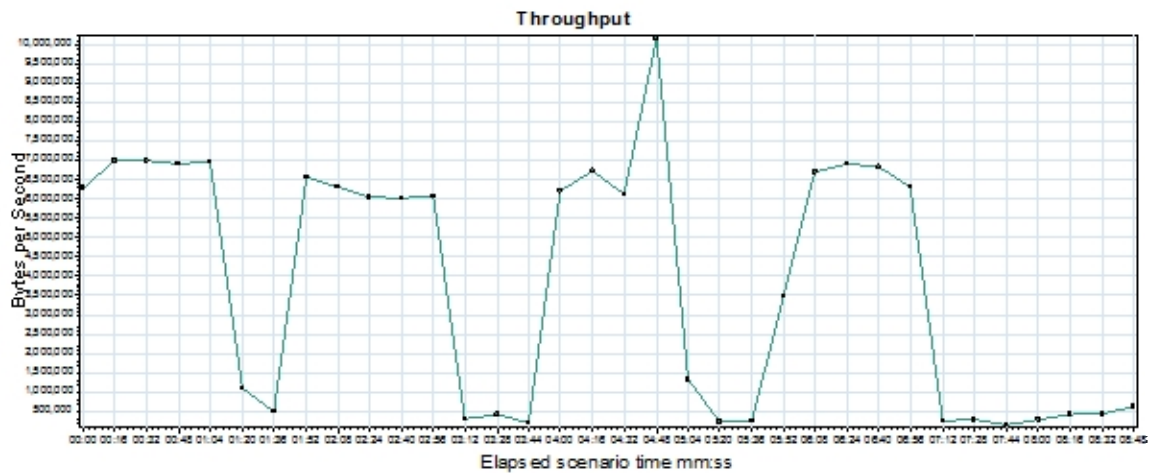


Color	Scale	Measurement	Graph Minimum	Average	Graph Maximum	Graph Median	Graph Std. Deviation
	1	Throughput	168,896.000	3,875,357.387	10,146,497.563	6,041,455.438	3,146,448.973

Description: Displays the amount of throughput (in bytes) on the Web server during the load test. Throughput represents the amount of data that the Vusers received from the server at any given second. This graph helps you to evaluate the amount of load Vusers generate, in terms of server throughput.

Transaction Summary

Title Transaction Summary
Current Results D:\LRtest\SmartGarden2\res\res.lrr
Filters (do not Include Think Time)
Group By

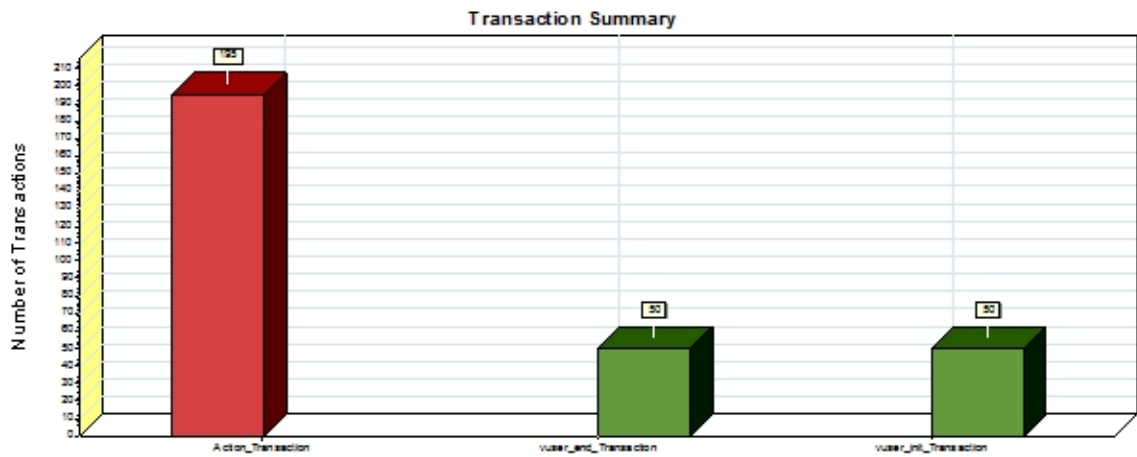

Color	Scale	Measurement
	1	Fail
	1	Pass

Description: Displays the number of transactions that passed, failed, stopped, or ended with errors.

Average Transaction Response Time

Title Average Transaction Response Time
Current Results D:\LRtest\SmartGarden2\res\res.lrr
Filters Transaction End Status = (Pass)(do not Include Think Time)
Group By
Granularity 16 Seconds,




Color	Scale	Measurement	Minimum	Average	Maximum	Std. Deviation
	1	vuser_end_Transaction	0.000	0.000	0.000	0.000
	1	vuser_init_Transaction	0.000	0.000	0.001	0.000

Description: Displays the average time taken to perform transactions during each second of the load test. This graph helps you determine whether the performance of the server is within acceptable minimum and maximum transaction performance time ranges defined for your system.

Auto Correlated Graph [1]

Title Running Vusers
Current Results D:\LRtest\SmartGarden2\res\res.lrr
Filters Vuser Status = (Run)(0 <= Scenario Elapsed Time) and (496 >= Scenario Elapsed Time)
Group By
Granularity 8 Seconds,

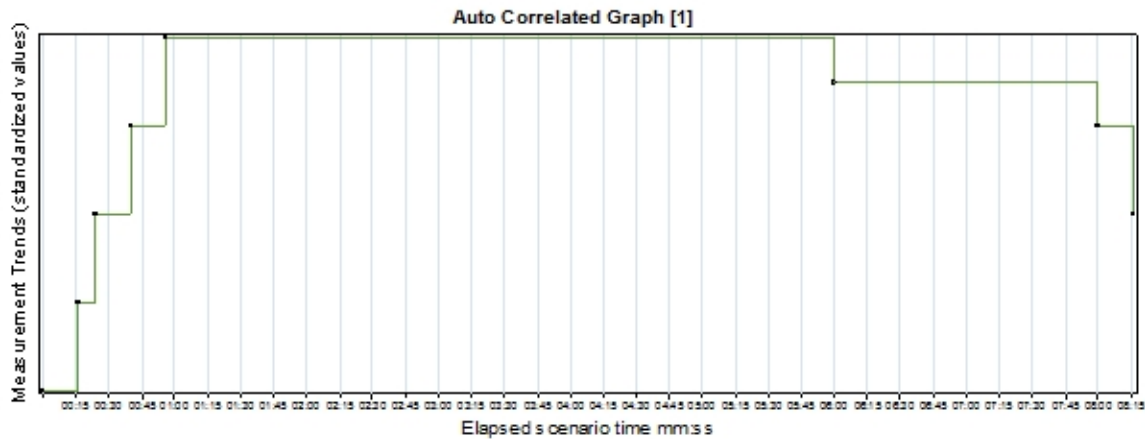

Color	Scale	Measurement	Correlation Match	Correlation	Minimum	Average	Maximum	Std. Deviation
	Standardized	Run	100	Directly Related	N/A	N/A	N/A	N/A

Description: Displays the number of Vusers that executed Vuser scripts, and their status, during each second of a load test. This graph is useful for determining the Vuser load on your server at any given moment.

Running Vusers - Average Transaction Response Time


TitleRunning Vusers - Average Transaction Response Time

Graph TypeOverlay

Graph 1Running Vusers

Graph 2Average Transaction Response Time

Granularity16 Seconds

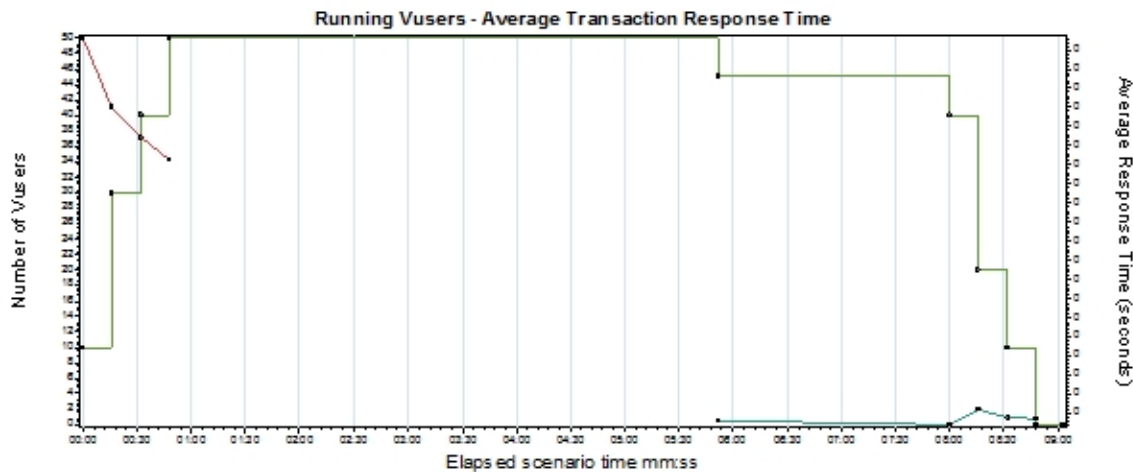

Color	Graph	Scale	Measurement	Graph's Minimum	Graph's Average	Graph's Maximum	Graph's Median	Graph's Std. Deviation
	Running Vusers	1	Run	0.000	24.500	50.000	30.000	17.951
	Average Transaction Response Time	1	vuser_end_Transaction	0.000	0.000	0.000	0.000	0.000
	Average Transaction Response Time	1	vuser_init_Transaction	0.000	0.000	0.000	0.000	0.000

Terminology

LoadRunner Objects

Term	Definition
Vuser Scripts	A Vuser script describes the actions that a Vuser performs during the scenario. Each Vuser executes a Vuser script during a scenario run. The Vuser scripts include functions that measure and record the performance of your application components.
Load Test	Tests a system's ability to handle a heavy workload. A load test simulates multiple transactions or users interacting with the computer at the same time and provides reports on response times and system behavior.
Run-Time Settings	Run-Time settings allow you to customize the way a Vuser script is executed. You configure the run-time settings from the Controller or VuGen before running a scenario. You can view information about the Vuser groups and scripts that were run in each scenario, as well as the run-time settings for each script in a scenario, in the Scenario Run-Time Settings dialog box.
Scenario	A scenario defines the events that occur during each testing session. For example, a scenario defines and controls the number of users to emulate, the actions that they perform, and the machines on which they run their emulations.
Scheduler	The Schedule Builder allows you to set the time that the scenario will start running, the duration time of the scenario or of the Vuser groups within the scenario, and to gradually run and stop the Vusers within the scenario or within a Vuser group. It also allows you to set the load behavior of Vusers in a scenario.
Session	When you work with the Analysis utility, you work within a session. An Analysis session contains at least one set of scenario results (.lrr file). The Analysis utility processes the scenario result information and generates graphs and reports. The Analysis stores the display information and layout settings for the active graphs in a file with an .lra extension. Each session has a session name, result file name, database name, directory path, and type.
Transactions	A transaction represents an action or a set of actions used to measure the performance of the server. You define transactions within your Vuser script by enclosing the appropriate sections of the script with start and end transaction statement.

Vusers	Vusers or virtual users are used by LoadRunner as a replacement for human users. When you run a scenario, Vusers emulate the actions of human users working with your application. A scenario can contain tens, hundreds, or even thousands of Vusers running concurrently on a single workstation.
--------	---

Graph Information

Term	Definition
Average	Average value of the graph measurement's.
Hits	The number of HTTP requests made by Vusers to the Web server.
Maximum	Maximum value of the graph measurement's.
Measurement	This is the type of resource being monitored
Median	Middle value of the graph measurement's.
Minimum	Minimum value of the graph measurement's.
Network Delay	The time it takes for a packet of data sent across the network to go to the requested node and return.
Network Path	The Network Path is the route data travels between the source machine and the destination machine.
Response time	The time taken to perform a transaction.
Scale (or granularity)	In order to display all the measurements on a single graph, thus making the graphs easier to read and analyze, you can change the scale or (granularity) of the x-axis. You can either set measurement scales manually, view measurement trends for all measurements in the graph, or let Analysis scale them automatically. The Legend tab indicates the scale factor for each resource.
Standard Deviation (SD)	The square root of the arithmetic mean value of the squares of the deviations from the arithmetic mean.
Throughput	Throughput is measured in bytes and represents the amount of data that the Vusers received from the server.
Vuser Load	When you run a scenario, the Vusers generate load or stress on the server. LoadRunner monitors the effect of this load on the performance of your application.