


## Performance

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)

▲ 0–49 50–89 90–100



### METRICS

[Expand view](#)

First Contentful Paint

2.9 s

▲ Largest Contentful Paint

7.7 s

▲ Total Blocking Time

1,950 ms


Cumulative Layout Shift

0.111

▲ Speed Index

10.0 s

View Treemap

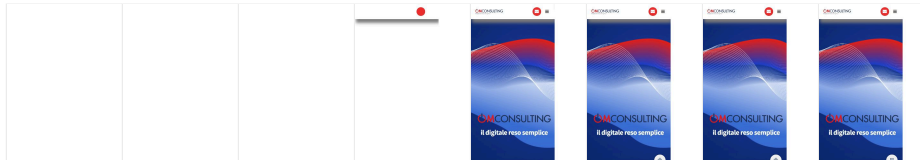

🔊 Later this year, insights will replace performance audits. [Learn more and provide feedback here.](#)

[Try insights](#)

Show audits relevant to: All [FCP](#) [LCP](#) [TBT](#) [CLS](#)

### DIAGNOSTICS

▲ Minimize main-thread work — 16.5 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to minimize main-thread work](#) (TBT)

Category	Time Spent
Script Evaluation	8,192 ms
Other	3,137 ms
Style & Layout	3,019 ms
Rendering	1,392 ms
Script Parsing & Compilation	333 ms

Category	Time Spent
Garbage Collection	250 ms
Parse HTML & CSS	194 ms

▲ Reduce JavaScript execution time — 8.5 s


Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to reduce Javascript execution time.](#) TBT

☒ Show 3rd-party resources (1)

URL	Total CPU Time	Script Evaluation	Script Parse
om-consulting.it <span>1st Party</span>	15,036 ms	8,107 ms	256 ms
...fusion-scripts/a30836c....min.js?ver=3.8.2 (www.om-consulting.it)	4,358 ms	4,062 ms	56 ms
...js/rbtools.min.js?ver=6.5.7 (www.om-consulting.it)	3,531 ms	869 ms	8 ms
https://www.om-consulting.it	3,276 ms	255 ms	139 ms
...jquery/jquery.min.js?ver=3.7.1 (www.om-consulting.it)	2,896 ms	2,410 ms	7 ms
...js/rs6.min.js?ver=6.5.7 (www.om-consulting.it)	575 ms	423 ms	24 ms
...js/layerslider.utils.js?ver=6.11.9 (www.om-consulting.it)	345 ms	46 ms	10 ms
...js/layerslider.kreaturamedia.jquery.js?ver=6.11.9 (www.om-consulting.it)	56 ms	43 ms	12 ms
Unattributable	1,240 ms	57 ms	0 ms
Unattributable	1,240 ms	57 ms	0 ms
axe DevTools - Web Accessibility Testing <span>Chrome Extension</span>	86 ms	0 ms	63 ms
chrome-extension://lhdoppoipmngadmndnejejpokejbdd/axe-versions/latest/axe.js	86 ms	0 ms	63 ms

▲ Largest Contentful Paint element — 7,660 ms

This is the largest contentful element painted within the viewport. [Learn more about the Largest Contentful Paint element](#) LCP

Element
 div.fusion-fullwidth.fullwidth-box.fusion-builder-row-2.fusion-flex-container....

Phase	% of LCP	Timing
TTFB	31%	2,400 ms
Load Delay	61%	4,680 ms
Load Time	2%	140 ms
Render Delay	6%	440 ms

▲ Reduce initial server response time — Root document took 2,280 ms

Keep the server response time for the main document short because all other requests depend on it. [Learn more about the Time to First Byte metric](#). (FCP) (LCP)





Choose a lightweight theme (ideally a block theme) and implement full-page caching or a static site solution. Disable unnecessary plugins to minimize server overhead. Consider upgrading your hosting to managed or dedicated service.

URL	Time Spent
om-consulting.it <a href="#">1st Party</a>	2,280 ms
https://www.om-consulting.it	2,280 ms

#### ▲ Avoid large layout shifts — 2 layout shifts found

These are the largest layout shifts observed on the page. Each table item represents a single layout shift, and shows the element that shifted the most. Below each item are possible root causes that led to the layout shift. Some of these layout shifts may not be included in the CLS metric value due to [windowing](#). [Learn how to improve CLS](#) (CLS)

Element
<div></div> <div>div.fusion-layout-column.fusion_builder_column.fusion-builder-column-3.fusion_builder_column_1_1...</div>
<div></div> <div>span</div>
<div></div> <div>img.img-responsive.wp-image-3151.lazyautosizes.ls-is-cached.lazyloaded</div>
...fusion-gfonts/1Ptug8zYS....woff2 (www.om-consulting.it)
...icomoon/awb-icons.woff (www.om-consulting.it)
...webfonts/fa-solid-900.woff2 (www.om-consulting.it)
...fusion-gfonts/6xKydsBYK....woff2 (www.om-consulting.it)
...webfonts/fa-regular-400.woff2 (www.om-consulting.it)
...fusion-gfonts/zYXGKVEIM....woff2 (www.om-consulting.it)
...fusion-gfonts/memSYaGs1....woff2 (www.om-consulting.it)

#### ▲ Eliminate render-blocking resources — Est savings of 860 ms

Resources are blocking the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-critical JS/styles. [Learn how to eliminate render-blocking resources](#). (FCP) (LCP)



There are a number of WordPress plugins that can help you [inline critical assets](#) or [defer less important resources](#). Beware that optimizations provided by these plugins may break features of your theme or plugins, so you will likely need to make code changes.

URL	Transfer Size	Est Savings
om-consulting.it <span>1st Party</span>	249.4 KiB	1,540 ms
...js/layerslider.kreaturamedia.jquery.js?ver=6.11.9 (www.om-consulting.it)	43.9 KiB	380 ms
...js/layerslider.utils.js?ver=6.11.9 (www.om-consulting.it)	39.2 KiB	190 ms
...jquery/jquery.min.js?ver=3.7.1 (www.om-consulting.it)	29.1 KiB	190 ms
...fusion-styles/097a947....min.css?ver=3.8.2 (www.om-consulting.it)	102.7 KiB	580 ms
...css/dashicons.min.css?ver=6.8.1 (www.om-consulting.it)	34.5 KiB	190 ms

#### ▲ Reduce unused JavaScript — Est savings of 640 KiB

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. [Learn how to reduce unused JavaScript.](#) FCP LCP



Consider reducing, or switching, the number of [WordPress plugins](#) loading unused JavaScript in your page. To identify plugins that are adding extraneous JS, try running [code coverage](#) in Chrome DevTools. You can identify the theme/plugin responsible from the URL of the script. Look out for plugins that have many scripts in the list which have a lot of red in code coverage. A plugin should only enqueue a script if it is actually used on the page.

☒ Show 3rd-party resources (3)

URL	Transfer Size	Est Savings
axe DevTools - Web Accessibility Testing <span>Chrome Extension</span>	802.4 KiB	484.6 KiB
chrome-extension://lhdoppojpmngadmndnejejpokejbdd/axe-versions/latest/axe.js	565.3 KiB	296.5 KiB
chrome-extension://lhdoppojpmngadmndnejejpokejbdd/vendor.bundle.js	130.4 KiB	116.3 KiB
chrome-extension://lhdoppojpmngadmndnejejpokejbdd/content.bundle.js	106.7 KiB	71.7 KiB
om-consulting.it <span>1st Party</span>	281.3 KiB	155.1 KiB
...fusion-scripts/a30836c....min.js?ver=3.8.2 (www.om-consulting.it)	168.8 KiB	97.5 KiB
...js/layerslider.utils.js?ver=6.11.9 (www.om-consulting.it)	39.0 KiB	30.0 KiB
...js/rs6.min.js?ver=6.5.7 (www.om-consulting.it)	73.4 KiB	27.6 KiB

#### ▲ Avoid an excessive DOM size — 4,411 elements

A large DOM will increase memory usage, cause longer [style calculations](#), and produce costly [layout reflows](#). [Learn how to avoid an excessive DOM size.](#) TBT

Statistic	Element	Value
Total DOM Elements		4,411
Maximum DOM Depth	path	23
Maximum Child Elements	g	93

#### ▲ Reduce unused CSS — Est savings of 112 KiB

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. [Learn how to reduce unused CSS.](#) FCP LCP



Consider reducing, or switching, the number of [WordPress plugins](#) loading unused CSS in your page. To identify plugins that are adding extraneous CSS, try running [code coverage](#) in Chrome DevTools. You can identify the theme/plugin responsible from the URL of the stylesheet. Look out for plugins that have many stylesheets in the list which have a lot of red in code coverage. A plugin should only enqueue a stylesheet if it is actually used on the page.

URL	Transfer Size	Est Savings
om-consulting.it <a href="#">1st Party</a>	121.8 KiB	111.9 KiB
...actionbar/smesh.action.bar.v1.css?v=202... (marketing.om-consulting.it)	62.5 KiB	58.5 KiB
...fusion-styles/097a947....min.css?ver=3.8.2 (www.om-consulting.it)	59.3 KiB	53.4 KiB


▲ Page prevented back/forward cache restoration — 1 failure reason ^

Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. [Learn more about the bfcache](#)

Failure reason	Failure type
The page has an unload handler in the main frame. <a href="https://www.om-consulting.it">https://www.om-consulting.it</a>	Actionable

Minify CSS — Est savings of 10 KiB ^


Minifying CSS files can reduce network payload sizes. [Learn how to minify CSS](#). [FCP](#) [LCP](#)

 A number of [WordPress plugins](#) can speed up your site by concatenating, minifying, and compressing your styles. You may also want to use a build process to do this minification up-front if possible.

URL	Transfer Size	Est Savings
om-consulting.it <a href="#">1st Party</a>	62.7 KiB	9.6 KiB
...actionbar/smesh.action.bar.v1.css?v=202... (marketing.om-consulting.it)	62.7 KiB	9.6 KiB

Serve images in next-gen formats — Est savings of 393 KiB ^

Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. [Learn more about modern image formats](#). [FCP](#) [LCP](#)

 Consider using the [Performance Lab](#) plugin to automatically convert your uploaded JPEG images into WebP, wherever supported.

URL	Resource Size	Est Savings
Unattributable	425.9 KiB	286.3 KiB
data:image/png;base64,iVBORw0KGgoAA AANSUhEUgAABtIAAR1CAYAAANE...	135.8 KiB	101.6 KiB
data:image/png;base64,iVBORw0KGgoAA AANSUhEUgAABLgAAAMiCAYAAABt/...	93.5 KiB	57.2 KiB
data:image/png;base64,iVBORw0KGgoAA AANSUhEUgAAB4AAAAQ4CAYAAADo0...	48.7 KiB	42.4 KiB
data:image/png;base64,iVBORw0KGgoAA AANSUhEUgAAA7AAAAJOCAYAAACOU...	82.6 KiB	38.4 KiB
data:image/png;base64,iVBORw0KGgoAA AANSUhEUgAAAoAAAAHJCAYAAAAVc...	49.0 KiB	34.0 KiB
data:image/png;base64,iVBORw0KGgoAA AANSUhEUgAAAXYAAAF4CAYAAABAV...	16.3 KiB	12.7 KiB
om-consulting.it <a href="#">1st Party</a>	210.0 KiB	106.8 KiB
img.disable-lazyload.tp-rs-img.rs-lazyload ...09/prima-slide.png (www.om-consulting.it)	123.8 KiB	77.1 KiB

URL	Resource Size	Est Savings
img.disable-lazyload.tp-rs-img.rs-lazyload...07/onda1200x800.png (www.om-consulting.it)	86.2 KiB	29.7 KiB

Enable text compression — Est savings of 77 KiB

Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytes. [Learn more about text compression.](#) (FCP) (LCP)



You can enable text compression in your web server configuration.

URL	Transfer Size	Est Savings
om-consulting.it <a href="#">1st Party</a>	94.9 KiB	77.3 KiB
...actionbar/smsh.action.bar.v1.css?v=202... (marketing.om-consulting.it)	62.5 KiB	56.4 KiB
...actionbar/smsh.action.bar.v1.js?ts=202... (marketing.om-consulting.it)	28.5 KiB	17.9 KiB
/services/siteActio...ic?code=96a77dKeP...&mobile=true&v=202... (marketing.om-consulting.it)	3.9 KiB	3.0 KiB

Serve static assets with an efficient cache policy — 3 resources found

A long cache lifetime can speed up repeat visits to your page. [Learn more about efficient cache policies.](#)



Read about [Browser Caching in WordPress.](#)

☒ Show 3rd-party resources (1)

URL	Cache TTL	Transfer Size
om-consulting.it <a href="#">1st Party</a>		91 KiB
...actionbar/smsh.action.bar.v1.css?v=202... (marketing.om-consulting.it)	None	63 KiB
...actionbar/smsh.action.bar.v1.js?ts=202... (marketing.om-consulting.it)	None	29 KiB
leadbi.com		8 KiB
/w/79dab879-4148-46e3-9137-5d57f3dc809e.js (a.leadbi.com)	None	8 KiB

Does not use passive listeners to improve scrolling performance

Consider marking your touch and wheel event listeners as passive to improve your page's scroll performance. [Learn more about adopting passive event listeners.](#)

Source

om-consulting.it [1st Party](#)

jquery.min.js:2

Defer offscreen images — Est savings of 6 KiB

Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. [Learn how to defer offscreen images.](#) (FCP) (LCP)



Install a [lazy-load WordPress plugin](#) that provides the ability to defer any offscreen images, or switch to a theme that provides that functionality. Also consider using [the AMP plugin](#).

URL	Resource Size	Est Savings
om-consulting.it <a href="#">1st Party</a>	5.6 KiB	5.6 KiB
img.img-responsive.wp-image-3177.disable-lazyload ...07/LOGO-OMC-600.png (www.om-consulting.it)	5.6 KiB	5.6 KiB

Avoid serving legacy JavaScript to modern browsers — Est savings of 80 KiB

Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. Consider modifying your JavaScript build process to not transpile [Baseline](#) features, unless you know you must support legacy browsers. [Learn why most sites can deploy ES6+ code without transpiling](#) [FCP](#) [LCP](#)

☐ Show 3rd-party resources (3)

URL	Est Savings
axe DevTools - Web Accessibility Testing <a href="#">Chrome Extension</a>	61.1 KiB
chrome-extension://lhdoppojpmngadmndnejefpokejbdd/axe-versions/latest/axe.js	50.5 KiB
<a href="#">axe.js:2</a>	@babel/plugin-transform-classes
<a href="#">axe.js:2</a>	@babel/plugin-transform-spread
<a href="#">axe.js:2</a>	Array.from
<a href="#">axe.js:2</a>	Array.prototype.find
<a href="#">axe.js:2</a>	Array.prototype.findIndex
<a href="#">axe.js:2</a>	Array.prototype.flat
<a href="#">axe.js:2</a>	Array.prototype.includes
<a href="#">axe.js:2</a>	Array.prototype.some
<a href="#">axe.js:2</a>	Object.assign
<a href="#">axe.js:2</a>	Object.hasOwn
<a href="#">axe.js:2</a>	Object.values
<a href="#">axe.js:2</a>	String.prototype.includes
chrome-extension://lhdoppojpmngadmndnejefpokejbdd/vendor.bundle.js	10.6 KiB
<a href="#">vendor.bundle.js:2</a>	@babel/plugin-transform-classes
<a href="#">vendor.bundle.js:2</a>	@babel/plugin-transform-spread
<a href="#">vendor.bundle.js:2</a>	Object.assign
<a href="#">vendor.bundle.js:2</a>	Object.entries
<a href="#">vendor.bundle.js:2</a>	Object.is
<a href="#">vendor.bundle.js:2</a>	Object.keys
om-consulting.it <a href="#">1st Party</a>	9.8 KiB
...fusion-scripts/a30836c....min.js?ver=3.8.2 (www.om-consulting.it)	7.7 KiB
<a href="#">/wp-content/uploads/...min.js?ver=3.8.2:33</a>	@babel/plugin-transform-classes
<a href="#">/wp-content/uploads/...min.js?ver=3.8.2:15</a>	Array.prototype.filter
<a href="#">/wp-content/uploads/...min.js?ver=3.8.2:15</a>	Array.prototype.indexOf
...actionbar/smesh.action.bar.v1.js?ts=202... (marketing.om-consulting.it)	2.1 KiB
<a href="#">smesh.action.bar.v1.js:192</a>	@babel/plugin-transform-classes

URL	Est Savings
<div>smsh.action.bar.v1.js:192</div>	@babel/plugin-transform-spread
leadbi.com	8.7 KiB
/w/79dab879-4148-46e3-9137-5d57f3dc809e.js (a.leadbi.com)	8.7 KiB
<div>79dab879-4148-46e3-9...7-5d57f3dc809e.js:1</div>	Object.assign

☐ Avoid long main-thread tasks — 20 long tasks found

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. [Learn how to avoid long main-thread tasks](#) TBT

☒ Show 3rd-party resources (1)

URL	Start Time	Duration
om-consulting.it <span>1st Party</span>		3,538 ms
...fusion-scripts/a30836c....min.js?ver=3.8.2 (www.om-consulting.it)	12,472 ms	670 ms
https://www.om-consulting.it	1,414 ms	289 ms
...fusion-scripts/a30836c....min.js?ver=3.8.2 (www.om-consulting.it)	13,406 ms	287 ms
...fusion-scripts/a30836c....min.js?ver=3.8.2 (www.om-consulting.it)	15,346 ms	285 ms
...fusion-scripts/a30836c....min.js?ver=3.8.2 (www.om-consulting.it)	13,171 ms	235 ms
...jquery/jquery.min.js?ver=3.7.1 (www.om-consulting.it)	8,071 ms	223 ms
...fusion-scripts/a30836c....min.js?ver=3.8.2 (www.om-consulting.it)	13,718 ms	208 ms
...fusion-scripts/a30836c....min.js?ver=3.8.2 (www.om-consulting.it)	12,265 ms	207 ms
...fusion-scripts/a30836c....min.js?ver=3.8.2 (www.om-consulting.it)	14,769 ms	203 ms
https://www.om-consulting.it	2,026 ms	184 ms
...js/layerslider.utils.js?ver=6.11.9 (www.om-consulting.it)	4,825 ms	130 ms
...fusion-scripts/a30836c....min.js?ver=3.8.2 (www.om-consulting.it)	13,950 ms	117 ms
...js/layerslider.utils.js?ver=6.11.9 (www.om-consulting.it)	4,988 ms	107 ms
...js/layerslider.utils.js?ver=6.11.9 (www.om-consulting.it)	12,118 ms	92 ms
...js/layerslider.utils.js?ver=6.11.9 (www.om-consulting.it)	12,036 ms	82 ms
https://www.om-consulting.it	1,333 ms	81 ms
...jquery/jquery.min.js?ver=3.7.1 (www.om-consulting.it)	8,000 ms	71 ms
...fusion-scripts/a30836c....min.js?ver=3.8.2 (www.om-consulting.it)	7,855 ms	67 ms
axe DevTools - Web Accessibility Testing <span>Chrome Extension</span>		86 ms
chrome-extension://1hdoppojpmngadmindnejejpokejbdd/axe-versions/latest/axe.js	1,703 ms	86 ms
Unattributable		83 ms
Unattributable	1,789 ms	83 ms

☐ Avoid chaining critical requests — 31 chains found



The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. [Learn how to avoid chaining critical requests.](#)

Maximum critical path latency: **4,647.443 ms**

Initial Navigation

https://www.om-consulting.it

...css/layerslider.css?ver=6.11.9 (www.om-consulting.it) - **172.095 ms**, 3.89 KiB

...css/cookie-law-info-public.css?ver=3.0.4 (www.om-consulting.it) - **176.204 ms**, 0.98 KiB

...css/cookie-law-info-gdpr.css?ver=3.0.4 (www.om-consulting.it) - **176.103 ms**, 4.18 KiB

...css/dashicons.min.css?ver=6.8.1 (www.om-consulting.it) - **244.075 ms**, 34.50 KiB

...css/frontend.min.css?ver=1.4.3 (www.om-consulting.it) - **254.298 ms**, 0.28 KiB

...Avada/style.css?ver=6.8.1 (www.om-consulting.it) - **254.01 ms**, 0.46 KiB

...fusion-styles/097a947....min.css?ver=3.8.2 (www.om-consulting.it)

...fusion-gfonts/1Ptug8zYS....woff2 (www.om-consulting.it) - **157.859 ms**, 47.42 KiB

...fonts/Seo-Set.ttf?kj1zta (www.om-consulting.it) - **158.747 ms**, 7.07 KiB

...icomoon/awb-icons.woff (www.om-consulting.it) - **158.511 ms**, 20.05 KiB

...webfonts/fa-solid-900.woff2 (www.om-consulting.it) - **63.32 ms**, 76.63 KiB

...fusion-gfonts/6xKydSBYK....woff2 (www.om-consulting.it) - **69.259 ms**, 14.55 KiB

...webfonts/fa-regular-400.woff2 (www.om-consulting.it) - **68.939 ms**, 13.14 KiB

...fusion-gfonts/zYXGKVEIM....woff2 (www.om-consulting.it) - **81.454 ms**, 23.81 KiB

...fusion-gfonts/memSYaGs1....woff2 (www.om-consulting.it) - **82.641 ms**, 18.42 KiB

...fusion-gfonts/6xKwdSBYK....woff2 (www.om-consulting.it) - **52.145 ms**, 14.05 KiB

...fusion-gfonts/1Ptsg8zYS....woff2 (www.om-consulting.it) - **54.845 ms**, 49.47 KiB

/w/79dab879-4148-46e3-9137-5d57f3dc809e.js (a.leadbi.com) - **209.721 ms**, 7.82 KiB

/css?family=... (fonts.googleapis.com)

...v22/6xKydSBYK....woff2 (fonts.gstatic.com) - **529.3 ms**, 14.39 KiB

...v43/memSYaGs1....woff2 (fonts.gstatic.com) - **427.865 ms**, 12.78 KiB

...v22/6xKydSBYK....woff2 (fonts.gstatic.com) - **71.488 ms**, 14.50 KiB

...v22/6xK3dSBYK....woff2 (fonts.gstatic.com) - **112.515 ms**, 14.57 KiB

...css/font-awesome.css (www.om-consulting.it) - **55.346 ms**, 6.82 KiB

...css/cookie-law-info-table.css?ver=3.0.4 (www.om-consulting.it) - **48.171 ms**, 1.75 KiB

...css/rs6.css?ver=6.5.7 (www.om-consulting.it) - **57.357 ms**, 11.58 KiB

...fusion-scripts/a30836c....min.js?ver=3.8.2 (www.om-consulting.it) - **120.113 ms**, 184.82 KiB

...workbox-v6.5.3/workbox-window.prod.js (www.om-consulting.it) - **54.498 ms**, 1.39 KiB

...jquery/jquery.min.js?ver=3.7.1 (www.om-consulting.it) - **334.664 ms**, 29.12 KiB

...js/layerslider.utils.js?ver=6.11.9 (www.om-consulting.it) - **358.725 ms**, 39.19 KiB

...js/layerslider.kreaturamedia.jquery.js?ver=6.11.9 (www.om-consulting.it) - **383.843 ms**, 43.86 KiB


...js/layerslider.transitions.js?ver=6.11.9 (www.om-consulting.it) - **383.818 ms**, 3.20 KiB

...js/cookie-law-info-public.js?ver=3.0.4 (www.om-consulting.it) - **383.776 ms**, 7.16 KiB

○ Minimize third-party usage — Third-party code blocked the main thread for 40 ms

Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. [Learn how to minimize third-party impact.](#) [TBT](#)

Third-Party	Transfer Size	Main-Thread Blocking Time
axe DevTools - Web Accessibility Testing <a href="#">Chrome Extension</a>	<b>587 KiB</b>	<b>36 ms</b>
chrome-extension://lhdoppojpmngadmndnejejpokejbdd/axe-versions/latest/axe.js	565 KiB	36 ms
chrome-extension://lhdoppojpmngadmndnejejpokejbdd/highlighter.js	21 KiB	0 ms
Google Fonts <a href="#">Cdn</a>	<b>59 KiB</b>	<b>0 ms</b>
...v22/6xK3dSBYK....woff2 (fonts.gstatic.com)	15 KiB	0 ms
...v22/6xKydSBYK....woff2 (fonts.gstatic.com)	15 KiB	0 ms
...v22/6xKydSBYK....woff2 (fonts.gstatic.com)	14 KiB	0 ms
...v43/memSYaGs1....woff2 (fonts.gstatic.com)	13 KiB	0 ms
/css?family=... (fonts.googleapis.com)	2 KiB	0 ms


Third-Party	Transfer Size	Main-Thread Blocking Time
leadbi.com	<b>8 KiB</b>	<b>0 ms</b>
/w/79dab879-4148-46e3-9137-5d57f3dc809e.js (a.leadbi.com)	8 KiB	0 ms
Unpkg 	<b>7 KiB</b>	<b>0 ms</b>
...css/phone.css?v=202... (unpkg.com)	1 KiB	0 ms
...css/file-document.css?v=202... (unpkg.com)	1 KiB	0 ms
...css/comment.css?v=202... (unpkg.com)	1 KiB	0 ms
...css/mail.css?v=202... (unpkg.com)	1 KiB	0 ms
...css/link.css?v=202... (unpkg.com)	1 KiB	0 ms
...css/flag-alt.css?v=202... (unpkg.com)	1 KiB	0 ms
...css/close.css?v=202... (unpkg.com)	1 KiB	0 ms
...css/view-comfortable.css?v=202... (unpkg.com)	1 KiB	0 ms
...css/menu-grid-o.css?v=202... (unpkg.com)	1 KiB	0 ms
...css/calendar-today.css?v=202... (unpkg.com)	1 KiB	0 ms

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

#### PASSED AUDITS (18)

Hide

##### Properly size images

Serve images that are appropriately-sized to save cellular data and improve load time. [Learn how to size images.](#)  



Upload images directly through the [media library](#) to ensure that the required image sizes are available, and then insert them from the media library or use the image widget to ensure the optimal image sizes are used (including those for the responsive breakpoints). Avoid using Full Size images unless the dimensions are adequate for their usage. [Learn More.](#)



##### Minify JavaScript

Minifying JavaScript files can reduce payload sizes and script parse time. [Learn how to minify JavaScript.](#)  



A number of [WordPress plugins](#) can speed up your site by concatenating, minifying, and compressing your scripts. You may also want to use a build process to do this minification up front if possible.


##### Efficiently encode images

Optimized images load faster and consume less cellular data. [Learn how to efficiently encode images.](#)  





Consider using an [image optimization WordPress plugin](#) that compresses your images while retaining quality.



##### Preconnect to required origins

Consider adding preconnect or dns-prefetch resource hints to establish early connections to important third-party origins. [Learn how to preconnect to required origins.](#)  



##### Avoid multiple page redirects

Redirects introduce additional delays before the page can be loaded. [Learn how to avoid page redirects.](#)  

##### Use HTTP/2

HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. [Learn more about HTTP/2.](#)  

##### Use video formats for animated content

Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. [Learn more about efficient video formats.](#)  



Consider uploading your GIF to a service which will make it available to embed as an HTML5 video.

## Remove duplicate modules in JavaScript bundles



Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. [FCP](#) [LCP](#)

## Preload Largest Contentful Paint image



If the LCP element is dynamically added to the page, you should preload the image in order to improve LCP. [Learn more about preloading LCP elements.](#) [LCP](#)

## Avoids enormous network payloads — Total size was 2,121 KiB



Large network payloads cost users real money and are highly correlated with long load times. [Learn how to reduce payload sizes.](#)



Consider showing excerpts in your post lists (e.g. via the more tag), reducing the number of posts shown on a given page, breaking your long posts into multiple pages, or using a plugin to lazy-load comments.

URL	Transfer Size
om-consulting.it <a href="#">1st Party</a>	1,282.1 KiB
...09/lf30_editor_mp3pzcsv.json (www.om-consulting.it)	389.6 KiB
...fusion-scripts/a30836c....min.js?ver=3.8.2 (www.om-consulting.it)	184.8 KiB
...09/prima-slide.png (www.om-consulting.it)	124.1 KiB
...fusion-styles/097a947....min.css?ver=3.8.2 (www.om-consulting.it)	102.7 KiB
...01/Tavola-disegno-1header.svg (www.om-consulting.it)	90.0 KiB
...js/rs6.min.js?ver=6.5.7 (www.om-consulting.it)	89.4 KiB
...07/onda1200x800.png (www.om-consulting.it)	86.4 KiB
...webfonts/fa-solid-900.woff2 (www.om-consulting.it)	76.6 KiB
...fonts/fontawesome-webfont.woff2?v=4.7.0 (www.om-consulting.it)	75.6 KiB
...actionbar/smesh.action.bar.v1.css?v=202... (marketing.om-consulting.it)	62.7 KiB

## ☐ User Timing marks and measures



Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more about User Timing marks.](#)

## All text remains visible during webfont loads



Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. [Learn more about font-display.](#)

## ☐ Lazy load third-party resources with facades



Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. [Learn how to defer third-parties with a facade.](#) [TBT](#)

## Largest Contentful Paint image was not lazily loaded



Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. [Learn more about optimal lazy loading.](#) [LCP](#)

Element



div.fusion-fullwidth.fullwidth-box.fusion-builder-row-2.fusion-flex-container.fusion-parallax-none.hun...

Avoids `document.write()`



For users on slow connections, external scripts dynamically injected via `document.write()` can delay page load by tens of seconds. [Learn how to avoid document.write\(\)](#).

☐ Avoid non-composited animations



Animations which are not composited can be janky and increase CLS. [Learn how to avoid non-composited animations](#) CLS

Image elements have explicit `width` and `height`



Set an explicit width and height on image elements to reduce layout shifts and improve CLS. [Learn how to set image dimensions](#) CLS

Has a `<meta name="viewport">` tag with `width` or `initial-scale`



A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more about using the viewport meta tag](#).



## Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so [manual testing](#) is also encouraged.

### CONTRAST

Background and foreground colors do not have a sufficient contrast ratio.



Low-contrast text is difficult or impossible for many users to read. [Learn how to provide sufficient color contrast](#).

#### Failing Elements

p

div.fusion-fullwidth.fullwidth-box.fusion-builder-row-3.fusion-flex-container.nonhundred-percent-full...

strong

div.fusion-fullwidth.fullwidth-box.fusion-builder-row-3.fusion-flex-container.nonhundred-percent-full...

strong

div.fusion-fullwidth.fullwidth-box.fusion-builder-row-3.fusion-flex-container.nonhundred-percent-full...

strong

div.fusion-fullwidth.fullwidth-box.fusion-builder-row-3.fusion-flex-container.nonhundred-percent-full...

strong

div.fusion-fullwidth.fullwidth-box.fusion-builder-row-3.fusion-flex-container.nonhundred-percent-full...

p

div.fusion-fullwidth.fullwidth-box.fusion-builder-row-8.fusion-flex-container.nonhundred-percent-full...

strong

div.fusion-fullwidth.fullwidth-box.fusion-builder-row-8.fusion-flex-container.nonhundred-percent-full...



#### Failing Elements

p

div.fusion-fullwidth.fullwidth-box.fusion-builder-row-23.fusion-flex-container.nonhundred-percent-full...

span.fusion-highlighted-text

div.fusion-fullwidth.fullwidth-box.fusion-builder-row-24.fusion-flex-container.fusion-parallax-none.no...



main#main.clearfix.width-100.full-bg

input.s

input.fusion-search-submit.searchsubmit

input.s

strong

div.fusion-fullwidth.fullwidth-box.fusion-builder-row-25.fusion-flex-container.nonhundred-percent-full...

p

div.fusion-fullwidth.fullwidth-box.fusion-builder-row-25.fusion-flex-container.nonhundred-percent-full...

strong

div.fusion-fullwidth.fullwidth-box.fusion-builder-row-25.fusion-flex-container.nonhundred-percent-full...

strong

div.fusion-fullwidth.fullwidth-box.fusion-builder-row-25.fusion-flex-container.nonhundred-percent-full...

p

div.fusion-fullwidth.fullwidth-box.fusion-builder-row-25.fusion-flex-container.nonhundred-percent-full...

These are opportunities to improve the legibility of your content.

#### NAMES AND LABELS

▲ Links do not have a discernible name



Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. [Learn how to make links accessible.](#)

#### Failing Elements



a.smsmf-component\_\_button--main

a.smsmf-component\_\_button--child

a.smsmf-component\_\_button--child

These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

#### NAVIGATION

▲ Heading elements are not in a sequentially-descending order



Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. [Learn more about heading order.](#)

#### Failing Elements

h3.title-heading-center.fusion-responsive-typography-calculated

These are opportunities to improve keyboard navigation in your application.

#### ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

- ☐ Interactive controls are keyboard focusable



Custom interactive controls are keyboard focusable and display a focus indicator. [Learn how to make custom controls focusable.](#)

- ☐ Interactive elements indicate their purpose and state



Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. [Learn how to decorate interactive elements with affordance hints.](#)

- ☐ The page has a logical tab order



Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. [Learn more about logical tab ordering.](#)

- ☐ Visual order on the page follows DOM order



DOM order matches the visual order, improving navigation for assistive technology. [Learn more about DOM and visual ordering.](#)

- ☐ User focus is not accidentally trapped in a region



A user can tab into and out of any control or region without accidentally trapping their focus. [Learn how to avoid focus traps.](#)

- ☐ The user's focus is directed to new content added to the page



If new content, such as a dialog, is added to the page, the user's focus is directed to it. [Learn how to direct focus to new content.](#)

- ☐ HTML5 landmark elements are used to improve navigation



Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. [Learn more about landmark elements.](#)

- ☐ Offscreen content is hidden from assistive technology



Offscreen content is hidden with display: none or aria-hidden=true. [Learn how to properly hide offscreen content.](#)

- ☐ Custom controls have associated labels



Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. [Learn more about custom controls and labels.](#)

- ☐ Custom controls have ARIA roles



Custom interactive controls have appropriate ARIA roles. [Learn how to add roles to custom controls.](#)

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review.](#)

#### PASSED AUDITS (26)

Hide

[aria-\*] attributes match their roles



Each ARIA role supports a specific subset of aria-\* attributes. Mismatching these invalidates the aria-\* attributes. [Learn how to match ARIA attributes to their roles.](#)

[aria-hidden="true"] is not present on the document <body>



Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. [Learn how aria-hidden affects the document body.](#)

[role]s have all required [aria-\*] attributes



Some ARIA roles have required attributes that describe the state of the element to screen readers. [Learn more about roles and required attributes.](#)

[aria-\*] attributes have valid values

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. [Learn more about valid values for ARIA attributes.](#)

[aria-\*] attributes are valid and not misspelled

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. [Learn more about valid ARIA attributes.](#)

Buttons have an accessible name

When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. [Learn how to make buttons more accessible.](#)

Image elements have [alt] attributes

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#)

Input buttons have discernible text.

Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. [Learn more about input buttons.](#)

[user-scalable="no"] is not used in the <meta name="viewport"> element and the [maximum-scale] attribute is not less than 5.

Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. [Learn more about the viewport meta tag.](#)

ARIA attributes are used as specified for the element's role

Some ARIA attributes are only allowed on an element under certain conditions. [Learn more about conditional ARIA attributes.](#)

[aria-hidden="true"] elements do not contain focusable descendents

Focusable descendents within an [aria-hidden="true"] element prevent those interactive elements from being available to users of assistive technologies like screen readers. [Learn how aria-hidden affects focusable elements.](#)

Elements use only permitted ARIA attributes

Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. [Learn more about prohibited ARIA roles.](#)

[role] values are valid

ARIA roles must have valid values in order to perform their intended accessibility functions. [Learn more about valid ARIA roles.](#)

Document has a <title> element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)

<html> element has a [lang] attribute

If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. [Learn more about the lang attribute.](#)

<html> element has a valid value for its [lang] attribute



Specifying a valid [BCP 47 language](#) helps screen readers announce text properly. [Learn how to use the lang attribute.](#)

#### Form elements have associated labels

Labels ensure that form controls are announced properly by assistive technologies, like screen readers. [Learn more about form element labels.](#)

#### Links are distinguishable without relying on color.

Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. [Learn how to make links distinguishable.](#)

#### Lists contain only <li> elements and script supporting elements (<script> and <template>).

Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. [Learn more about proper list structure.](#)

#### List items (<li>) are contained within <ul>, <ol> or <menu> parent elements

Screen readers require list items (<li>) to be contained within a parent <ul>, <ol> or <menu> to be announced properly. [Learn more about proper list structure.](#)

#### No element has a [tabindex] value greater than 0

A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. [Learn more about the tabindex attribute.](#)

#### Touch targets have sufficient size and spacing.

Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. [Learn more about touch targets.](#)

#### Skip links are focusable.

Including a skip link can help users skip to the main content to save time. [Learn more about skip links.](#)

#### Uses ARIA roles only on compatible elements

Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. [Learn more about ARIA roles.](#)

#### Deprecated ARIA roles were not used

Deprecated ARIA roles may not be processed correctly by assistive technology. [Learn more about deprecated ARIA roles.](#)

#### Image elements do not have [alt] attributes that are redundant text.

Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. [Learn more about the alt attribute.](#)

### NOT APPLICABLE (28)

Hide

#### ☐ [accesskey] values are unique

Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. [Learn more about access keys.](#)

#### ☐ button, link, and menuitem elements have accessible names

When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to make command elements more accessible.](#)

#### ☐ Elements with role="dialog" or role="alertdialog" have accessible names.

ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. [Learn how to make ARIA dialog elements more accessible.](#)

☐ ARIA input fields have accessible names ^

When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about input field labels.](#)

☐ ARIA `meter` elements have accessible names ^

When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name meter elements.](#)

☐ ARIA `progressbar` elements have accessible names ^

When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to label progressbar elements.](#)

☐ Elements with an ARIA `[role]` that require children to contain a specific `[role]` have all required children. ^

Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. [Learn more about roles and required children elements.](#)

☐ `[role]`s are contained by their required parent element ^

Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. [Learn more about ARIA roles and required parent element.](#)

☐ Elements with the `role=text` attribute do not have focusable descendents. ^

Adding `role=text` around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. [Learn more about the role=text attribute.](#)

☐ ARIA toggle fields have accessible names ^

When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about toggle fields.](#)

☐ ARIA `tooltip` elements have accessible names ^

When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name tooltip elements.](#)

☐ ARIA `treeitem` elements have accessible names ^

When a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about labeling treeitem elements.](#)

☐ The page contains a heading, skip link, or landmark region ^

Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. [Learn more about bypass blocks.](#)

☐ `<d1>`'s contain only properly-ordered `<dt>` and `<dd>` groups, `<script>`, `<template>` or `<div>` elements. ^

When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. [Learn how to structure definition lists correctly.](#)

☐ Definition list items are wrapped in `<d1>` elements ^

Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<d1>` element to ensure that screen readers can properly announce them. [Learn how to structure definition lists correctly.](#)

☐ ARIA IDs are unique ^

The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. [Learn how to fix duplicate ARIA IDs.](#)

☐ No form fields have multiple labels

Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. [Learn how to use form labels.](#)

☐ `<frame>` or `<iframe>` elements have a title

Screen reader users rely on frame titles to describe the contents of frames. [Learn more about frame titles.](#)

☐ `<html>` element has an `[xml:lang]` attribute with the same base language as the `[lang]` attribute.

If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. [Learn more about the lang attribute.](#)

☐ `<input type="image">` elements have `[alt]` text

When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. [Learn about input image alt text.](#)

☐ The document does not use `<meta http-equiv="refresh">`

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. [Learn more about the refresh meta tag.](#)

☐ `<object>` elements have alternate text

Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements helps screen readers convey meaning to users. [Learn more about alt text for object elements.](#)

☐ Select elements have associated label elements.

Form elements without effective labels can create frustrating experiences for screen reader users. [Learn more about the select element.](#)

☐ Tables have different content in the summary attribute and `<caption>`.

The summary attribute should describe the table structure, while `<caption>` should have the onscreen title. Accurate table mark-up helps users of screen readers. [Learn more about summary and caption.](#)

☐ Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table.

Screen readers have features to make navigating tables easier. Ensuring `<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. [Learn more about the headers attribute.](#)

☐ `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe.

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. [Learn more about table headers.](#)

☐ `[lang]` attributes have a valid value

Specifying a valid [BCP 47 language](#) on elements helps ensure that text is pronounced correctly by a screen reader. [Learn how to use the lang attribute.](#)

☐ `<video>` elements contain a `<track>` element with `[kind="captions"]`

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more about video captions.](#)

# Best Practices

## GENERAL

### ▲ Uses deprecated APIs — 1 warning found ^

Deprecated APIs will eventually be removed from the browser. [Learn more about deprecated APIs.](#)

Deprecation / Warning	Source
om-consulting.it <span>1st Party</span>	
Unload event listeners are deprecated and will be removed.	rs6.min.js:36

### ○ Detected JavaScript libraries ^

All front-end JavaScript libraries detected on the page. [Learn more about this JavaScript library detection diagnostic audit.](#)

Name	Version
jQuery	3.7.1
Modernizr	3.12.0
Isotope	
FlexSlider	
WordPress	6.8.1

### ▲ Missing source maps for large first-party JavaScript ^

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. [Learn more about source maps.](#)

URL	Map URL
om-consulting.it <span>1st Party</span>	
...fusion-scripts/a30836c....min.js?ver=3.8.2 (www.om-consulting.it)	
Large JavaScript file is missing a source map	
...workbox-v6.5.3/workbox-window.prod.js (www.om-consulting.it)	...workbox-v6.5.3/workbox-window.prod.js.map (www.om-consulting.it)
Unattributable	
chrome-extension://fdhgeoginicbhagdbmlfikbgkahlbd/scripts/content_navigate_complete.js	chrome-extension://fdhgeoginicbhagdbmlfikbgkahlbd/sourceMap/edge/scripts/content_navigate_complete.js.map
Error: Failed fetching source map (null)	

## TRUST AND SAFETY

### ○ Ensure CSP is effective against XSS attacks ^

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn how to use a CSP to prevent XSS](#)

Description	Directive	Severity
No CSP found in enforcement mode		High

☐ Use a strong HSTS policy ^

Deployment of the HSTS header significantly reduces the risk of downgrading HTTP connections and eavesdropping attacks. A rollout in stages, starting with a low max-age is recommended. [Learn more about using a strong HSTS policy.](#)

Description	Directive	Severity
No HSTS header found		High

☐ Ensure proper origin isolation with COOP ^

The Cross-Origin-Opener-Policy (COOP) can be used to isolate the top-level window from other documents such as pop-ups. [Learn more about deploying the COOP header.](#)

Description	Directive	Severity
No COOP header found		High

☐ Mitigate clickjacking with XFO or CSP ^

The X-Frame-Options (XFO) header or the frame-ancestors directive in the Content-Security-Policy (CSP) header control where a page can be embedded. These can mitigate clickjacking attacks by blocking some or all sites from embedding the page. [Learn more about mitigating clickjacking.](#)

Description	Severity
No frame control policy found	High

PASSED AUDITS (13)

Hide

Uses HTTPS ^

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding [mixed content](#), where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more about HTTPS.](#)

Avoids third-party cookies ^

Third-party cookies may be blocked in some contexts. [Learn more about preparing for third-party cookie restrictions.](#)

Allows users to paste into input fields ^

Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. [Learn more about user-friendly input fields.](#)

Avoids requesting the geolocation permission on page load ^

Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. [Learn more about the geolocation permission.](#)

Avoids requesting the notification permission on page load ^

Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. [Learn more about responsibly getting permission for notifications.](#)

Displays images with correct aspect ratio ^

Image display dimensions should match natural aspect ratio. [Learn more about image aspect ratio.](#)

Serves images with appropriate resolution



Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. [Learn how to provide responsive images.](#)

Has a `<meta name="viewport">` tag with `width` or `initial-scale`



A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents a [300 millisecond delay to user input](#). [Learn more about using the viewport meta tag.](#)

Document uses legible font sizes — 100% legible text



Font sizes less than 12px are too small to be legible and require mobile visitors to “pinch to zoom” in order to read. Strive to have >60% of page text ≥12px. [Learn more about legible font sizes.](#)

Source	Selector	% of Page Text	Font Size
Legible text		100.00%	≥ 12px

Page has the HTML doctype



Specifying a doctype prevents the browser from switching to quirks-mode. [Learn more about the doctype declaration.](#)

Properly defines charset



A character encoding declaration is required. It can be done with a `<meta>` tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. [Learn more about declaring the character encoding.](#)

No browser errors logged to the console



Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. [Learn more about this errors in console diagnostic audit](#)

No issues in the [Issues](#) panel in Chrome Devtools



Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

NOT APPLICABLE (1)

Hide

☐ Redirects HTTP traffic to HTTPS



Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. [Learn more.](#)



## SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#). [Learn more about Google Search Essentials.](#)

### CONTENT BEST PRACTICES

Document does not have a meta description



Meta descriptions may be included in search results to concisely summarize page content. [Learn more about the meta description.](#)

Format your HTML in a way that enables crawlers to better understand your app's content.

Structured data is valid

^

Run the [Structured Data Testing Tool](#) and the [Structured Data Linter](#) to validate structured data. [Learn more about Structured Data.](#)

Run these additional validators on your site to check additional SEO best practices.

Page isn't blocked from indexing

^

Search engines are unable to include your pages in search results if they don't have permission to crawl them. [Learn more about crawler directives.](#)

Document has a <title> element

^

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)

Page has successful HTTP status code

^

Pages with unsuccessful HTTP status codes may not be indexed properly. [Learn more about HTTP status codes.](#)

Links have descriptive text

^

Descriptive link text helps search engines understand your content. [Learn how to make links more accessible.](#)

Links are crawlable

^

Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. [Learn how to make links crawlable](#)

robots.txt is valid

^

If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. [Learn more about robots.txt.](#)

Image elements have [alt] attributes

^

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#)

Document has a valid hreflang

^

hreflang links tell search engines what version of a page they should list in search results for a given language or region. [Learn more about hreflang.](#)

Document has a valid rel=canonical

^

Canonical links suggest which URL to show in search results. [Learn more about canonical links.](#)

Captured at Jun 23, 2025, 12:21 PM GMT+2

Initial page load

Emulated Moto G Power with Lighthouse 12.6.0

Slow 4G throttling

Single page session

Using Chromium 137.0.0.0 with devtools

Generated by Lighthouse 12.6.0 | [File an issue](#)