LinkedIn Ad Metrics → HubSpot

Complete User Guide — setup, sync, batch jobs, and troubleshooting


WhiteRock Tech · Salesforce LinkedIn Ad Sync · Professional demographics (Company Name Segment)

Table of contents

1. 1. Overview & architecture
2. 2. Key concepts
3. 3. Access & prerequisites
4. 4. Initial setup (first time)
5. 5. Sync tab (manual import)
6. 6. API Settings tab
7. 7. HubSpot batch sync
8. 8. Daily auto-sync & scheduler
9. 9. Custom Metadata configuration
10. 10. Monitoring & logs
11. 11. Troubleshooting
12. 12. FAQ
13. 13. Full setup checklist

1. Overview & architecture

The **LinkedIn Ad Sync** Lightning component imports company-level ad metrics from LinkedIn (Professional demographics / Company Name Segment), stores them in Salesforce, and pushes updates to **HubSpot Companies** via an Apex batch job.

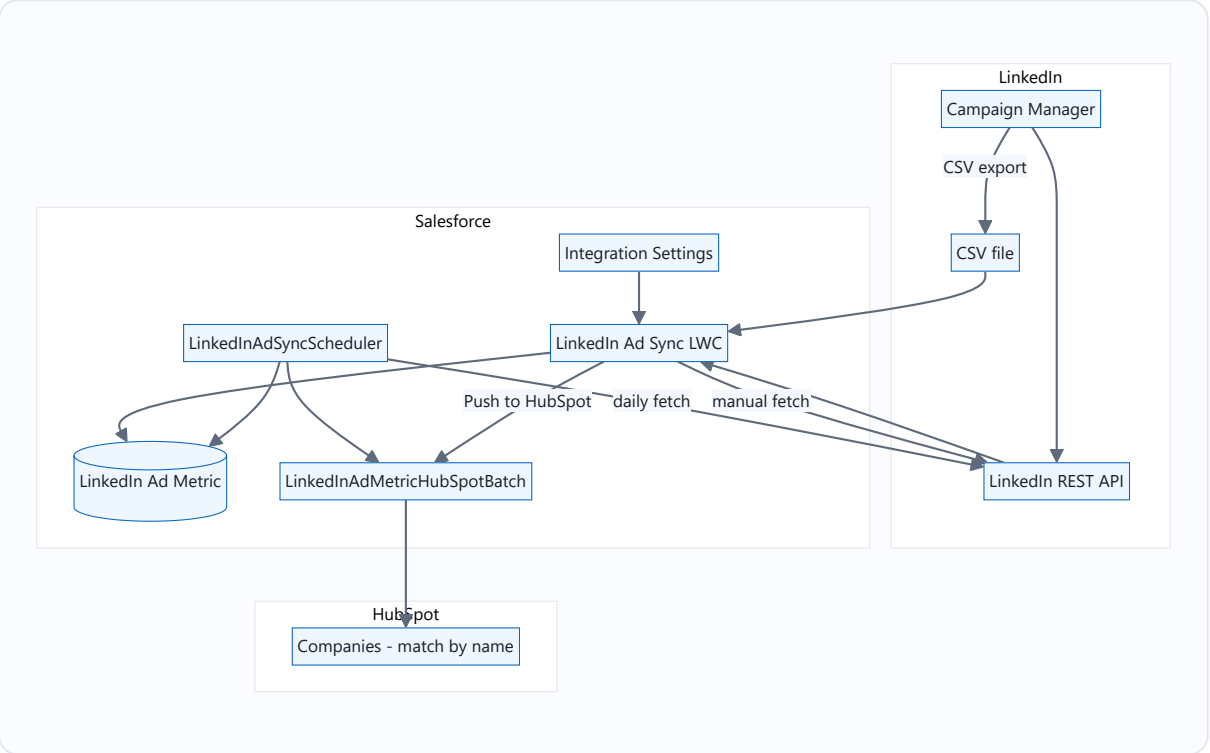

> **Design principle:** Salesforce is the staging layer. HubSpot is updated only after data is stored locally. Companies are matched by **exact name** — HubSpot does not auto-create records.

2. Key concepts

Term	Meaning
LinkedIn Ad Metric	Salesforce record: one row per Campaign + Company with impressions, clicks, conversions
Sync key	Unique key = Campaign Name + Company Name (case-insensitive). Updates overwrite duplicates
Source	`CSV Upload` or `LinkedIn API`
HubSpot Status	`Pending`, `Synced`, `Skipped`, or `Failed`
Manual batch	User clicks **Push to HubSpot (Batch)** on Sync tab
Scheduled job	Daily Apex scheduler: LinkedIn fetch → then HubSpot batch for all pending rows
Lookback days	How many days back the scheduler fetches from LinkedIn (default 30)

3. Access & prerequisites

Salesforce

- Tab **LinkedIn Ad Sync** (or app containing the component)
- Read/write on `LinkedIn_Ad_Metric__c` and org Custom Settings


LinkedIn

- Marketing / Advertising API access with ad analytics reporting scopes
- Access token (long tokens use secure store via **Use LinkedIn Named Credential**)
- Optional: Refresh token + Client Id/Secret for automatic token renewal
- Ad Account URN, e.g. `urn:li:sponsoredAccount:506515554`

HubSpot

- Private App token with Companies read/write
- Custom company properties for LinkedIn metrics (see section 9)

4. Initial setup (first time)



1. Open **LinkedIn Ad Sync → API Settings**
2. Enter LinkedIn Access Token, Ad Account URN, API version (default `202607`)
3. Enter HubSpot Access Token (or enable Named Credential)
4. Click **Save Settings**
5. Click **Test LinkedIn** and **Test HubSpot** — both should return SUCCESS
6. Go to **Sync** → enter Campaign Name + Campaign Id → **Save Sync Defaults**
7. Run first import (CSV or Fetch) → **Push to HubSpot (Batch)**

5. Sync tab — manual import

Campaign fields


Field	Required	Description
Campaign Name	Yes	Exact name from Campaign Manager / ad set
LinkedIn Campaign Id	For API	Numeric id from URL `campaignIds=[704412604]`
Report Start	No	API date range start
Report End	No	API date range end. **Empty = always today**

> **Campaign Id vs Campaign Group Id:** Use the **ad set / campaign id** from `campaignIds=[...]`, not the campaign group id (`campaignGroupIds`).

Option A — CSV upload

1. Campaign Manager → Export → Report type: **Professional demographics**
2. Enter Campaign Name, choose CSV file
3. Parser reads **Company Name Segment** rows only

Option B — LinkedIn API fetch

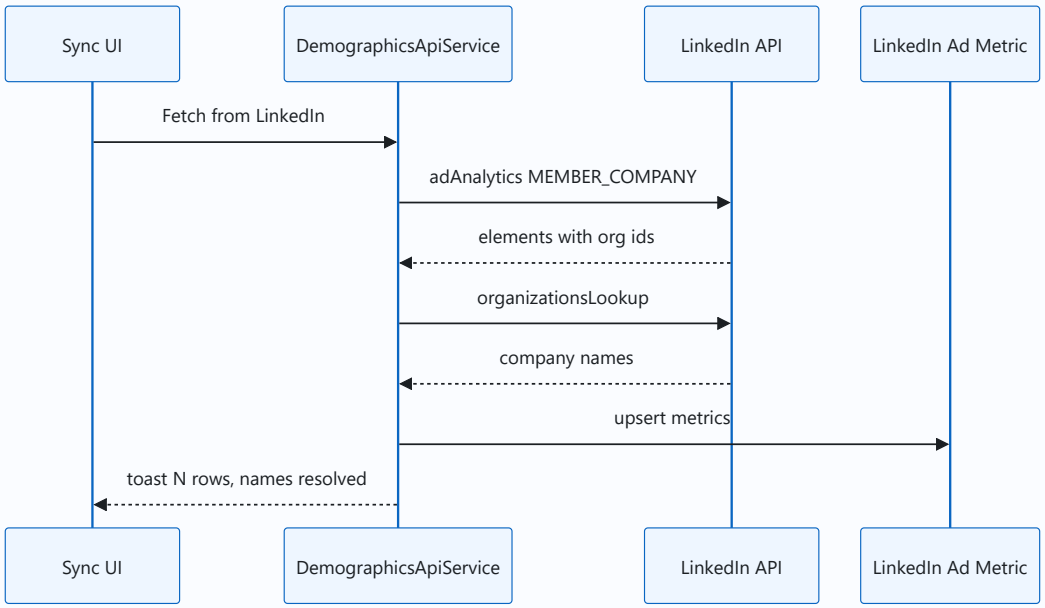

Toast examples:

- `LinkedIn: 97 rows` — data received
- `Company names resolved: 97/97` — ids converted to names
- `LinkedIn: 0 rows` — empty API response (check id / dates)

Save Sync Defaults

Persists campaign name, id, and report dates. Empty Report End is saved as “use today on every fetch”.

Stored metrics table

Column	Description
Company	Company name (after API lookup)
Impressions / Clicks / Conversions	Metric values
HubSpot Status / Error	Last sync result
Source	CSV Upload or LinkedIn API

6. API Settings tab

LinkedIn settings

- **Access Token**
- **Refresh Token**, Client Id, Secret (optional)
- **Use LinkedIn Named Credential** — required for tokens > 255 chars
- **LinkedIn Ad Account URN**
- **LinkedIn API Version**
- **Default Campaign Name / Id**

HubSpot settings


- **HubSpot Access Token**
- **Use HubSpot Named Credential**
- **HubSpot Batch Size** (default 50)

Action buttons

Button	Action
Save Settings	Persist all API Settings fields
Test LinkedIn	Call adAccounts API — verifies token
Refresh LinkedIn Token	OAuth refresh using stored credentials
Test HubSpot	Call HubSpot Companies API — verifies token

7. HubSpot batch sync

The batch job `LinkedInAdMetricHubSpotBatch` syncs staged Salesforce records to HubSpot. It processes rows where **HubSpot Sync Status** is `Pending` or `Failed`.

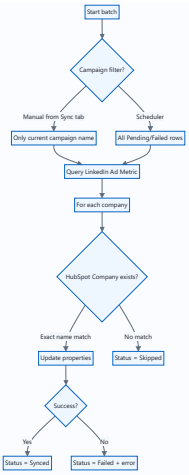

Manual batch (Sync tab)

1. Ensure metrics exist in **Stored metrics**
2. Click **Push to HubSpot (Batch)**
3. Batch job Id appears in toast; status shows below buttons
4. When complete, refresh table — check HubSpot Status column

> Manual batch filters by the **Campaign Name** currently entered on Sync tab (if set). Only `Pending` and `Failed` rows for that campaign are processed.

HubSpot properties updated

Mapped via Custom Metadata **LinkedIn HubSpot Config** → **Default**:

Metric	Default HubSpot property
Impressions	`linkedin_impressions`
Clicks	`linkedin_clicks`
Conversions	`linkedin_conversions`
Campaign name	`linkedin_campaign_name`

Batch size


HubSpot Batch Size in API Settings controls how many records each batch chunk processes (default **50**). Lower if hitting HubSpot rate limits; higher for faster runs on large datasets.

Status reference

Status	Meaning	Action
Pending	Not yet synced or re-queued	Run Push to HubSpot
Synced	HubSpot Company updated	None
Skipped	No HubSpot Company with exact name	Create/rename in HubSpot
Failed	API or property error	Read HubSpot Error column

8. Daily auto-sync & scheduler

The scheduled Apex class `LinkedInAdSyncScheduler` (job name: **LinkedIn Ad Sync Daily**) runs automatically when configured from API Settings.

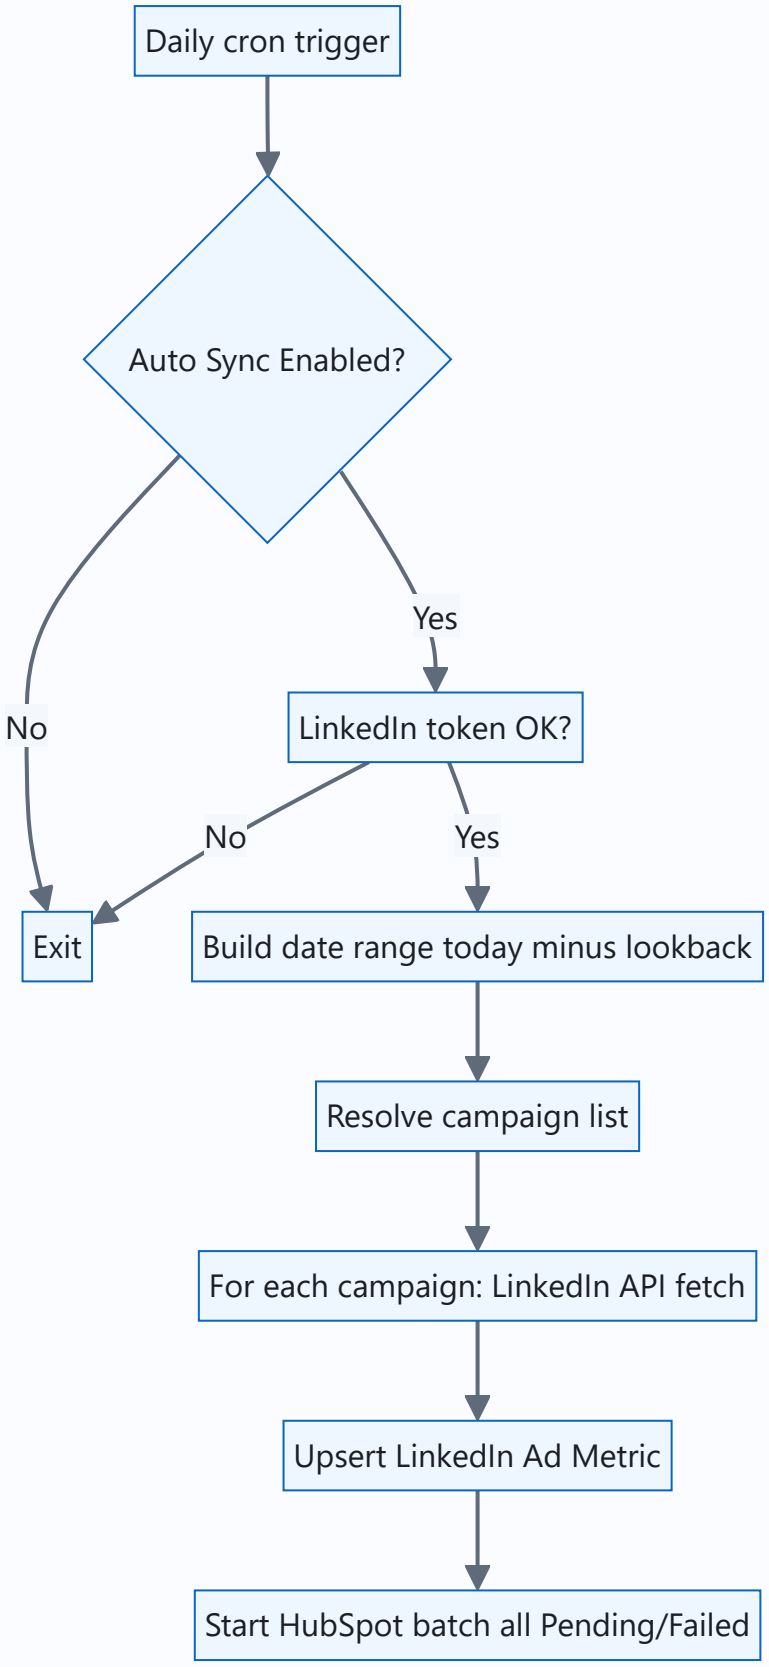

Configure from UI (recommended)

1. API Settings → enable **Auto Sync Enabled**

2. Set **Auto Sync Lookback Days** (e.g. 30)
3. Set **Daily run hour** (0–23, Salesforce org timezone)
4. Set **Default Campaign Name** and **Default LinkedIn Campaign Id**
5. Click **Save Settings**
6. Click **Schedule Daily Job**

The schedule panel shows:

- **Job: Active / Not scheduled**
- **Next fire time**
- **Campaigns** — list used by the job

> **Auto Sync Enabled must be ON** or the scheduler exits immediately even if cron is active. **Stop Daily Job** aborts the cron and disables Auto Sync.

Campaign sources for scheduler

The job fetches metrics for:

1. All active records in Custom Metadata **LinkedIn Scheduled Campaign**
2. Plus **Default Campaign Name / Id** from Integration Settings (if not duplicate)

Date range used by scheduler

Setting	Effect
Auto Sync Lookback Days	Start = today − N days; End = today
Report Start/End on Sync tab	Used for **manual** fetch only, not scheduler

Alternative: Setup → Schedule Apex

Admins can also schedule manually:

`Setup → Apex Classes → LinkedInAdSyncScheduler → Schedule Apex`

Daily at 6:00 AM cron: `0 0 6 * * ?`

Prefer the UI buttons — they manage the job name and settings consistently.

Manual vs scheduled batch comparison

	Manual Push to HubSpot	Daily scheduler
Trigger	User button	Cron + Auto Sync Enabled

LinkedIn fetch	User runs Fetch separately	Automatic before batch
Batch scope	Current campaign filter (if set)	All Pending/Failed rows
Date range	Sync tab Report Start/End	Lookback days → today

9. Custom Metadata configuration

LinkedIn HubSpot Config (Default)

`Setup → Custom Metadata Types → LinkedIn HubSpot Config → Manage Records → Default`

Field	Default value
HubSpot Target Type	Companies
HubSpot Property Impressions	linkedin_impressions
HubSpot Property Clicks	linkedin_clicks
HubSpot Property Conversions	linkedin_conversions
HubSpot Property Campaign	linkedin_campaign_name

> These properties must exist on HubSpot Companies before sync succeeds. Create them in HubSpot or use the setup script with Private App scope `crm.schemas.companies.write`.

LinkedIn Scheduled Campaign

For multiple campaigns in the daily job, add CMDT records:

`Setup → Custom Metadata Types → LinkedIn Scheduled Campaign → New`

Field	Example
Campaign Name	May 26 CTO Peer Perspective
LinkedIn Campaign Id	704412604
Active	checked

10. Monitoring & logs

In the UI

- **Stored metrics** — HubSpot Status / Error per row
- **Batch status line** — after manual Push (Processed/Total)
- **Schedule panel** — Active, Next fire, campaign list
- **Fetch toast** — row count and name resolution

In Salesforce Setup

- **Setup** → **Apex Jobs** — monitor `LinkedInAdMetricHubSpotBatch`
- **Setup** → **Scheduled Jobs** — verify `LinkedIn Ad Sync Daily`
- **Debug Logs** — filter on fetch / scheduler / batch Apex classes

What to look for in logs

Log pattern	Meaning
`adAnalytics ... StatusCode=200`	LinkedIn metrics fetched
`elements: []`	Empty period — no company rows
`organizationsLookup HTTP 400`	Name lookup failed — ids stay numeric
`Resolved N/N company names`	Name lookup succeeded
`PROPERTY_DOESNT_EXIST`	Missing HubSpot company property

11. Troubleshooting

Symptom	Likely cause	Fix
Fetch OK, 0 rows	Wrong campaign id or empty date range	Verify `campaignIds` in URL; widen dates
Company shows numeric id	organizationsLookup failed	Re-fetch; check token scopes
HubSpot Skipped	Company name mismatch	Match HubSpot Company name exactly
HubSpot Failed	Missing property	Create HubSpot custom properties
Scheduler does nothing	Auto Sync off or no campaigns	Enable Auto Sync; set defaults or CMDT
LinkedIn 403 ACCESS_DENIED	Missing ad reporting scope	Update LinkedIn app scopes; use CSV path
Test LinkedIn 401	Expired token	Refresh token or paste new access token
Report End won't stay empty	Old saved default	Clear → Save Sync Defaults

12. FAQ

Do we use Campaign Group id?
No. Use campaign/ad set id from `campaignIds=[704412604]`.

Does scheduler use Sync tab dates?
No. It uses lookback days ending today.

Will HubSpot create new companies?
No. Only existing companies with exact name match are updated.

Can I sync one campaign manually?
Yes — set Campaign Name on Sync tab, then Push to HubSpot.

What happens to Failed rows?
They are included in the next batch run (manual or scheduled).

13. Full setup checklist

One-time admin

1. Create HubSpot company properties (impressions, clicks, conversions, campaign)
2. Verify LinkedIn HubSpot Config CMDT mapping
3. Add LinkedIn Scheduled Campaign CMDT records (if multiple campaigns)
4. Configure Remote Site / Named Credentials (if used)

Per-environment setup

1. API Settings: LinkedIn token + URN + HubSpot token → Save → Test both
2. Sync: Campaign Name + Id → Save Sync Defaults
3. Test Fetch or CSV import
4. Push to HubSpot (Batch) — verify Synced status
5. Enable Auto Sync, set lookback + hour → Schedule Daily Job
6. Confirm Next fire time in schedule panel