

No bags on table,
chair, floor, etc.

All bags on the racks,
please!

COMPUTER NETWORKS LAB (CS315)

Assignment-10

ICMP

Date: 14 March 2023



Indian Institute of Technology Dharwad
भारतीय प्रौद्योगिकी संस्थान धारवाड़

ICMP: internet control message protocol


- used by hosts and routers to communicate network-level information
 - error reporting: unreachable host, network, port, protocol
 - echo request/reply (used by ping)
- network-layer “above” IP:
 - ICMP messages carried in IP datagrams
- *ICMP message*: type, code plus first 8 bytes of IP datagram causing error

<u>Type</u>	<u>Code</u>	<u>description</u>
0	0	echo reply (ping)
3	0	dest. network unreachable
3	1	dest host unreachable
3	2	dest protocol unreachable
3	3	dest port unreachable
3	6	dest network unknown
3	7	dest host unknown
4	0	source quench (congestion control - not used)
8	0	echo request (ping)
9	0	route advertisement
10	0	router discovery
11	0	TTL expired
12	0	bad IP header

Network Layer: 4-<number>



Traceroute and ICMP

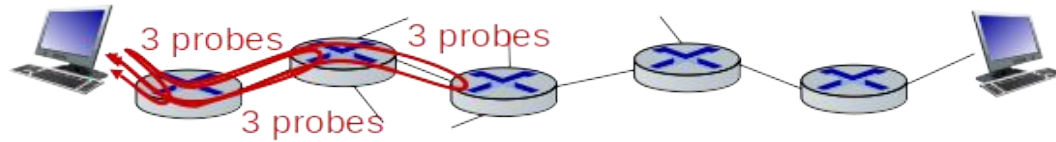

- source sends sets of UDP segments to destination
 - 1st set has TTL =1, 2nd set has TTL=2, etc.
- datagram in n th set arrives to n th router:
 - router discards datagram and sends source ICMP message (type 11, code 0)
 - ICMP message possibly includes name of router & IP address
- when ICMP message arrives at source: record RTTs

stopping criteria:

- UDP segment eventually arrives at destination host
- destination returns ICMP “port unreachable” message (type 3, code 3)
- source stops

Network Layer: 4-<number>



Thank you