

Augustinas Jokubauskas (psyaj1)

Notes

When looking at github commits, some might say username of Knightls or Augustinas, that happened because I had github configured incorrectly.

All the charts are taken from <https://npm-stat.com>

dlister



Created: 05/02/2017

Downloads between 05/02/2017 and 26/09/2018: **2297**

Github: <https://github.com/WhoAteDaCake/dlister>

npm: <https://www.npmjs.com/package/dlister>

Stats

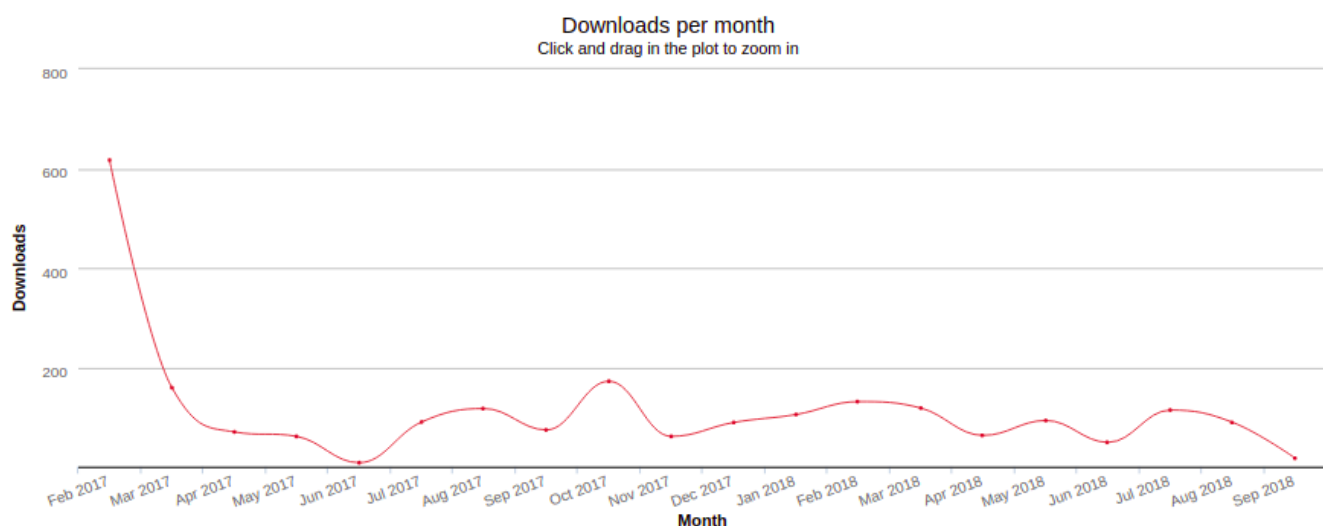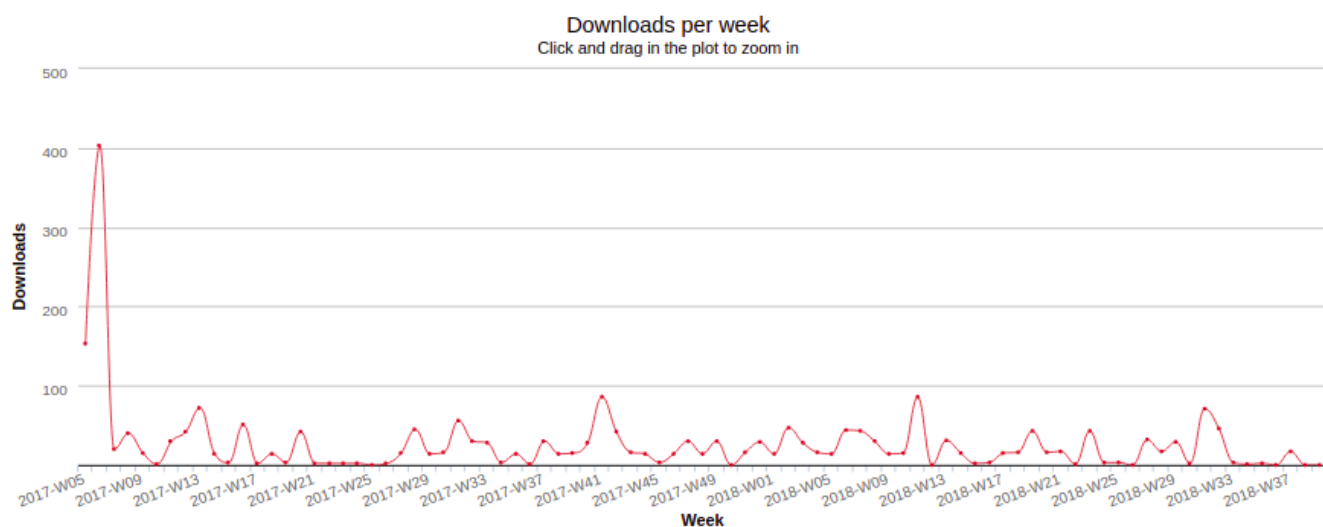

Example

```
[august@augustPc][components] $ dlistser
```

```
├── antd
│   ├── Badge
│   │   └── index.js
│   ├── Collapse
│   │   ├── index.js
│   │   └── style.js
│   ├── DatePicker
│   │   └── index.js
│   ├── JobState
│   │   ├── index.js
│   │   └── style.js
│   ├── MenuItem
│   │   └── index.js
│   ├── Popconfirm
│   │   └── index.js
│   ├── Table
│   │   └── index.js
│   ├── Timeline
│   │   └── index.js
│   └── main.js
├── form
│   ├── Checkbox
│   │   └── index.js
│   ├── DragDrop
│   │   ├── Card.js
│   │   ├── Container.js
│   │   └── index.js
│   ├── Dropdown
│   │   └── index.js
│   ├── ScrollList
│   │   ├── index.js
│   │   └── style.js
│   ├── Switch
│   │   └── index.js
│   ├── TextArea
│   │   └── index.js
│   ├── TextField
│   │   └── index.js
│   └── main.js
├── hoc.js
├── main.js
├── manager
│   ├── ChartManager
│   │   ├── index.js
│   │   └── utils.js
│   ├── Responsive
│   │   ├── ResponsiveConsumer.js
│   │   ├── ResponsiveProvider.js
│   │   ├── breakpoints.js
│   │   ├── context.js
│   │   └── getQueries.js
```

```
| | | └─index.js
| | └─TableManager
| |   └─TableFilter.js
| |   └─TableProvider.js
| |   └─TableSubscriber.js
| |   └─context.js
| |   └─core.js
| |   └─index.js
| └─main.js
└─ui
  └─Loading.js
  └─ProgressBar.js
  └─SidebarToggle
    └─index.js
    └─style.js
  └─main.js
```

```
[august@augustPc][components] $ dlist --help
--a : Adds a given expression to ignore list
--ci : Overlooks ignore list and only ignores given expressions
--cj : Joins given argument list with the ignore list
--i : Overlooks ignore list
--r : Removes given expressions from ignore list
--l : Lists current ignore list
--help : Lists available commands
--so : Adds left padding of 4 spaces
```

About

This was my first published npm package, it was made because I found that there were no directory tree lister that suited my needs. The main issue was that when posting to stackoverflow, you would need to manually indent every line by 4 spaces, so I wrote a package that does that for me.

react-routes-map


Created: 27/09/2017

Downloads between 27/09/2017 and 26/09/2018: **1283**

Github: <https://github.com/WhoAteDaCake/dlister>

npm: <https://www.npmjs.com/package/react-router-map>

Stats

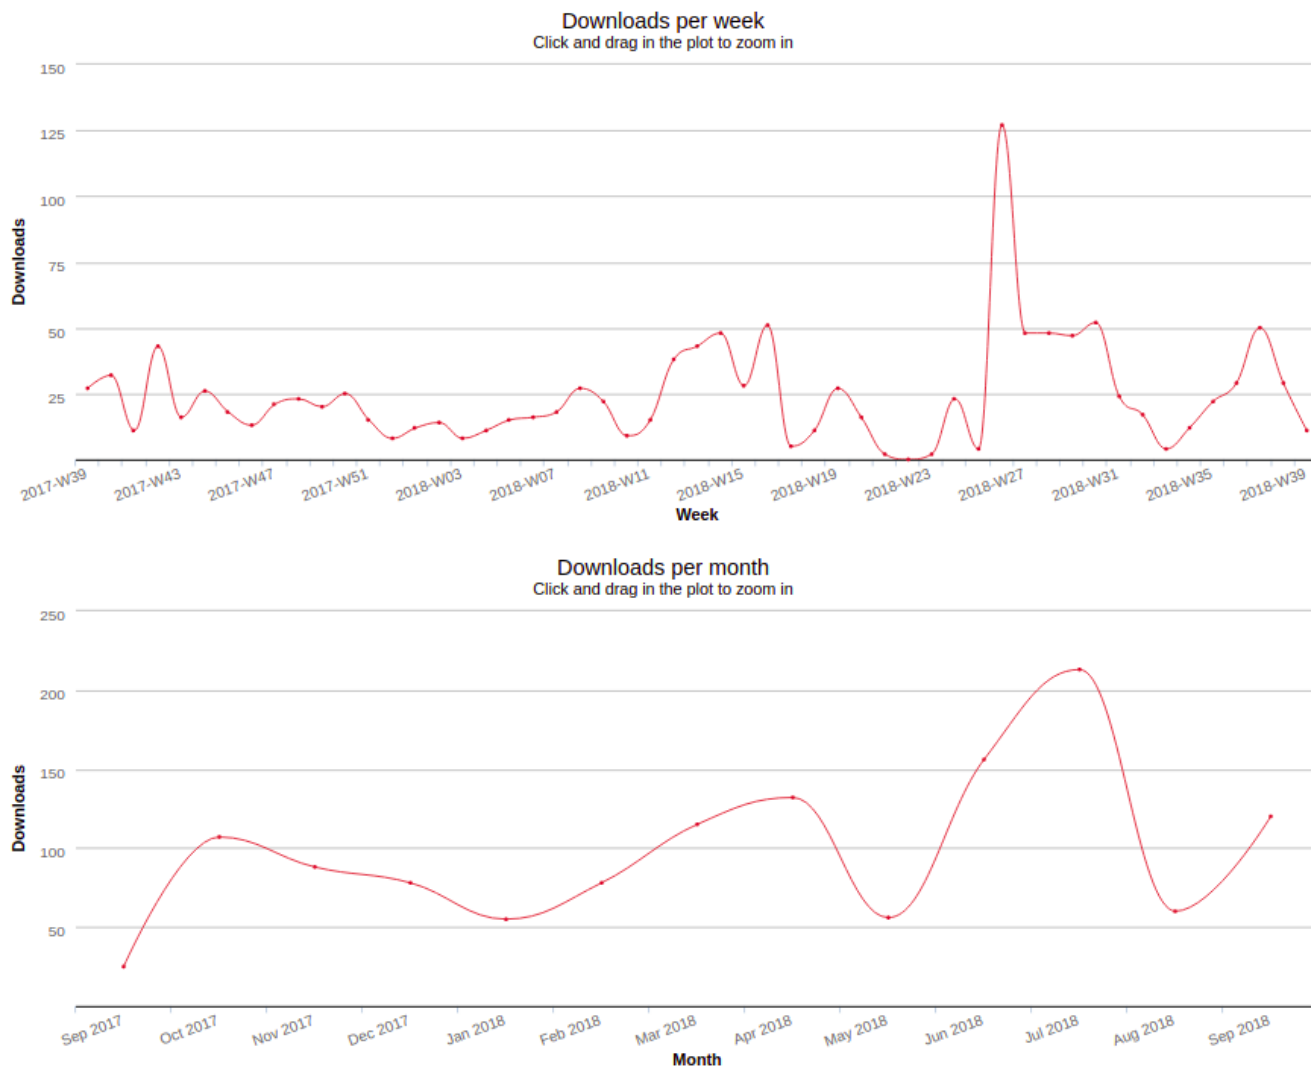

Examples

```
import mapRoutes from 'react-routes-map';

import { Loading } from '@spotlightdata/nanowire-extensions';
import { paths } from './paths';

/**
 * @class
 * Route configuration:
 *
 * @param {string | bool} path
 * Absolute path to component
 * Is false if the component is the 404 path
 *
 * @param {string} component
 * Filename of the component
 * File should be placed inside /routes, however, it can be elsewhere
 * Keep in mind that the path will be relative to /routes
 *
 * @param {string} name
 * Default name that will be displayed in the Header
 */
```

```

* @param {?Array<Route>} children
* Components of which path will be relative to parent path
*
* @example
*{
*  path: '/home',
*  component: 'Home',
*  name: 'Home page',
*}
*/

const specification = [
  {
    path: `/${paths.login.all}`,
    component: 'Login',
  },
  {
    path: `/${paths.home.all}`,
    component: 'Home',
  },
  {
    path: `/${paths.support.all}`,
    component: 'Support',
  },
  {
    path: false,
    component: 'NotFound',
  },
];

const options = {
  loader: component => {
    return import(`./${component}`)
      .catch(() => import(`./${component}/index.js`))
      .catch(() => import(`./NotFound.js`));
  },
  Loading,
};

export const routes = mapRoutes(specification, options);

```

About

I created this package when while working on multiple react projects. While working with react I realised that without routing, generated JavaScript bundles used to run pages would be way too large and dynamic route loading was way harder than it needed to be.

color-re


Created: 19/06/2018

Downloads between 19/06/2018 and 26/09/2018: **227**

Github: <https://github.com/WhoAteDaCake/color-re>

npm: <https://www.npmjs.com/package/color-re>

Stats

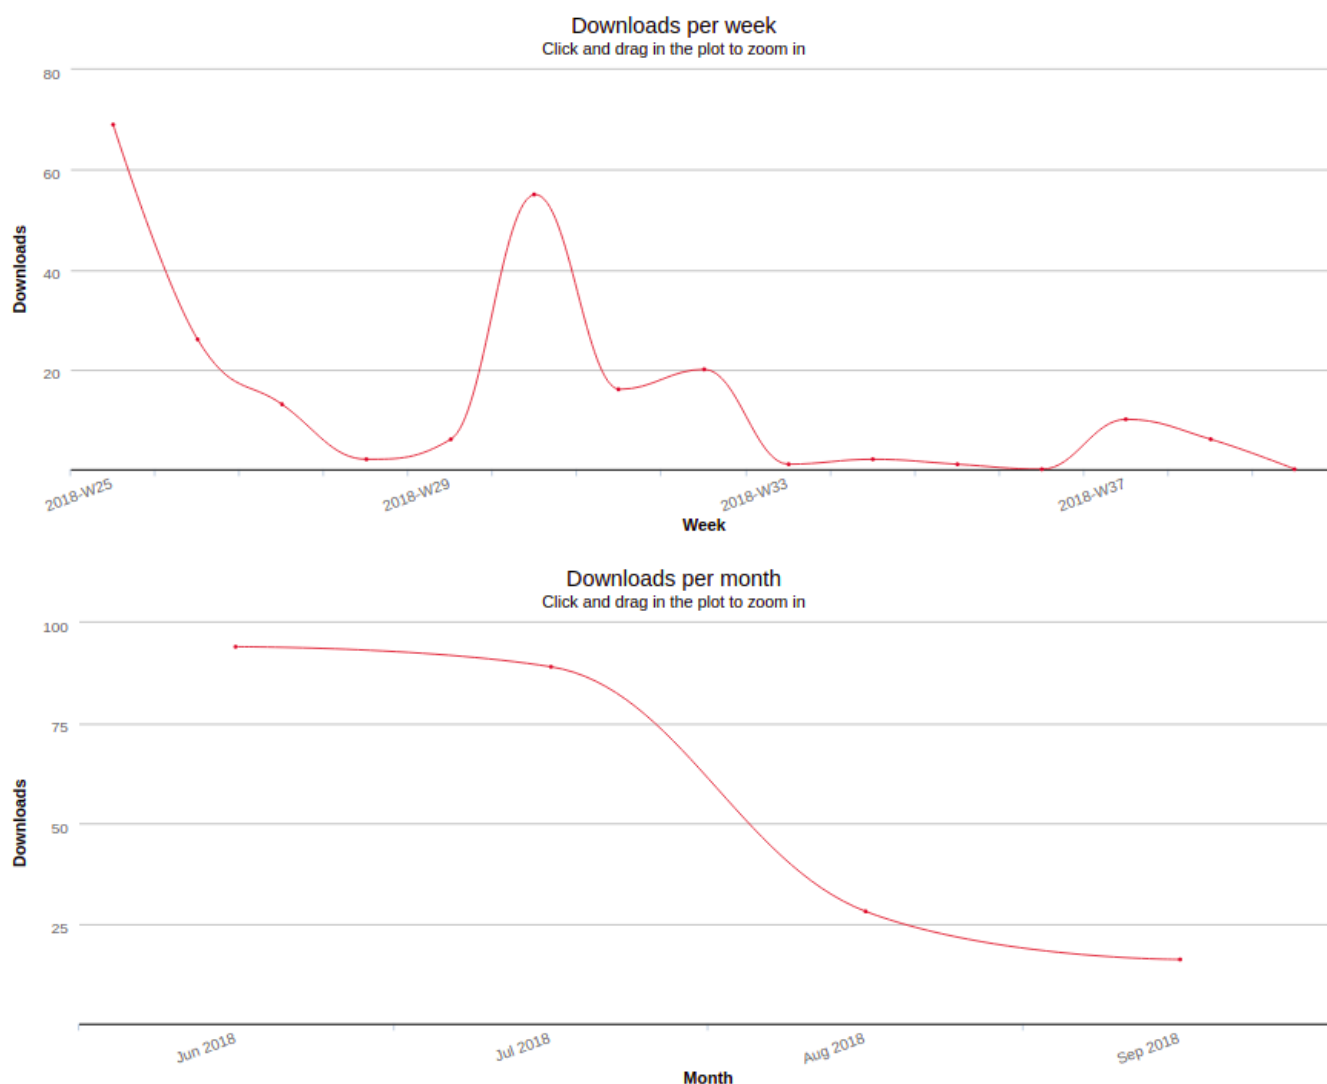

Example

```
/* Change the opacity */
Color.(fromRgb((200, 200, 200)) |> opacity(1.5) |> toString) |> Js.log
Color.(fromRgb((200, 200, 200)) |> toHsl |> fade(0.5) |> toString) |>
Js.log
Color.(fromRgb((200, 200, 200)) |> toHsl |> opaquer(0.4) |> toString) |>
Js.log

/* Color conversions */
Color.(fromRgb((200, 200, 200)) |> toHex |> toHsl |> toHsv |> toString) |>
Js.log

/* Color properties */
Color.(fromRgb((200, 200, 200)) |> luminosity) |> Belt.Option.getExn |>
Js.log
```

```
Color.(fromRgb((200, 200, 200)) |> contrast(fromHex("#aaafff"))) |>  
Belt.Option.getExn |> Js.log
```

About

This package was created as part of learning experience for reasonml, new language written by facebook. I've been part of reasonml community for few months now and I have noticed that it was missing a lot crucial packages for web development. So I took upon myself to help the community and ported this package from JavaScript one.

@atecake/builder


Created 11/09/2018

Downloads between 11/09/2018 and 26/09/2018: 259

Github: <https://github.com/WhoAteDaCake/builder>

npm: <https://www.npmjs.com/package/@atecake/builder>

Stats

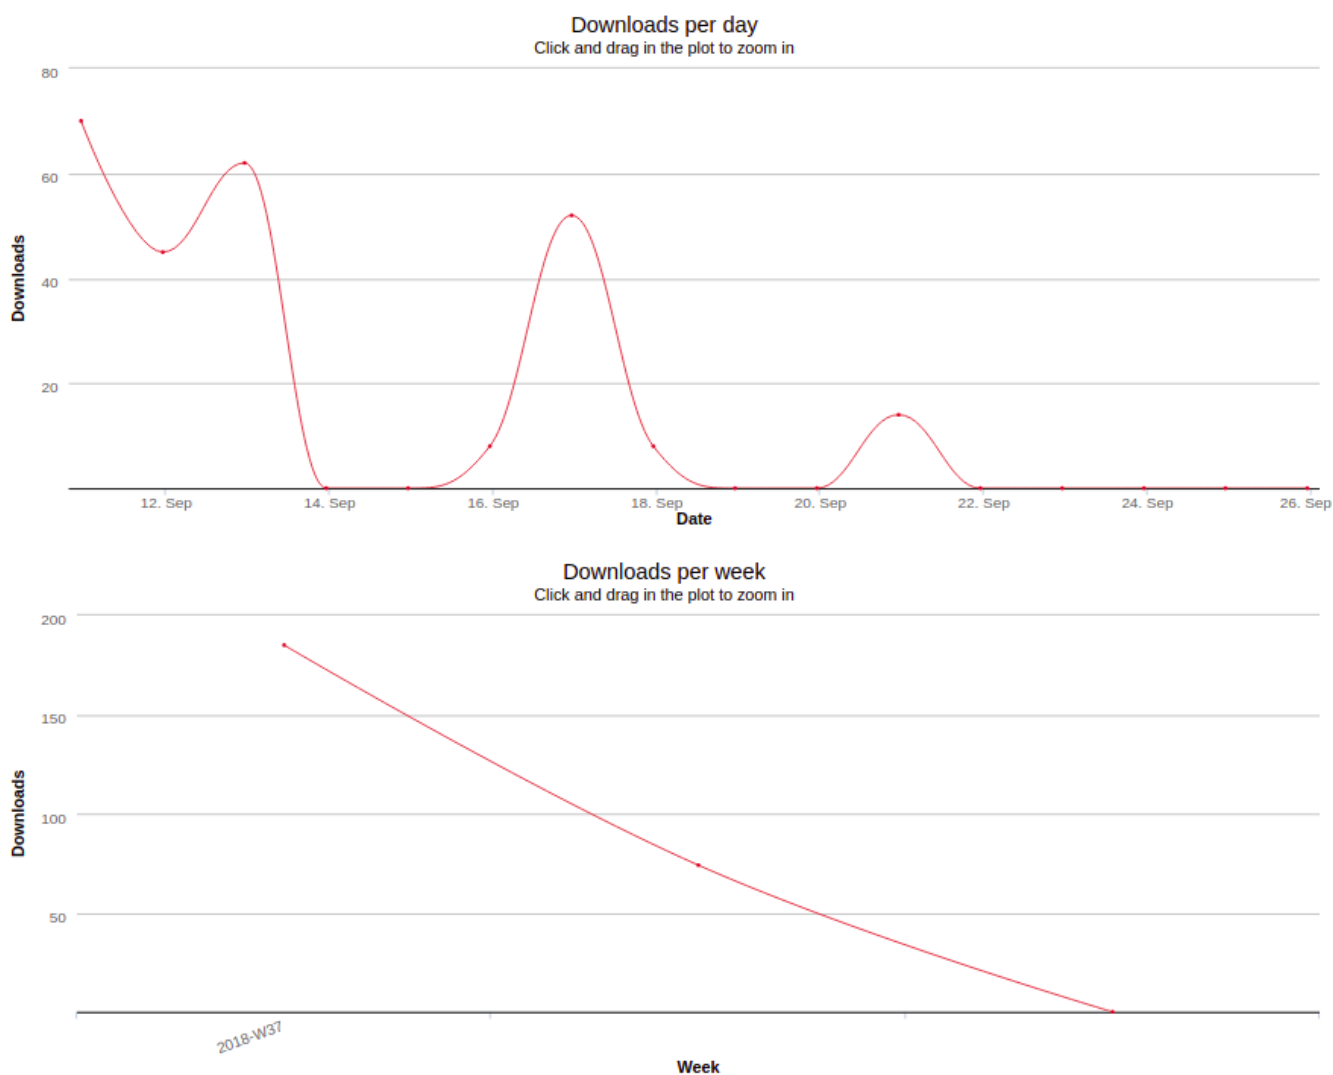

Example

```
const {
  start,
  devServer,
  when,
  bundle,
  library,
  configure,
  customise,
  tag,
  tap,
} = require('@atecake/builder');

const pkg = require('./package.json');

start([
  configure(),
  when('build', [
    bundle({ files: { input: 'src/index.js', output: pkg.main } }),
    bundle({
      files: { input: 'src/index.js', output: pkg.module },
      build: { rollup: { format: 'esm' } },
      action: Promise.resolve(),
    }),
    library({
      files: { input: 'src', output: 'lib' },
      build: { rollup: { format: 'cjs' } },
      action: Promise.resolve(),
    }),
  ]),
  when('start', [devServer()]),
  when('tag', [tag()]),
]);
```

About

I wrote this utility package to simplify releases of my other libraries. It has been made to allow easier library packaging as well as supporting development modes for libraries. **Documentation is still work in progress**

@spotlightdata/nanowire-extensions


Created: 19/06/2018

Downloads between 19/06/2018 and 26/09/2018: **3430**


Github: <https://github.com/SpotlightData/nanowire-extensions>

npm: <https://www.npmjs.com/package/@spotlightdata/nanowire-extensions>

Stats

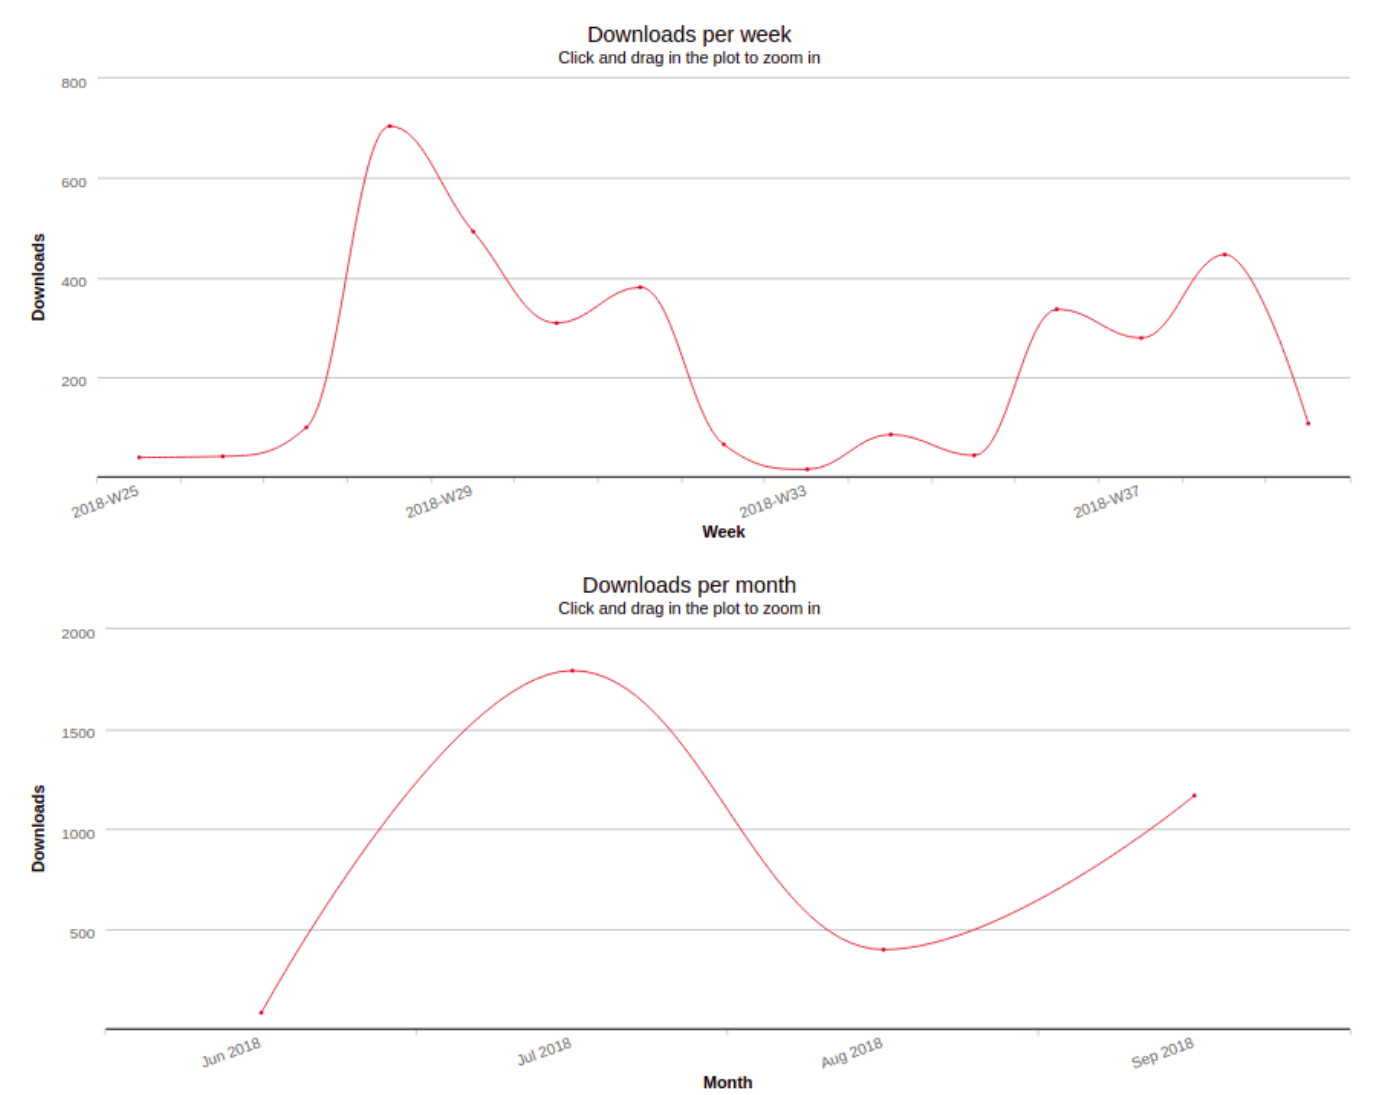

Example

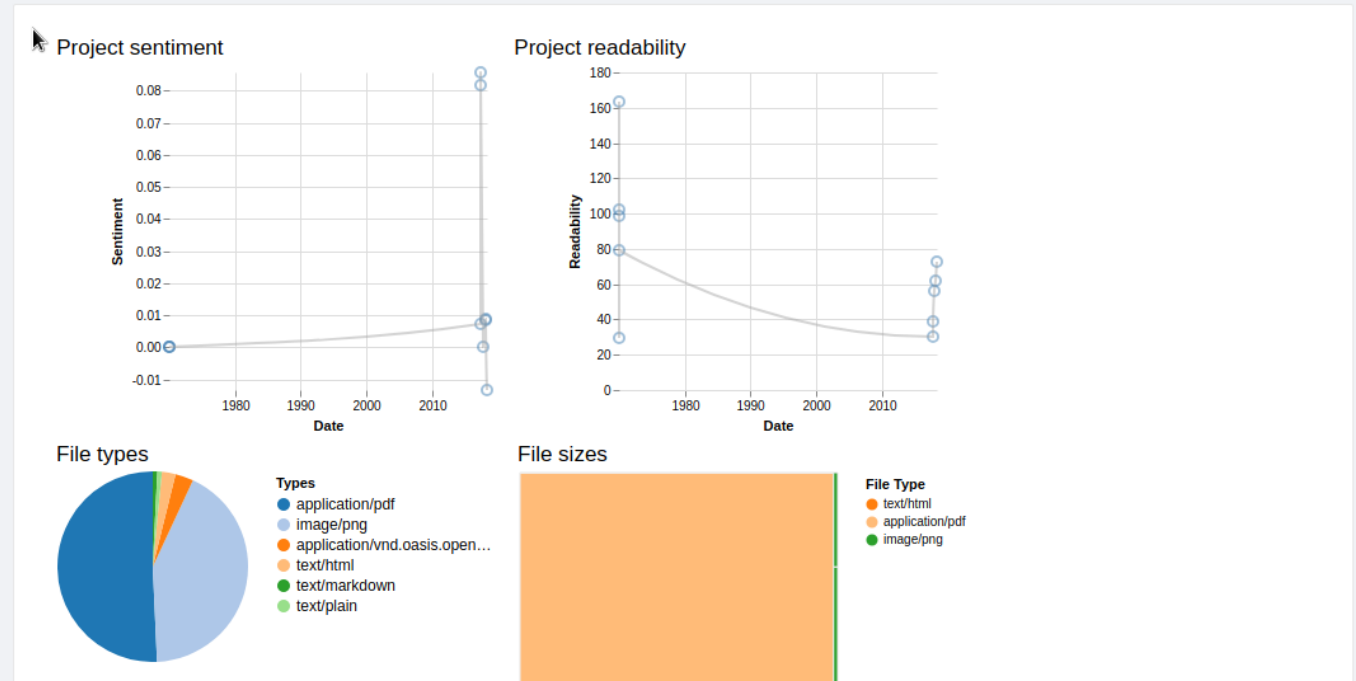

About

I wrote this package as part of my initiative to give back to open-source community. I discussed it with my boss and began open sourcing the code that I've been working on. It was a very good experience because this made me think about architecture of open-source projects. I learned how to write documentation, setup continuous integration as well as how to release packages based on semantic versioning system

@spotlightdata/es-search


Created 06/09/2018

Downloads between 06/09/2018 and 26/09/2018: **972**


Github: <https://github.com/SpotlightData/es-search>

npm: <https://www.npmjs.com/package/@spotlightdata/es-search>

Stats

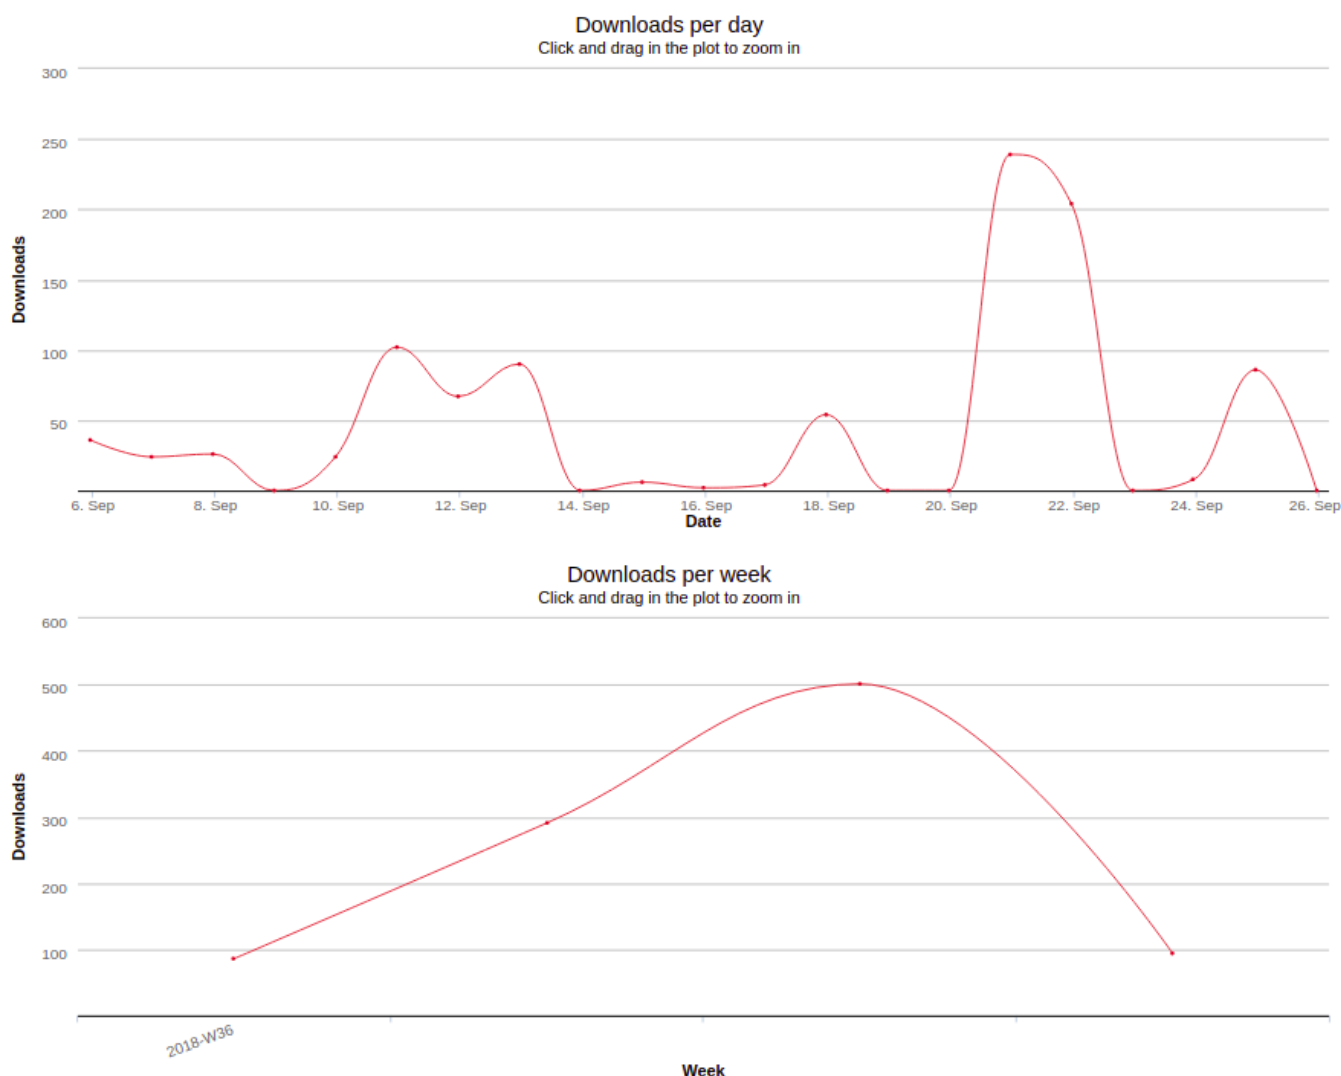

Example

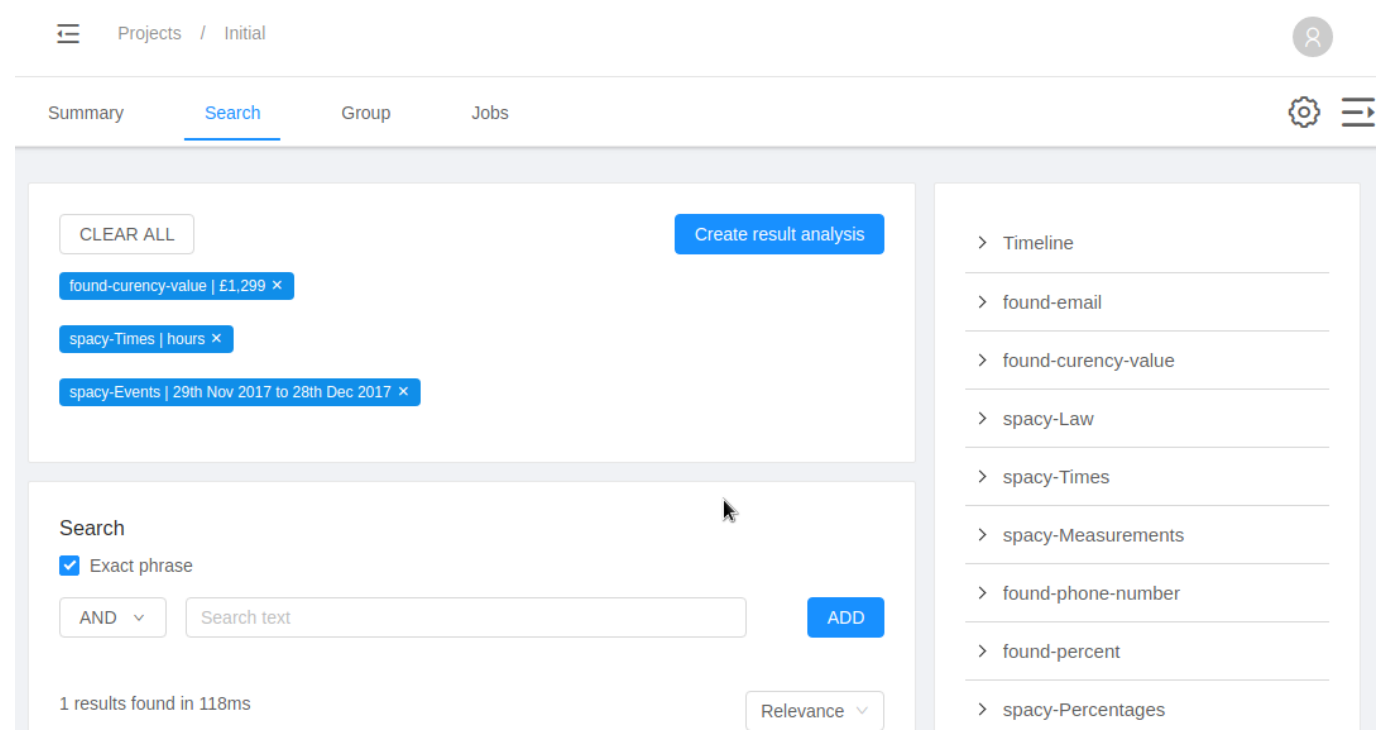

About

This package is a wrapper for comonly used searchkit components, it simplifies the usage as well as fixes some common searchkit library issues. **Documentation is still work in progress**

@spotlightdata/document-viewer


Created 22/08/2018

Downloads between 22/08/2018 and 26/09/2018: **754**

Github: <https://github.com/SpotlightData/react-lazylog>

npm: <https://www.npmjs.com/package/@spotlightdata/document-viewer>

Stats

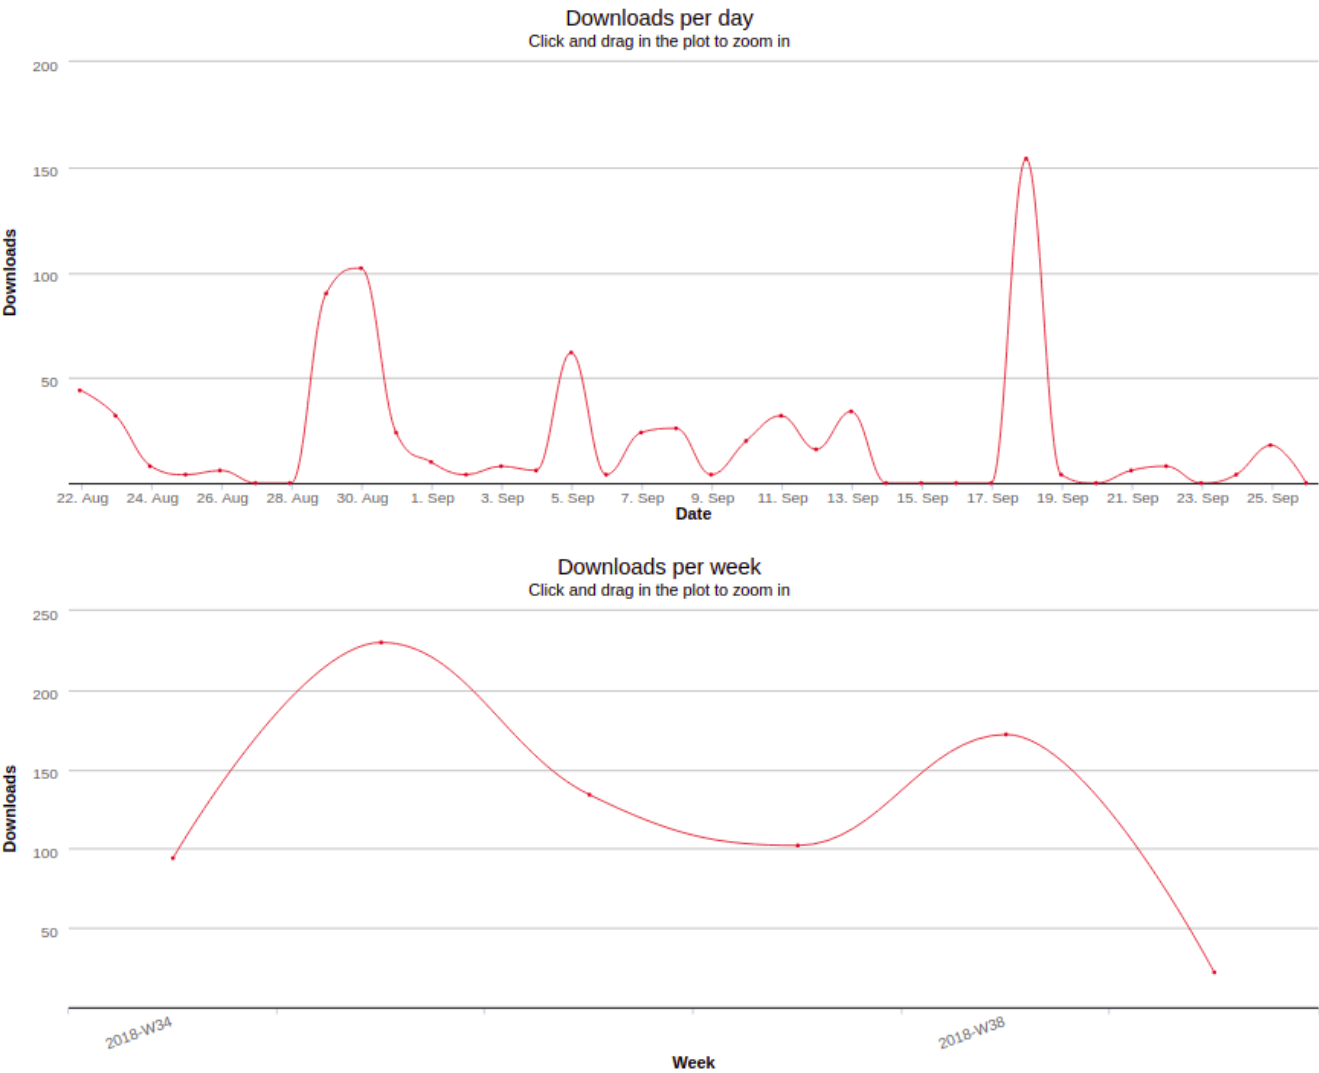

Example

7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31

• To do Coding well

• Agreement on coding standards

The software quality team aim to make sure :

• A good SE process is chosen for the project

• All aspects of that SE process are all 'done well'

3 principle concerns of SQM

• Defining standards and procedures for the whole company

• Check that projects conform to company standards, so that the

• Help create project plans, so that the quality goals are set

This team is often call the Quality Assurance (QA) Team

• Ideally this team should separate from development teams

• Report to the managers above the project manager

QA : Four things

• Planning for quality

• Agreeing/Using standards

• Inspecting for quality

• Measuring quality

Quality planning

Sets the bar for the team to achieve. It means everyone know

therefore defines what 'high-quality' software actually means for a

Key sections of a quality plan document for a project.

3

Four

3-7

1/2

1

1

1

1

Show all

spacy-Countries, cities and states

spacy-Structure

Takeaway

1

Hide all

spacy-Products

Process

1

1

1

1

Show all

spacy-Times

around 2 hours

1

Hide all

About

12 / 13

This package is a fork of [react-lazylog](#). It uses fundamentals of the forked project, however it's purpose is vastly different. It has been made to allow large files (< 30mb in size) to be readable and dynamically loaded in the browser. It also features a fully functional text and positional entity search. **Documentation is still work in progress**