


From screen to working system

Implementation architecture, backend rules and a build contract for every one of the 177 screen designs.

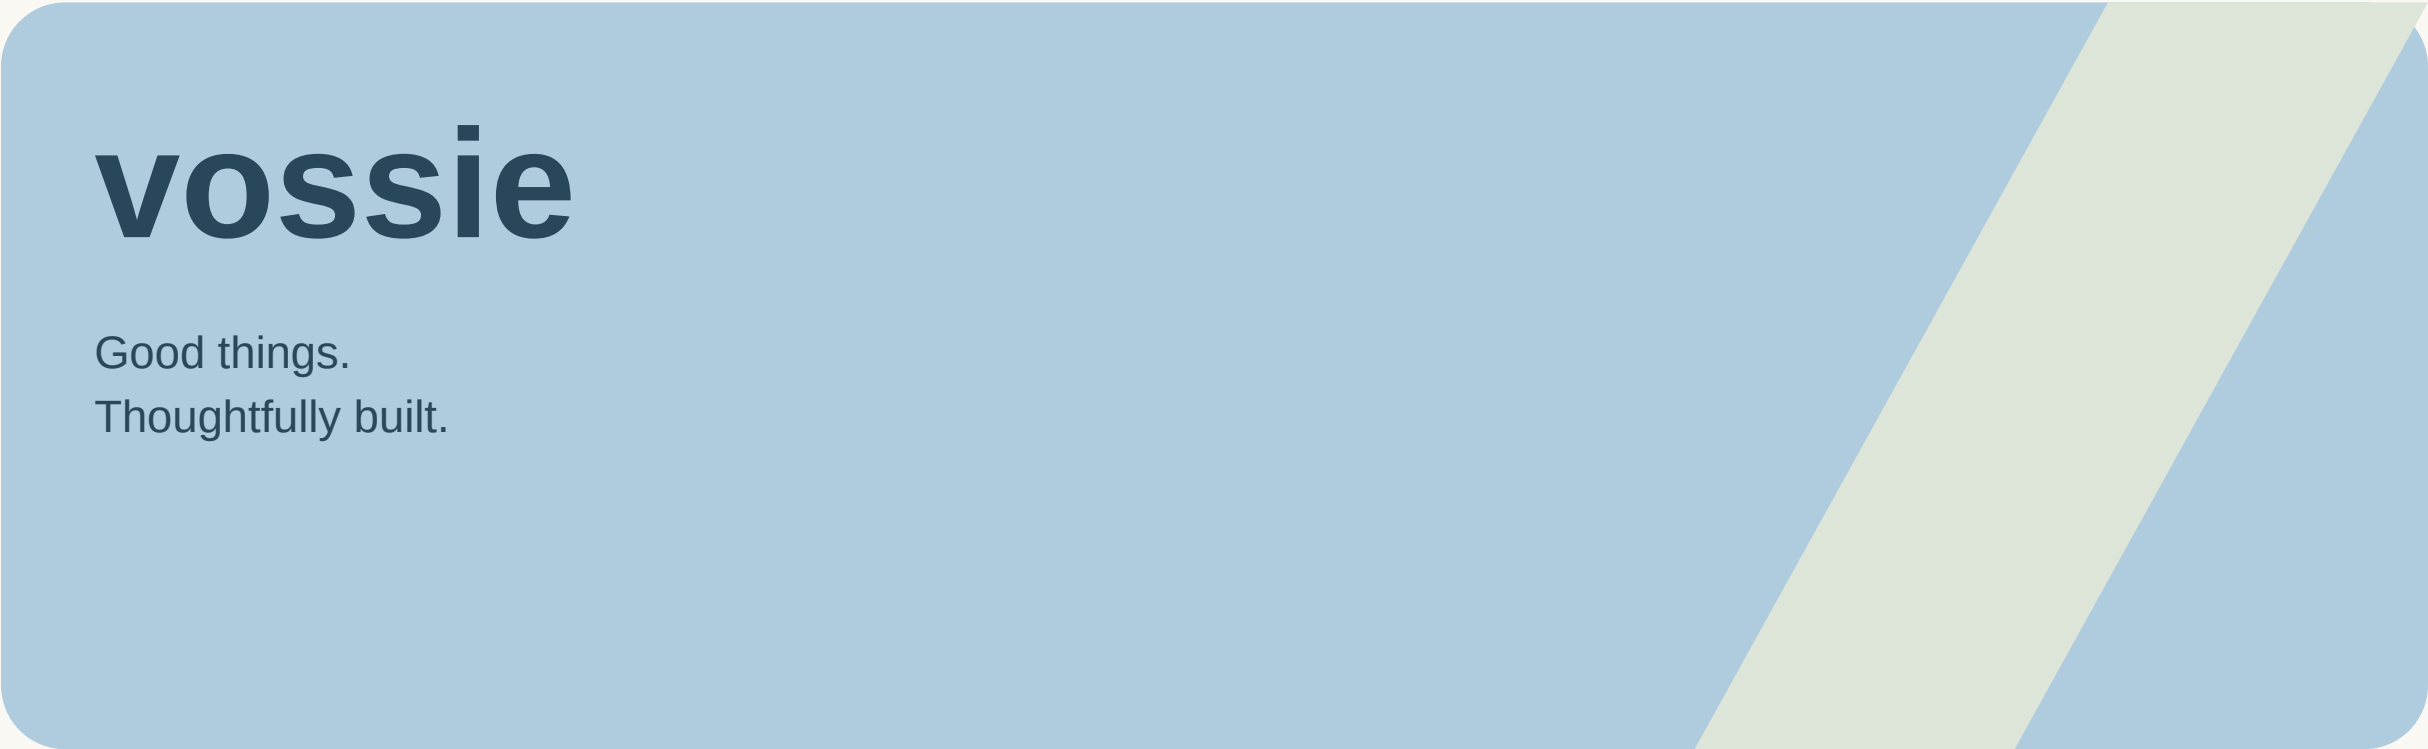

MOBILE + WEB | TRANSACTIONAL BACKEND | DATABASE + INTEGRATIONS | MOTION + QUALITY

Companion to the 177-screen UI/UX atlas. Proposed implementation and interaction contracts; no live marketplace services are connected.

Engineering chapters

After these chapters: official references and the 177-screen implementation appendix, in UI-atlas order.

- 01. How to use this developer blueprint
- 02. Recommended stack and platform split
- 03. System topology and deployment boundaries
- 04. Repository and local development workflow
- 05. Turning the UI atlas into production screens
- 06. Motion and interactive 3D implementation
- 07. Identity, sessions and student verification
- 08. Permissions, data isolation and staff roles
- 09. Database model and migration strategy
- 10. Read models, search and geospatial matching
- 11. REST commands, API errors and concurrency
- 12. Orders, money and custody are separate states
- 13. Atomic seller acceptance and reservations
- 14. Quotes, variable fees and checkout
- 15. Payments and provider adapter
- 16. Ledger, balances and payout release

Engineering chapters

After these chapters: official references and the 177-screen implementation appendix, in UI-atlas order.

- 17. Services, slot holds and authorisation
- 18. Hub custody, QR tokens and recipient proof
- 19. Courier dispatch and location pipeline
- 20. Food and failed-delivery recovery
- 21. Cross-campus transfers and manifests
- 22. Uploads, messaging and notifications
- 23. Incubation intelligence and human review
- 24. Disputes, moderation and audit
- 25. Realtime, outbox and background jobs
- 26. Offline behaviour and recovery
- 27. Security engineering and threat tests
- 28. Testing strategy and release evidence
- 29. Performance, telemetry and reliability
- 30. CI/CD, hosting and disaster recovery
- 31. Implementation sequence and definition of done
- 32. Extensions: architecture without premature rollout

Engineering chapters

After these chapters: official references and the 177-screen implementation appendix, in UI-atlas order.

33. Handoff checklist and unresolved decisions

How to use this developer blueprint

DELIVERABLE BOUNDARY

This is the implementation design for the 177-screen Vossie atlas, not a completed marketplace. It supplies architecture decisions, domain boundaries, proposed database and API contracts, delivery sequencing, operational requirements and a screen-by-screen build specification. The source package contains planning data and illustrative code fragments; it is not a runnable production backend.

READ IN THIS ORDER

Read the architecture and transaction chapters first. Implement the walking skeleton and one end-to-end product flow. Then use the screen implementation appendix alongside the UI/UX PDF. The motion catalogue M01-M30 is the interaction contract. The HTML motion lab demonstrates selected behaviours with local simulated states.

SOURCE PRECEDENCE

The five supplied Hack Jam / UX / technical PDFs and presentations are the research baseline. The later technical dossier governs variable fees, service authorisation and transfer operations. The 177-screen decomposition and contracts are proposals. Earlier fixed 2% fees are not adopted. The original custom logo must be supplied as an approved vector; text labels in engineering prototypes are stand-ins.

DECISIONS STILL REQUIRED

Confirm pilot campuses and hubs, identity integration, payment provider capabilities, funds custody model, fee schedule, food handling rules, data retention, hosting region and support ownership. The engineering design isolates these as adapters and versioned policy rather than inventing live capabilities. No real-money pilot starts with unresolved money-flow decisions.

Recommended stack and platform split

MOBILE AND WEB

Use TypeScript. React Native with Expo and Expo Router serves iOS/Android buyers, sellers and couriers. Use Next.js App Router for responsive buyer web and the staff console. Reuse schemas, query contracts, tokens and domain helpers across clients; maintain native and web UI adapters where interaction differs. Expo Router supplies file-based navigation [D1]; Next.js separates server and interactive client components [D8].

API AND WORKERS

Use a NestJS modular monolith with REST /v1, OpenAPI and an authenticated WebSocket gateway. Run a separate BullMQ worker process backed by Redis. Keep the API stateless; both processes use the same versioned domain packages. Start with one deployable backend codebase, not independent microservices.

DATA AND IDENTITY

Use PostgreSQL with PostGIS, SQL migrations and Drizzle for typed access. Supabase is the proposed managed Postgres, Auth and private Storage host. Keep marketplace mutations behind NestJS; Supabase Auth authenticates identities, but NestJS and database constraints enforce marketplace authority. Redis is a cache/queue, not the order or wallet source of truth.

MOTION AND DESKTOP

Use Reanimated plus gesture handling for native UI and CSS transforms for web. Use Three.js only for optional web 3D after the CSS/SVG baseline is accepted. Native launches with static or layered 2.5D versions. The research mentions Tauri desktop; defer that wrapper until an actual scanner/printer or offline desktop requirement justifies another release surface.

System topology and deployment boundaries

REQUEST PATH

Mobile / Next.js -> TLS edge -> NestJS API -> application service -> transaction -> PostgreSQL. A committed transaction stores an outbox event. A worker publishes notifications and integration jobs. A WebSocket notification tells subscribed clients to refresh the affected versioned resource.

SERVICES TO PROVISION

Provision separate development, staging and production identity projects, databases, buckets, Redis instances and provider credentials. Recommended pilot deployment: containerised API and worker on a managed container platform; Next.js on a Node-compatible host; managed Postgres/Auth/Storage. Select region and contractual data handling before provisioning production. Keep API, database and Redis near one another.


RUNTIME BOUNDARIES

API replicas must not depend on local filesystem or in-memory offer ownership. Use private object storage for evidence and media. WebSockets need long-lived connection support; workers need continuous execution. Do not run durable timers or background work as untracked tasks inside short-lived web requests.

SCALE ONLY FROM EVIDENCE

Scale API replicas by latency and utilisation; workers by queue age and provider rate limits. Add read replicas or search infrastructure only after query profiling. Critical mutations always use the primary transactional database. Separate services later only when team ownership or measured bottlenecks require it.

IMPLEMENTATION FLOW

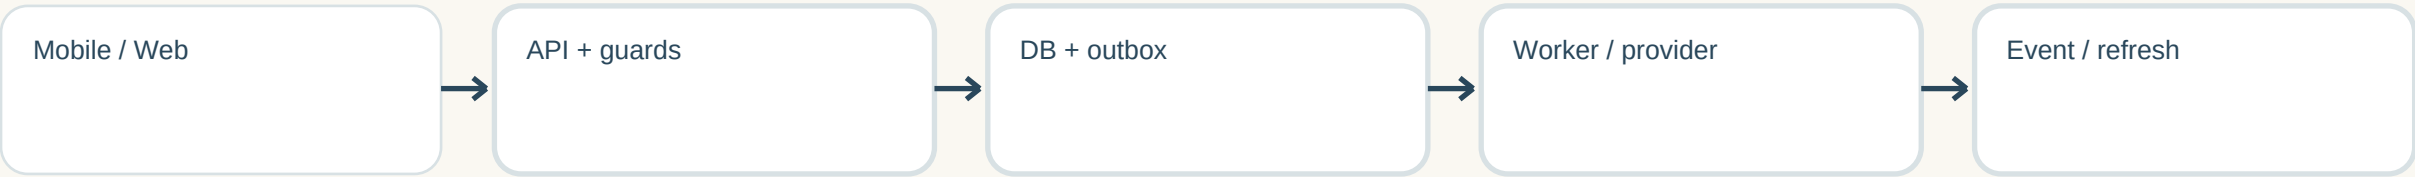

Repository and local development workflow

WORKSPACE LAYOUT

apps/mobile: Expo app. apps/web: Next.js buyer and staff routes. apps/api: NestJS controllers, guards and application services. apps/worker: outbox, retries and scheduled jobs. packages/contracts: DTO schemas and generated API types. packages/domain: state transitions and fee calculations. packages/design: tokens and motion presets. packages/db: schema and SQL migrations.

BOOTSTRAP SEQUENCE

Create a pnpm workspace and commit the lockfile. Scaffold clients and NestJS using their official generators. Choose a supported Node LTS and mutually compatible Expo/React Native/Reanimated versions at kickoff; record exact resolved versions in an architecture decision record. Do not blindly upgrade native packages independently of the Expo SDK.

LOCAL SERVICES

Use Docker Compose for PostgreSQL/PostGIS and Redis or an isolated local Supabase setup. Seed fake campuses, students, sellers, inventory and orders. Supply .env.example with variable names only. Provider adapters use deterministic sandbox fixtures and signed test webhooks. Never copy production identity evidence into local development.

DEVELOPER COMMANDS TO ESTABLISH

Define pnpm dev, lint, typecheck, test, test:integration, test:e2e, db:migrate, db:seed and contracts:generate in workspace scripts. These are required project conventions, not commands already implemented in the supplied handoff. A fresh clone must document exact setup and run one seeded buyer-to-hub-to-recipient journey.

Turning the UI atlas into production screens

TRACEABILITY

Preserve A01-U24/B01-X15 IDs in route metadata, tests and design tickets. Display friendly URLs with resource IDs; do not use a screen code as a substitute for a resource key. Store screenId, route, component, permissions, query key, commands and motion IDs in the screen registry.

COMPONENT CONSTRUCTION

Build Button, Field, FormError, BottomSheet, StatusBadge, OrderTimeline, ScannerPanel, MoneySummary, EvidenceCard and RoleNavigation first. Use shared colour, typography, radius, spacing and motion tokens. Build forms against schemas. Responsive staff tables become labelled cards on small screens rather than squeezed desktop tables.

SERVER STATE AND LOCAL STATE

Use TanStack Query for server resources and invalidation. Keep form drafts and presentation state local; introduce Zustand only for cross-screen transient state such as a basket draft. Never keep authoritative money, permissions or custody solely in a global client store. Clear query caches and secure tokens on identity change.

REPLACE PROTOTYPE SHORTCUTS

The UI atlas contains buttons such as Preview payment confirmed and cross-role walkthrough links. Remove those from production. Replace them with provider/webhook or authorised staff events. The appendix identifies demo controls. A transition shown in the prototype is a contract to implement, not proof that a backend already exists.

Motion and interactive 3D implementation

SHARED MOTION TOKENS

Proposed tokens: press 120 ms; micro 180 ms; navigation 240 ms; panel 280 ms; confirmed transition 360 ms; optional celebration 550 ms. Use gentle ease-out and limited movement. M01-M30 specify exceptions. Cancellation must settle to the newest valid state, not leave half-visible controls.

NATIVE IMPLEMENTATION

Reanimated handles transform/opacity interactions and follows the system reduced-motion preference [D2]. Keep input feedback off network timing. Use stable keys and native-stack navigation. Test gestures with keyboard, screen reader and scroll interactions. Never animate an entire complex list when a single row changes.

WEB 3D CHOICE

The supplied parcel is CSS perspective geometry, not a photorealistic model. Start with this for packaging, a layered icon and an isometric campus illustration. If a GLB model is approved, lazy-load Three.js within a client-only viewer; fit camera to container, cap device pixel ratio, dispose textures/materials and render only on change. Three.js has responsive and on-demand guidance [D3].

PROPOSED PERFORMANCE GATES

Optional viewer target: at most 1 MB compressed asset transfer, one viewer active at a time, at most 20k triangles for a later model. These are budgets to validate, not measured results. Target responsive 60 fps on the pilot mid-range phone, degrade to 30 fps or static when needed. Respect Reduce Motion, in-app low-motion toggle and reduced-data preference where available. 3D never blocks ordering.

Identity, sessions and student verification

AUTHENTICATION

Use managed Auth for password/email verification and MFA. NestJS verifies JWT signature against trusted JWKS, algorithm allow-list, issuer, audience and expiry; do not decode a token and treat claims as proof. Resolve active account and server-side memberships for protected commands [D4,D5].

SESSION HANDLING

Native refresh credentials use SecureStore rather than unencrypted async storage [D12]. For web, choose a documented secure cookie/session flow, set HttpOnly/Secure/SameSite appropriately and protect cookie-authenticated mutations against CSRF. Rotate and revoke sessions on password changes, account restriction and staff removal.

VERIFICATION MODEL

Authentication proves account control, not student or government identity. Store verification requests with status, provider/manual reference, decision actor and expiry. Buyer student verification precedes marketplace access as required by policy. Seller/courier identity checks reuse an existing verified identity without exposing documents to other participants.

MFA AND PASSKEYS

Require step-up MFA for staff sessions, payout destination changes and high-risk actions. Passkey UI in A10 is capability-gated: enable only after the selected auth stack supports a tested WebAuthn/passkey flow; otherwise hide it. Staff roles cannot be self-selected during registration.

Permissions, data isolation and staff roles

AUTHORITY MODEL

Use roles plus resource conditions: user owns order, seller owns listing, courier is currently assigned, hub operator belongs to this hub, incubation staff belongs to permitted campuses. A user may have several memberships, but each request uses an explicit permitted context. Deny by default.

DATABASE BOUNDARY

Keep transactional domain tables in a private schema unavailable to public Data API roles. Apply least-privilege database grants to the API connection. If any tables/views are exposed via Supabase Data API, explicitly enable and test RLS; do not assume every creation path enables it [D9]. Service-role credentials never enter mobile/web bundles.

SEPARATE STAFF CAPABILITIES

Hub intake, hub release, dispatch, moderation, refunds, finance reconciliation, incubation and platform configuration are independent grants. A generic staff role is insufficient. Use two-person approval for defined high-risk grants/refunds/payout overrides; prohibit approving your own action.

INFORMATION BOUNDARIES

Buyers see only assigned courier contact and delivery data for the active order. Couriers see minimum pickup/drop-off details. Sellers see practical business feedback, not internal incubation health scores. Signed evidence URLs require current entitlement. Record attempted denied access without leaking document content into logs.

Database model and migration strategy

CORE RELATIONS

users -> memberships -> campuses/hubs. sellers -> listings -> variants -> inventory. requests -> offers -> orders -> order_items -> fulfilments -> packages -> custody_events. service_slots -> slot_holds -> bookings. transfers -> manifest_items -> scans. payments -> ledger_journals -> ledger_lines -> payout_allocations. disputes and incubation plans reference their subject records.

REQUIRED COLUMN CONVENTIONS

Use UUID primary keys, created_at/updated_at timestamptz, record_version integer and explicit status values. Use integer minor units plus ISO currency for money; never floats. Campus-scoped records carry campus_id with a foreign key. All external references are uniquely indexed by provider and external ID.

CONSTRAINTS

Unique accepted offer per request; unique active assignment per delivery; unique package custody transition command ID; no overlapping committed booking for a seller/resource time range. Reservation counts cannot exceed inventory. Validate journal balancing inside a transaction or deferred constraint trigger; a row-level CHECK cannot sum an entire journal.

MIGRATION ROLLOUT

Write reviewed SQL migrations. Use expand/migrate/contract: add nullable field, deploy compatible code, backfill, validate, then enforce/remove later. Run migrations once as a release job, not on every API replica start. Test forward migration on staging and restore from backup before destructive production changes.

Read models, search and geospatial matching

SEARCH BASELINE

Start with PostgreSQL text search and indexed filters for campus, category, availability and verified publication status. Use cursor pagination with a stable tie-breaker. Return safe preview fields; never hydrate staff-only seller indicators into public search results.

LOCATION MODEL

Store approved campus service areas and hub coordinates using PostGIS. Use spatial indexes for radius checks. Addresses have structured fields plus delivery notes. Preserve user-picked coordinates with accuracy metadata; a device location is a suggestion until confirmed by the user.

MATCHING INPUTS

Rank eligible sellers by stock/capacity, category, campus, availability and policy-defined ranking. Persist the ranking-policy version and relevant snapshot. Seller listed price remains fixed; ranking is not an auction. Start a small configurable batch and expand only when no eligible acceptance succeeds.

READ MODELS

Build buyer order summary, seller queue, hub queue and incubation projections from committed events or SQL views. A projection may lag; commands must re-check authoritative rows. Return last-updated and record-version fields so clients can explain stale data.

REST commands, API errors and concurrency

CONTRACT FORMAT

Prefix production APIs /v1. Use GET for reads; POST command routes for state changes; PATCH only for editable drafts/settings. Validate DTOs server-side. Proposed request headers include Idempotency-Key and If-Match resource version for protected commands. Do not accept actor_id, price totals or permissions from client payloads as authority.

SUCCESS AND FAILURE

Return resource ID, state, version and server_time. For queued work, return 202 with command_id and status URL. Errors use code, message, field_errors, retryable, correlation_id and optionally current_version. Use 401 for missing/expired auth, 403 or privacy-preserving 404 for denied records, 409 for state conflict, 422 for validation, 429 for throttling.

IDEMPOTENCY

Persist key scope as actor + route + key with request hash and result. Same key/same payload returns original result; same key/different payload is rejected. Clients retry an uncertain command with the same key. Database uniqueness and provider idempotency remain necessary beyond HTTP middleware.

OPENAPI DISCIPLINE

Define resource schemas and each mutation effect before client implementation. Generate typed clients and contract tests in CI. The included OpenAPI fragment shows one acceptance command only; screen appendix APIs are representative contracts to expand, not a falsely complete API specification.

Orders, money and custody are separate states

SEPARATE AGGREGATES

Keep commercial order state, payment state, fulfilment state, package custody and dispute state separate. An order can be paid with a delivery exception. A delivered parcel may still have an open dispute. Do not collapse these into one ambiguous order_status column.

ORDINARY PRODUCT LIFECYCLE

Requested -> seller accepted -> awaiting payment -> paid -> preparing -> seller drop-off -> hub received -> courier assigned -> collected -> delivered -> buyer confirmation -> payout eligible. All transitions have guards. Courier dispatch cannot occur before committed hub receipt for an ordinary product.

FOOD AND SERVICE VARIATION

Food dispatch can start after payment while preparation continues; courier collects directly from seller. Service flow is slot held -> buyer confirms -> funds authorised -> seller accepts -> service delivered -> completion review -> release according to agreed policy. Authorisation is not captured settlement and can expire.

STATE HISTORY

Each transition writes actor, command ID, from/to state, aggregate version and evidence references. Return allowed_actions computed from state and permissions. UI button visibility helps users, but the same guards execute inside the server transaction.

Atomic seller acceptance and reservations

TRANSACTION ORDER

Authenticate seller; validate request campus/category; begin transaction; lock request, offer and inventory/capacity rows in a consistent order; re-check expiry and eligibility; reserve quantity/capacity; update accepted seller/order state; expire competing offers; insert outbox event; commit. PostgreSQL row locks coordinate concurrent changes [D6].

RACE PREVENTION

Use a unique accepted offer constraint as a backstop. If two accepts race, one returns success and the other receives 409 with the current state. Retry deadlocks/serialization failures only with bounded retry and the original idempotency key. Never hold database locks while calling payment or notification providers.


TIMEOUT OWNERSHIP

Store expires_at in PostgreSQL. BullMQ triggers checks, but a delayed or missing job cannot extend eligibility. On acceptance, compare to server time; on scheduled expiry, re-check state/version before releasing reservations. A reconciliation sweeper repairs missed expiries.

CONSENT

An alternate seller, changed campus, substitute item or changed quote requires buyer review. No automatic charge to a changed offer. Keep the accepted quote snapshot and consent timestamp linked to the order.

IMPLEMENTATION FLOW

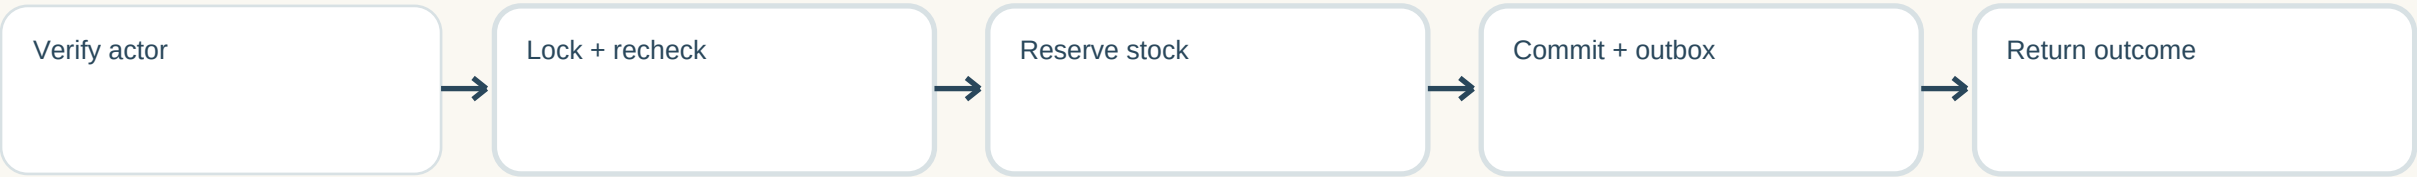

Quotes, variable fees and checkout

QUOTE CONTRACT

Create a server quote with item lines, quantities, unit prices, delivery/transfer fee, platform fee, discount/subsidy, provider fee treatment, currency, expiry and fee_policy_version. Store amounts in cents. Include a human-readable breakdown and a hash/version the buyer accepts.

VERSIONED POLICY

Rules may vary by category, order value, seller/courier standing and delivery complexity. Store effective_from and effective_to; existing accepted quotes retain their snapshot. The earlier fixed 2% concept is superseded. Tax treatment and fee disclosure must be confirmed by the business before production.

CHECKOUT SEQUENCE

For ordinary products, request seller acceptance first, then create the payment attempt for the accepted quote. Revalidate stock reservation, quote expiry and delivery eligibility. If anything changes, return a fresh quote and require consent. Do not silently reprice.

VALIDATION TESTS

Test boundary amounts, rounding allocation, zero subsidies, full discounts, transfer fees, stale policy versions and concurrent stock depletion. Sum of displayed line items must equal the authorised amount exactly. No client subtotal is trusted.

Payments and provider adapter

PROVIDER-NEUTRAL INTERFACE

Define createPayment, getPayment, authorise, capture, void, refund, createPayout and getPayout behind an adapter with an explicit capability matrix. The research mentions several South African providers; this guide does not claim any one supports every required flow. Complete a sandbox capability proof before selection.

WEBHOOK HANDLING

Verify signature using raw request bytes, timestamp/replay rules and configured secrets. Persist provider + event ID uniquely before processing. Check order/attempt reference, currency and amount against server records. Acknowledge only after durable receipt; process idempotently and reconcile with provider when ordering is ambiguous.

UNKNOWN AND LATE OUTCOMES

A cancelled browser or network timeout is not a failed charge. Return checking status and query the existing attempt. A late success after reservation expiry enters reconciliation: restore fulfilment only if still valid and consented, otherwise initiate an idempotent refund. Never create another charge merely because a spinner timed out.

LAUNCH GATE

Approve supported authorisation lifetime, partial capture/refunds, marketplace allocation, payout verification and settlement timing in writing with the selected provider. Do not implement unapproved custody of client money as a homemade escrow. Block flows whose required provider capability is absent.

Ledger, balances and payout release

ACCOUNTING MODEL

Use immutable double-entry journals with balanced debits/credits per currency. Separate processor clearing, buyer/customer liability where applicable, seller payable, courier payable, platform revenue, refunds and payout clearing. An accountant and provider settlement model must validate final account treatment.

ILLUSTRATIVE POSTING ONLY

A confirmed R100 capture can debit processor receivable and credit an order allocation liability. On approved allocation, debit that liability and credit seller/courier/platform accounts according to the fee snapshot. A payout moves payable to payout clearing, then clears against bank/provider settlement. These are design examples, not final accounting policy.

ELIGIBILITY VERSUS MONEY

Track payout allocation eligibility separately from ledger ownership. Product eligibility waits for required completion and dispute rules. Transfers with discrepancies initially hold affected release; review may release unaffected package allocations while disputed ones stay held. Reversals create compensating journals, never edit historic lines.

WALLET SEMANTICS

Spendable, withdrawable and pending are labelled views and may overlap; do not sum them into a misleading total. R50 minimum withdrawal and up to three verified destinations are research rules to version. Reserve withdrawable balance atomically before provider payout; prevent two concurrent withdrawals spending the same amount.

Services, slot holds and authorisation

AVAILABILITY

Store recurring seller availability in local campus timezone and materialise/derive bookable ranges. Keep appointments as UTC instants with timezone context. Prevent overlapping bookings for the same resource using range exclusion or a properly locked slot inventory transaction.

HOLD AND CONFIRM

Propose the next eligible slot, create a server hold for the configured 5-10-minute window and return `expires_at`. Buyer explicitly confirms, then provider authorisation is requested. Commit a booking only according to provider outcome and seller acceptance. Expired holds cannot be resurrected by a stale client screen.

DECLINE AND REMATCH

Seller decline triggers buyer-controlled alternatives. Void or reuse authorisation only if the provider and buyer consent allow the exact flow; do not carry a money authorisation to a changed service without review. Earlier 30/70 release is a business proposal requiring policy approval, not a fixed implementation assumption.

COMPLETION

Seller submits completion evidence, buyer reviews and either confirms or opens a case. Release is a separate command with state and dispute guards. Scheduled work must flag authorisations approaching expiry and request explicit recovery rather than assuming indefinite holds.

Hub custody, QR tokens and recipient proof

PACKAGE IDENTITY

Generate a cryptographically random opaque token that maps to a package; do not encode buyer address, phone, payment or identity data in QR. Treat token possession as a lookup aid, not authority. Store token hash, expiry/revocation and permitted use where practical.

CUSTODY COMMAND

Resolve token -> show expected package/current custodian -> collect receiving condition -> validate actor/hub/assignment -> transactionally append custody event and update custodian/version. Unique command ID prevents duplicate confirmation. Store evidence references, timestamp and previous custody event.


HUB REJECTION

Failed intake remains before HUB_RECEIVED. Record rejection reason and correction deadline, notify seller and block ordinary dispatch. Research proposes 24 hours for correction; the scheduled expiry cancels the eligible order and initiates the appropriate refund/release workflow, reconciled to provider outcome.

RECIPIENT HANDOVER

Generate a single-use PIN for this handover; store a slow hash or keyed verifier and enforce attempt limits. Verify only after correct order and delivery actor are resolved. Never log PINs. GPS proximity can help detection but cannot substitute for recipient proof. Camera APIs support barcode scanning; permissions and lifecycle require handling [D10].

IMPLEMENTATION FLOW

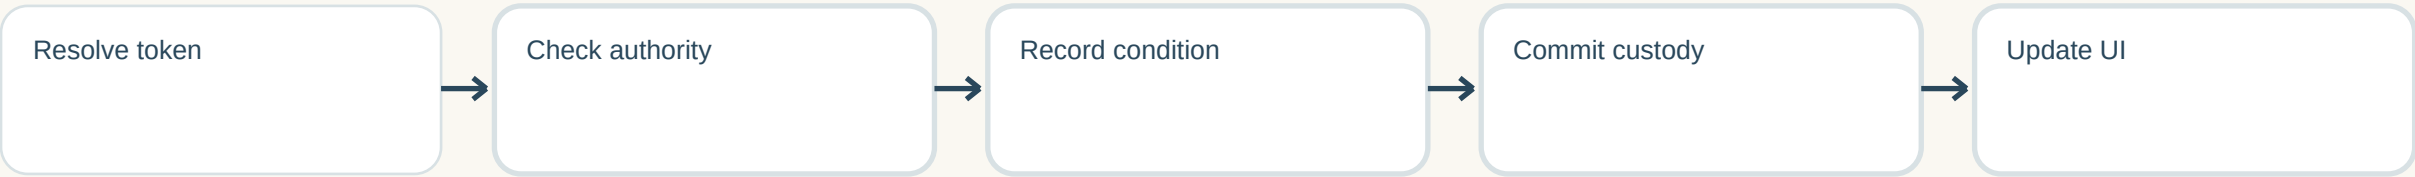

Courier dispatch and location pipeline

DISPATCH ELIGIBILITY

Query approved courier, transport mode, campus coverage, capacity and current assignments. Ordinary product dispatch requires hub receipt. Food allows dispatch after payment with direct seller pickup. Offer acceptance locks delivery/assignment and uses unique active assignment protection.

LOCATION INGESTION

Accept sequence, timestamp, latitude, longitude and accuracy only from the assigned active courier. Rate-limit, validate ranges, reject stale/out-of-order samples and detect implausible jumps for review. Store latest location separately from custody. Retain detailed traces only under an approved retention policy.

CLIENT DELIVERY

Authorise each order subscription. Send minimal location updates with version and sample age. Client interpolates between known samples, stops following after map panning and displays stale status. A reconnect fetches the latest snapshot. Expo background location requires platform permissions/configuration and can be interrupted by OS lifecycle [D11].

MAPS ADAPTER

Use a maps/geocoding/routing provider chosen after South African coverage and cost testing. Restrict client keys by app/domain; keep server routing secrets private. Build address lookup, route estimate and reverse-geocode interfaces. ETA is an estimate with last-update time, never a guaranteed promise.

Food and failed-delivery recovery

FOOD WAITING

After payment, dispatch may proceed while food prepares. Courier waits within the configured 10-15-minute policy before eligible release/rematch. A timer job re-checks current state and does not blindly cancel an already-collected order. Food does not inherit ordinary hub storage rules.

BUYER UNAVAILABLE

Courier records arrival and attempt according to policy, waits 10-15 minutes, then requests return. Ordinary parcel return is a new custody transition to hub, not an automatic marker reversal. The hub records condition and starts the configured 48-hour collection window.

ESCALATION

On uncollected expiry, open seller recollection and any approved handling-fee workflow. Food/perishables require their own approved disposition/refund rules. Damage, unsafe conditions and recipient mismatches open support cases. Never tell a courier to leave goods unattended without a specifically authorised policy.

TEST TRANSITIONS

Cover buyer returns during timeout, courier loses signal, seller finishes food just as courier releases, hub rejects returned package, duplicate timeout jobs and payment refund pending. Every timer has a database deadline, cancellation/version guard and recovery route.

Cross-campus transfers and manifests

PLANNING

Maintain three configurable daily transfer windows per participating route. Prefer approved institutional transport; student overflow requires opt-in and eligible vehicle mode. Do not assign bulk transfer to a walking/bicycle courier where policy forbids it.

MANIFEST LOCK

Build a draft manifest with exact package IDs, source/destination hubs and assigned transport. Lock before dispatch. Origin scans must reconcile the exact expected set. After locking, edits require an explicit versioned amendment and revalidation; no silent additions.

DESTINATION

Record arrival; scan the same package set and receiving conditions. Missing, unexpected or damaged packages create an exception with evidence. Equal counts alone are insufficient. Publish delivery-to-local-hub readiness only for packages actually received.

ALLOCATION RELEASE

A discrepancy triggers the defined payout hold. Review can isolate disputed package allocations and release unaffected allocations with an audit trail. Route staff do not directly mutate wallet balances; they submit evidence to the eligible release process.

Uploads, messaging and notifications

MEDIA PIPELINE

Issue short-lived signed upload URLs after permission and quota checks. Write into a quarantine bucket; inspect content type, size and malware; strip unnecessary metadata; generate safe thumbnails; promote only approved public listing media. Identity and dispute evidence remain private with retention and deletion rules.

MESSAGING

Create conversations scoped to order/booking/support participation. Persist message and outbox event in one transaction. Use `client_message_id` for deduplication. Attachments share the safe upload pipeline. Delivered and read receipts are separate optional events with clear semantics.

PUSH AND EMAIL

Outbox workers enqueue push/email according to user preferences and transactional necessity. Push payloads contain minimal identifiers, not private evidence or PINs. Deep links authenticate then re-check access. Rotate invalid push tokens and record delivery outcome without treating push delivery as user acknowledgement.

ABUSE CONTROLS

Rate-limit messages/uploads, allow reporting/blocking subject to order support obligations, moderate public material and log provider failures. A client cannot send an arbitrary push to another user ID. Calls need a separate approved masked-calling integration; the prototype call button is not an implemented telephony service.

Incubation intelligence and human review

READ-SIDE EVIDENCE

Derive demand, conversion, fulfilment and support metrics from approved operational events. Document metric definitions, lookback windows, exclusions and freshness. Use campus-scoped staff permissions. Avoid treating missing activity as a proven business failure.

INTERNAL VERSUS SHARED

Internal business health components remain staff-only. Seller responses contain practical guidance, their own performance and accepted plan tasks. Direct contact respects seller opt-in. Support invitation, acceptance, active plan and closure are distinct states.

AI WORKFLOW

Optional AI consumes minimised, authorised evidence and produces a draft recommendation with evidence IDs, confidence/limitations and model/prompt version. Treat uploaded text as untrusted input. AI cannot approve plans, change fees, release payouts, grant roles or contact sellers without a human-authorised action.

30-DAY PLAN

Staff drafts goals, baseline, owner, tasks and review dates. Review approves an invitation; seller participation activates shared tasks. Milestone completion includes evidence and reviewer where required. Keep reversals/revisions in plan history; reporting separates proposed interventions from accepted and completed outcomes.

Disputes, moderation and audit

CASE LIFECYCLE

Open -> triaged -> evidence requested -> under review -> decision proposed -> approved/executed -> appeal/closed. Model commercial and safety severity separately. Freeze only allocations or privileges justified by case policy. Return understandable participant status without disclosing another party's private evidence.

DECISION EXECUTION

A moderation decision records reason, policy version, evidence IDs, actor and affected resources. Financial outcomes call payment/ledger commands; they cannot update a balance directly. High-risk decisions require a second approver and recent MFA.

AUDIT INTEGRITY

Append audit records with correlation ID, actor membership, action, subject, prior/new version and time. Redact secrets and sensitive payload bodies. Restrict deletion and export. Consider tamper-evident storage for required audit trails once retention and assurance needs are agreed.

APPEALS AND ACCESS CHANGES

Participant appeal O08 uses a user-facing view, not the staff queue. Revoking staff access terminates subscriptions/sessions and invalidates cached protected data. Deletion requests track workflow and any approved retention obligations rather than instantly deleting ledger history.

Realtime, outbox and background jobs

OUTBOX TRANSACTION

Every protected mutation inserts domain changes and outbox record in one PostgreSQL transaction. Worker claims records safely, publishes with event_id and retries on failure. Consumers maintain dedupe records. Do not promise exactly-once network delivery; design at-least-once delivery with idempotent effects.

EVENT ENVELOPE

Include event_id, type, schema_version, aggregate_id, aggregate_version, occurred_at and minimal permitted payload. Clients reject older versions; gaps trigger a fresh snapshot. Access-check each subscription and re-check on role revocation or assignment change.


JOBS

Use deterministic job identity for reminders, expiries, refunds, reconciliation and notification attempts. BullMQ recommends retry-safe idempotent job design [D7]. A worker crash after provider success must reconcile before repeating a payout or refund.

OPERATIONS

Track queue age, failed attempts and dead-letter items. Use exponential backoff with jitter and provider rate limits. Staff replay tools display original command/effect and require authorisation. A database sweeper finds expired holds and unsent outbox rows after Redis outages.

IMPLEMENTATION FLOW

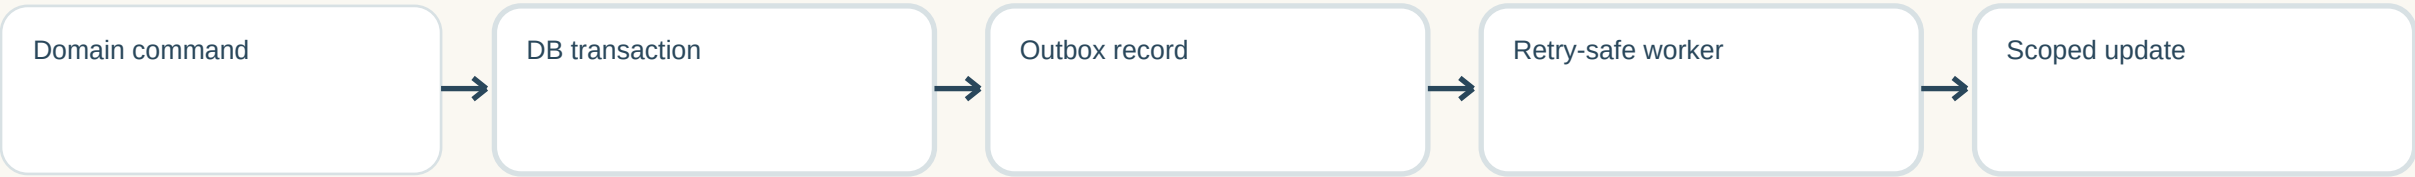

Offline behaviour and recovery

ALLOWED OFFLINE

Permit reading labelled cached catalogues and owned order summaries, safe local draft editing and non-binding basket changes. Show cache timestamp and network state. Minimise cached personal data; clear on logout and account switch.

BLOCKED OFFLINE

Do not finalise payment, accept seller/courier offers, validate recipient PINs, confirm custody, approve refunds or grant staff access offline. A captured scan can be shown as unverified pending input, never completed custody. High-risk commands require fresh state after reconnect.

RECONNECT PROTOCOL

Refresh session, re-check membership, fetch relevant snapshot, compare resource version, reconcile uncertain command by idempotency key, then allow another action. Do not replay an entire offline queue of irreversible commands automatically.

CONFLICT UX

If price, availability, recipient, assignment or policy changed, show old/new values and require review. Preserve safe form values. Return to the named recovery screen in the atlas. Reduced motion and offline mode are independent settings.

Security engineering and threat tests

ABUSE CASES

Prioritise cross-account order access, forged staff role, replayed QR/PIN, double offer acceptance, duplicate webhook, payout destination takeover, malicious uploads and cross-campus data leakage. Write integration tests for each rather than relying only on UI role hiding.

CONTROLS

Schema validation, parameterised SQL, route/object authorisation, per-action rate limits, secure secret storage, TLS, restricted CORS, CSRF protection for cookies, output encoding, upload quarantine and least-privilege service accounts. Never put service-role, signing or payment secrets in public environment variables.

OPERATIONAL RESPONSE

Rotate compromised keys; invalidate sessions; pause affected provider adapter/commands via audited feature flags; reconcile money/custody records; retain incident evidence with restricted access. A kill switch blocks new risky actions while preserving status reads and support routes.

VERIFICATION GATE

Run dependency and secret scans, static analysis, API abuse tests, authorised penetration testing and restore drills. Conduct a privacy/security review against the actual deployment before launch. This document does not certify legal compliance or system security.

Testing strategy and release evidence

UNIT AND MODEL TESTS

Test pure transition functions, fee calculations, eligibility, permission predicates and motion preference resolution. Property tests assert balanced journals, no negative available inventory and immutable accepted quote totals. Use controlled clocks for expiries.

INTEGRATION TESTS

Use real PostgreSQL/PostGIS and Redis in isolated test environments. Test concurrent accepts/withdrawals, booking overlaps, webhook replay, outbox crash/retry, exact manifest sets and partial provider outages. Mocks alone cannot prove locking or SQL constraints.

END-TO-END

Use Playwright for web and a native test runner such as Maestro for mobile after validating the selected tool versions. Cover registration, direct purchase, matching, food, service, hub scan, courier PIN, failed delivery, dispute and incubation invitation. Seed fake users per role and include denied-access paths.

VISUAL AND ACCESSIBILITY

Test each shared component at narrow/wide viewports, large text, keyboard and screen reader. Compare critical screens with atlas references. Run motion with system Reduce Motion and in-app setting. W3C describes disabling non-essential interaction animation [D13]. Manual review remains necessary for gestures and reading order.

Performance, telemetry and reliability

PROPOSED PILOT OBJECTIVES

Target API p95 under 500 ms for first-party reads and 800 ms for simple mutations, excluding provider completion; validate under agreed pilot load. Keep first usable screen under 3 seconds on the chosen mid-range device/network. These are acceptance targets, not measured guarantees.

OBSERVABILITY

Propagate correlation IDs through API, jobs and provider requests. Monitor error rate, latency, outbox lag, queue age, payment mismatch, failed custody, stale tracking, notification failures and crash-free sessions. Never record raw credentials, PINs or identity document content in telemetry.

SLO AND INCIDENT RESPONSE

Agree availability and recovery targets with the pilot team; proposed starting targets are 99.5% monthly API availability, RPO 15 minutes and RTO 4 hours only if the selected backup/deployment plan can meet them. Test and revise before committing externally.

LOAD MODEL

Record active users, peak requests, concurrent tracking subscriptions, scans per minute and media volume. Load-test realistic order journeys and bursts at class breaks. Render expensive 3D only on explicit request, stop when hidden and measure frame time and battery impact on real devices.

CI/CD, hosting and disaster recovery

PULL REQUEST GATES

Lint, typecheck, unit tests, database integration tests, contract generation diff, dependency/secret scan and affected E2E journeys. Require review for auth, money, custody and schema changes. Build immutable container images tagged with commit SHA.

DEPLOYMENT ORDER

Apply backward-compatible migrations, deploy worker/API capable of old/new schemas, deploy web/mobile clients, backfill and observe, then remove obsolete schema in a later release. Mobile clients may lag for weeks; keep API compatibility and minimum-supported-client policy explicit.

ENVIRONMENTS AND SECRETS

Separate staging and production credentials and webhook URLs. Grant deployments short-lived infrastructure credentials where supported. Restrict console access with MFA. Pin lockfiles and images, set health/readiness probes and run release smoke tests against sandbox accounts.

BACKUP AND ROLLBACK

Enable provider-supported database backups/PITR and private-object backup strategy. Rehearse restore to isolated environment and reconcile provider financial records after recovery. Roll back code/feature flags first; do not assume a destructive schema migration can safely be reversed.

Implementation sequence and definition of done

STAGE 1 - FOUNDATION

Build repository, environments, Auth, memberships, design tokens, reusable forms, error envelope, migrations and observability. Deliver A01-A09, U01-U06 and a seeded buyer catalogue with object-authorisation tests. Gate: fresh clone and staging deploy are repeatable.

STAGE 2 - COMPLETE PRODUCT JOURNEY

Implement listing, inventory, quote, atomic seller acceptance, sandbox payment, hub receipt, courier assignment, scan/condition/PIN, buyer confirmation and ledger eligibility. Gate: one complete cross-role E2E with concurrency and failure tests; no demo success buttons remain.

STAGE 3 - OPERATIONAL BREADTH

Add food and service variants, transfer manifests, disputes/refunds, withdrawals, notifications, incubation and finance operations. Gate each domain on provider capability and staff procedure. Build functional motion as components ship; add optional 3D only after usable flows are stable.

STAGE 4 - EXTENSIONS AND LAUNCH

Rentals, digital goods, events, group orders and recurring services are feature-flagged extensions. Run privacy/security/accessibility review, load/restore tests and staffed pilot rehearsal. Done means approved screen, contract, state guards, logs, tests, runbook and real integration outcome; visual completion alone is not done.

Extensions: architecture without premature rollout

RENTALS AND DIGITAL

Rentals require asset availability, reservation, deposit capability, check-out/in condition and overdue/dispute policy; do not reuse ordinary product completion. Digital goods need entitlement issuance after confirmed payment, private authorised downloads, malware checks and a defined refund/revocation policy.

EVENTS AND OPPORTUNITIES

Tickets need unique entitlement, capacity reservation and idempotent check-in. Applications expose applicant evidence only to approved organisers. Public stories use the media/moderation pipeline. Recognition should be based on approved measurable rules rather than private staff scores.

GROUP AND RECURRING

Group orders need participant consent, funded shares, cut-off and partial-failure policy before committing inventory. Recurring services need explicit schedule and payment mandate/provider support with easy cancellation. Do not infer future payment consent from a one-time purchase.

GATE

Appendix X01-X15 and rental/digital pages are design coverage, not a promise that every extension launches in the first release. Keep unsupported features hidden. Add domain-specific contracts and tests before enabling a flag.

Handoff checklist and unresolved decisions

DESIGNER TO ENGINEER

Provide approved vector logo, font licences, colour/spacing tokens, component variants, responsive layouts and motion asset source. Keep UI screen IDs in design frames. For every action specify trigger, enabled state, payload, success destination, error/recovery and reduced-motion variant.

ENGINEER TO REVIEWER

Provide preview builds, API docs, database migration diff, sandbox integration evidence, cross-role tests, threat model and operational runbooks. Demonstrate denied access and duplicate command outcomes as well as happy paths. Verify actual asset sizes, latency and motion performance rather than treating target budgets as results.

OUTSTANDING BUSINESS APPROVALS

Confirm provider and approved money model, category-specific fees, authorisation windows, refunds/disputes, food disposal/return handling, campus integration, transfer authority, retention schedule, app-store digital-goods requirements and support staffing. Assign an owner and decision date to each before its implementation gate.

ARTIFACTS IN THIS PACKAGE

Motion PDF and interactive HTML; developer PDF; motion.json; screen-implementation-map.json and CSV; illustrative acceptance transaction SQL; OpenAPI acceptance fragment; documentation/build source. No paid provider account, deployment, production database or real integration was created.

Official documentation

Checked 22 September 2026. Architecture choices and budgets are project proposals; vendor documentation supports the named capabilities.

D1 / EXPO ROUTER

<https://docs.expo.dev/router/introduction/>

D2 / REANIMATED ACCESSIBILITY

<https://docs.swmansion.com/react-native-reanimated/docs/guides/accessibility/>

D3 / THREE.JS MANUAL

<https://threejs.org/manual/>

D4 / NESTJS AUTHENTICATION

<https://docs.nestjs.com/security/authentication>

D5 / SUPABASE JWT VERIFICATION

<https://supabase.com/docs/guides/auth/jwts>

D6 / POSTGRESQL EXPLICIT LOCKING

<https://www.postgresql.org/docs/current/explicit-locking.html>

D7 / BULLMQ IDEMPOTENT JOBS

<https://docs.bullmq.io/patterns/idempotent-jobs>

Official documentation

Checked 22 September 2026. Architecture choices and budgets are project proposals; vendor documentation supports the named capabilities.

D8 / NEXT.JS SERVER/CLIENT COMPONENTS

<https://nextjs.org/docs/app/getting-started/server-and-client-components>

D9 / SUPABASE API SECURITY

<https://supabase.com/docs/guides/api/securing-your-api>

D10 / EXPO CAMERA

<https://docs.expo.dev/versions/latest/sdk/camera/>

D11 / EXPO LOCATION

<https://docs.expo.dev/versions/latest/sdk/location/>

D12 / EXPO SECURESTORE

<https://docs.expo.dev/versions/latest/sdk/securestore/>

D13 / W3C ANIMATION FROM INTERACTIONS

<https://www.w3.org/WAI/WCAG22/Understanding/animation-from-interactions.html>

Screen-by-screen implementation contracts

177 records follow. Pair each page with its matching wireframe in the UI/UX atlas.

INTERPRETATION

Each page preserves the screen purpose, fields, representative domain contract, exact button destination/effect and key recovery rules. Contracts are proposed and must be expanded into route-specific DTOs and tests before implementation.

PROTOTYPE VERSUS PRODUCTION

Any action labelled DEMO must be replaced with a genuine authorised event or external integration. Do not ship preview-success controls or role-hopping walkthrough buttons. Navigation destinations in the atlas describe UX continuity, not an authorisation grant.

DEFINITION OF READY

Engineer supplies request/response schema, ownership checks, allowed states, data transaction, outbox event, idempotency scope and error codes for each mutation. Designer verifies loading/empty/offline/denied layouts and motion. QA tests stale versions, repeats and cross-user access.

Welcome to Vossie

Identity | /access/a01

PURPOSE AND UI COMPOSITION

Join your campus marketplace. Render hero layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

users, sessions, verification_requests, memberships. Unauthenticated or pending identity; valid challenge for verification/recovery.

RULES AND SERVER GUARD

Public entry; no order or wallet data is loaded. Restore a valid session to its last authorised workspace. Confirm identity state and permitted membership; never grant authority from a selected client role.

RECOVERY AND STATE HANDLING

Session expired: open login and preserve the intended destination. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M01, M28. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /session
Event proposal: session.resolved
This is the screen anchor, not an endpoint for every action.

01 / LOG IN -> A02

Open existing-account authentication. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / CREATE ACCOUNT -> A03

Start a new student identity. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / STAFF ACCESS -> A11

Open the separate staff entry. Navigation/read: preserve safe route context; re-authorise destination resource.

Welcome back

Identity | /access/a02

PURPOSE AND UI COMPOSITION

Log in to your student account. Render form layout with shared controls.

INPUTS

Email (email); Password (password)

DATA / AUTHORITY

users, sessions, verification_requests, memberships. Unauthenticated or pending identity; valid challenge for verification/recovery.

RULES AND SERVER GUARD

Unverified users route to A05; MFA challenge routes to A09. Never grant a role from a client-side selection. Confirm identity state and permitted membership; never grant authority from a selected client role.

RECOVERY AND STATE HANDLING

Incorrect credentials: remain here with a generic error; throttle repeated failures. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M02. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /auth/login
Event proposal: auth.signed_in
This is the screen anchor, not an endpoint for every action.

01 / LOG IN -> B01

Validate credentials; restore session and verified buyer workspace. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / USE A PASSKEY -> A10

Open device credential sign-in. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / FORGOT PASSWORD -> A07

Start recovery without revealing account existence. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

04 / CREATE ACCOUNT -> A03

Open registration. Navigation/read: preserve safe route context; re-authorise destination resource.

Create your account

Identity | /access/a03

PURPOSE AND UI COMPOSITION

One identity for buying, selling and delivering. Render form layout with shared controls.

INPUTS

Full name (text); Student email (email); Password (password); Accept terms and privacy notice (checkbox)

DATA / AUTHORITY

users, sessions, verification_requests, memberships. Unauthenticated or pending identity; valid challenge for verification/recovery.

RULES AND SERVER GUARD

Required fields; trim email, validate syntax and configured credential policy. Marketing consent is separate and optional. Confirm identity state and permitted membership; never grant authority from a selected client role.

RECOVERY AND STATE HANDLING

Email cannot be used: show a neutral recovery option; keep non-secret entered data. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M02. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /auth/register
Event proposal: auth.verification_sent
This is the screen anchor, not an endpoint for every action.

01 / CREATE ACCOUNT -> A04

Create pending identity and send verification challenge. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / ALREADY REGISTERED -> A02

Return to login. Navigation/read: preserve safe route context; re-authorise destination resource.

Verify your email

Identity | /access/a04

PURPOSE AND UI COMPOSITION

Enter the code sent to your student email. Render form layout with shared controls.

INPUTS

Verification code (text)

DATA / AUTHORITY

users, sessions, verification_requests, memberships. Unauthenticated or pending identity; valid challenge for verification/recovery.

RULES AND SERVER GUARD

Code tied to pending identity; rate-limit attempts and resends. Autofill/paste supported. Confirm identity state and permitted membership; never grant authority from a selected client role.

RECOVERY AND STATE HANDLING

Expired or invalid code: explain retry; never advance until verification succeeds. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M02. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /auth/email/verify
Event proposal: auth.email_verified
This is the screen anchor, not an endpoint for every action.

01 / VERIFY EMAIL -> A05

Verify single-use code; continue student-status check. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / RESEND CODE -> A04

Invalidate the previous challenge and show a new expiry. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / CHANGE EMAIL -> A03

Return to registration details. Navigation/read: preserve safe route context; re-authorise destination resource.

Verify student status

Identity | /access/a05

PURPOSE AND UI COMPOSITION

Confirm your campus membership. Render form layout with shared controls.

INPUTS

Campus (select); Student number (text); Proof of enrolment (file)

DATA / AUTHORITY

users, sessions, verification_requests, memberships. Unauthenticated or pending identity; valid challenge for verification/recovery.

RULES AND SERVER GUARD

Only request documentary proof when institution status integration is unavailable. Student number is never public. Confirm identity state and permitted membership; never grant authority from a selected client role.

RECOVERY AND STATE HANDLING

Unsupported document or status mismatch: identify the field and allow resubmission. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M02. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /verification/student

Event proposal: verification.submitted

This is the screen anchor, not an endpoint for every action.

01 / SUBMIT VERIFICATION -> A06

Send status request to the approved identity process. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / BACK -> A04

Return without publishing identity data. Navigation/read: preserve safe route context; re-authorise destination resource.

Verification status

Identity | /access/a06

PURPOSE AND UI COMPOSITION

Track your application and next step. Render status layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

users, sessions, verification_requests, memberships. Unauthenticated or pending identity; valid challenge for verification/recovery.

RULES AND SERVER GUARD

Pending, verified, action required and rejected variants. Only the server verification outcome unlocks buying. Confirm identity state and permitted membership; never grant authority from a selected client role.

RECOVERY AND STATE HANDLING

Review needs more information: show reason and precise evidence request. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M02. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /verification/me

Event proposal: verification.updated

This is the screen anchor, not an endpoint for every action.

01 / PREVIEW APPROVED ACCOUNT -> B01 / DEMO

Demo: simulate verified status and unlock buying. Replace demo trigger with authorised event; no production success override.

02 / UPDATE EVIDENCE -> A05

Resubmit requested information. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / GET HELP -> U12

Open verification support. Navigation/read: preserve safe route context; re-authorise destination resource.

Recover your account

Identity | /access/a07

PURPOSE AND UI COMPOSITION

We will send recovery instructions if an account exists. Render form layout with shared controls.

INPUTS

Email (email)

DATA / AUTHORITY

users, sessions, verification_requests, memberships. Unauthenticated or pending identity; valid challenge for verification/recovery.

RULES AND SERVER GUARD

Same response for existing and unknown accounts. The next screen is opened from a valid recovery link in production. Confirm identity state and permitted membership; never grant authority from a selected client role.

RECOVERY AND STATE HANDLING

Rate limited: show cooldown; never reveal whether the email is registered. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M02. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /auth/recovery
Event proposal: auth.recovery_requested
This is the screen anchor, not an endpoint for every action.

01 / SEND RECOVERY LINK -> A08

Send a time-limited recovery challenge. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / BACK TO LOGIN -> A02

Return to authentication. Navigation/read: preserve safe route context; re-authorise destination resource.

Set a new password

Identity | /access/a08

PURPOSE AND UI COMPOSITION

Choose a new password for your account. Render form layout with shared controls.

INPUTS

New password (password); Confirm password (password)

DATA / AUTHORITY

users, sessions, verification_requests, memberships. Unauthenticated or pending identity; valid challenge for verification/recovery.

RULES AND SERVER GUARD

Require valid, unused recovery token and matching passwords. Notify account owner after a change. Confirm identity state and permitted membership; never grant authority from a selected client role.

RECOVERY AND STATE HANDLING

Expired link: block reset and offer another link. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M02. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /auth/recovery/complete
Event proposal: auth.password_changed
This is the screen anchor, not an endpoint for every action.

01 / RESET PASSWORD -> A02

Consume recovery token and revoke appropriate sessions. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / REQUEST ANOTHER LINK -> A07

Replace an expired challenge. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Confirm it is you

Identity | /access/a09

PURPOSE AND UI COMPOSITION

Complete verification to continue securely. Render form layout with shared controls.

INPUTS

Authentication code (text)

DATA / AUTHORITY

users, sessions, verification_requests, memberships. Unauthenticated or pending identity; valid challenge for verification/recovery.

RULES AND SERVER GUARD

Return to the original pending action, not always Account. Demo defaults to Account; staff challenges return to staff landing. Confirm identity state and permitted membership; never grant authority from a selected client role.

RECOVERY AND STATE HANDLING

Invalid challenge: keep action locked; enforce attempt limits and recovery. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M02. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /auth/challenge/verify
Event proposal: auth.step_up_completed
This is the screen anchor, not an endpoint for every action.

01 / VERIFY -> U01

Verify challenge and resume the stored intended action. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / USE RECOVERY METHOD -> A07

Open account recovery. Navigation/read: preserve safe route context; re-authorise destination resource.

Sign in with a passkey

Identity | /access/a10

PURPOSE AND UI COMPOSITION

Use a saved device credential. Render status layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

users, sessions, verification_requests, memberships. Unauthenticated or pending identity; valid challenge for verification/recovery.

RULES AND SERVER GUARD

Enrollment belongs in Security. Unsupported devices must retain password/recovery access. Confirm identity state and permitted membership; never grant authority from a selected client role.

RECOVERY AND STATE HANDLING

Prompt cancelled or no credential: offer retry and password login. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M02. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /auth/passkey/verify
Event proposal: auth.passkey_verified
This is the screen anchor, not an endpoint for every action.

01 / CONTINUE WITH DEVICE -> B01 / DEMO

Demo: simulate credential success; production invokes device credential prompt. Replace demo trigger with authorised event; no production success override.

02 / USE PASSWORD -> A02

Use alternative authentication. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Staff sign-in

Identity | /access/a11

PURPOSE AND UI COMPOSITION

Access your assigned operations workspace. Render form layout with shared controls.

INPUTS

Work email (email); Password (password)

DATA / AUTHORITY

users, sessions, verification_requests, memberships. Unauthenticated or pending identity; valid challenge for verification/recovery.

RULES AND SERVER GUARD

Staff permissions are assigned, never self-selected. MFA/passkey and scoped campus access required. Confirm identity state and permitted membership; never grant authority from a selected client role.

RECOVERY AND STATE HANDLING

No staff assignment: explain access request process without exposing other workspaces. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /auth/staff/login
Event proposal: auth.staff_challenge_required
This is the screen anchor, not an endpoint for every action.

01 / CONTINUE -> A09

Challenge staff identity; resume assigned staff module. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / BACK -> A01

Return to public entry. Navigation/read: preserve safe route context; re-authorise destination resource.

Account access restricted

Identity | /access/a12

PURPOSE AND UI COMPOSITION

Review the reason and your available options. Render status layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

users, sessions, verification_requests, memberships. Unauthenticated or pending identity; valid challenge for verification/recovery.

RULES AND SERVER GUARD

Restriction does not remove access to appeal or necessary existing-order support. Public listings follow separate content states. Confirm identity state and permitted membership; never grant authority from a selected client role.

RECOVERY AND STATE HANDLING

Missing case access: return a safe support reference, not another user's record. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /account/restriction
Event proposal: account.restriction_updated
This is the screen anchor, not an endpoint for every action.

01 / VIEW CASE -> U13

Open the permitted case record. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / SUBMIT APPEAL -> O08

Open the student appeal form. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / GET HELP -> U12

Open restricted-account support. Navigation/read: preserve safe route context; re-authorise destination resource.

Your account

Account and communication | /shared/u01

PURPOSE AND UI COMPOSITION

Manage your profile, money and preferences. Render menu layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Same identity across roles. Staff modules appear only with staff grants. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

Expired session: reauthenticate and resume Account. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M04. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /me
Event proposal: account.viewed
This is the screen anchor, not an endpoint for every action.

01 / SWITCH ROLE -> U02

Open only eligible modes. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / EDIT PROFILE -> U03

Edit public profile fields. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / WALLET -> U16

Open your balances. Navigation/read: preserve safe route context; re-authorise destination resource.

04 / INBOX -> U09

Open conversations. Navigation/read: preserve safe route context; re-authorise destination resource.

05 / SETTINGS -> U14

Open security and preferences. Navigation/read: preserve safe route context; re-authorise destination resource.

06 / HELP -> U12

Open support. Navigation/read: preserve safe route context; re-authorise destination resource.

Choose your workspace

Account and communication | /shared/u02

PURPOSE AND UI COMPOSITION

Use the right tools for what you want to do. Render menu layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Prototype exposes roles for review. Production checks role and campus grants before loading any data. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

Role removed during session: clear restricted data and return here. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M05. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /me/roles
Event proposal: workspace.changed
This is the screen anchor, not an endpoint for every action.

01 / SHOP -> B01

Switch navigation to buyer mode. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / SELL -> S01

Open activation or seller home if already eligible. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / DELIVER -> C01

Open activation or courier home if approved. Navigation/read: preserve safe route context; re-authorise destination resource.

04 / INCUBATION -> I01 / DEMO

Demo staff workspace; production requires staff grant. Replace demo trigger with authorised event; no production success override.

05 / HUB OPERATIONS -> H01 / DEMO

Demo hub workspace; production requires staff grant. Replace demo trigger with authorised event; no production success override.

06 / OPERATIONS -> O01 / DEMO

Demo operations workspace; production requires assigned module. Replace demo trigger with authorised event; no production success override.

Edit profile

Account and communication | /shared/u03

PURPOSE AND UI COMPOSITION

Choose what your campus community sees. Render form layout with shared controls.

INPUTS

Display name (text); Bio (textarea); Profile photo (file)

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Display name cannot alter verified legal identity. Media passes upload checks before public use. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

Image fails checks: retain prior photo and explain replacement. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

PATCH /me/profile
Event proposal: profile.updated
This is the screen anchor, not an endpoint for every action.

01 / SAVE PROFILE -> U01

Validate and save public profile. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / CAMPUS -> U04

Change browsing campus. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / ADDRESSES -> U05

Manage private delivery locations. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Choose campus

Account and communication | /shared/u04

PURPOSE AND UI COMPOSITION

See relevant availability and fulfilment. Render form layout with shared controls.

INPUTS

Campus (select)

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Changing campus invalidates old delivery quotes, not existing paid orders. Ask before clearing incompatible basket items. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

Campus unavailable: retain previous selection. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M08. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

PATCH /me/campus

Event proposal: campus.changed

This is the screen anchor, not an endpoint for every action.

01 / USE THIS CAMPUS -> B01

Update discovery scope and re-evaluate eligible offers. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / CANCEL -> U01

Keep current campus. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Saved locations

Account and communication | /shared/u05

PURPOSE AND UI COMPOSITION

Choose a delivery point you can access. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Addresses are private and scoped to the owner. Show only approved handoff areas as campus defaults. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

Location outside eligible zone: explain available collection choices. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M08. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /me/addresses
Event proposal: addresses.loaded
This is the screen anchor, not an endpoint for every action.

01 / ADD LOCATION -> U06

Create a private delivery location. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / EDIT LOCATION -> U06

Load the selected address. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / USE FOR ORDER -> B09

Return selected location to fulfilment. Navigation/read: preserve safe route context; re-authorise destination resource.

Delivery location

Account and communication | /shared/u06

PURPOSE AND UI COMPOSITION

Set a clear meeting point. Render form layout with shared controls.

INPUTS

Label (text); Building or address (text); Handoff instructions (textarea); Use precise location for this order (checkbox)

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Manual entry remains possible without GPS permission. Validate service boundary and access instructions. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

GPS denied: keep manual fields active; do not repeatedly prompt. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M08. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /me/addresses
Event proposal: address.saved
This is the screen anchor, not an endpoint for every action.

01 / SAVE LOCATION -> U05

Validate location and store owner-scoped address. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / CHOOSE CAMPUS PICKUP -> B09

Use a designated pickup point instead. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Notifications

Account and communication | /shared/u07

PURPOSE AND UI COMPOSITION

Updates that help you act at the right time. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Deep links resolve current state, not stale message state. Mark read only after opening. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

Deleted or inaccessible target: explain and link to Activity. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M22. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /notifications
Event proposal: notification.opened
This is the screen anchor, not an endpoint for every action.

01 / OPEN ORDER -> B14

Resolve order notification to current authorised state. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / OPEN PLAN -> S22

Open the seller plan. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / PREFERENCES -> U08

Change optional notification choices. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Notification preferences

Account and communication | /shared/u08

PURPOSE AND UI COMPOSITION

Choose how optional updates reach you. Render form layout with shared controls.

INPUTS

Order push updates (checkbox); Discovery updates (checkbox); Email newsletters (checkbox); Quiet hours (text)

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Explain essential vs optional notices. OS push permission is separate from account preferences. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

Push blocked by device: offer system-setting guidance without changing other preferences. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M22. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

PATCH /notification-preferences
Event proposal: preferences.updated
This is the screen anchor, not an endpoint for every action.

01 / SAVE PREFERENCES -> U01

Persist channel choices. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / BACK -> U07

Return to notifications. Navigation/read: preserve safe route context; re-authorise destination resource.

Inbox

Account and communication | /shared/u09

PURPOSE AND UI COMPOSITION

Keep marketplace conversations attached to context. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Only participants and authorised case reviewers can access a thread. Block/report options remain available. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

No messages: link to an order or seller profile to start a contextual conversation. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M22. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /conversations
Event proposal: inbox.loaded
This is the screen anchor, not an endpoint for every action.

01 / OPEN CONVERSATION -> U10

Load selected thread and authorised participants. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / NOTIFICATIONS -> U07

Open activity alerts. Navigation/read: preserve safe route context; re-authorise destination resource.

Order conversation

Account and communication | /shared/u10

PURPOSE AND UI COMPOSITION

VM-1042 · Campus Kitchen Render chat layout with shared controls.

INPUTS

Message (textarea)

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Keep failed messages visibly unsent with retry. Do not expose private phone numbers. Attachments require scanning. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

Offline: retain draft and mark unsent; retry without duplicate messages. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M22. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /conversations/{id}/messages
Event proposal: message.created
This is the screen anchor, not an endpoint for every action.

01 / SEND -> U10 / DEMO

Append a demo message; production sends once with message ID. Replace demo trigger with authorised event; no production success override.

02 / VIEW ORDER -> B14

Open the linked order. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / CALL -> U11

Start an order-scoped call. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

04 / REPORT CONVERSATION -> B21

Attach thread reference to a report. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Call participant

Account and communication | /shared/u11

PURPOSE AND UI COMPOSITION

Call through your active order. Render status layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Call availability ends with policy-defined order access. No public raw phone numbers. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

Call unavailable: offer chat and order support. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M22. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /orders/{id}/call-session
Event proposal: call.session_created
This is the screen anchor, not an endpoint for every action.

01 / START DEMO CALL -> U11 / DEMO

Show simulated call state; production uses approved calling provider. Replace demo trigger with authorised event; no production success override.

02 / END CALL -> U10

Return to the thread. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / USE CHAT -> U10

Continue by text. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

How can we help?

Account and communication | /shared/u12

PURPOSE AND UI COMPOSITION

Choose the order or account issue. Render menu layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Do not require a completed order to report login or verification problems. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

No order found: allow account-level support reference. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /support/topics
Event proposal: support.opened
This is the screen anchor, not an endpoint for every action.

01 / ORDER PROBLEM -> B21

Open order-scoped report form. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / TRACK A CASE -> U13

Open your existing case. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / SECURITY SETTINGS -> U14

Manage account access. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Support case

Account and communication | /shared/u13

PURPOSE AND UI COMPOSITION

CASE-218 · We have your request. Render timeline layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Show owner, status, requested action and timestamp. Do not expose internal reviewer notes. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

Upload failed: preserve text and retry only the failed evidence file. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /support/cases/{id}
Event proposal: case.updated
This is the screen anchor, not an endpoint for every action.

01 / ADD INFORMATION -> B21

Append evidence to this case. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / OPEN RELATED ORDER -> B14

Show order context. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / BACK TO HELP -> U12

Return to support topics. Navigation/read: preserve safe route context; re-authorise destination resource.

Security and settings

Account and communication | /shared/u14

PURPOSE AND UI COMPOSITION

Control access to your account. Render menu layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Sensitive changes require step-up. Sign-out clears cached private data; other sessions can be revoked separately. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

Session revocation failed: keep warning until server confirms. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /me/security
Event proposal: security.viewed
This is the screen anchor, not an endpoint for every action.

01 / SET UP PASSKEY -> A10 / DEMO

Demo credential flow; production enrolls after step-up. Replace demo trigger with authorised event; no production success override.

02 / CHANGE PASSWORD -> A07

Begin secure recovery/change flow. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / ACTIVE SESSIONS -> U23

Inspect and revoke recognised sessions. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

04 / NOTIFICATION PREFERENCES -> U08

Open channel settings. Navigation/read: preserve safe route context; re-authorise destination resource.

05 / PRIVACY -> U15

Open data controls. Navigation/read: preserve safe route context; re-authorise destination resource.

06 / SIGN OUT -> A02

Confirm and revoke current session. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Privacy controls

Account and communication | /shared/u15

PURPOSE AND UI COMPOSITION

Manage your information and participation. Render form layout with shared controls.

INPUTS

Optional analytics (checkbox); Allow incubation contact (checkbox)

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Export and deletion are different actions. Resume the exact pending action after verification; explain any unresolved orders. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

Request already pending: show status instead of creating another request. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /privacy/requests
Event proposal: privacy.requested
This is the screen anchor, not an endpoint for every action.

01 / SAVE CHOICES -> U01

Store separate purpose-specific preferences. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / REQUEST DATA EXPORT -> A09

Verify identity before creating export request. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / REQUEST DELETION -> U24

Verify identity before showing deletion confirmation. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Wallet

Payments and ledger | /shared/u16

PURPOSE AND UI COMPOSITION

Your transaction balances at a glance. Render wallet layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

payment_attempts, provider_events, ledger_journals, ledger_lines, payouts, destinations.
Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Demo values. Spendable and withdrawable may overlap; never add them as separate assets.
Provider-backed capability must be enabled. Provider-confirmed outcome and immutable balanced ledger govern money. Unknown outcomes remain unresolved; retries reuse command identity.

RECOVERY AND STATE HANDLING

Wallet unavailable: show last-update time and hide monetary actions until refreshed. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /wallet
Event proposal: wallet.balance_changed
This is the screen anchor, not an endpoint for every action.

01 / TRANSACTIONS -> U17

Open ledger with balance definitions. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / WITHDRAW -> U18

Start withdrawal from eligible funds. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / PAYOUT DESTINATIONS -> U19

Manage verified destinations. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

04 / PAYOUT STATUS -> U21

Track submitted withdrawal. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Transaction history

Payments and ledger | /shared/u17

PURPOSE AND UI COMPOSITION

See what changed and why. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

payment_attempts, provider_events, ledger_journals, ledger_lines, payouts, destinations.
Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Show direction, gross amount, deductions, net amount, timestamp and stable reference on expanded row. Provider-confirmed outcome and immutable balanced ledger govern money. Unknown outcomes remain unresolved; retries reuse command identity.

RECOVERY AND STATE HANDLING

No records: explain that completed financial events appear here. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /ledger
Event proposal: ledger.loaded
This is the screen anchor, not an endpoint for every action.

01 / VIEW WITHDRAWAL -> U21

Open payout event trail. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / VIEW ORDER -> B14

Open underlying transaction. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / BACK TO WALLET -> U16

Return to balances. Navigation/read: preserve safe route context; re-authorise destination resource.

Withdraw funds

Payments and ledger | /shared/u18

PURPOSE AND UI COMPOSITION

Move eligible funds to a verified destination. Render form layout with shared controls.

INPUTS

Amount in rand (number); Payout destination (select)

DATA / AUTHORITY

payment_attempts, provider_events, ledger_journals, ledger_lines, payouts, destinations.
Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Minimum R50; not above available funds. Show fee, net receipt and provider estimate before final submission. Never promise instant settlement. Provider-confirmed outcome and immutable balanced ledger govern money. Unknown outcomes remain unresolved; retries reuse command identity.

RECOVERY AND STATE HANDLING

Insufficient funds or unverified destination: block and explain. Repeated taps share one withdrawal ID. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M14. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /withdrawals
Event proposal: wallet.withdrawal_requested
This is the screen anchor, not an endpoint for every action.

01 / REVIEW WITHDRAWAL -> U22

Validate amount and destination; open exact fee and net-receipt review; step-up if required. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / CANCEL -> U16

Return without reserving funds. Navigation/read: preserve safe route context; re-authorise destination resource.

Payout destinations

Payments and ledger | /shared/u19

PURPOSE AND UI COMPOSITION

Save up to three verified destinations. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

payment_attempts, provider_events, ledger_journals, ledger_lines, payouts, destinations.
Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Masked details only. Editing is treated as adding a new verified destination, not silently replacing payout data. Provider-confirmed outcome and immutable balanced ledger govern money. Unknown outcomes remain unresolved; retries reuse command identity.

RECOVERY AND STATE HANDLING

Three saved: ask which destination to remove before adding another. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M14. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /payout-destinations
Event proposal: destinations.loaded
This is the screen anchor, not an endpoint for every action.

01 / ADD DESTINATION -> U20

Enter provider-hosted destination setup. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / REMOVE DESTINATION -> A09

Step-up then confirm removal of selected destination. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / BACK -> U16

Return to wallet. Navigation/read: preserve safe route context; re-authorise destination resource.

Verify payout destination

Payments and ledger | /shared/u20

PURPOSE AND UI COMPOSITION

Add a destination securely. Render form layout with shared controls.

INPUTS

Destination label (text); Account-holder name (text); Provider verification reference (text)

DATA / AUTHORITY

payment_attempts, provider_events, ledger_journals, ledger_lines, payouts, destinations.
Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Do not store raw account credentials in this prototype. Successful provider verification must precede eligibility. Provider-confirmed outcome and immutable balanced ledger govern money. Unknown outcomes remain unresolved; retries reuse command identity.

RECOVERY AND STATE HANDLING

Verification mismatch: keep destination unusable and show correction route. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M14. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /payout-destinations/verify
Event proposal: destination.verified
This is the screen anchor, not an endpoint for every action.

01 / VERIFY DESTINATION -> A09

Step-up; then verify through the provider and return to U19. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / CANCEL -> U19

Discard unsubmitted destination. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Withdrawal status

Payments and ledger | /shared/u21

PURPOSE AND UI COMPOSITION

WD-201 · R120.00 requested. Render timeline layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

payment_attempts, provider_events, ledger_journals, ledger_lines, payouts, destinations.
Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Failed payouts release reserved funds only after reconciliation. Processing is not the same as paid.
Provider-confirmed outcome and immutable balanced ledger govern money. Unknown outcomes remain unresolved; retries reuse command identity.

RECOVERY AND STATE HANDLING

Provider timeout: show pending verification; do not submit a second withdrawal. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M14. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /withdrawals/{id}
Event proposal: payout.status_changed
This is the screen anchor, not an endpoint for every action.

01 / REFRESH STATUS -> U21

Fetch current provider-backed status. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / VIEW TRANSACTIONS -> U17

Open immutable financial history. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / GET HELP -> U13

Open a payout support case. Navigation/read: preserve safe route context; re-authorise destination resource.

Good things, on campus

Commerce | /buyer/b01

PURPOSE AND UI COMPOSITION

What do you need today? Render home layout with shared controls.

INPUTS

Search (text)

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Campus-first discovery; availability comes from stock, schedule and capacity. No paid boosts. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

No local supply: offer alternatives and structured request, not a dead end. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M04, M06, M07. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /discovery
Event proposal: discovery.loaded
This is the screen anchor, not an endpoint for every action.

01 / SEARCH -> B02

Carry query and campus into discovery. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / SHOP CATEGORIES -> B07

Browse marketplace categories. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / POST A REQUEST -> B25

Create structured unmet demand. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

04 / ACTIVITY -> B19

Open current and past orders. Navigation/read: preserve safe route context; re-authorise destination resource.

05 / ACCOUNT -> U01

Open profile and role switching. Navigation/read: preserve safe route context; re-authorise destination resource.

Find what you need

Commerce | /buyer/b02

PURPOSE AND UI COMPOSITION

Search your campus first. Render form layout with shared controls.

INPUTS

Search term (text); Category (select); Availability (select); Scope (select)

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Keep filters when returning from a listing. Search logs used for demand signals must minimise personal data. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

No results: route to B24 with original query intact. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M07. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /search
Event proposal: search.performed
This is the screen anchor, not an endpoint for every action.

01 / SHOW RESULTS -> B03

Apply query, campus and filters. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / SAVED ITEMS -> B06

Open favourites. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / POST REQUEST -> B25

Carry failed query into request form. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Results near you

Commerce | /buyer/b03

PURPOSE AND UI COMPOSITION

Notebooks · Potchefstroom Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Show total fulfilment estimate when known, category, condition and availability. Never imply guaranteed stock from cached data. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Listing sold out while browsing: explain and offer B24 or B41. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M07, M08, M09. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /listings/search
Event proposal: search.results_viewed
This is the screen anchor, not an endpoint for every action.

01 / VIEW NOTEBOOK -> B04

Open listing and current availability. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / CHANGE FILTERS -> B02

Retain query and selected filters. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / SEE ALTERNATIVES -> B24

Compare other sellers or campuses. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

A5 study notebook

Commerce | /buyer/b04

PURPOSE AND UI COMPOSITION

Campus Stationery · Potchefstroom Render product layout with shared controls.

INPUTS

Quantity (number)

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Direct-seller purchase never silently switches seller. Stock and capacity checked again on request. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Unavailable: disable request, preserve listing detail and show alternatives. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M09, M10, M27. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /listings/{id}
Event proposal: listing.viewed
This is the screen anchor, not an endpoint for every action.

01 / REQUEST THIS SELLER -> B09

Carry listing, seller, quantity and price snapshot to fulfilment. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / FIND ANOTHER SELLER -> B24

Keep item requirements and compare eligible alternatives. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / SAVE ITEM -> B06

Save listing reference to favourites. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

04 / SELLER PROFILE -> B05

Open public seller details. Navigation/read: preserve safe route context; re-authorise destination resource.

Campus Stationery

Commerce | /buyer/b05

PURPOSE AND UI COMPOSITION

Student seller · Potchefstroom Render profile layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Public trust indicators are explained separately from internal business health. No student number or ID image shown. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Suspended seller: hide purchase actions and retain relevant order support. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /sellers/{id}/public
Event proposal: seller.profile_viewed
This is the screen anchor, not an endpoint for every action.

01 / VIEW PRODUCTS -> B03

Filter results by selected seller. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / MESSAGE SELLER -> U10

Open listing-scoped conversation. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / REPORT SELLER -> B21

Attach profile reference to report. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Saved for later

Commerce | /buyer/b06

PURPOSE AND UI COMPOSITION

Return to things you like. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Saved price is not a quote; refresh price and status before ordering. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Empty: explain how to save items and link to discovery. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /me/saved
Event proposal: saved.updated
This is the screen anchor, not an endpoint for every action.

01 / OPEN SAVED ITEM -> B04

Recheck listing availability. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / REMOVE ITEM -> B06

Remove selected favourite. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / KEEP EXPLORING -> B01

Return to discovery. Navigation/read: preserve safe route context; re-authorise destination resource.

Explore services and more

Commerce | /buyer/b07

PURPOSE AND UI COMPOSITION

Choose a category to continue. Render menu layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Category eligibility controls available fulfilment and required fields. Extended modules are designed but can be feature-gated. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Disabled category: explain availability without allowing unsupported checkout. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M04, M06, M29. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /categories
Event proposal: category.selected
This is the screen anchor, not an endpoint for every action.

01 / PRODUCTS -> B03

Open product results. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / FOOD -> B39

Open food detail example. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / SERVICES -> B27

Open service booking example. Navigation/read: preserve safe route context; re-authorise destination resource.

04 / RENTALS -> B33

Open rental example. Navigation/read: preserve safe route context; re-authorise destination resource.

05 / DIGITAL -> B37

Open digital product example. Navigation/read: preserve safe route context; re-authorise destination resource.

06 / EVENTS AND MORE -> X01

Open expanded marketplace modules. Navigation/read: preserve safe route context; re-authorise destination resource.

Your basket

Commerce | /buyer/b08

PURPOSE AND UI COMPOSITION

Review items before requesting the seller. Render list layout with shared controls.

INPUTS

Quantity (number)

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Proposed first-build rule: one seller per checkout; split multi-seller shopping into separate orders explicitly. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Stock changed: identify affected line and require quantity correction. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M10. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /baskets/validate

Event proposal: basket.validated

This is the screen anchor, not an endpoint for every action.

01 / CONTINUE -> B09

Validate basket and select fulfilment. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / REMOVE ITEM -> B08

Update basket and totals. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / KEEP SHOPPING -> B03

Return to results. Navigation/read: preserve safe route context; re-authorise destination resource.

How should it reach you?

Commerce | /buyer/b09

PURPOSE AND UI COMPOSITION

Choose an eligible fulfilment option. Render form layout with shared controls.

INPUTS

Fulfilment (select); Delivery point (select)

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Normal products default to hub intake before courier dispatch. Food bypasses storage hubs. Seller delivery appears only when configured. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

No courier or route: offer pickup or later transfer without changing choice silently. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M08. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /fulfilment/quote
Event proposal: fulfilment.quoted
This is the screen anchor, not an endpoint for every action.

01 / REVIEW REQUEST -> B10

Calculate eligible quote for location and category. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / CHANGE LOCATION -> U05

Return selected private location here. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / TRANSFER DETAILS -> T01

Compare scheduled cross-campus choices. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Review your request

Commerce | /buyer/b10

PURPOSE AND UI COMPOSITION

Confirm the item and fulfilment before matching. Render checkout layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Show all known fees and quote expiry. Seller listing price fixed; any changed final price needs buyer approval. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Quote expired: refresh and ask buyer to confirm changed total. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /product-requests

Event proposal: request.created

This is the screen anchor, not an endpoint for every action.

01 / SEND REQUEST -> B11

Create request with quote version; chosen seller or approved match scope. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / EDIT FULFILMENT -> B09

Requote if location changes. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / CANCEL -> B04

Return to the listing. Navigation/read: preserve safe route context; re-authorise destination resource.

Finding your seller

Commerce | /buyer/b11

PURPOSE AND UI COMPOSITION

We are checking availability. Render matching layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Server owns batch timing, acceptance and stock locks. Another campus or substitute requires explicit buyer approval. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

No acceptance: show retry scope and alternatives; release expired offers. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M11. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /requests/{id}
Event proposal: request.locked
This is the screen anchor, not an endpoint for every action.

01 / PREVIEW SELLER ACCEPTED -> B12 / DEMO

Demo server event: one seller locks stock and opens payment window. Replace demo trigger with authorised event; no production success override.

02 / SEE ALTERNATIVES -> B24

Show fallback choices if matching is exhausted. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / CANCEL REQUEST -> B20

Cancel only if current state permits. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Seller accepted

Commerce | /buyer/b12

PURPOSE AND UI COMPOSITION

Complete payment before your reservation expires. Render checkout layout with shared controls.

INPUTS

Payment method (select)

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Reserve stock until server expiry. Button amount equals accepted price and fee snapshot; no raw card entry in Vossie. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Payment window expires: release reservation and offer rematch, never claim paid. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M12. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /payments/authorise
Event proposal: payment.pending
This is the screen anchor, not an endpoint for every action.

01 / PAY R100 -> B13

Create one payment attempt and open provider checkout. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / CHANGE PAYMENT METHOD -> B12

Preserve reservation while method is changed. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / CANCEL -> B20

Explain unpaid reservation release. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Checking payment

Payments and ledger | /buyer/b13

PURPOSE AND UI COMPOSITION

Wait for verified payment confirmation. Render status layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

payment_attempts, provider_events, ledger_journals, ledger_lines, payouts, destinations.
Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

A browser redirect is not proof of payment. Only verified provider outcome advances the order.
Provider-confirmed outcome and immutable balanced ledger govern money. Unknown outcomes remain unresolved; retries reuse command identity.

RECOVERY AND STATE HANDLING

Unknown outcome: retain processing state and reconcile before permitting another attempt.
Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M14. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /payments/{id}
Event proposal: payment.confirmed
This is the screen anchor, not an endpoint for every action.

01 / PREVIEW PAYMENT CONFIRMED -> B14 / DEMO

Demo webhook: payment confirmed; enable fulfilment. Replace demo trigger with authorised event; no production success override.

02 / REFRESH STATUS -> B13

Read existing payment attempt status. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / PAYMENT HELP -> U12

Open payment support without retrying charge. Navigation/read: preserve safe route context; re-authorise destination resource.

Your order

Commerce | /buyer/b14

PURPOSE AND UI COMPOSITION

VM-1042 · Campus Stationery Render timeline layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Render category-specific timeline. Do not dispatch ordinary-product courier before HUB_RECEIVED. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Hub rejection: show correction deadline and buyer options without blaming courier. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M15. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /orders/{id}
Event proposal: order.updated
This is the screen anchor, not an endpoint for every action.

01 / TRACK DELIVERY -> B15

Open current delivery status. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / COLLECTION DETAILS -> B16

Show hub instructions if pickup selected. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / MESSAGE -> U10

Open order conversation. Navigation/read: preserve safe route context; re-authorise destination resource.

04 / GET HELP -> B21

Open order-specific problem report. Navigation/read: preserve safe route context; re-authorise destination resource.

On its way

Commerce | /buyer/b15

PURPOSE AND UI COMPOSITION

Your courier is heading to the handoff point. Render map layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Map is schematic in prototype. Live version shows ETA, last-update time and text route; location access stops when task ends. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

GPS stale: mark location delayed, retain last-known timestamp and contact options. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M16. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /deliveries/{id}
Event proposal: courier.location.updated
This is the screen anchor, not an endpoint for every action.

01 / MESSAGE COURIER -> U10

Open assigned courier thread. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / CALL COURIER -> U11

Start scoped call. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / SHOW HANDOFF CODE -> B16

Reveal recipient code only when appropriate. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

04 / DELIVERY RECEIVED -> B17

Open explicit receipt confirmation. Navigation/read: preserve safe route context; re-authorise destination resource.

Collection and handoff

Commerce | /buyer/b16

PURPOSE AND UI COMPOSITION

Share the code only when your order is present. Render code layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

QR identifies package; recipient PIN proves handoff. PIN must be single-use and is not exposed to courier before entry. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Code expired or locked: request authorised recovery; never bypass recipient verification. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /orders/{id}/handoff
Event proposal: handoff.ready
This is the screen anchor, not an endpoint for every action.

01 / I HAVE RECEIVED IT -> B17

Review item receipt before completion. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / DIRECTIONS -> B15

Show pickup location with text instructions. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / CANNOT COLLECT -> B21

Open failed-collection assistance. Navigation/read: preserve safe route context; re-authorise destination resource.

Confirm receipt

Commerce | /buyer/b17

PURPOSE AND UI COMPOSITION

Confirm only after receiving and checking the order. Render form layout with shared controls.

INPUTS

I received the correct order (checkbox)

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Separate handoff evidence from payment settlement. Open dispute blocks the disputed allocation; non-response enters review, not assumed consent. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Already confirmed: show existing receipt; never release funds twice. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /orders/{id}/confirm
Event proposal: order.buyer_confirmed
This is the screen anchor, not an endpoint for every action.

01 / CONFIRM RECEIPT -> B18

Record explicit buyer confirmation once; show receipt and rating. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / SOMETHING IS WRONG -> B21

Open dispute route before confirming. Navigation/read: preserve safe route context; re-authorise destination resource.

How was your order?

Commerce | /buyer/b18

PURPOSE AND UI COMPOSITION

Your review helps other students. Render form layout with shared controls.

INPUTS

Rating (select); Review (textarea)

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Reviews cannot be bought with reliability points; support reporting stays separate from public review. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Already reviewed: load editable review where policy permits. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M30. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /orders/{id}/review
Event proposal: review.created
This is the screen anchor, not an endpoint for every action.

01 / SUBMIT REVIEW -> B19

Attach one review to completed transaction. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / SKIP -> B19

Finish without affecting payout or order completion. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Your activity

Commerce | /buyer/b19

PURPOSE AND UI COMPOSITION

Current orders and past purchases. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Tabs: Active, Completed, Cancelled. Reorder creates a new request, not a repeat charge. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

No activity: offer discovery and post-request shortcuts. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M04. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /me/orders

Event proposal: activity.loaded

This is the screen anchor, not an endpoint for every action.

01 / OPEN ORDER -> B14

Open current order state. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / OPEN BOOKING -> B31

Open appointment and brief. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / OPEN RENTAL -> B35

Open return deadline and condition record. Navigation/read: preserve safe route context; re-authorise destination resource.

04 / ORDER AGAIN -> B04

Recheck current price and stock. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Cancel request or order

Commerce | /buyer/b20

PURPOSE AND UI COMPOSITION

Review the consequences before cancelling. Render form layout with shared controls.

INPUTS

Reason (select)

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Paid or started orders show applicable refund/deposit consequences before submission; server calculates eligibility. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

State changed during review: refresh consequences and ask again. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /orders/{id}/cancel
Event proposal: order.cancelled
This is the screen anchor, not an endpoint for every action.

01 / CONFIRM CANCELLATION -> B19

Submit state-checked cancellation and show final result. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / KEEP ORDER -> B14

Return without changing the order. Navigation/read: preserve safe route context; re-authorise destination resource.

Report an issue

Commerce | /buyer/b21

PURPOSE AND UI COMPOSITION

Tell us what happened with this order. Render form layout with shared controls.

INPUTS

Issue (select); Description (textarea); Evidence (file)

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Limit evidence to relevant material. Upload checks and participant access apply; no public sharing. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Missing explanation or failed upload: keep draft, identify field, allow retry. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /disputes
Event proposal: dispute.opened
This is the screen anchor, not an endpoint for every action.

01 / SUBMIT ISSUE -> B22

Create case with order snapshot and evidence references. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / RETURN TO ORDER -> B14

Keep draft while returning. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Dispute progress

Commerce | /buyer/b22

PURPOSE AND UI COMPOSITION

CASE-218 · Human review in progress. Render timeline layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Separate case status from refund status. Show submission deadline, reason and participant-visible evidence. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Case closed: show decision and available appeal window rather than silently reopening. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /disputes/{id}
Event proposal: dispute.updated
This is the screen anchor, not an endpoint for every action.

01 / ADD EVIDENCE -> B21

Append evidence to existing case. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / VIEW REFUND -> B23

Show financial outcome when issued. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / APPEAL DECISION -> O08

Open appeal when decision is eligible. Navigation/read: preserve safe route context; re-authorise destination resource.

Refund status

Payments and ledger | /buyer/b23

PURPOSE AND UI COMPOSITION

Your refund has been requested. Render timeline layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

payment_attempts, provider_events, ledger_journals, ledger_lines, payouts, destinations.
Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Display requested, processing, completed or failed separately. Provider timeframe is an estimate, not a guarantee. Provider-confirmed outcome and immutable balanced ledger govern money.
Unknown outcomes remain unresolved; retries reuse command identity.

RECOVERY AND STATE HANDLING

Processing exceeds estimate: offer support; never create duplicate refund. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M14. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /refunds/{id}
Event proposal: refund.updated
This is the screen anchor, not an endpoint for every action.

01 / REFRESH -> B23

Reconcile current provider status. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / VIEW ORDER -> B14

Open original order. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / GET HELP -> U13

Attach refund reference to support. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Let us find another option

Commerce | /buyer/b24

PURPOSE AND UI COMPOSITION

Keep your original need, compare the alternatives. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

No automatic seller, item, campus or price substitution after buyer commitment. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

No alternatives: retain wanted request and clear availability expectations. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M11. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /requests/{id}/alternatives
Event proposal: alternatives.viewed
This is the screen anchor, not an endpoint for every action.

01 / CHOOSE LOCAL OPTION -> B04

Open substitute listing; ask confirmation before new request. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / COMPARE TRANSFER -> T01

Show campus, window and total cost. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / POST A WANTED REQUEST -> B25

Prefill original search and unmet need. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

04 / NOTIFY ME -> B41

Subscribe to availability updates. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Post what you need

Commerce | /buyer/b25

PURPOSE AND UI COMPOSITION

Let campus sellers know about unmet demand. Render form layout with shared controls.

INPUTS

Category (select); What do you need? (text); Details (textarea); Needed by (date); Campus (select)

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Do not collect a buyer bid budget in fixed-price dispatch. Aggregate unmet demand for incubation without exposing buyer identity. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Duplicate active need: offer updating existing request instead. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /wanted-requests

Event proposal: wanted.created

This is the screen anchor, not an endpoint for every action.

01 / POST REQUEST -> B26

Create structured demand with expiry and matching scope. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / CANCEL -> B01

Discard or save draft. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Your wanted request

Commerce | /buyer/b26

PURPOSE AND UI COMPOSITION

We will show suitable listings when available. Render status layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Closing excludes future matching; retained analytics follow policy and do not imply a sale occurred. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Request expired: offer renew with current need and date. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /wanted-requests/{id}
Event proposal: wanted.updated
This is the screen anchor, not an endpoint for every action.

01 / VIEW MATCHES -> B24

Open candidate listings with their prices. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / EDIT REQUEST -> B25

Update unfulfilled need. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / CLOSE REQUEST -> B26

Mark fulfilled elsewhere or no longer needed. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Book a student service

Service booking | /buyer/b27

PURPOSE AND UI COMPOSITION

Tutoring · fixed price for a defined session. Render product layout with shared controls.

INPUTS

Session format (select); Brief (textarea)

DATA / AUTHORITY

availability_rules, service_slots, slot_holds, bookings, authorisations. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

A versioned brief and service scope form the agreement. Academic-integrity restrictions appear before commitment. Use server-expiring holds and overlap protection; authorisation precedes seller acceptance in the selected service flow.

RECOVERY AND STATE HANDLING

Unavailable: propose another slot or seller with explicit consent. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M09, M13. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /service-requests

Event proposal: service.requested

This is the screen anchor, not an endpoint for every action.

01 / FIND A TIME -> B28

Match eligible seller-slot combinations. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / VIEW SELLER -> B05

Open service seller profile. Navigation/read: preserve safe route context; re-authorise destination resource.

Does this time work?

Service booking | /buyer/b28

PURPOSE AND UI COMPOSITION

We are holding the next suitable slot. Render slot layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

availability_rules, service_slots, slot_holds, bookings, authorisations. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Only one buyer can hold a slot; server expiry controls booking. Do not force default calendar browsing. Use server-expiring holds and overlap protection; authorisation precedes seller acceptance in the selected service flow.

RECOVERY AND STATE HANDLING

Slot expires: show refreshed suggestion; never silently book a different time. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M13. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /slots/{id}/confirm
Event proposal: slot.confirmed
This is the screen anchor, not an endpoint for every action.

01 / CONFIRM SLOT -> B29

Accept proposed time and show protected-funds authorisation. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / ANOTHER TIME -> B28

Release current hold and propose next available slot. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / CANCEL -> B27

Release temporary reservation. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Service payment authorisation

Payments and ledger | /buyer/b29

PURPOSE AND UI COMPOSITION

Protect the agreed service amount before seller response. Render checkout layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

payment_attempts, provider_events, ledger_journals, ledger_lines, payouts, destinations.
Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Latest technical dossier uses authorisation before seller acceptance for services. 30/70 allocation remains a policy proposal; do not label all funds immediately paid out. Provider-confirmed outcome and immutable balanced ledger govern money. Unknown outcomes remain unresolved; retries reuse command identity.

RECOVERY AND STATE HANDLING

Authorisation fails: preserve brief and show remaining slot hold; no booking confirmed. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M13, M14. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /service-bookings/authorise
Event proposal: payment.authorised
This is the screen anchor, not an endpoint for every action.

01 / AUTHORISE AND REQUEST -> B31 / DEMO

Demo authorisation; send seller booking request; wait for acceptance. Replace demo trigger with authorised event; no production success override.

02 / SELLER DECLINED -> B30 / DEMO

Demo decline event; ask whether to rematch. Replace demo trigger with authorised event; no production success override.

03 / BACK -> B28

Keep valid slot hold while editing. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Choose your next service option

Service booking | /buyer/b30

PURPOSE AND UI COMPOSITION

Your previous seller could not accept. Render checkout layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

availability_rules, service_slots, slot_holds, bookings, authorisations. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Cheaper replacement: offer original-method release/refund or eligible credit. Never silently switch seller. Use server-expiring holds and overlap protection; authorisation precedes seller acceptance in the selected service flow.

RECOVERY AND STATE HANDLING

Provider cannot top up authorisation: explain replacement payment flow before proceeding. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M13. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /bookings/{id}/rematch
Event proposal: rematch.accepted
This is the screen anchor, not an endpoint for every action.

01 / ACCEPT ALTERNATIVE -> B29

Obtain explicit consent and new/difference authorisation where supported. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / TRY ANOTHER SLOT -> B28

Propose a new seller-slot pair. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / CANCEL REQUEST -> B20

Release/refund according to provider state. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Your booking

Service booking | /buyer/b31

PURPOSE AND UI COMPOSITION

BK-103 · tutoring session Render timeline layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

availability_rules, service_slots, slot_holds, bookings, authorisations. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Accepted, in progress, submitted and completed states use separate actions. Brief changes require agreement and versioning. Use server-expiring holds and overlap protection; authorisation precedes seller acceptance in the selected service flow.

RECOVERY AND STATE HANDLING

Seller declines: route to B30 rather than automatic replacement. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M13. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /bookings/{id}
Event proposal: booking.updated
This is the screen anchor, not an endpoint for every action.

01 / MESSAGE SELLER -> U10

Open booking-scoped conversation. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / VIEW COMPLETION -> B32

Review delivered work when submitted. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / CANCEL -> B20

Show service-specific deposit consequences. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Review service completion

Service booking | /buyer/b32

PURPOSE AND UI COMPOSITION

Check the agreed work before confirming. Render form layout with shared controls.

INPUTS

Completion feedback (textarea)

DATA / AUTHORITY

availability_rules, service_slots, slot_holds, bookings, authorisations. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Show submitted evidence and scope side by side; correction is not an automatic refund. Use server-expiring holds and overlap protection; authorisation precedes seller acceptance in the selected service flow.

RECOVERY AND STATE HANDLING

Submission unavailable: block acceptance until accessible or support reviewed. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /bookings/{id}/complete

Event proposal: service.confirmed

This is the screen anchor, not an endpoint for every action.

01 / ACCEPT COMPLETION -> B18

Record acceptance and settle per agreed service rules. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / REQUEST CORRECTION -> B31

Send specific correction request to seller. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / OPEN DISPUTE -> B21

Attach brief and submission versions. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Rent a calculator

Commerce | /buyer/b33

PURPOSE AND UI COMPOSITION

Use it for your study session. Render product layout with shared controls.

INPUTS

Start date (date); Return date (date)

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Dates and item cannot overlap other reservations. Show late-charge cap, wear policy and return point before payment. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Unavailable dates: suggest next eligible period. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M09. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /rentals/{id}/availability
Event proposal: rental.viewed
This is the screen anchor, not an endpoint for every action.

01 / CHECK RENTAL TERMS -> B34

Validate period, eligibility and return rules. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / ASK SELLER -> U10

Open rental enquiry. Navigation/read: preserve safe route context; re-authorise destination resource.

Rental agreement

Commerce | /buyer/b34

PURPOSE AND UI COMPOSITION

Review fees, deposit and return conditions. Render checkout layout with shared controls.

INPUTS

I accept rental and return terms (checkbox)

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Carry category and amounts through matching/payment; sample product totals must be replaced. Record agreement version. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Trust or deposit requirement unmet: explain eligibility and support route. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /rental-requests

Event proposal: rental.requested

This is the screen anchor, not an endpoint for every action.

01 / REQUEST RENTAL -> B11

Reserve through acceptance and payment with rental-specific amounts. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / EDIT DATES -> B33

Revalidate availability. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Your active rental

Commerce | /buyer/b35

PURPOSE AND UI COMPOSITION

RN-104 · calculator Render timeline layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Reminders use server deadline. Late-charge estimate disclosed and reviewable; final charges are not inferred by UI. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Return overdue: show next return action and help, not a blocked dead end. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /rentals/{id}/contract
Event proposal: rental.updated
This is the screen anchor, not an endpoint for every action.

01 / START RETURN -> B36

Open return condition and hub instructions. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / REPORT DAMAGE -> B21

Attach rental and condition evidence. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / MESSAGE SELLER -> U10

Open rental thread. Navigation/read: preserve safe route context; re-authorise destination resource.

Return your rental

Commerce | /buyer/b36

PURPOSE AND UI COMPOSITION

Record the condition and arrange handoff. Render form layout with shared controls.

INPUTS

Condition (select); Return notes (textarea); Photos (file)

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Buyer submission alone does not release deposit. Receiving custody/condition confirmation is required. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Condition mismatch: hold disputed deposit allocation and start human review. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /rentals/{id}/return

Event proposal: rental.return_requested

This is the screen anchor, not an endpoint for every action.

01 / SUBMIT RETURN EVIDENCE -> B35

Record intent and evidence; await receiving scan before closing. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / VIEW PICKUP EVIDENCE -> B35

Compare original condition. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / REPORT PROBLEM -> B21

Open return dispute. Navigation/read: preserve safe route context; re-authorise destination resource.

Digital study planner

Commerce | /buyer/b37

PURPOSE AND UI COMPOSITION

Original template · version 1.2 Render product layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Require ownership declaration and clean file scan before delivery. Digital checkout bypasses physical hubs. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

File under review: prevent purchase and show status. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /digital-products/{id}
Event proposal: digital.viewed
This is the screen anchor, not an endpoint for every action.

01 / REQUEST PURCHASE -> B10

Carry digital category and remove delivery fee. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / VIEW LICENCE -> B37

Show full licence in the detail panel. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / ASK SELLER -> U10

Open digital listing conversation. Navigation/read: preserve safe route context; re-authorise destination resource.

Your digital library

Commerce | /buyer/b38

PURPOSE AND UI COMPOSITION

Access purchased files securely. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Do not publish permanent file URLs. Record access version/hash; access is not automatically buyer acceptance. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Scan failure or revoked file: block download and open support. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /digital-purchases/{id}/access
Event proposal: digital.accessed
This is the screen anchor, not an endpoint for every action.

01 / DOWNLOAD DEMO FILE -> B38 / DEMO

Demo records access; production issues expiring signed download. Replace demo trigger with authorised event; no production success override.

02 / CONFIRM WORKS -> B17

Open digital-specific completion review. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / REPORT FILE ISSUE -> B21

Attach file version and access evidence. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Lunch from Campus Kitchen

Commerce | /buyer/b39

PURPOSE AND UI COMPOSITION

Freshly prepared for your campus. Render product layout with shared controls.

INPUTS

Option (select); Quantity (number)

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Food-specific required disclosures and eligibility; no claim that AI certifies kitchen safety. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Seller paused: show alternatives and next availability. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M09. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /food-listings/{id}
Event proposal: food.viewed
This is the screen anchor, not an endpoint for every action.

01 / REQUEST FOOD -> B09

Carry food category; offer direct eligible pickup/delivery. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / INGREDIENT DETAILS -> B39

Expand full ingredient and handling information. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / SELLER PROFILE -> B05

Open food seller information. Navigation/read: preserve safe route context; re-authorise destination resource.

Your food order

Commerce | /buyer/b40

PURPOSE AND UI COMPOSITION

Preparing · courier is on the way to the seller. Render map layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Food courier matching starts after seller acceptance and payment confirmation, before preparation ends. No ordinary hub-storage return assumption. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Preparation delayed: show updated ETA and courier wait/rematch state. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M15. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /food-orders/{id}
Event proposal: food.updated
This is the screen anchor, not an endpoint for every action.

01 / MESSAGE -> U10

Open active-order conversation. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / HANDOFF PIN -> B16

Open recipient proof when courier arrives. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / PROBLEM WITH ORDER -> B21

Report food-specific issue. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Notify me when available

Commerce | /buyer/b41

PURPOSE AND UI COMPOSITION

Get a useful update without losing other options. Render form layout with shared controls.

INPUTS

Availability notifications (checkbox)

DATA / AUTHORITY

listings, requests, offers, orders, order_items, quotes, bookings. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Notification is not a stock reservation. On tap recheck availability and quote. Read current quote and order versions; changing money, seller or fulfilment requires explicit buyer review.

RECOVERY AND STATE HANDLING

Queue closed: explain and link to alternatives. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /availability-subscriptions
Event proposal: availability.subscribed
This is the screen anchor, not an endpoint for every action.

01 / JOIN NOTIFICATION QUEUE -> B26

Save subscription and show request status. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / BROWSE ALTERNATIVES -> B24

Keep shopping while subscribed. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Start selling

Seller operations | /seller/s01

PURPOSE AND UI COMPOSITION

Build your student business step by step. Render menu layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Existing courier ID verification is reused. Seller grant remains pending until required checks pass. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Verification declined: display reason and human review route. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /roles/seller/activate

Event proposal: seller.activation_started

This is the screen anchor, not an endpoint for every action.

01 / VERIFY IDENTITY -> S02

Reuse valid ID verification or start approved verification. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / SELLER SETUP -> S03

Open onboarding after identity approval. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / BACK -> U02

Return to role selector. Navigation/read: preserve safe route context; re-authorise destination resource.

Verify your identity

Seller operations | /seller/s02

PURPOSE AND UI COMPOSITION

Keep your legal identity private. Render form layout with shared controls.

INPUTS

Document type (select); Verification consent (checkbox)

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Government ID required for seller/courier activation; store verification reference separately from public profile. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Unreadable or expired document: request correction through provider; do not email sensitive documents. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /verification/identity/session

Event proposal: identity.updated

This is the screen anchor, not an endpoint for every action.

01 / CONTINUE VERIFICATION -> S03 / DEMO

Demo approved identity; production opens approved verification provider. Replace demo trigger with authorised event; no production success override.

02 / CHECK REVIEW STATUS -> A06

Open current verification outcome. Navigation/read: preserve safe route context; re-authorise destination resource.

Set up your seller profile

Seller operations | /seller/s03

PURPOSE AND UI COMPOSITION

Tell buyers what you can provide. Render form layout with shared controls.

INPUTS

Seller display name (text); Categories (select); Pickup campus (select); Accept seller rules (checkbox)

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Brand storefront unlock is separate from basic personal selling. Category-specific checks apply before publication. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Missing eligibility: save draft and list outstanding checks. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /seller-profile

Event proposal: seller.onboarded

This is the screen anchor, not an endpoint for every action.

01 / FINISH SETUP -> S04

Save initial profile; grant eligible seller workspace. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / SET PAYOUT DESTINATION -> U19

Configure verified payout route. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Your seller workspace

Seller operations | /seller/s04

PURPOSE AND UI COMPOSITION

Manage requests and today's work. Render dashboard layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Count accepted active orders across categories; exclude expired offers. Show current capacity from authoritative state. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Disconnected: show reconnecting and disable live acceptance until refreshed. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M04, M12. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /seller/dashboard
Event proposal: seller.dashboard_updated
This is the screen anchor, not an endpoint for every action.

01 / INCOMING REQUEST -> S05

Open time-limited seller offer. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / ORDERS -> S06

Open accepted order detail. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / LISTINGS -> S07

Manage inventory and publication. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

04 / CAPACITY -> S14

Change busy mode. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

05 / EARNINGS -> S18

Review financial breakdown. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

06 / BUSINESS SUPPORT -> S21

View practical guidance. Navigation/read: preserve safe route context; re-authorise destination resource.

New order request

Seller operations | /seller/s05

PURPOSE AND UI COMPOSITION

Decide before this offer expires. Render offer layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Acceptance only if verified, eligible, under capacity and stock available. Show net estimate before action. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Expired, already matched or at capacity: show exact reason and return to request queue. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M12. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /seller-offers/{id}/accept

Event proposal: seller_offer.closed

This is the screen anchor, not an endpoint for every action.

01 / ACCEPT REQUEST -> S06

Atomically reserve stock/capacity and lock one seller. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / DECLINE -> S04

Close this offer and let matching continue. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Order to fulfil

Seller operations | /seller/s06

PURPOSE AND UI COMPOSITION

VM-1042 · wait for confirmed payment. Render timeline layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Primary action disabled while unpaid. Once paid, show preparation deadline and hub intake instructions. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Payment expired: release stock/capacity; seller must not prepare. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /seller/orders/{id}
Event proposal: payment.confirmed
This is the screen anchor, not an endpoint for every action.

01 / PREVIEW PAYMENT CONFIRMED -> S16 / DEMO

Demo payment event: open packaging and hub drop-off. Replace demo trigger with authorised event; no production success override.

02 / MESSAGE BUYER -> U10

Open order thread. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / REPORT FULFILMENT ISSUE -> B21

Open seller-side case. Navigation/read: preserve safe route context; re-authorise destination resource.

04 / BACK TO REQUESTS -> S04

Return to seller overview. Navigation/read: preserve safe route context; re-authorise destination resource.

Your listings

Seller operations | /seller/s07

PURPOSE AND UI COMPOSITION

Keep stock and availability accurate. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Stock changes are atomic with reservations; show available vs reserved stock separately. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Concurrent stock update: refresh version and ask seller to confirm correction. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /seller/listings
Event proposal: listings.loaded
This is the screen anchor, not an endpoint for every action.

01 / ADD PRODUCT -> S08

Create product draft. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / EDIT FOOD -> S09

Edit food-specific fields. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / EDIT SERVICE -> S10

Edit service-specific fields. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

04 / DIGITAL PRODUCT -> S11

Edit digital listing. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

05 / RENTAL -> S12

Edit rental listing. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

06 / PUBLICATION REVIEW -> S13

Inspect policy checks. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Product listing

Seller operations | /seller/s08

PURPOSE AND UI COMPOSITION

Show the item honestly and clearly. Render form layout with shared controls.

INPUTS

Title (text); Description (textarea); Price ZAR (number); Available stock (number); Condition (select); Photos (file)

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Mandatory title, category, price, stock, current media and condition; disclose defects for used items. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Invalid price or missing evidence: focus field and preserve draft. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M21. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /listings

Event proposal: listing.draft_saved

This is the screen anchor, not an endpoint for every action.

01 / SAVE AND CHECK -> S13

Validate required fields and send draft to publication checks. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / SAVE DRAFT -> S07

Keep unpublished listing. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Food listing

Seller operations | /seller/s09

PURPOSE AND UI COMPOSITION

Give buyers the information they need. Render form layout with shared controls.

INPUTS

Meal name (text); Price ZAR (number); Ingredients (textarea); Allergens (textarea); Preparation minutes (number); Storage and serving guidance (textarea)

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Require category eligibility, ingredients, allergens and applicable preparation declarations. AI checks completeness only. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Missing allergen disclosure: block publication with a specific correction. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M21. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /food-listings
Event proposal: food_listing.checked
This is the screen anchor, not an endpoint for every action.

01 / SAVE AND CHECK -> S13

Validate food fields and declarations. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / SAVE DRAFT -> S07

Keep unpublished food item. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Service listing

Service booking | /seller/s10

PURPOSE AND UI COMPOSITION

Define what one booking includes. Render form layout with shared controls.

INPUTS

Service name (text); Price ZAR (number); Duration minutes (number); Scope and exclusions (textarea); Delivery format (select)

DATA / AUTHORITY

availability_rules, service_slots, slot_holds, bookings, authorisations. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Use clear deliverables and prohibited-work exclusions. No buyer bidding in matching flow. Use server-expiring holds and overlap protection; authorisation precedes seller acceptance in the selected service flow.

RECOVERY AND STATE HANDLING

Overlapping availability: explain conflict before saving. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M21. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /service-listings

Event proposal: service_listing.saved

This is the screen anchor, not an endpoint for every action.

01 / SAVE AND CHECK -> S13

Validate service and policy eligibility. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / SET SCHEDULE -> S15

Configure recurring category availability. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Digital listing

Seller operations | /seller/s11

PURPOSE AND UI COMPOSITION

Publish original work with a clear licence. Render form layout with shared controls.

INPUTS

Title (text); Price ZAR (number); Version (text); Licence and requirements (textarea); File (file); I own distribution rights (checkbox)

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

File version/hash must match purchase access. Public listing must not reveal permanent download URL. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Scan failed: quarantine upload and prevent publication. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M21. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /digital-listings
Event proposal: digital.scan_completed
This is the screen anchor, not an endpoint for every action.

01 / SAVE AND CHECK -> S13

Upload privately; publish only after eligible scan outcome. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / SAVE DRAFT -> S07

Keep file inaccessible to buyers. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Rental listing

Seller operations | /seller/s12

PURPOSE AND UI COMPOSITION

Define safe use, condition and return terms. Render form layout with shared controls.

INPUTS

Item (text); Fee ZAR (number); Security deposit ZAR (number); Return terms and late-charge cap (textarea); Condition evidence (file)

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Deposits, late charges and limits are policy-configured. Explain normal wear and evidence expectations. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Unapproved high-value item: route for review rather than publishing. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M21. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /rental-listings
Event proposal: rental_listing.saved
This is the screen anchor, not an endpoint for every action.

01 / SAVE AND CHECK -> S13

Validate deposit and policy fields. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / SAVE DRAFT -> S07

Keep unpublished rental. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Publication checks

Seller operations | /seller/s13

PURPOSE AND UI COMPOSITION

Review what needs attention. Render status layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Subtype editor must be preserved. Content hold and account punishment are separate; show reasons and appeal route. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Low-confidence flag: hold for review, no automatic account penalty. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M21. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /listings/{id}/submit

Event proposal: listing.moderation_updated

This is the screen anchor, not an endpoint for every action.

01 / PREVIEW APPROVED PUBLICATION -> S07 / DEMO

Demo human/automated permitted outcome: publish eligible listing. Replace demo trigger with authorised event; no production success override.

02 / FIX LISTING -> S08

Return to correct subtype editor with flagged fields. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / REQUEST HUMAN REVIEW -> U13

Open policy-review case. Navigation/read: preserve safe route context; re-authorise destination resource.

Availability and workload

Seller operations | /seller/s14

PURPOSE AND UI COMPOSITION

Set a workload that fits your day. Render form layout with shared controls.

INPUTS

Mode (select); Category limit (number); Overall limit (number)

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Cannot increase above policy/restriction. At capacity listings remain visible but excluded from new matching. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Active work exceeds reduced limit: keep existing orders; stop new matching until below cap. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M20. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

PATCH /seller-category-availability
Event proposal: capacity.updated
This is the screen anchor, not an endpoint for every action.

01 / SAVE CAPACITY -> S04

Apply effective minimum of policy, restriction and seller setting. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / NOTIFY QUEUE -> B41 / DEMO

Preview how buyers see availability. Replace demo trigger with authorised event; no production success override.

Recurring availability

Service booking | /seller/s15

PURPOSE AND UI COMPOSITION

Choose regular working windows. Render form layout with shared controls.

INPUTS

Day (select); Start time (time); End time (time); Slot duration minutes (number)

DATA / AUTHORITY

availability_rules, service_slots, slot_holds, bookings, authorisations. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Research baseline uses recurring windows; no one-off exceptions. Existing confirmed bookings cannot disappear after editing schedule. Use server-expiring holds and overlap protection; authorisation precedes seller acceptance in the selected service flow.

RECOVERY AND STATE HANDLING

End before start or overlap: block and identify conflicting window. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M20. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

PATCH /seller/schedules

Event proposal: schedule.updated

This is the screen anchor, not an endpoint for every action.

01 / SAVE SCHEDULE -> S04

Validate recurring windows and regenerate eligible slots. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / BACK -> S10

Return to service editor. Navigation/read: preserve safe route context; re-authorise destination resource.

Prepare and drop at hub

Seller operations | /seller/s16

PURPOSE AND UI COMPOSITION

VM-1042 · package label and instructions. Render code layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Seller-ready is not HUB_RECEIVED. Official condition baseline begins with receiving hub inspection. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Label cannot load: authorised manual package lookup; never expose buyer data in QR. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /packages

Event proposal: package.created

This is the screen anchor, not an endpoint for every action.

01 / READY FOR HUB -> S16

Record seller-ready status; custody remains with seller. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / PREVIEW HUB RECEIVED -> S06 / DEMO

Demo hub event: show accepted custody in order timeline. Replace demo trigger with authorised event; no production success override.

03 / PACKAGING PROBLEM -> S17

Open correction instructions. Navigation/read: preserve safe route context; re-authorise destination resource.

Repackage this order

Seller operations | /seller/s17

PURPOSE AND UI COMPOSITION

The hub could not accept the package. Render timeline layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Server deadline drives countdown. On expiry, cancel and initiate refund/release; training does not restore reliability points. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Deadline expired: disable resubmit and show cancellation and recollection instructions. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /packages/{id}/correction
Event proposal: package.rejected
This is the screen anchor, not an endpoint for every action.

01 / VIEW PACKAGING GUIDANCE -> S21

Open educational resource. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / READY TO RESUBMIT -> S16

Prepare same package for new intake inspection. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / CONTACT HUB -> U10

Open relevant order conversation. Navigation/read: preserve safe route context; re-authorise destination resource.

Seller earnings

Payments and ledger | /seller/s18

PURPOSE AND UI COMPOSITION

Understand gross sales, fees and net proceeds. Render wallet layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

payment_attempts, provider_events, ledger_journals, ledger_lines, payouts, destinations. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Use variable fee rules from latest technical dossier; separate seller proceeds from courier earnings and processor fees. Provider-confirmed outcome and immutable balanced ledger govern money. Unknown outcomes remain unresolved; retries reuse command identity.

RECOVERY AND STATE HANDLING

Fee unavailable: show pending calculation, not an invented net amount. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /seller/earnings
Event proposal: earnings.updated
This is the screen anchor, not an endpoint for every action.

01 / LEDGER -> U17

Show itemised seller transactions. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / WITHDRAW -> U18

Use eligible balance. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / PAYOUT STATUS -> U21

Track provider settlement. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Seller standing

Seller operations | /seller/s19

PURPOSE AND UI COMPOSITION

See the behaviours that build trust. Render status layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

No public internal incubation score. Recovery comes from successful orders and time-decay policy, not training completion. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Insufficient data: say so; never infer low quality from zero history. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /seller/standing

Event proposal: standing.updated

This is the screen anchor, not an endpoint for every action.

01 / VIEW GUIDANCE -> S21

Open practical improvement actions. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / STOREFRONT ELIGIBILITY -> S23

Review published unlock criteria. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / CHALLENGE AN EVENT -> O08

Appeal a specific adverse event. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Business performance

Seller operations | /seller/s20

PURPOSE AND UI COMPOSITION

Understand demand and fulfilment over time. Render dashboard layout with shared controls.

INPUTS

Period (select)

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Show denominator, period and data freshness. Separate paid sales, refunded orders and abandoned requests. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Low-volume data: show limited evidence rather than confident conclusions. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /seller/analytics
Event proposal: analytics.viewed
This is the screen anchor, not an endpoint for every action.

01 / VIEW GUIDANCE -> S21

Translate indicators into concrete actions. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / INVENTORY -> S07

Act on stock needs. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / SUPPORT PREFERENCES -> S25

Choose contact permissions. Navigation/read: preserve safe route context; re-authorise destination resource.

Support for your business

Seller operations | /seller/s21

PURPOSE AND UI COMPOSITION

Practical ideas based on your activity. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Explain evidence behind prompts; invitations can appear in-app without direct-contact opt-in. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

No evidence: show general resources labelled as general guidance. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /seller/guidance
Event proposal: guidance.viewed
This is the screen anchor, not an endpoint for every action.

01 / OPEN SUPPORT PLAN -> S22

View an agreed plan. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / MANAGE CONTACT -> S25

Set opt-in for direct contact. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / UPDATE LISTINGS -> S07

Act on supply opportunity. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Your 30-day plan

Seller operations | /seller/s22

PURPOSE AND UI COMPOSITION

Agree small steps with the incubation team. Render timeline layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Seller sees agreed actions and useful measures, not internal score. Progress updates retain actor/time. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Plan draft: do not show as agreed until seller participation is confirmed. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M24, M30. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

PATCH /support-plans/{id}/progress
Event proposal: plan.progress_updated
This is the screen anchor, not an endpoint for every action.

01 / UPDATE PROGRESS -> S22

Save action completion and evidence. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / MESSAGE MENTOR -> U10

Open consented support thread. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / REVIEW CHECKPOINT -> I07 / DEMO

Demo view of scheduled review; staff edit requires role. Replace demo trigger with authorised event; no production success override.

Your storefront

Seller operations | /seller/s23

PURPOSE AND UI COMPOSITION

Build a brand once eligibility is met. Render form layout with shared controls.

INPUTS

Storefront name (text); Brand description (textarea); Cover image (file)

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Earlier full dossier proposes 10 sales and R1000 plus good standing; configurable policy, not permanent hard-coded entitlement. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Not yet eligible: retain draft and explain each unmet criterion. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

PATCH /seller/storefront

Event proposal: storefront.updated

This is the screen anchor, not an endpoint for every action.

01 / SAVE STOREFRONT -> S07

Save eligible brand presentation. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / VIEW STANDING -> S19

Explain unmet criteria. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Deliver your service

Service booking | /seller/s24

PURPOSE AND UI COMPOSITION

BK-103 · keep the agreed scope visible. Render form layout with shared controls.

INPUTS

Progress note (textarea); Completion evidence (file)

DATA / AUTHORITY

availability_rules, service_slots, slot_holds, bookings, authorisations. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Cannot unilaterally change price/scope. Submission is not acceptance or payout release. Use server-expiring holds and overlap protection; authorisation precedes seller acceptance in the selected service flow.

RECOVERY AND STATE HANDLING

Upload fails: keep submission draft and retry missing files. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /bookings/{id}/submission

Event proposal: service.submitted

This is the screen anchor, not an endpoint for every action.

01 / SUBMIT COMPLETION -> B32 / DEMO

Demo buyer review; production notify buyer and retain seller view. Replace demo trigger with authorised event; no production success override.

02 / MESSAGE BUYER -> U10

Open booking conversation. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / REQUEST SCOPE CHANGE -> S24

Record proposed change requiring buyer agreement. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Incubation contact preferences

Seller operations | /seller/s25

PURPOSE AND UI COMPOSITION

Choose how the team may reach you. Render form layout with shared controls.

INPUTS

Allow direct incubation contact (checkbox); Preferred channel (select); Support interests (text)

DATA / AUTHORITY

sellers, listings, inventory, availability, offers, fulfilments. Verified seller; own listings, offers, orders and permitted support plans.

RULES AND SERVER GUARD

Opt-out stops future direct outreach; explain effect on existing agreed support separately. Require verified seller ownership; reserve inventory/capacity atomically and honour policy caps.

RECOVERY AND STATE HANDLING

Save fails: retain previous consent and explicitly show unsaved state. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

PATCH /incubation-contact-preference
Event proposal: support.consent_updated
This is the screen anchor, not an endpoint for every action.

01 / SAVE PREFERENCES -> S21

Record timestamped purpose-specific preference. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / BACK -> S21

Return without change. Navigation/read: preserve safe route context; re-authorise destination resource.

Become a courier

Delivery | /courier/c01

PURPOSE AND UI COMPOSITION

Deliver around your campus. Render menu layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

couriers, delivery_offers, assignments, location_samples, custody_events. Approved courier; assigned offer/job, eligible transport and route only.

RULES AND SERVER GUARD

Courier approval is distinct from seller approval. No role self-grant. Require approved transport eligibility and active assignment; GPS and QR decode alone never prove custody.

RECOVERY AND STATE HANDLING

Pending review: display outstanding checks and safe help route. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /roles/courier/activate
Event proposal: courier.activation_started
This is the screen anchor, not an endpoint for every action.

01 / START CHECKS -> C02

Collect courier-specific eligibility. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / USE EXISTING ID -> S02

Reuse or complete identity verification. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / BACK -> U02

Return to mode selector. Navigation/read: preserve safe route context; re-authorise destination resource.

Courier setup

Delivery | /courier/c02

PURPOSE AND UI COMPOSITION

Choose how you will deliver. Render form layout with shared controls.

INPUTS

Transport mode (select); Required transport evidence (file); Accept courier rules (checkbox)

DATA / AUTHORITY

couriers, delivery_offers, assignments, location_samples, custody_events. Approved courier; assigned offer/job, eligible transport and route only.

RULES AND SERVER GUARD

Checks depend on mode and campus policy. Car/motorbike transfer eligibility requires separate opt-in. Require approved transport eligibility and active assignment; GPS and QR decode alone never prove custody.

RECOVERY AND STATE HANDLING

Missing licence or mode evidence: retain draft and show required check. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /courier-profile

Event proposal: courier.reviewed

This is the screen anchor, not an endpoint for every action.

01 / SUBMIT CHECKS -> C03 / DEMO

Demo approval; production route to review until eligible. Replace demo trigger with authorised event; no production success override.

02 / PAYOUT SETUP -> U19

Add verified payout destination. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Ready to deliver?

Delivery | /courier/c03

PURPOSE AND UI COMPOSITION

Choose availability before receiving offers. Render dashboard layout with shared controls.

INPUTS

Availability (select)

DATA / AUTHORITY

couriers, delivery_offers, assignments, location_samples, custody_events. Approved courier; assigned offer/job, eligible transport and route only.

RULES AND SERVER GUARD

One active transport method. Active job survives navigation and connectivity loss. Require approved transport eligibility and active assignment; GPS and QR decode alone never prove custody.

RECOVERY AND STATE HANDLING

Location unavailable: show manual help and eligibility limitations, not false movement. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

PATCH /courier/availability

Event proposal: courier.availability_changed

This is the screen anchor, not an endpoint for every action.

01 / GO ONLINE -> C04

Validate eligibility and request available offers. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / CURRENT DELIVERY -> C06

Resume assigned job. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / EARNINGS -> C13

View completed and pending earnings. Navigation/read: preserve safe route context; re-authorise destination resource.

04 / CHANGE TRANSPORT -> C14

Start required mode checks. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

05 / TRANSFER MODE -> T02

Open eligible transfer offers. Navigation/read: preserve safe route context; re-authorise destination resource.

Available delivery offers

Delivery | /courier/c04

PURPOSE AND UI COMPOSITION

Only accept work you can complete safely. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

couriers, delivery_offers, assignments, location_samples, custody_events. Approved courier; assigned offer/job, eligible transport and route only.

RULES AND SERVER GUARD

Show pickup/destination zones, handling, estimated effort and net earnings before acceptance. Require approved transport eligibility and active assignment; GPS and QR decode alone never prove custody.

RECOVERY AND STATE HANDLING

No offers: remain online with last update and offline choice. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M04. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /courier/offers
Event proposal: courier.offer_created
This is the screen anchor, not an endpoint for every action.

01 / VIEW OFFER -> C05

Open full job scope and expiry. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / GO OFFLINE -> C03

Stop new offers; preserve accepted work. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Delivery offer

Delivery | /courier/c05

PURPOSE AND UI COMPOSITION

Collect from Campus hub. Render offer layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

couriers, delivery_offers, assignments, location_samples, custody_events. Approved courier; assigned offer/job, eligible transport and route only.

RULES AND SERVER GUARD

Accept disabled for incompatible mode, expired offer or conflicting active task. Require approved transport eligibility and active assignment; GPS and QR decode alone never prove custody.

RECOVERY AND STATE HANDLING

Another courier accepted: close offer with explanation, not an error loop. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /courier/offers/{id}/accept
Event proposal: courier.assigned
This is the screen anchor, not an endpoint for every action.

01 / ACCEPT JOB -> C06

Atomically assign one courier and close competing offers. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / DECLINE -> C04

Close offer and continue availability. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Head to pickup

Delivery | /courier/c06

PURPOSE AND UI COMPOSITION

Assigned delivery DL-1042. Render map layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

couriers, delivery_offers, assignments, location_samples, custody_events. Approved courier; assigned offer/job, eligible transport and route only.

RULES AND SERVER GUARD

Warn before releasing inactive assignments; distinguish GPS failure from no movement. Require approved transport eligibility and active assignment; GPS and QR decode alone never prove custody.

RECOVERY AND STATE HANDLING

Stale location: show last update; never infer misconduct from one missing GPS event. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M16. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /deliveries/{id}/arrive-pickup
Event proposal: courier.arrived
This is the screen anchor, not an endpoint for every action.

01 / ARRIVED AT PICKUP -> C07

Record arrival and open package scan. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / MESSAGE PICKUP -> U10

Open authorised order thread. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / CANNOT PROCEED -> C12

Open reasoned exception flow. Navigation/read: preserve safe route context; re-authorise destination resource.

Scan pickup package

Delivery | /courier/c07

PURPOSE AND UI COMPOSITION

Match the package to this delivery. Render scanner layout with shared controls.

INPUTS

Manual package code (text)

DATA / AUTHORITY

couriers, delivery_offers, assignments, location_samples, custody_events. Approved courier; assigned offer/job, eligible transport and route only.

RULES AND SERVER GUARD

Camera requires just-in-time permission; manual fallback still requires server validation. QR contains no private buyer data. Require approved transport eligibility and active assignment; GPS and QR decode alone never prove custody.

RECOVERY AND STATE HANDLING

Duplicate scan: show already scanned; mismatch: no custody transfer. Offline: pending only, no confirmed pickup. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M17. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /packages/{id}/scan
Event proposal: package.scanned
This is the screen anchor, not an endpoint for every action.

01 / SIMULATE MATCHING SCAN -> C08 / DEMO

Resolve opaque token and open condition check. Replace demo trigger with authorised event; no production success override.

02 / ENTER CODE -> C08

Validate manual identifier against assigned job. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / WRONG PACKAGE -> C12 / DEMO

Demo mismatch: block custody and report. Replace demo trigger with authorised event; no production success override.

Check package condition

Delivery | /courier/c08

PURPOSE AND UI COMPOSITION

Record what you receive before accepting custody. Render form layout with shared controls.

INPUTS

Condition (select); Notes (textarea); Condition photo (file)

DATA / AUTHORITY

couriers, delivery_offers, assignments, location_samples, custody_events. Approved courier; assigned offer/job, eligible transport and route only.

RULES AND SERVER GUARD

Exceptions require notes/evidence; receiving actor confirms. Do not overwrite previous hub condition. Require approved transport eligibility and active assignment; GPS and QR decode alone never prove custody.

RECOVERY AND STATE HANDLING

Evidence upload pending: keep acceptance blocked when evidence is required. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M18. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /packages/{id}/condition
Event proposal: custody.accepted
This is the screen anchor, not an endpoint for every action.

01 / ACCEPT CUSTODY -> C09

Validate condition and record transfer from hub to courier. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / REPORT EXCEPTION -> C12

Record evidence and keep custody unresolved. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Deliver to buyer

Delivery | /courier/c09

PURPOSE AND UI COMPOSITION

Keep the buyer updated. Render map layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

couriers, delivery_offers, assignments, location_samples, custody_events. Approved courier; assigned offer/job, eligible transport and route only.

RULES AND SERVER GUARD

Location shared only for active assignment. Text directions and ETA must work without map. Require approved transport eligibility and active assignment; GPS and QR decode alone never prove custody.

RECOVERY AND STATE HANDLING

Network lost: show offline timestamp; queue location updates but do not invent delivery confirmation. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M16. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /deliveries/{id}/arrive-dropoff
Event proposal: delivery.at_dropoff
This is the screen anchor, not an endpoint for every action.

01 / ARRIVED AT DESTINATION -> C10

Record arrival and open recipient PIN. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / MESSAGE BUYER -> U10

Open assigned buyer thread. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / CALL BUYER -> U11

Open protected call. Navigation/read: preserve safe route context; re-authorise destination resource.

04 / REPORT ISSUE -> C12

Open active-delivery exception. Navigation/read: preserve safe route context; re-authorise destination resource.

Confirm recipient

Delivery | /courier/c10

PURPOSE AND UI COMPOSITION

Ask for the buyer's code at handoff. Render form layout with shared controls.

INPUTS

Recipient PIN (text)

DATA / AUTHORITY

couriers, delivery_offers, assignments, location_samples, custody_events. Approved courier; assigned offer/job, eligible transport and route only.

RULES AND SERVER GUARD

Never reveal expected PIN to courier. Production rate-limits attempts and validates server-side; buyer confirmation/settlement remains distinct. Require approved transport eligibility and active assignment; GPS and QR decode alone never prove custody.

RECOVERY AND STATE HANDLING

Wrong PIN: no completion; retry under limits, then support. Repeated success returns same handoff. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M18. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /deliveries/{id}/pin
Event proposal: handoff.verified
This is the screen anchor, not an endpoint for every action.

01 / VERIFY PIN -> C13 / DEMO

Demo valid code 482619: record handoff once and show earnings status. Replace demo trigger with authorised event; no production success override.

02 / BUYER UNAVAILABLE -> C11

Start wait and return workflow. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / PIN PROBLEM -> C12

Open authorised recovery. Navigation/read: preserve safe route context; re-authorise destination resource.

Waiting for the buyer

Delivery | /courier/c11

PURPOSE AND UI COMPOSITION

Try the in-app contact options first. Render timeline layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

couriers, delivery_offers, assignments, location_samples, custody_events. Approved courier; assigned offer/job, eligible transport and route only.

RULES AND SERVER GUARD

Do not allow immediate return before policy deadline. Food has a separate approved exception path, not routine hub storage. Require approved transport eligibility and active assignment; GPS and QR decode alone never prove custody.

RECOVERY AND STATE HANDLING

Timer missing while offline: fetch authoritative deadline before confirming return. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /deliveries/{id}/wait

Event proposal: delivery.waiting

This is the screen anchor, not an endpoint for every action.

01 / MESSAGE BUYER -> U10

Contact through order thread. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / BUYER ARRIVED -> C10

Continue recipient verification. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / START AUTHORISED RETURN -> C12

After server threshold, open return-to-hub instructions. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Delivery exception

Delivery | /courier/c12

PURPOSE AND UI COMPOSITION

Keep people and custody informed. Render form layout with shared controls.

INPUTS

Reason (select); Notes (textarea); Evidence (file)

DATA / AUTHORITY

couriers, delivery_offers, assignments, location_samples, custody_events. Approved courier; assigned offer/job, eligible transport and route only.

RULES AND SERVER GUARD

Food wait threshold 10-15 minutes: keep waiting or release without penalty where eligible; rematch with updated ready time. Other issues never auto-transfer custody. Require approved transport eligibility and active assignment; GPS and QR decode alone never prove custody.

RECOVERY AND STATE HANDLING

No connection: save draft locally, label unsubmitted, retain physical custody responsibility. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /deliveries/{id}/exceptions
Event proposal: delivery.exception_created
This is the screen anchor, not an endpoint for every action.

01 / SUBMIT ISSUE -> H07 / DEMO

Demo normal-parcel return; production routes by selected reason. Replace demo trigger with authorised event; no production success override.

02 / CONTACT SUPPORT -> U13

Open case with assignment reference. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / RESUME JOB -> C09

Resume only if assignment still valid. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Delivery earnings

Payments and ledger | /courier/c13

PURPOSE AND UI COMPOSITION

Track completion and settlement separately. Render wallet layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

payment_attempts, provider_events, ledger_journals, ledger_lines, payouts, destinations.
Approved courier; assigned offer/job, eligible transport and route only.

RULES AND SERVER GUARD

Earnings eligible is not paid. Transfer earnings wait for destination reconciliation.
Provider-confirmed outcome and immutable balanced ledger govern money. Unknown outcomes remain unresolved; retries reuse command identity.

RECOVERY AND STATE HANDLING

Dispute hold: identify affected allocation and case rather than hiding all earnings. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /courier/earnings
Event proposal: courier.earnings_updated
This is the screen anchor, not an endpoint for every action.

01 / FIND MORE JOBS -> C04

Return if available and no active assignment. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / WALLET -> U16

Show settled balances. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / REPORT EARNINGS ISSUE -> U13

Open job-linked case. Navigation/read: preserve safe route context; re-authorise destination resource.

Transport and transfer eligibility

Delivery | /courier/c14

PURPOSE AND UI COMPOSITION

Only one transport method is active. Render form layout with shared controls.

INPUTS

New mode (select); Required documents (file); Apply for transfer mode (checkbox)

DATA / AUTHORITY

couriers, delivery_offers, assignments, location_samples, custody_events. Approved courier; assigned offer/job, eligible transport and route only.

RULES AND SERVER GUARD

Do not change mode mid-job. Transfer requires approved motorbike/car route capability and explicit opt-in. Require approved transport eligibility and active assignment; GPS and QR decode alone never prove custody.

RECOVERY AND STATE HANDLING

Checks pending: keep previous eligible mode or offline status; never broaden scope prematurely. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

PATCH /courier/transport

Event proposal: transport.updated

This is the screen anchor, not an endpoint for every action.

01 / SUBMIT MODE CHANGE -> C03

Review new checks before changing active eligibility. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / TRANSFER ELIGIBILITY -> T02

Show only approved routes. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Hub operations

Hub custody | /hub/h01

PURPOSE AND UI COMPOSITION

Potchefstroom hub · assigned staff only. Render dashboard layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

hubs, memberships, packages, custody_events, intake_rejections. Assigned hub staff; matching campus, package state and custody authority.

RULES AND SERVER GUARD

Campus-scoped staff permission; every custody action records actor, place, time and condition. Check staff hub scope, expected custodian, receiving condition and package version before committing.

RECOVERY AND STATE HANDLING

Wrong hub grant: deny action without exposing package details. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /ops/hubs/{id}/queue
Event proposal: hub.queue_updated
This is the screen anchor, not an endpoint for every action.

01 / SCAN INTAKE -> H02

Start receiving a package. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / PACKAGE SEARCH -> H04

Look up permitted hub records. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / COLLECTION RELEASE -> H06

Verify buyer handoff. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

04 / RECEIVE RETURN -> H07

Scan returning custody. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

05 / TRANSFERS -> T03

Open hub transfer manifests. Navigation/read: preserve safe route context; re-authorise destination resource.

Receive a package

Hub custody | /hub/h02

PURPOSE AND UI COMPOSITION

Scan before inspecting the package. Render scanner layout with shared controls.

INPUTS

Manual package ID (text)

DATA / AUTHORITY

hubs, memberships, packages, custody_events, intake_rejections. Assigned hub staff; matching campus, package state and custody authority.

RULES AND SERVER GUARD

Scanner does not itself accept custody. Validate order paid, destination hub and package state. Check staff hub scope, expected custodian, receiving condition and package version before committing.

RECOVERY AND STATE HANDLING

Unknown, duplicate or wrong-hub token: explain and prevent intake acceptance. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M17. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /packages/{id}/scan
Event proposal: hub.intake_started
This is the screen anchor, not an endpoint for every action.

01 / SIMULATE SCAN -> H03 / DEMO

Resolve package and load eligible intake state. Replace demo trigger with authorised event; no production success override.

02 / MANUAL LOOKUP -> H03

Validate opaque package reference. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / CANCEL -> H01

Exit without custody change. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Intake condition check

Hub custody | /hub/h03

PURPOSE AND UI COMPOSITION

Record the official condition baseline. Render form layout with shared controls.

INPUTS

Condition (select); Notes (textarea); Evidence photo (file)

DATA / AUTHORITY

hubs, memberships, packages, custody_events, intake_rejections. Assigned hub staff; matching campus, package state and custody authority.

RULES AND SERVER GUARD

Accept only after inspection. Rejection occurs before hub custody and starts correction flow. Check staff hub scope, expected custodian, receiving condition and package version before committing.

RECOVERY AND STATE HANDLING

Missing exception evidence: block reject until valid evidence exists. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M18. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /packages/{id}/condition
Event proposal: package.hub_received
This is the screen anchor, not an endpoint for every action.

01 / ACCEPT INTO HUB -> H04

Record condition and HUB_RECEIVED; enable eligible courier dispatch. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / REJECT INTAKE -> H05

Require reason/evidence before rejection. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Package record

Hub custody | /hub/h04

PURPOSE AND UI COMPOSITION

PK-1042 · condition and custody. Render timeline layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

hubs, memberships, packages, custody_events, intake_rejections. Assigned hub staff; matching campus, package state and custody authority.

RULES AND SERVER GUARD

Append-only custody history. Only authorised reviewers view sensitive evidence. Check staff hub scope, expected custodian, receiving condition and package version before committing.

RECOVERY AND STATE HANDLING

Stale record: refresh before release and reject state conflict. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /ops/packages/{id}
Event proposal: custody.updated
This is the screen anchor, not an endpoint for every action.

01 / RELEASE TO COURIER -> H08

Verify assigned courier and matching package. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / BUYER COLLECTION -> H06

Verify recipient at hub. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / INSPECT EVIDENCE -> O04

Open authorised custody case view. Navigation/read: preserve safe route context; re-authorise destination resource.

04 / BACK TO QUEUE -> H01

Return to intake queue. Navigation/read: preserve safe route context; re-authorise destination resource.

Reject package intake

Hub custody | /hub/h05

PURPOSE AND UI COMPOSITION

Tell the seller exactly what to fix. Render form layout with shared controls.

INPUTS

Reason (select); Correction instructions (textarea); Evidence (file)

DATA / AUTHORITY

hubs, memberships, packages, custody_events, intake_rejections. Assigned hub staff; matching campus, package state and custody authority.

RULES AND SERVER GUARD

No HUB_RECEIVED event on rejection. Scheduler cancels and starts refund/release if correction expires. Check staff hub scope, expected custodian, receiving condition and package version before committing.

RECOVERY AND STATE HANDLING

Notification fails: preserve rejection event and retry notification separately. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /packages/{id}/reject
Event proposal: package.rejected
This is the screen anchor, not an endpoint for every action.

01 / CONFIRM REJECTION -> H01

Set correction deadline and notify relevant participants. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / BACK TO INSPECTION -> H03

Review condition without rejecting. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Release to buyer

Hub custody | /hub/h06

PURPOSE AND UI COMPOSITION

Check the package and recipient together. Render form layout with shared controls.

INPUTS

Package ID (text); Recipient PIN (text)

DATA / AUTHORITY

hubs, memberships, packages, custody_events, intake_rejections. Assigned hub staff; matching campus, package state and custody authority.

RULES AND SERVER GUARD

PIN and package must match; delegated collection requires separately approved recipient rules. Never expose PIN to operator. Check staff hub scope, expected custodian, receiving condition and package version before committing.

RECOVERY AND STATE HANDLING

Already released or wrong PIN: block duplicate handoff and show support route. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M18. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /packages/{id}/release-to-buyer
Event proposal: hub.collection_completed
This is the screen anchor, not an endpoint for every action.

01 / VERIFY AND RELEASE -> H04

Record one verified handoff and show released custody. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / WRONG CODE -> H06 / DEMO

Demo invalid code without release. Replace demo trigger with authorised event; no production success override.

03 / GET HELP -> O03

Open permitted review queue. Navigation/read: preserve safe route context; re-authorise destination resource.

Receive returned package

Hub custody | /hub/h07

PURPOSE AND UI COMPOSITION

Confirm the package returned from delivery. Render scanner layout with shared controls.

INPUTS

Package code (text); Condition (select); Notes (textarea)

DATA / AUTHORITY

hubs, memberships, packages, custody_events, intake_rejections. Assigned hub staff; matching campus, package state and custody authority.

RULES AND SERVER GUARD

Normal-product return only. Food/perishable handling follows category policy. After expiry notify seller for recollection. Check staff hub scope, expected custodian, receiving condition and package version before committing.

RECOVERY AND STATE HANDLING

Unexpected return: inspect order state and obtain authorised exception, not silent acceptance. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M17. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /packages/{id}/return-receive
Event proposal: hub.return_received
This is the screen anchor, not an endpoint for every action.

01 / RECEIVE RETURN -> H04

Record hub-return custody and start eligible 48-hour buyer collection window. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / CONDITION EXCEPTION -> O04

Record exception evidence and open case. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Release to assigned courier

Hub custody | /hub/h08

PURPOSE AND UI COMPOSITION

Reconcile the assigned job and parcel. Render form layout with shared controls.

INPUTS

Courier job reference (text); Package code (text)

DATA / AUTHORITY

hubs, memberships, packages, custody_events, intake_rejections. Assigned hub staff; matching campus, package state and custody authority.

RULES AND SERVER GUARD

Hub staff alone cannot invent receiving-courier acceptance; verify matching scan and assignment version. Check staff hub scope, expected custodian, receiving condition and package version before committing.

RECOVERY AND STATE HANDLING

Courier reassigned: deny previous assignment and load new authorised job. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M18. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /packages/{id}/release-to-courier
Event proposal: custody.transferred
This is the screen anchor, not an endpoint for every action.

01 / CONFIRM JOINT HANDOFF -> H04

Record matching release and receiving condition acknowledgment. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / MISMATCH -> O04

Open custody exception without releasing. Navigation/read: preserve safe route context; re-authorise destination resource.

Cross-campus options

Transfers | /transfers/t01

PURPOSE AND UI COMPOSITION

Compare timing and total cost. Render checkout layout with shared controls.

INPUTS

Transfer choice (select)

DATA / AUTHORITY

transfer_routes, windows, manifests, manifest_items, transfer_scans. Assigned transfer role and route; buyer/courier previews remain separately scoped.

RULES AND SERVER GUARD

No direct long-distance buyer-address delivery in standard transfer. Buyer sees hub stages and last-mile choice. Require route/vehicle authority and exact expected package-set reconciliation at both ends.

RECOVERY AND STATE HANDLING

Window full: offer next window or optional priced overflow. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /transfers/quote

Event proposal: transfer.quoted

This is the screen anchor, not an endpoint for every action.

01 / USE STANDARD TRANSFER -> B10

Attach scheduled transfer quote to buyer request. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / REQUEST OVERFLOW -> B11

Match eligible transfer capacity; charge extra only after acceptance. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / BACK -> B09

Return to fulfilment choices. Navigation/read: preserve safe route context; re-authorise destination resource.

Transfer courier offers

Transfers | /transfers/t02

PURPOSE AND UI COMPOSITION

Opt-in hub-to-hub work for eligible couriers. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

transfer_routes, windows, manifests, manifest_items, transfer_scans. Assigned transfer role and route; buyer/courier previews remain separately scoped.

RULES AND SERVER GUARD

Approved transport prioritised; student transfer capacity handles approved overflow. No buyer identities or order values. Require route/vehicle authority and exact expected package-set reconciliation at both ends.

RECOVERY AND STATE HANDLING

Ineligible vehicle or active conflict: explain checks and disable acceptance. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /courier/transfer-offers
Event proposal: transfer.offer_created
This is the screen anchor, not an endpoint for every action.

01 / VIEW TRANSFER -> T04

Show manifest summary and route requirements. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / BACK TO COURIER -> C03

Return to local delivery mode. Navigation/read: preserve safe route context; re-authorise destination resource.

Transfer operations

Transfers | /transfers/t03

PURPOSE AND UI COMPOSITION

Coordinate scheduled campus routes. Render dashboard layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

transfer_routes, windows, manifests, manifest_items, transfer_scans. Assigned transfer role and route; buyer/courier previews remain separately scoped.

RULES AND SERVER GUARD

Assigned campus and route scope. Window timing is configurable, not invented institution policy. Require route/vehicle authority and exact expected package-set reconciliation at both ends.

RECOVERY AND STATE HANDLING

No transport capacity: hold packages at origin and update buyers. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /ops/transfers
Event proposal: transfer.queue_updated
This is the screen anchor, not an endpoint for every action.

01 / OPEN MANIFEST -> T04

Load selected route and assigned packages. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / CREATE BATCH -> T09

Create route/window draft. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / RECONCILE ARRIVAL -> T07

Open destination scan queue. Navigation/read: preserve safe route context; re-authorise destination resource.

04 / EXCEPTIONS -> T08

Inspect unresolved package allocation. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Transfer manifest

Transfers | /transfers/t04

PURPOSE AND UI COMPOSITION

TR-201 · draft package allocation. Render table layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

transfer_routes, windows, manifests, manifest_items, transfer_scans. Assigned transfer role and route; buyer/courier previews remain separately scoped.

RULES AND SERVER GUARD

Show package ID, handling type and destination only to transfer courier. Staff see only permitted supporting data. Require route/vehicle authority and exact expected package-set reconciliation at both ends.

RECOVERY AND STATE HANDLING

Late package after lock: assign next batch; never silently alter departed manifest. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M19. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /transfer-batches/{id}/lock
Event proposal: transfer.manifest_locked
This is the screen anchor, not an endpoint for every action.

01 / LOCK MANIFEST -> T05

Freeze package membership and require origin scans. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / EDIT BATCH -> T09

Change draft only before lock. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / DECLINE TRANSFER -> T02

Release offer before accepting custody. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Origin scan reconciliation

Transfers | /transfers/t05

PURPOSE AND UI COMPOSITION

Scan every locked-manifest package. Render scanner layout with shared controls.

INPUTS

Package code (text)

DATA / AUTHORITY

transfer_routes, windows, manifests, manifest_items, transfer_scans. Assigned transfer role and route; buyer/courier previews remain separately scoped.

RULES AND SERVER GUARD

Departure guard must enforce exact set equality, not just count equality. Require route/vehicle authority and exact expected package-set reconciliation at both ends.

RECOVERY AND STATE HANDLING

Missing/extra/duplicate package: identify discrepancy and block departure. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M17, M19. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /transfers/{id}/depart
Event proposal: transfer.departed
This is the screen anchor, not an endpoint for every action.

01 / SCAN NEXT -> T05

Mark matching unscanned package; duplicates do not increase count. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / CONFIRM DEPARTURE -> T06

Allow only when all expected packages and custody checks reconcile. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / REPORT MISMATCH -> T08

Hold departure and open exception. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Transfer in progress

Transfers | /transfers/t06

PURPOSE AND UI COMPOSITION

TR-201 · between campus hubs. Render map layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

transfer_routes, windows, manifests, manifest_items, transfer_scans. Assigned transfer role and route; buyer/courier previews remain separately scoped.

RULES AND SERVER GUARD

GPS indicates progress, not custody or completed transfer. Buyer sees simplified stages. Require route/vehicle authority and exact expected package-set reconciliation at both ends.

RECOVERY AND STATE HANDLING

Route delay: update estimate and notify affected users without showing private transport details. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M16, M19. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /transfers/{id}
Event proposal: transfer.arrived
This is the screen anchor, not an endpoint for every action.

01 / ARRIVED AT DESTINATION -> T07

Record arrival; receiving hub must reconcile. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / REPORT INCIDENT -> T08

Open transport exception. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / CONTACT HUB -> U10

Open route-scoped conversation. Navigation/read: preserve safe route context; re-authorise destination resource.

Destination reconciliation

Transfers | /transfers/t07

PURPOSE AND UI COMPOSITION

Check every package and its condition. Render scanner layout with shared controls.

INPUTS

Package code (text); Condition (select)

DATA / AUTHORITY

transfer_routes, windows, manifests, manifest_items, transfer_scans. Assigned transfer role and route; buyer/courier previews remain separately scoped.

RULES AND SERVER GUARD

Unresolved discrepancies block ordinary completion. Reviewed unaffected allocations can later release separately. Require route/vehicle authority and exact expected package-set reconciliation at both ends.

RECOVERY AND STATE HANDLING

Mismatch: preserve scans and evidence; do not assume courier fault. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M17, M19. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /transfers/{id}/reconcile

Event proposal: transfer.reconciled

This is the screen anchor, not an endpoint for every action.

01 / RECORD NEXT PACKAGE -> T07

Append destination scan and condition for selected package. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / COMPLETE RECONCILIATION -> T03

Enable only after exact manifest resolved; create eligible earnings allocations. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / REPORT EXCEPTION -> T08

Hold initial transfer payout for review. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Transfer exception

Transfers | /transfers/t08

PURPOSE AND UI COMPOSITION

Reconstruct custody before deciding responsibility. Render form layout with shared controls.

INPUTS

Affected package IDs (text); Issue (select); Notes (textarea); Evidence (file)

DATA / AUTHORITY

transfer_routes, windows, manifests, manifest_items, transfer_scans. Assigned transfer role and route; buyer/courier previews remain separately scoped.

RULES AND SERVER GUARD

After affected allocations identified, release unaffected earnings; only disputed portion stays held. Require route/vehicle authority and exact expected package-set reconciliation at both ends.

RECOVERY AND STATE HANDLING

Evidence missing: save draft but do not issue blame or final financial allocation. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M19. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /transfer-disputes

Event proposal: transfer.exception_opened

This is the screen anchor, not an endpoint for every action.

01 / OPEN INVESTIGATION -> O04

Attach manifest and custody history to human review. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / BACK TO RECONCILIATION -> T07

Continue permitted scans. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Create transfer batch

Transfers | /transfers/t09

PURPOSE AND UI COMPOSITION

Schedule approved hub-to-hub capacity. Render form layout with shared controls.

INPUTS

Origin hub (text); Destination hub (text); Window (select); Transport assignment (text); Capacity (number)

DATA / AUTHORITY

transfer_routes, windows, manifests, manifest_items, transfer_scans. Assigned transfer role and route; buyer/courier previews remain separately scoped.

RULES AND SERVER GUARD

Require approved route, window and capacity. Never publish sensitive hub details beyond eligible participants. Require route/vehicle authority and exact expected package-set reconciliation at both ends.

RECOVERY AND STATE HANDLING

Invalid route or overlapping assignment: explain conflict and block save. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /transfer-batches

Event proposal: transfer.created

This is the screen anchor, not an endpoint for every action.

01 / SAVE DRAFT -> T04

Create route batch before manifest lock. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / CANCEL -> T03

Return to operations. Navigation/read: preserve safe route context; re-authorise destination resource.

Incubation overview

Incubation | /incubation/i01

PURPOSE AND UI COMPOSITION

Turn marketplace evidence into useful support. Render dashboard layout with shared controls.

INPUTS

Campus (select); Period (select)

DATA / AUTHORITY

business_metrics, evidence, recommendations, plans, milestones, invitations. Assigned incubation staff and campus scope; raw health indicators private to authorised staff.

RULES AND SERVER GUARD

Raw health indicators staff-only. No unrestricted identity, chat or finance access from incubation role. Campus-scoped staff see internal evidence; seller sharing and contact honour permission and opt-in.

RECOVERY AND STATE HANDLING

Incomplete data: show coverage/period limitations beside metrics. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M23. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /incubation/overview

Event proposal: incubation.overview_loaded

This is the screen anchor, not an endpoint for every action.

01 / DEMAND SIGNALS -> I02

Explore aggregate unmet demand. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / STUDENT BUSINESSES -> I04

Open scoped business directory. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / SUPPORT PLANS -> I06

Manage interventions. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

04 / REVIEWS -> I07

Open checkpoints. Navigation/read: preserve safe route context; re-authorise destination resource.

05 / REPORTS -> I10

Compare outcomes. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Demand signals

Incubation | /incubation/i02

PURPOSE AND UI COMPOSITION

Find repeated needs with limited supply. Render table layout with shared controls.

INPUTS

Category (select); Campus (select)

DATA / AUTHORITY

business_metrics, evidence, recommendations, plans, milestones, invitations. Assigned incubation staff and campus scope; raw health indicators private to authorised staff.

RULES AND SERVER GUARD

Deduplicate repeat requests; distinguish failed searches, wanted requests and paid demand. Suppress identifying small groups. Campus-scoped staff see internal evidence; seller sharing and contact honour permission and opt-in.

RECOVERY AND STATE HANDLING

Low sample: show insufficient evidence, not an opportunity certainty. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M23. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /incubation/demand
Event proposal: demand.explored
This is the screen anchor, not an endpoint for every action.

01 / INSPECT SIGNAL -> I03

Open cohort definition, period and evidence. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / EXPORT AGGREGATE -> I10

Prepare scoped report. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / BACK -> I01

Return to overview. Navigation/read: preserve safe route context; re-authorise destination resource.

Demand evidence

Incubation | /incubation/i03

PURPOSE AND UI COMPOSITION

Notebook bundles · a testable opportunity. Render dashboard layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

business_metrics, evidence, recommendations, plans, milestones, invitations. Assigned incubation staff and campus scope; raw health indicators private to authorised staff.

RULES AND SERVER GUARD

Show source definition and limitations. Demand signal is not a sales forecast or funding promise. Campus-scoped staff see internal evidence; seller sharing and contact honour permission and opt-in.

RECOVERY AND STATE HANDLING

Stale signal: warn and refresh before approving intervention. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M23. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /incubation/demand/{id}
Event proposal: demand.detail_viewed
This is the screen anchor, not an endpoint for every action.

01 / FIND SUITABLE BUSINESSES -> I04

Filter relevant opted-in/eligible sellers. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / DRAFT EXPERIMENT -> I06

Create intervention proposal from signal. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / BACK -> I02

Return to demand list. Navigation/read: preserve safe route context; re-authorise destination resource.

Student businesses

Incubation | /incubation/i04

PURPOSE AND UI COMPOSITION

Review sellers within your authorised scope. Render table layout with shared controls.

INPUTS

Search business (text); Support status (select)

DATA / AUTHORITY

business_metrics, evidence, recommendations, plans, milestones, invitations. Assigned incubation staff and campus scope; raw health indicators private to authorised staff.

RULES AND SERVER GUARD

Business contact requires opt-in; in-app guidance may remain available. No public exposure of internal ranks. Campus-scoped staff see internal evidence; seller sharing and contact honour permission and opt-in.

RECOVERY AND STATE HANDLING

No contact consent: disable direct outreach and offer in-app opportunity placement. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M23. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /incubation/businesses
Event proposal: businesses.loaded
This is the screen anchor, not an endpoint for every action.

01 / OPEN BUSINESS -> I05

Show performance evidence and participation preferences. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / INVITE TO SUPPORT -> I08

Check consent before direct contact. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / BACK -> I01

Return to overview. Navigation/read: preserve safe route context; re-authorise destination resource.

Business evidence profile

Incubation | /incubation/i05

PURPOSE AND UI COMPOSITION

Campus Stationery · indicators and context. Render dashboard layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

business_metrics, evidence, recommendations, plans, milestones, invitations. Assigned incubation staff and campus scope; raw health indicators private to authorised staff.

RULES AND SERVER GUARD

Expose interpretable components and missing-data warnings; score cannot automatically punish or remove access. Campus-scoped staff see internal evidence; seller sharing and contact honour permission and opt-in.

RECOVERY AND STATE HANDLING

Data dispute: annotate challenged evidence and avoid unreviewed intervention decisions. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M23. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /incubation/businesses/{id}
Event proposal: business.evidence_loaded
This is the screen anchor, not an endpoint for every action.

01 / REVIEW RECOMMENDATIONS -> I09

Inspect AI-assisted suggestions and evidence. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / CREATE PLAN -> I06

Draft with seller participation. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / CONTACT PREFERENCE -> I08

Check permitted channels. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

04 / CASE HISTORY -> I11

Review support-only history. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Build a 30-day plan

Incubation | /incubation/i06

PURPOSE AND UI COMPOSITION

Agree an owner, actions and measurable outcomes. Render form layout with shared controls.

INPUTS

Business (text); Goal (text); Owner (text); Start date (date); Weekly actions (textarea); Success measure (text)

DATA / AUTHORITY

business_metrics, evidence, recommendations, plans, milestones, invitations. Assigned incubation staff and campus scope; raw health indicators private to authorised staff.

RULES AND SERVER GUARD

AI may draft; staff edit and approve. Seller participation must be confirmed separately from contact consent. Campus-scoped staff see internal evidence; seller sharing and contact honour permission and opt-in.

RECOVERY AND STATE HANDLING

Missing owner or measure: block approval, preserve draft. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M24. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /incubation/plans

Event proposal: plan.drafted

This is the screen anchor, not an endpoint for every action.

01 / SAVE DRAFT -> I06

Version plan without activating. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / REVIEW APPROVAL -> I12

Show final plan and decision controls. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / SCHEDULE CHECKPOINT -> I07

Choose review date and evidence needed. Navigation/read: preserve safe route context; re-authorise destination resource.

Review checkpoint

Incubation | /incubation/i07

PURPOSE AND UI COMPOSITION

Compare agreed actions with actual outcomes. Render form layout with shared controls.

INPUTS

Checkpoint date (date); Progress summary (textarea); Evidence and limitations (textarea); Next action (select)

DATA / AUTHORITY

business_metrics, evidence, recommendations, plans, milestones, invitations. Assigned incubation staff and campus scope; raw health indicators private to authorised staff.

RULES AND SERVER GUARD

Record baseline, observed result and context; do not claim impact from raw correlation alone. Campus-scoped staff see internal evidence; seller sharing and contact honour permission and opt-in.

RECOVERY AND STATE HANDLING

No seller evidence: mark missing and reschedule rather than fabricate completion. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M24. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /incubation/plans/{id}/reviews
Event proposal: plan.reviewed
This is the screen anchor, not an endpoint for every action.

01 / SAVE REVIEW -> I11

Append dated checkpoint and notify participating seller. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / REVISE PLAN -> I06

Create updated plan version. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / VIEW SELLER EXPERIENCE -> S22 / DEMO

Demo seller-facing plan, without internal score. Replace demo trigger with authorised event; no production success override.

Support invitation

Incubation | /incubation/i08

PURPOSE AND UI COMPOSITION

Respect the seller's contact choice. Render form layout with shared controls.

INPUTS

Channel (select); Invitation message (textarea)

DATA / AUTHORITY

business_metrics, evidence, recommendations, plans, milestones, invitations. Assigned incubation staff and campus scope; raw health indicators private to authorised staff.

RULES AND SERVER GUARD

Do not send outside permitted channel. Record consent snapshot and invitation outcome; direct contact opt-out blocks send. Campus-scoped staff see internal evidence; seller sharing and contact honour permission and opt-in.

RECOVERY AND STATE HANDLING

Consent withdrawn before send: cancel queued outreach and show explanation. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M24. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /incubation/invitations

Event proposal: invitation.created

This is the screen anchor, not an endpoint for every action.

01 / PREVIEW ELIGIBLE INVITATION -> I08 / DEMO

Show message preview; no real send in prototype. Replace demo trigger with authorised event; no production success override.

02 / RECORD SELLER ACCEPTED -> I06 / DEMO

Demo acceptance: create participating plan. Replace demo trigger with authorised event; no production success override.

03 / NO CONSENT ROUTE -> S21 / DEMO

Preview non-contact in-app guidance. Replace demo trigger with authorised event; no production success override.

Review suggested intervention

Incubation | /incubation/i09

PURPOSE AND UI COMPOSITION

AI-assisted recommendation for staff review. Render status layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

business_metrics, evidence, recommendations, plans, milestones, invitations. Assigned incubation staff and campus scope; raw health indicators private to authorised staff.

RULES AND SERVER GUARD

Suggestion must cite internal evidence/time period and limitations. Human approval required for intervention. Campus-scoped staff see internal evidence; seller sharing and contact honour permission and opt-in.

RECOVERY AND STATE HANDLING

Unsupported claim: flag suggestion and exclude it from seller-facing guidance. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M24. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /incubation/recommendations/{id}
Event proposal: recommendation.reviewed
This is the screen anchor, not an endpoint for every action.

01 / USE IN DRAFT -> I06

Copy suggestion into editable plan, not automatic action. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / DISMISS SUGGESTION -> I05

Record reason; do not penalise seller. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / VIEW EVIDENCE -> I05

Inspect source indicators. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Programme reports

Incubation | /incubation/i10

PURPOSE AND UI COMPOSITION

Measure support without exposing student records. Render table layout with shared controls.

INPUTS

Period (select); Campus scope (select); Measure (select)

DATA / AUTHORITY

business_metrics, evidence, recommendations, plans, milestones, invitations. Assigned incubation staff and campus scope; raw health indicators private to authorised staff.

RULES AND SERVER GUARD

Downloads exclude raw identity, private conversations and hidden score lists unless explicitly authorised for purpose. Campus-scoped staff see internal evidence; seller sharing and contact honour permission and opt-in.

RECOVERY AND STATE HANDLING

Small cohort: suppress identifying breakdown and explain omission. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M23, M24. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /incubation/reports

Event proposal: report.generated

This is the screen anchor, not an endpoint for every action.

01 / GENERATE AGGREGATE -> I10

Prepare permitted aggregate report and show completion status. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / INSPECT COHORT -> I04

Open authorised underlying business cohort. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / BACK -> I01

Return to overview. Navigation/read: preserve safe route context; re-authorise destination resource.

Support history

Incubation | /incubation/i11

PURPOSE AND UI COMPOSITION

An accountable record of the intervention. Render timeline layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

business_metrics, evidence, recommendations, plans, milestones, invitations. Assigned incubation staff and campus scope; raw health indicators private to authorised staff.

RULES AND SERVER GUARD

Support notes are permission-scoped and separated from moderation evidence. Corrections preserve history. Campus-scoped staff see internal evidence; seller sharing and contact honour permission and opt-in.

RECOVERY AND STATE HANDLING

Unauthorised note access: deny without revealing note text. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M24. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /incubation/plans/{id}/history
Event proposal: plan.history_loaded
This is the screen anchor, not an endpoint for every action.

01 / OPEN PLAN -> I06

Read current plan version. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / ADD CHECKPOINT -> I07

Append review, not overwrite history. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / CLOSE PLAN -> I12

Review closure reason and seller summary. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Approve or close a plan

Incubation | /incubation/i12

PURPOSE AND UI COMPOSITION

Review the seller-facing outcome before confirming. Render form layout with shared controls.

INPUTS

Decision (select); Reason (textarea)

DATA / AUTHORITY

business_metrics, evidence, recommendations, plans, milestones, invitations. Assigned incubation staff and campus scope; raw health indicators private to authorised staff.

RULES AND SERVER GUARD

Approval and closure require staff permission and version match. Confirmation modal summarises audience and effect. Campus-scoped staff see internal evidence; seller sharing and contact honour permission and opt-in.

RECOVERY AND STATE HANDLING

Draft changed concurrently: compare latest version and require new review. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M24. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /incubation/plans/{id}/decision
Event proposal: intervention.approved
This is the screen anchor, not an endpoint for every action.

01 / CONFIRM DECISION -> I11

Record authorised decision and notify participating seller. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / EDIT DRAFT -> I06

Return for changes. Navigation/read: preserve safe route context; re-authorise destination resource.

Operations workspace

Operations and finance | /operations/o01

PURPOSE AND UI COMPOSITION

Open the modules assigned to your role. Render dashboard layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

cases, evidence, decisions, audit_events, policies, approval_requests. Assigned operations module, object and campus scope; step-up for sensitive mutations.

RULES AND SERVER GUARD

Prototype role switch is for design review only. Production loads assigned modules and campus scope, not universal admin data. Enforce specific staff capability and sensitive-action approval; route money effects through ledger/provider services.

RECOVERY AND STATE HANDLING

Grant removed: clear sensitive results and return to access request. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /ops/modules
Event proposal: ops.modules_loaded
This is the screen anchor, not an endpoint for every action.

01 / MODERATION -> O02

Open report triage. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / DISPUTES -> O03

Open case queue. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / FINANCE -> O09

Open payment exceptions. Navigation/read: preserve safe route context; re-authorise destination resource.

04 / ADMINISTRATION -> O12

Open scoped configuration. Navigation/read: preserve safe route context; re-authorise destination resource.

05 / AUDIT LOG -> O14

Review permitted action history. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Moderation queue

Operations and finance | /operations/o02

PURPOSE AND UI COMPOSITION

Prioritise content reports and policy flags. Render table layout with shared controls.

INPUTS

Filter (select); Category (select)

DATA / AUTHORITY

cases, evidence, decisions, audit_events, policies, approval_requests. Assigned operations module, object and campus scope; step-up for sensitive mutations.

RULES AND SERVER GUARD

Show reason, age, severity, assignee and confidence limitations. Content holds do not themselves punish accounts. Enforce specific staff capability and sensitive-action approval; route money effects through ledger/provider services.

RECOVERY AND STATE HANDLING

Already assigned: show current owner and reassignment process. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /ops/reports
Event proposal: report.created
This is the screen anchor, not an endpoint for every action.

01 / OPEN REVIEW -> O05

Inspect listing snapshot and flag evidence. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / ASSIGN TO ME -> O02

Atomically claim review task. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / DISPUTES -> O03

Open transaction cases. Navigation/read: preserve safe route context; re-authorise destination resource.

Dispute queue

Operations and finance | /operations/o03

PURPOSE AND UI COMPOSITION

Review cases with traceable ownership. Render table layout with shared controls.

INPUTS

Status (select); Campus (select)

DATA / AUTHORITY

cases, evidence, decisions, audit_events, policies, approval_requests. Assigned operations module, object and campus scope; step-up for sensitive mutations.

RULES AND SERVER GUARD

Only reviewers assigned by permitted scope can read evidence. Sensitive identity review is separate. Enforce specific staff capability and sensitive-action approval; route money effects through ledger/provider services.

RECOVERY AND STATE HANDLING

Evidence still scanning: label unavailable, do not treat as absent proof. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /ops/disputes
Event proposal: dispute.queue_updated
This is the screen anchor, not an endpoint for every action.

01 / OPEN CASE -> O04

Load participant-visible evidence and authorised private records. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / ASSIGN CASE -> O03

Record owner with audit trail. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / BACK -> O01

Return to workspace. Navigation/read: preserve safe route context; re-authorise destination resource.

Dispute evidence workspace

Operations and finance | /operations/o04

PURPOSE AND UI COMPOSITION

CASE-218 · reconstruct the facts. Render timeline layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

cases, evidence, decisions, audit_events, policies, approval_requests. Assigned operations module, object and campus scope; step-up for sensitive mutations.

RULES AND SERVER GUARD

Evidence viewer supports timestamps, provenance and restricted access; AI summary is optional assistance, never final decision. Enforce specific staff capability and sensitive-action approval; route money effects through ledger/provider services.

RECOVERY AND STATE HANDLING

Missing chain event: mark gap explicitly and investigate without assuming liability. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /ops/disputes/{id}/evidence
Event proposal: evidence.reviewed
This is the screen anchor, not an endpoint for every action.

01 / REQUEST INFORMATION -> O04

Create scoped evidence request and due date. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / DRAFT DECISION -> O06

Summarise reason and financial allocation. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / VIEW TRANSFER -> T08

Open related manifest exception. Navigation/read: preserve safe route context; re-authorise destination resource.

Listing policy review

Operations and finance | /operations/o05

PURPOSE AND UI COMPOSITION

Separate visibility from account enforcement. Render form layout with shared controls.

INPUTS

Decision (select); Reason code (text); Explanation to seller (textarea)

DATA / AUTHORITY

cases, evidence, decisions, audit_events, policies, approval_requests. Assigned operations module, object and campus scope; step-up for sensitive mutations.

RULES AND SERVER GUARD

Show applicable policy version and original content. Seller receives actionable reason and appeal route. Enforce specific staff capability and sensitive-action approval; route money effects through ledger/provider services.

RECOVERY AND STATE HANDLING

Concurrent listing revision: review correct version before deciding. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /ops/listings/{id}/decision
Event proposal: listing.reviewed
This is the screen anchor, not an endpoint for every action.

01 / SAVE CONTENT DECISION -> O02

Apply allowed visibility decision and notify seller. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / ACCOUNT ESCALATION -> O07

Open separate human-reviewed account action. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / RETURN -> O02

Keep pending state. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Dispute decision

Operations and finance | /operations/o06

PURPOSE AND UI COMPOSITION

Make the outcome and amounts explicit. Render form layout with shared controls.

INPUTS

Outcome (select); Buyer amount ZAR (number); Seller amount ZAR (number); Courier allocation ZAR (number); Decision reason (textarea)

DATA / AUTHORITY

cases, evidence, decisions, audit_events, policies, approval_requests. Assigned operations module, object and campus scope; step-up for sensitive mutations.

RULES AND SERVER GUARD

Allocate only available disputed funds; totals reconcile with case ledger. Decision and provider execution are separate. Enforce specific staff capability and sensitive-action approval; route money effects through ledger/provider services.

RECOVERY AND STATE HANDLING

Allocation mismatch: block submission with exact difference. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /ops/disputes/{id}/decision-preview

Event proposal: decision.previewed

This is the screen anchor, not an endpoint for every action.

01 / REVIEW DECISION -> O15 / DEMO

Preview allocation, reasons and notifications before step-up. Replace demo trigger with authorised event; no production success override.

02 / BACK -> O04

Return to evidence without applying decision. Navigation/read: preserve safe route context; re-authorise destination resource.

Account enforcement review

Operations and finance | /operations/o07

PURPOSE AND UI COMPOSITION

Use a proportionate, reasoned action. Render form layout with shared controls.

INPUTS

Action (select); Reason (textarea); Duration if applicable (text)

DATA / AUTHORITY

cases, evidence, decisions, audit_events, policies, approval_requests. Assigned operations module, object and campus scope; step-up for sensitive mutations.

RULES AND SERVER GUARD

No opaque AI-only final penalty. Existing financial obligations, support and appeal access require explicit treatment. Enforce specific staff capability and sensitive-action approval; route money effects through ledger/provider services.

RECOVERY AND STATE HANDLING

Missing policy basis: block final action and retain draft. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /ops/accounts/{id}/action-preview
Event proposal: enforcement.previewed
This is the screen anchor, not an endpoint for every action.

01 / REVIEW ACTION -> O15

Show scope and consequences for human confirmation. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / BACK -> O05

Return to content review. Navigation/read: preserve safe route context; re-authorise destination resource.

Appeal a decision

Operations and finance | /operations/o08

PURPOSE AND UI COMPOSITION

Explain what should be reconsidered. Render form layout with shared controls.

INPUTS

Decision reference (text); Reason for appeal (textarea); Additional evidence (file)

DATA / AUTHORITY

cases, evidence, decisions, audit_events, policies, approval_requests. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

This is a participant-facing screen despite Operations grouping. Owner access only; independent review where configured. Enforce specific staff capability and sensitive-action approval; route money effects through ledger/provider services.

RECOVERY AND STATE HANDLING

Already appealed or window ended: show current status and support route. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /appeals

Event proposal: appeal.submitted

This is the screen anchor, not an endpoint for every action.

01 / SUBMIT APPEAL -> U13

Create appeal and acknowledge receipt. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / BACK TO CASE -> B22

Return without submission. Navigation/read: preserve safe route context; re-authorise destination resource.

Finance operations

Payments and ledger | /operations/o09

PURPOSE AND UI COMPOSITION

Reconcile external outcomes and internal records. Render table layout with shared controls.

INPUTS

Queue (select)

DATA / AUTHORITY

payment_attempts, provider_events, ledger_journals, ledger_lines, payouts, destinations. Assigned operations module, object and campus scope; step-up for sensitive mutations.

RULES AND SERVER GUARD

Financial permissions do not confer arbitrary dispute-evidence or identity access. No raw card credentials. Provider-confirmed outcome and immutable balanced ledger govern money. Unknown outcomes remain unresolved; retries reuse command identity.

RECOVERY AND STATE HANDLING

Provider unavailable: mark stale and disable speculative final settlement. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /ops/finance/exceptions
Event proposal: finance.queue_updated
This is the screen anchor, not an endpoint for every action.

01 / INSPECT PAYMENT -> O10

Open provider reference and ledger reconciliation. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / REVIEW WITHDRAWAL -> O11

Inspect risk flag and destination verification. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / AUDIT LOG -> O14

Trace money-related actions. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Payment reconciliation

Payments and ledger | /operations/o10

PURPOSE AND UI COMPOSITION

Compare provider events with the ledger. Render timeline layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

payment_attempts, provider_events, ledger_journals, ledger_lines, payouts, destinations. Assigned operations module, object and campus scope; step-up for sensitive mutations.

RULES AND SERVER GUARD

Never edit ledger history in place. Corrections use compensating entries and unique provider event IDs. Provider-confirmed outcome and immutable balanced ledger govern money. Unknown outcomes remain unresolved; retries reuse command identity.

RECOVERY AND STATE HANDLING

Duplicate webhook: ignore side effect and log already processed. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /ops/payments/{id}/reconcile
Event proposal: payment.reconciled
This is the screen anchor, not an endpoint for every action.

01 / REFRESH PROVIDER STATUS -> O10

Fetch authoritative event before correcting local projection. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / PROPOSE CORRECTION -> O15

Draft reasoned reconciliation action. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / RELATED ORDER -> B14

Open permitted order projection. Navigation/read: preserve safe route context; re-authorise destination resource.

Withdrawal risk review

Payments and ledger | /operations/o11

PURPOSE AND UI COMPOSITION

Investigate the specific flagged withdrawal. Render form layout with shared controls.

INPUTS

Decision (select); Reason (textarea)

DATA / AUTHORITY

payment_attempts, provider_events, ledger_journals, ledger_lines, payouts, destinations. Assigned operations module, object and campus scope; step-up for sensitive mutations.

RULES AND SERVER GUARD

A hold is an exception, not mandatory friction for every withdrawal. Reviewer cannot change destination during release. Provider-confirmed outcome and immutable balanced ledger govern money. Unknown outcomes remain unresolved; retries reuse command identity.

RECOVERY AND STATE HANDLING

Destination changed after request: revalidate and require authorised review. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /ops/withdrawals/{id}/review
Event proposal: withdrawal.reviewed
This is the screen anchor, not an endpoint for every action.

01 / REVIEW DECISION -> O15 / DEMO

Preview reserve and notification effect. Replace demo trigger with authorised event; no production success override.

02 / REQUEST INFORMATION -> U13

Create scoped case task. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Platform configuration

Operations and finance | /operations/o12

PURPOSE AND UI COMPOSITION

Versioned settings for campus operations. Render menu layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

cases, evidence, decisions, audit_events, policies, approval_requests. Assigned operations module, object and campus scope; step-up for sensitive mutations.

RULES AND SERVER GUARD

Admin is not universal private-data access. Policy edits require preview and cannot rewrite historical order snapshots. Enforce specific staff capability and sensitive-action approval; route money effects through ledger/provider services.

RECOVERY AND STATE HANDLING

Invalid dependency: explain which active routes/orders prevent change. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /ops/configuration
Event proposal: configuration.loaded
This is the screen anchor, not an endpoint for every action.

01 / EDIT POLICY -> O13

Open scoped rule editor. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / STAFF ACCESS -> O16

Manage role assignments. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / HUB CONFIGURATION -> O17

Manage operational locations. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

04 / AUDIT -> O14

Inspect configuration history. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Policy rule editor

Operations and finance | /operations/o13

PURPOSE AND UI COMPOSITION

Set values with a clear effective date. Render form layout with shared controls.

INPUTS

Rule (select); Value (text); Scope (text); Effective date (date); Change reason (textarea)

DATA / AUTHORITY

cases, evidence, decisions, audit_events, policies, approval_requests. Assigned operations module, object and campus scope; step-up for sensitive mutations.

RULES AND SERVER GUARD

Preserve 24h correction, 48h collection, R50 withdrawal and other chosen defaults as versioned proposals, not immutable constants. Enforce specific staff capability and sensitive-action approval; route money effects through ledger/provider services.

RECOVERY AND STATE HANDLING

Invalid or contradictory bounds: block and report conflicting rule. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /ops/policies/preview

Event proposal: policy.previewed

This is the screen anchor, not an endpoint for every action.

01 / PREVIEW IMPACT -> O15 / DEMO

Validate bounds and affected future transactions. Replace demo trigger with authorised event; no production success override.

02 / CANCEL -> O12

Discard draft. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Audit history

Operations and finance | /operations/o14

PURPOSE AND UI COMPOSITION

Trace sensitive actions and their outcomes. Render table layout with shared controls.

INPUTS

Actor or record (text); Action type (select); Date range (text)

DATA / AUTHORITY

cases, evidence, decisions, audit_events, policies, approval_requests. Assigned operations module, object and campus scope; step-up for sensitive mutations.

RULES AND SERVER GUARD

Audit records are tamper-evident/append-only in proposed backend; access itself is logged. Do not export secrets. Enforce specific staff capability and sensitive-action approval; route money effects through ledger/provider services.

RECOVERY AND STATE HANDLING

Unavailable event: show record reference and support route, not fabricated history. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /ops/audit
Event proposal: audit.viewed
This is the screen anchor, not an endpoint for every action.

01 / INSPECT EVENT -> O14

Expand before/after, actor, reason and correlation ID. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / RELATED RECORD -> O04

Open target only with object permission. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / BACK -> O01

Return to operations. Navigation/read: preserve safe route context; re-authorise destination resource.

Review sensitive action

Operations and finance | /operations/o15

PURPOSE AND UI COMPOSITION

Check the exact effect before applying it. Render form layout with shared controls.

INPUTS

I reviewed the affected records and outcome (checkbox)

DATA / AUTHORITY

cases, evidence, decisions, audit_events, policies, approval_requests. Assigned operations module, object and campus scope; step-up for sensitive mutations.

RULES AND SERVER GUARD

Resume exact action ID and version after step-up. High-risk financial adjustments can require a second authorised reviewer. Enforce specific staff capability and sensitive-action approval; route money effects through ledger/provider services.

RECOVERY AND STATE HANDLING

Version conflict or permission change: invalidate preview and re-review. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /ops/actions/{id}/confirm
Event proposal: sensitive_action.confirmed
This is the screen anchor, not an endpoint for every action.

01 / CONFIRM WITH VERIFICATION -> A09

Step-up then return to pending action for server commit. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / GO BACK -> O01

Return to originating form and retain draft. Navigation/read: preserve safe route context; re-authorise destination resource.

Staff access management

Operations and finance | /operations/o16

PURPOSE AND UI COMPOSITION

Assign only necessary campus modules. Render form layout with shared controls.

INPUTS

Staff identity (email); Campus scope (text); Module (select); Expiry (date); Reason (textarea)

DATA / AUTHORITY

cases, evidence, decisions, audit_events, policies, approval_requests. Assigned operations module, object and campus scope; step-up for sensitive mutations.

RULES AND SERVER GUARD

No self-escalation. Grants require authorised administrator and audit; review conflicting financial permissions. Enforce specific staff capability and sensitive-action approval; route money effects through ledger/provider services.

RECOVERY AND STATE HANDLING

Unknown staff identity: request verification, not create unrestricted account. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /ops/role-grants/preview
Event proposal: role_grant.previewed
This is the screen anchor, not an endpoint for every action.

01 / PREVIEW ASSIGNMENT -> O15 / DEMO

Review scope, approver and effective period. Replace demo trigger with authorised event; no production success override.

02 / REVOKE ACCESS -> O15 / DEMO

Preview removal and session invalidation. Replace demo trigger with authorised event; no production success override.

03 / CANCEL -> O12

Return to configuration. Navigation/read: preserve safe route context; re-authorise destination resource.

Campus hub settings

Operations and finance | /operations/o17

PURPOSE AND UI COMPOSITION

Keep operating information accurate. Render form layout with shared controls.

INPUTS

Hub name (text); Campus (text); Opening hours (text); Approved pickup instructions (textarea); Storage/category limits (textarea)

DATA / AUTHORITY

cases, evidence, decisions, audit_events, policies, approval_requests. Assigned operations module, object and campus scope; step-up for sensitive mutations.

RULES AND SERVER GUARD

Only institution-approved locations. Closing a hub with current parcels requires a migration/exception plan. Enforce specific staff capability and sensitive-action approval; route money effects through ledger/provider services.

RECOVERY AND STATE HANDLING

Packages still held: block silent deactivation and show dependencies. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M25. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

PATCH /ops/hubs/{id}
Event proposal: hub.settings_updated
This is the screen anchor, not an endpoint for every action.

01 / PREVIEW UPDATE -> O15 / DEMO

Show routes and future quotes affected. Replace demo trigger with authorised event; no production success override.

02 / BACK -> O12

Return without publishing. Navigation/read: preserve safe route context; re-authorise destination resource.

Campus opportunities

Extensions | /extensions/x01

PURPOSE AND UI COMPOSITION

Explore additional marketplace experiences. Render menu layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

entitlements, events, applications, group_orders, recurring_agreements. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Expanded modules stay feature-gated until core commerce and operating policy are validated. Feature flag and domain-specific consent/capacity/payment rules must be implemented before enabling this flow.

RECOVERY AND STATE HANDLING

Unavailable module: explain pilot status and return to core marketplace. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M06, M29. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /opportunities
Event proposal: opportunities.viewed
This is the screen anchor, not an endpoint for every action.

01 / EVENTS -> X02

Browse approved events. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / GIGS -> X05

Browse legitimate opportunities. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / STORIES -> X08

Explore campus-linked content. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

04 / GROUP ORDERS -> X10

Join pooled demand. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

05 / SUBSCRIPTIONS -> X12

Manage eligible recurring services. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

06 / REWARDS -> X13

View institution-defined recognition. Navigation/read: preserve safe route context; re-authorise destination resource.

Campus events

Extensions | /extensions/x02

PURPOSE AND UI COMPOSITION

Find approved campus activities. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

entitlements, events, applications, group_orders, recurring_agreements. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Only approved organisers publish; location and capacity follow institutional rules. Feature flag and domain-specific consent/capacity/payment rules must be implemented before enabling this flow.

RECOVERY AND STATE HANDLING

Cancelled event: show notice and refund/RSVP effect. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /events
Event proposal: events.loaded
This is the screen anchor, not an endpoint for every action.

01 / OPEN EVENT -> X03

Show organiser, time, place and terms. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / MY TICKETS -> X04

Open owned event tickets. Navigation/read: preserve safe route context; re-authorise destination resource.

03 / ORGANISER WORKSPACE -> X14 / DEMO

Demo approved organiser management. Replace demo trigger with authorised event; no production success override.

Market day

Extensions | /extensions/x03

PURPOSE AND UI COMPOSITION

Meet campus entrepreneurs. Render product layout with shared controls.

INPUTS

Ticket quantity (number)

DATA / AUTHORITY

entitlements, events, applications, group_orders, recurring_agreements. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Paid tickets require separate provider checkout; no silent charge. Waitlist promotion needs explicit deadline. Feature flag and domain-specific consent/capacity/payment rules must be implemented before enabling this flow.

RECOVERY AND STATE HANDLING

Capacity changed: show waitlist instead of overselling. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /events/{id}/rsvp
Event proposal: event.rsvp_created
This is the screen anchor, not an endpoint for every action.

01 / RSVP -> X04

Reserve available place once and issue owned ticket. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / JOIN WAITLIST -> X04

Record waitlist status, not confirmed seat. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / APPLY FOR STALL -> X07

Open vendor application. Navigation/read: preserve safe route context; re-authorise destination resource.

Your event ticket

Extensions | /extensions/x04

PURPOSE AND UI COMPOSITION

Market day · confirmed RSVP. Render code layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

entitlements, events, applications, group_orders, recurring_agreements. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Ticket belongs to attendee; scanner sees necessary admission state only. Do not display buyer payment information. Feature flag and domain-specific consent/capacity/payment rules must be implemented before enabling this flow.

RECOVERY AND STATE HANDLING

Already checked in: show prior admission time and help route. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /tickets/{id}
Event proposal: ticket.viewed
This is the screen anchor, not an endpoint for every action.

01 / VIEW EVENT -> X03

Open current event instructions. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / CANCEL RSVP -> X04

Release seat according to event policy. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / CHECK-IN DEMO -> X15 / DEMO

Open staff-only check-in preview. Replace demo trigger with authorised event; no production success override.

Paid opportunities

Extensions | /extensions/x05

PURPOSE AND UI COMPOSITION

Apply your skills to an approved brief. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

entitlements, events, applications, group_orders, recurring_agreements. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Expanded opportunities may have application selection; core dispatch stays fixed-price without bidding. Institutional procurement boundaries apply. Feature flag and domain-specific consent/capacity/payment rules must be implemented before enabling this flow.

RECOVERY AND STATE HANDLING

Unapproved opportunity: hide application and show review status. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /gigs
Event proposal: gigs.loaded
This is the screen anchor, not an endpoint for every action.

01 / OPEN OPPORTUNITY -> X06

Show scope and eligibility. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / MY APPLICATION -> X07

Track submitted response. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Opportunity brief

Extensions | /extensions/x06

PURPOSE AND UI COMPOSITION

Event photography · approved scope. Render product layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

entitlements, events, applications, group_orders, recurring_agreements. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

No bypass of institutional contracting; selected application proceeds through approved service agreement. Feature flag and domain-specific consent/capacity/payment rules must be implemented before enabling this flow.

RECOVERY AND STATE HANDLING

Deadline passed: show closed status and alternatives. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /gigs/{id}
Event proposal: gig.viewed
This is the screen anchor, not an endpoint for every action.

01 / APPLY -> X07

Submit proposal against published scope. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / ASK A QUESTION -> U10

Open contextual enquiry. Navigation/read: preserve safe route context; re-authorise destination resource.

Application details

Extensions | /extensions/x07

PURPOSE AND UI COMPOSITION

Explain how you meet the published requirements. Render form layout with shared controls.

INPUTS

Application type (select); Experience or portfolio (textarea); Availability (text); Supporting file (file)

DATA / AUTHORITY

entitlements, events, applications, group_orders, recurring_agreements. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Different application subtypes add relevant fields; no automatic award from AI ranking. Feature flag and domain-specific consent/capacity/payment rules must be implemented before enabling this flow.

RECOVERY AND STATE HANDLING

Deadline or eligibility changed: keep draft and explain why submission is blocked. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /opportunity-applications
Event proposal: application.submitted
This is the screen anchor, not an endpoint for every action.

01 / SUBMIT APPLICATION -> X07

Record one application and show submitted status. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / EDIT BEFORE DEADLINE -> X07

Version permitted changes. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / WITHDRAW -> X01

Withdraw with explicit confirmation. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Campus stories

Extensions | /extensions/x08

PURPOSE AND UI COMPOSITION

Discover useful things through student stories. Render feed layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

entitlements, events, applications, group_orders, recurring_agreements. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Purposeful campus-first feed; no paid boosts. Captions, mute and reduced-motion controls; video is not implemented in demo. Feature flag and domain-specific consent/capacity/payment rules must be implemented before enabling this flow.

RECOVERY AND STATE HANDLING

Removed listing: disable purchase link and explain availability. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /stories
Event proposal: story.viewed
This is the screen anchor, not an endpoint for every action.

01 / OPEN LINKED ITEM -> B04

Open current listing, not stale video price. Navigation/read: preserve safe route context; re-authorise destination resource.

02 / CREATE STORY -> X09

Upload original commerce-related content. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / REPORT STORY -> B21

Attach content reference to report. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Create a campus story

Extensions | /extensions/x09

PURPOSE AND UI COMPOSITION

Link original content to something useful. Render form layout with shared controls.

INPUTS

Caption (textarea); Video or image (file); Linked listing or event ID (text); I can publish this content (checkbox)

DATA / AUTHORITY

entitlements, events, applications, group_orders, recurring_agreements. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Require rights declaration and captions. Transaction-linked reviews must correspond to an eligible purchase. Feature flag and domain-specific consent/capacity/payment rules must be implemented before enabling this flow.

RECOVERY AND STATE HANDLING

Unsafe or unscannable upload: hold and show correction/review path. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /stories
Event proposal: story.submitted
This is the screen anchor, not an endpoint for every action.

01 / SUBMIT FOR REVIEW -> X08

Upload draft and show pending moderation. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / SAVE DRAFT -> X09

Keep unpublished content. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Group order

Extensions | /extensions/x10

PURPOSE AND UI COMPOSITION

Join a transparent pooled purchase. Render checkout layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

entitlements, events, applications, group_orders, recurring_agreements. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Do not charge before disclosed commitment condition. Threshold failure must release/refund relevant funds. Feature flag and domain-specific consent/capacity/payment rules must be implemented before enabling this flow.

RECOVERY AND STATE HANDLING

Group full or expired: show final outcome before accepting join. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /group-orders/{id}/join
Event proposal: group.joined
This is the screen anchor, not an endpoint for every action.

01 / JOIN GROUP -> X11

Record participation and payment commitment according to approved policy. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / VIEW TERMS -> X10

Expand threshold failure and cancellation rules. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Your group participation

Extensions | /extensions/x11

PURPOSE AND UI COMPOSITION

Track whether the group proceeds. Render timeline layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

entitlements, events, applications, group_orders, recurring_agreements. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Group count is server-owned; fulfilled group creates traceable individual allocations. Feature flag and domain-specific consent/capacity/payment rules must be implemented before enabling this flow.

RECOVERY AND STATE HANDLING

Threshold not reached: show cancellation and release/refund status. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /group-orders/{id}/participation
Event proposal: group.updated
This is the screen anchor, not an endpoint for every action.

01 / VIEW GROUP -> X10

Show latest count and deadline. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / LEAVE GROUP -> X11

Apply disclosed withdrawal terms. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / ORDER CREATED -> B14 / DEMO

Demo successful threshold creates the participant order. Replace demo trigger with authorised event; no production success override.

Recurring service

Extensions | /extensions/x12

PURPOSE AND UI COMPOSITION

Control renewals and future charges. Render form layout with shared controls.

INPUTS

Plan (select); Explicit renewal consent (checkbox)

DATA / AUTHORITY

entitlements, events, applications, group_orders, recurring_agreements. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Feature-gated; clearly defined deliverables, missed-session policy and cancellation. No default long lock-in. Feature flag and domain-specific consent/capacity/payment rules must be implemented before enabling this flow.

RECOVERY AND STATE HANDLING

Payment fails: show paused state and recovery, not repeated hidden charges. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /subscriptions

Event proposal: subscription.updated

This is the screen anchor, not an endpoint for every action.

01 / REVIEW SUBSCRIPTION -> X12

Show final recurring terms before activation. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / CANCEL RENEWAL -> X12

Stop future charges and show effective date. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / GET HELP -> U12

Open subscription support. Navigation/read: preserve safe route context; re-authorise destination resource.

Campus recognition

Extensions | /extensions/x13

PURPOSE AND UI COMPOSITION

Recognition defined with Eduvos. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

entitlements, events, applications, group_orders, recurring_agreements. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Points are not money or withdrawable credit. Avoid unsupported reward promises and opaque public rankings. Feature flag and domain-specific consent/capacity/payment rules must be implemented before enabling this flow.

RECOVERY AND STATE HANDLING

Programme not active: show informative state, not fictional spendable balance. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M30. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

GET /recognition
Event proposal: recognition.viewed
This is the screen anchor, not an endpoint for every action.

01 / VIEW ACTIVITY -> B19

Show eligible completed activities. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / PROGRAMME TERMS -> X13

Explain rules and expiry when configured. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

Organiser workspace

Extensions | /extensions/x14

PURPOSE AND UI COMPOSITION

Manage approved events and vendor participation. Render form layout with shared controls.

INPUTS

Event title (text); Date (date); Approved location (text); Capacity (number); Admission terms (textarea)

DATA / AUTHORITY

entitlements, events, applications, group_orders, recurring_agreements. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Approved organiser grant required. Event cancellation must trigger attendee notices and financial review where paid. Feature flag and domain-specific consent/capacity/payment rules must be implemented before enabling this flow.

RECOVERY AND STATE HANDLING

Capacity below confirmed attendance: block and show reconciliation requirement. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /organiser/events
Event proposal: event.submitted
This is the screen anchor, not an endpoint for every action.

01 / SUBMIT EVENT -> X02

Save pending event; publish only after approval. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / VENDOR APPLICATIONS -> X07

Review authorised applications. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / CHECK-IN -> X15

Open event admission scanner. Navigation/read: preserve safe route context; re-authorise destination resource.

Event check-in

Extensions | /extensions/x15

PURPOSE AND UI COMPOSITION

Admit each eligible ticket once. Render scanner layout with shared controls.

INPUTS

Manual ticket reference (text)

DATA / AUTHORITY

entitlements, events, applications, group_orders, recurring_agreements. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Single-use admission distinct from package custody. Do not accept a package QR as a ticket. Feature flag and domain-specific consent/capacity/payment rules must be implemented before enabling this flow.

RECOVERY AND STATE HANDLING

Wrong event, cancelled or already used: refuse admission with clear reason and supervisor route. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M17. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /events/{id}/check-in
Event proposal: ticket.checked_in
This is the screen anchor, not an endpoint for every action.

01 / SIMULATE TICKET SCAN -> X15 / DEMO

Validate ticket-event match; record single admission. Replace demo trigger with authorised event; no production success override.

02 / MANUAL LOOKUP -> X15

Validate ticket reference without camera. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

03 / BACK -> X14

Return to organiser workspace. Navigation/read: preserve safe route context; re-authorise destination resource.

Review withdrawal

Payments and ledger | /shared/u22

PURPOSE AND UI COMPOSITION

Check destination and net receipt. Render checkout layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

payment_attempts, provider_events, ledger_journals, ledger_lines, payouts, destinations.
Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

After step-up, return here with validated draft. Recheck balance and quote version at final commit.
Provider-confirmed outcome and immutable balanced ledger govern money. Unknown outcomes remain unresolved; retries reuse command identity.

RECOVERY AND STATE HANDLING

Balance changed: show new available amount and require correction. Preserve safe drafts;
uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26, M14. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /withdrawals
Event proposal: withdrawal.submitted
This is the screen anchor, not an endpoint for every action.

01 / CONFIRM WITHDRAWAL -> U21

Reserve eligible funds atomically and submit once. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / EDIT AMOUNT -> U18

Return with amount and destination preserved. Navigation/read: preserve safe route context; re-authorise destination resource.

Active sessions

Account and communication | /shared/u23

PURPOSE AND UI COMPOSITION

Review devices signed into your account. Render list layout with shared controls.

INPUTS

No form input. Read scoped resource state; never expose a state-changing GET.

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Revoke refresh/session tokens server-side and notify owner; never rely only on deleting browser data. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

Already revoked: show current state, no repeated action. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

DELETE /sessions/{id}

Event proposal: session.revoked

This is the screen anchor, not an endpoint for every action.

01 / REVOKE OTHER SESSION -> A09

Step-up then revoke selected session. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / BACK -> U14

Return to security. Navigation/read: preserve safe route context; re-authorise destination resource.

Confirm account deletion

Account and communication | /shared/u24

PURPOSE AND UI COMPOSITION

Review what happens to your account. Render form layout with shared controls.

INPUTS

I understand this deletion request (checkbox)

DATA / AUTHORITY

profiles, addresses, notifications, conversations, messages, wallet_views. Owner-scoped student account and any category eligibility.

RULES AND SERVER GUARD

Show scope, processing steps and any retained data categories with reason. Completion depends on applicable approved policy. Scope every read and update to the actor; financial and identity commands require separate domain guards.

RECOVERY AND STATE HANDLING

Unresolved obligations: explain next steps, retain access needed to resolve them. Preserve safe drafts; uncertain command outcomes are reconciled before retry.

MOTION / TEST

M03, M26. Verify successful action, denied actor, stale state, duplicate command and offline recovery.

REPRESENTATIVE DOMAIN CONTRACT

POST /privacy/deletion

Event proposal: deletion.requested

This is the screen anchor, not an endpoint for every action.

01 / SUBMIT DELETION REQUEST -> U13

Create tracked request after verification; do not erase required records blindly. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.

02 / KEEP ACCOUNT -> U15

Cancel request before submission. Domain action: specify DTO, authority, state guard, transaction, idempotency and recovery before coding.