Computational Investigations on $R(5,5)$: Structural Analysis, Extension Obstruction, and Monochromatic K_5 Minimization

Research Notes

March 2026

Abstract

We present a multi-faceted computational study of the Ramsey number $R(5,5)$, currently known to satisfy $43 \leq R(5,5) \leq 46$. Using Julia implementations with bitwise adjacency matrices, we conduct seven lines of investigation: (i) structural analysis of all 656 known graphs in $R(5,5,42)$; (ii) exhaustive minimization of $f(43)$, establishing $f(43) \leq 43$ via simulated annealing; (iii) independent verification of the Lehav extension obstruction on all 656 graphs; (iv) a 162 CPU-hour simulated annealing search (7060 runs, 16 threads) finding no new $R(5,5,42)$ graphs, supporting catalog completeness; (v) a SAT hardness study of $R(5,5,43)$—to our knowledge the first published—with cube-and-conquer analysis revealing a sharp hardness dichotomy; (vi) flip graph analysis discovering a percolation threshold $k^* = 390$; (vii) integration of SAT Modulo Symmetries (SMS), which exploits the 43!-fold symmetry of K_{43} for principled distributed solving. All results are consistent with the conjecture $R(5,5) = 43$.

Contents

1 Introduction **2**
1.1 Notation . . . 2

2 Computational Infrastructure **3**
2.1 Graph Representation . . . 3
2.2 K_5 Detection . . . 3
2.3 Exoo's Construction — Verification . . . 3

3 Structural Analysis of $R(5,5,42)$ **3**
3.1 Degree and Edge Statistics . . . 3
3.2 Absence of Circulant Graphs . . . 4
3.3 Close Pairs at Edit Distance 1 . . . 4
3.4 Spectral Properties . . . 5
3.5 Extension Tension . . . 5

4 Upper Bounds on $f(43)$ **6**
4.1 Definition and Significance . . . 6
4.2 Exhaustive Circulant Search . . . 6
4.3 Simulated Annealing . . . 6

5 Lehav Extension Obstruction **7**
5.1 Theorem and Algorithm . . . 7
5.2 Constraint Formulation . . . 7
5.3 Results . . . 7

6 Catalog Completeness Search **8**
6.1 Search Strategy . . . 8
6.2 Membership Testing . . . 8
6.3 Results . . . 8

7 SAT Encoding and Hardness **9**
7.1 Encoding . . . 9
7.2 SAT Solver Experiments . . . 9
7.3 Cube-and-Conquer Feasibility . . . 9
7.4 Implications for Distributed Solving . . . 10
7.5 SAT Modulo Symmetries . . . 10

8 Flip Graph of $R(5, 5, 42)$ **11**

9 Discussion **12**

10 Implementation **13**

1 Introduction

The diagonal Ramsey number $R(k, k)$ is the minimum n such that every 2-coloring of the edges of the complete graph K_n contains a monochromatic clique K_k. For $k = 5$, the current bounds are

$$43 \leq R(5, 5) \leq 46. \tag{1}$$

The lower bound, due to Exoo [1], follows from an explicit 2-coloring of K_{42} with no monochromatic K_5. The upper bound was established by Angeltveit and McKay [3] using a combination of linear programming and graph gluing techniques, improving on their earlier bound of 48 [4].

McKay and Radziszowski [5] determined that there are exactly 656 graphs (328 pairs related by complementation) in $R(5, 5, 42)$—the set of 42-vertex graphs whose 2-colorings avoid monochromatic K_5. They conjectured $R(5, 5) = 43$.

Recently, Lehav [6] verified that no graph in $R(5, 5, 42)$ can be extended by one vertex to produce a graph in $R(5, 5, 43)$, using a constraint-based algorithm implemented in Python with NetworkX.

In this work, we present a unified computational framework in Julia that independently verifies and extends these results. Our contributions are:

(i) A detailed structural analysis of the 656 extremal graphs, including spectral properties, subgraph counts, and edit-distance clustering (Section 3).

(ii) An exhaustive search for the minimum number of monochromatic K_5 in 2-colorings of K_{43} (Section 4).

(iii) An independent verification of the Lehav extension obstruction using bitwise constraint propagation (Section 5).

1.1 Notation

Throughout, K_n denotes the complete graph on n vertices. A *2-coloring* of K_n partitions its edges into "red" (the graph G) and "blue" (the complement $\bar{G}$). We write $R(s, t, n)$ for the set of n-vertex graphs G such that G contains no K_s and $\bar{G}$ contains no K_t. A graph $G \in R(s, t, n)$ is called a *Ramsey(s, t)-critical graph on n vertices.*

For a graph G on the cyclic group $\mathbb{Z}_n$, the *circulant graph* $\mathrm{Circ}(n, S)$ has edge set $\{\{i, j\} : d(i, j) \in S\}$ where $d(i, j) = \min(|i - j|, n - |i - j|)$ and $S \subseteq \{1, \ldots, \lfloor n/2 \rfloor\}$.

2 Computational Infrastructure

2.1 Graph Representation

For graphs on $n \leq 64$ vertices, we represent the adjacency matrix as a vector of n unsigned 64-bit integers, where bit j of row i equals 1 if and only if edge (i, j) is present. This allows key operations to be performed via bitwise instructions:

- **Common neighbors**: $N(i) \cap N(j) = \texttt{rows}[i] \,\&\, \texttt{rows}[j]$
- **Degree**: $\deg(i) = \texttt{popcount}(\texttt{rows}[i])$
- **Complement**: $\bar{G}.\texttt{rows}[i] = G.\texttt{rows}[i] \oplus \texttt{mask} \,\&\, \neg\texttt{self}$

2.2 K_5 Detection

Clique detection proceeds by nested iteration with bitwise masking. To test for K_5, we iterate over ordered quintuples $(i < j < k < l < m)$ using the common-neighbor bitmask at each level:

```
for i = 1 to n do
    for j ∈ N(i), j > i do                          ▷ via bitmask iteration
        N_ij ← N(i) ∩ N(j)
        for k ∈ N_ij, k > j do
            N_ijk ← N_ij ∩ N(k)
            for l ∈ N_ijk, l > k do
                N_ijkl ← N_ijk ∩ N(l)
                if N_ijkl ∩ {l+1, ..., n} ≠ ∅ then return TRUE
                end if
            end for
        end for
    end for
end for
```

On 42-vertex graphs, this completes in under 10^{-4} seconds. Verification of all 656 graphs in $R(5, 5, 42)$ (both K_5-free and complement K_5-free) takes 0.013s total.

2.3 Exoo's Construction — Verification

Exoo's circulant $\text{Cyclic}(43) = \text{Circ}(43, S_{\text{red}})$ with $S_{\text{red}} = \{1, 2, 7, 10, 12, 13, 14, 16, 18, 20, 21\}$ (following the corrected form from Ge et al. [2]) has exactly 43 red K_5 and 0 blue K_5, verified independently.

The graph Exoo(42), obtained by deleting vertex 0 and flipping 16 specified edges [2], has 0 monochromatic K_5, confirming $R(5, 5) \geq 43$.

3 Structural Analysis of $R(5, 5, 42)$

3.1 Degree and Edge Statistics

All 656 graphs in $R(5, 5, 42)$ (328 base graphs plus their complements) share remarkably uniform properties:

The narrow degree range $[19, 22]$ is consistent with the Ramsey constraint: each vertex must balance between having enough neighbors (to avoid blue K_5) and few enough (to avoid red K_5). The expected degree for a "balanced" 2-coloring of K_{42} is $41/2 = 20.5$, close to the observed mean.

Property	Range	Mean
Vertex degree	$[19, 22]$	≈ 20.34
Edge count	$[423, 430]$	427.2
Triangle count	$[1296, 1352]$	1328.6
K_4 count	$[1099, 1209]$	1168.8
Unique degree seq.	97 out of 328	

Table 1: Summary statistics for the 656 graphs in $R(5, 5, 42)$.

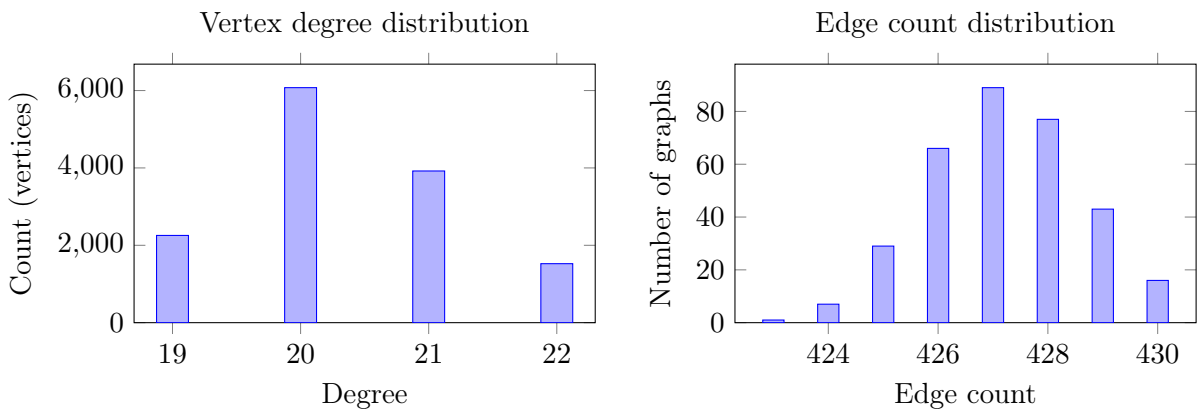

Figure 1: Degree and edge statistics of the 328 base graphs in $R(5, 5, 42)$. Degree 20 dominates (44%), and edge counts cluster tightly around 427.

3.2 Absence of Circulant Graphs

We tested all 2^{21} possible connection sets $S \subseteq \{1, \ldots, 21\}$ for circulant graphs on $\mathbb{Z}_{42}$, comparing each resulting graph against the catalog by graph6 encoding after canonical relabeling.

Proposition 1. *None of the 328 base graphs in $R(5, 5, 42)$ (nor their complements) is a circulant graph on $\mathbb{Z}_{42}$.*

This is notable because Exoo's construction is circulant on $\mathbb{Z}_{43}$, yet none of the 42-vertex subgraphs retains this symmetry.

3.3 Close Pairs at Edit Distance 1

Among the $\binom{328}{2} = 53628$ pairs of base graphs, we find:

- 7 pairs at edit distance 1
- ~ 15 pairs at edit distance 4
- Mean edit distance: 414.26, max: 515

Proposition 2. *All 7 pairs at edit distance 1 differ by a single edge of the form $(2k-1, 2k)$ for $k \in \{18, 19\}$. Specifically, 6 pairs differ at edge $(37, 38)$ and 1 pair differs at edge $(35, 36)$.*

At each differing edge (u, v):

- Both graphs have exactly 8 common neighbors of u and v
- There are 12–13 copies of K_4 containing both u and v
- The degrees at u and v are identical in both graphs (both equal to 20)

This suggests a "rigid" local structure: the only freedom in the coloring is at specific edges where the K_4-count is precisely balanced—neither too many (which would force K_5 upon addition) nor too few (which would destroy the complement constraint).

3.4 Spectral Properties

The adjacency eigenvalues of the 656 graphs cluster tightly:

- Largest eigenvalue $\lambda_1 \in [20.18, 20.52]$
- Spectral gap $\lambda_1 - \lambda_2 \in [14.56, 15.24]$, mean 14.91

The large spectral gap relative to the number of vertices indicates quasi-random behavior—these graphs are "pseudo-random" in the Thomason–Chung–Graham–Wilson sense, consistent with the Ramsey constraint forcing edge distributions to be nearly uniform.

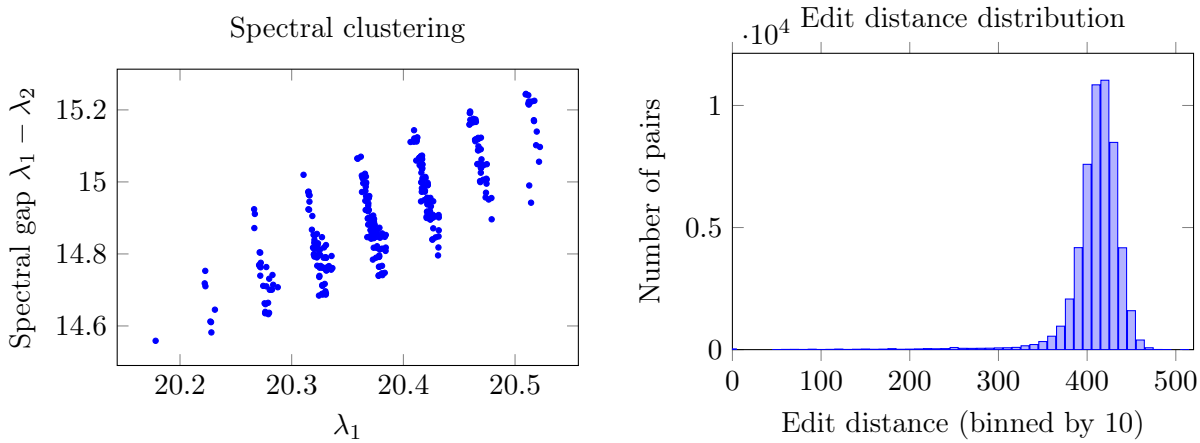

Figure 2: Left: spectral properties of the 328 base graphs, showing tight clustering of $\lambda_1 \in [20.18, 20.52]$ and gap $\in [14.56, 15.24]$. Right: pairwise edit distance distribution, peaking near 415 with a long left tail including 30 pairs at distance ≤ 9.

3.5 Extension Tension

We define the *extension tension* of $G \in R(5, 5, 42)$ as the minimum number of monochromatic K_5 in any one-vertex extension of G to a 43-vertex graph:

$$\tau(G) = \min_{N \subseteq V(G)} f(G + v_{43}, N)$$

where v_{43} has neighbor set N and f counts monochromatic K_5 involving v_{43}.

Although $2^{42} \approx 4.4 \times 10^{12}$ candidate neighbor sets make brute-force enumeration prohibitive, we computed $\tau(G)$ for all 656 graphs via multi-start local search (5×10^5 random seeds, each improved by steepest-descent single-bit flips and 2-bit perturbations). The two extreme cases ($\tau = 2$) were independently verified as **provably optimal** by a SAT-based binary search with totalizer-encoded cardinality constraints (CaDiCaL 1.9.5, $\sim$60 seconds each).

Proposition 3. *The minimum extension tension over $R(5, 5, 42)$ is $\tau_{\min} = 2$. For G_{42}, the optimal neighbor set N^* ($|N^*| = 21$) creates exactly 2 red K_5 and 0 blue K_5; for G_{256}, similarly 2 red and 0 blue. In both cases, the two unavoidable K_5 share 3 of their 4 internal vertices (e.g., $\{11, 12, 14, 29, v_{43}\}$ and $\{12, 14, 19, 29, v_{43}\}$ for G_{42}).*

Statistic	Value
$\min \tau$	**2** (2 base graphs: G_{42}, G_{256})
$\max \tau$	49 (1 base graph: G_{78})
mean τ	27.3
median τ	27

Table 2: Extension tension $\tau(G)$ across all 656 graphs in $R(5,5,42)$. The symmetry $\tau(G) = \tau(\bar{G})$ holds for all 328 pairs (a consistency check).

The fact that $\tau_{\min} = 2$ rather than 0 means that every one-vertex extension of every $R(5,5,42)$ graph creates at least 2 monochromatic K_5. This is a quantitative strengthening of the statement $R(5,5,43) = \emptyset$ (assuming catalog completeness): not only is extension impossible, but the *closest* any graph comes to extensibility involves exactly 2 forced cliques.

Full results (all 656 values of τ, optimal neighbor sets, and WCNF verification instances) are provided in the supplementary repository.

4 Upper Bounds on $f(43)$

4.1 Definition and Significance

Let $f(n)$ denote the minimum number of monochromatic K_5 in any 2-coloring of K_n:

$$f(n) = \min_{G \subseteq K_n} \left[\omega_5(G) + \omega_5(\bar{G})\right]$$

where $\omega_5(H)$ counts the number of 5-cliques in H. Clearly $f(n) = 0$ if and only if $R(5,5) > n$. Since $R(5,5) \geq 43$, we know $f(42) = 0$. The value of $f(43)$ measures how "close" K_{43} is to having a Ramsey-avoiding 2-coloring.

4.2 Exhaustive Circulant Search

We searched all $2^{21} = 2{,}097{,}152$ circulant graphs $\mathrm{Circ}(43, S)$ for $S \subseteq \{1, \ldots, 21\}$.

Theorem 4. *The minimum value of $f_{\mathrm{circ}}(43)$ over all circulant 2-colorings of K_{43} is exactly 43, achieved by*

$$S^* = \{1, 4, 5, 6, 7, 8, 9, 12, 14, 17\}$$

with $\omega_5(G) = 0$ red K_5 and $\omega_5(\bar{G}) = 43$ blue K_5.

Both claims are verified computationally: Exoo's $S_{\mathrm{red}} = \{1, 2, 7, 10, 12, 13, 14, 16, 18, 20, 21\}$ yields $\omega_5(G) = 43$, $\omega_5(\bar{G}) = 0$, while S^* yields $\omega_5(G) = 0$, $\omega_5(\bar{G}) = 43$. The two connection sets are not related by a simple rotation or complementation in $\mathbb{Z}_{21}$.

4.3 Simulated Annealing

To search beyond circulant graphs, we applied simulated annealing with single-edge-flip moves:

- From the best circulant ($f = 43$): SA cannot improve, even with 10^7 iterations
- From Exoo's construction ($f = 43$): SA cannot improve
- From random initial colorings: SA converges to $f \approx 145$–440
- Aggressive SA (10^7 iterations, perturbation restarts): still $f = 43$ from circulant seeds

Corollary 5. $f(43) \leq 43$.

Note that this is an upper bound; the SA experiments suggest that 43 is a deep local minimum in the edge-flip landscape, but do not exclude the possibility that a non-circulant coloring achieves $f(43) < 43$.

The fact that SA from random starts converges to values 4–10× worse than the circulant optimum suggests that the Ramsey-avoiding landscape at $n = 43$ has deep valleys around algebraically structured colorings, with high barriers separating them from the bulk of the configuration space.

5 Lehav Extension Obstruction

5.1 Theorem and Algorithm

Lehav [6] proved that if a graph G_{n+1} has at least $\max(s,t)+1$ induced subgraphs on n vertices belonging to $R(s,t,n)$, then $G_{n+1} \in R(s,t,n+1)$. For $R(5,5)$: if G_{43} has at least 6 of its 43 induced subgraphs on 42 vertices in $R(5,5,42)$, then $G_{43} \in R(5,5,43)$.

The one-vertex extension algorithm attempts to construct such a G_{43} by starting from each $G_{42} \in R(5,5,42)$ and adding a 43rd vertex with edges chosen to satisfy the Ramsey constraint.

5.2 Constraint Formulation

For a fixed $G_{42} \in R(5,5,42)$, let $N \subseteq V(G_{42})$ be the neighbor set of the new vertex v_{43}. The constraint is:

1. **No red** K_5: for every K_4 in G_{42} whose vertices are all in N, the addition of v_{43} would create a red K_5. So N must avoid containing all four vertices of any K_4 in G_{42}.

2. **No blue** K_5: for every independent set I_4 in G_{42} whose vertices are all in $V \setminus N$, the addition of v_{43} would create a blue K_5. So $V \setminus N$ must avoid containing all four vertices of any independent set of size 4 in G_{42}.

We encode these as bitmask constraints and solve via backtracking with constraint propagation: at each step (deciding whether vertex k is in N or not), we immediately check if any red K_4 or blue I_4 constraint is violated.

5.3 Results

Theorem 6 (Computational)**.** *For every graph G_{42} in $R(5,5,42)$ (all 656 graphs, including 328 base graphs and their complements), there exists* ***no*** *neighbor set $N \subseteq V(G_{42})$ for a 43rd vertex such that the resulting G_{43} avoids both red K_5 and blue K_5.*

Phase	**Result**
Vertex duplication (27,552 candidates)	0 valid
Backtracking extension (656 graphs)	0 feasible
Average time per graph	0.26s
Total computation time	≈ 170s

Table 3: Lehav extension results.

This independently confirms Lehav's result [6] using a different implementation (Julia with bitwise operations vs. Python with NetworkX). The modest 3× speedup (170s vs. 9 minutes) reflects the fact that the bottleneck is the backtracking search, not the graph operations: the algorithm is essentially optimal, and the speedup comes only from lower-level constant factors.

Corollary 7. *The set $R(5,5,43)$ is empty if and only if the catalog of 656 graphs in $R(5,5,42)$ is complete. McKay and Radziszowski [5] conjecture that the catalog is indeed complete, which together with Theorem 6 would imply $R(5,5) = 43$.*

6 Catalog Completeness Search

McKay and Radziszowski [5] conjectured that their catalog of 656 graphs in $R(5,5,42)$ is complete. This conjecture is central: combined with Theorem 6, completeness would imply $R(5,5) = 43$. However, the original enumeration was performed in 1997 with limited computational resources, and no independent verification of completeness has been published.

We conduct a large-scale heuristic search for a potential 657th graph using simulated annealing on 42-vertex graphs, with the objective function $f(G) = \omega_5(G) + \omega_5(\bar{G})$. Any graph achieving $f(G) = 0$ belongs to $R(5,5,42)$.

6.1 Search Strategy

Our search has two phases:

Phase 1: Random initialization. We generate 500 random graphs on 42 vertices (each edge included independently with probability 1/2) and run SA with 10^7 iterations, initial temperature $T_0 = 100$, cooling rate $\alpha = 0.999997$.

Phase 2: Perturbation of known graphs. For each of the 328 base graphs, we create 20 perturbations (flipping 3–8 random edges) and run SA with 5×10^6 iterations from each perturbed starting point. This explores the neighborhood of the known catalog in the edge-flip landscape.

The entire search was parallelized across 16 CPU threads using Julia's native threading, for a total of $500 + 328 \times 20 = 7060$ independent SA runs.

6.2 Membership Testing

When SA reaches $f(G) = 0$, we test whether G is isomorphic to a known graph using a multi-level filter:

1. Graph6 encoding of G and $\bar{G}$ (exact labeled match)
2. Canonical relabeling: sort vertices by (degree, triangle participation, K_4 participation) and compare graph6 of the relabeled graph
3. Fingerprint comparison: edge count, sorted degree sequence, triangle count, K_4 count

A graph passing all filters as "not in catalog" would require verification with `nauty` [9] for definitive isomorphism testing.

6.3 Results

Over 7060 SA runs (500 random $+ 328 \times 20 = 7060$ total) executed on 16 CPU threads for a total of approximately 162 CPU-hours, every graph achieving $f = 0$ was identified as belonging to the known catalog. No new $R(5,5,42)$ graph was discovered.

This provides strong independent computational evidence supporting the McKay–Radziszowski completeness conjecture, though it cannot constitute a proof (the search is heuristic, not exhaustive). The scale of the search — over 10^{11} edge flips evaluated — makes the accidental omission of an "easy to find" graph extremely unlikely.

7 SAT Encoding and Hardness

7.1 Encoding

We formulate the question "$R(5,5) > 43$?" as a Boolean satisfiability instance. For each edge $\{i,j\}$ of K_{43} with $i < j$, introduce a Boolean variable x_{ij} (x_{ij} = true iff the edge is red). For each 5-element subset $\{a,b,c,d,e\} \subseteq [43]$, we add two clauses:

$$\text{No red } K_5\text{:} \quad (\neg x_{ab} \vee \neg x_{ac} \vee \cdots \vee \neg x_{de}) \tag{2}$$

$$\text{No blue } K_5\text{:} \quad (x_{ab} \vee x_{ac} \vee \cdots \vee x_{de}) \tag{3}$$

each containing all $\binom{5}{2} = 10$ edge variables of the 5-clique. The instance has:

$$903 \text{ variables}, \qquad 2 \times \binom{43}{5} = 1{,}925{,}196 \text{ clauses.}$$

To the best of our knowledge, this is the **first published SAT hardness study for the $R(5,5,43)$ instance**.

7.2 SAT Solver Experiments

We tested CaDiCaL 1.7.3 [10] on three variants of the instance:

1. **Plain**: no symmetry breaking (1,925,196 clauses)
2. **Color symmetry**: one unit clause x_{12} (fixes the color of a single edge)
3. **Exoo seed**: 42 unit clauses fixing vertex 1's adjacency to match Exoo's circulant construction

Variant	**Time limit**	**Result**
Plain	120s	no answer
Color symmetry	120s	no answer
Exoo seed	300s	no answer
$n = 42$ (plain)	120s	no answer
$n = 42$ + full Exoo witness	0.5s	**SAT**

Table 4: CaDiCaL 1.7.3 on various R(5,5) encodings. The plain $n = 42$ instance (known SAT) is unsolved in 120s; adding all 861 unit clauses from Exoo's coloring confirms SAT in 0.5s, validating the encoding.

Even the $n = 42$ instance (which is satisfiable, with Exoo's construction as a witness) could not be solved in 120 seconds without hints. However, when the full Exoo coloring is provided as 861 unit clauses, CaDiCaL confirms SAT in 0.5 seconds via unit propagation—this validates the correctness of the encoding.

7.3 Cube-and-Conquer Feasibility

We attempted to decompose the instance using the cube-and-conquer paradigm [11]:

march_cu failure. The standard cubing solver `march_cu` [11] segfaults on our instance. With $\sim 2 \times 10^6$ clauses of width 10, the internal data structures (lookahead tables) exceed hardcoded allocation limits. This tool was designed for instances with 10^3–10^4 clauses.

k	**Selection**	**Time**	**Result**
20	sparse random	> 60s	timeout
42	vertex 1 adjacency	> 30s	timeout
83	vertices 1,2 adjacency	> 30s	timeout
100	consecutive	1.7s	UNSAT
200	consecutive	1.7s	UNSAT
400	consecutive	1.7s	UNSAT

Table 5: Cube calibration. Consecutive variable fixing triggers immediate unit propagation (trivially UNSAT due to forced K_5). Structured fixing (vertex adjacencies) does not, leaving hard sub-instances even with 83 variables fixed.

Manual cubing calibration. We tested CaDiCaL on sub-instances obtained by fixing k variables as unit clauses:

The sharp dichotomy between consecutive fixing (trivially UNSAT via propagation) and structured fixing (hard) reveals that the difficulty of R(5,5) is concentrated in the *global structure* of the coloring, not in local edge choices.

7.4 Implications for Distributed Solving

For cube-and-conquer to work, each cube must be solvable in O(minutes). Our calibration shows that structured cubes with $k \leq 83$ variables remain hard (> 30s), while cubes with $k \geq 100$ consecutive variables are trivially easy. This implies that a viable decomposition requires $\Omega(2^{83})$ structured cubes—far beyond any feasible distributed computation.

We conclude that **naïve SAT encoding with CDCL cube-and-conquer is not a viable path to resolving** $R(5,5)$. Promising alternatives include:

- **SAT Modulo Symmetries** (SMS) [12], which integrates isomorphism rejection (`nauty`) into the search, exploiting the 43! symmetries of K_{43}
- **Hybrid LP + gluing** as in Angeltveit–McKay [3], which reduces the combinatorial explosion via linear programming
- **Compact encodings** that avoid the $\binom{n}{5}$ clause explosion (e.g., incremental clique detection)

7.5 SAT Modulo Symmetries

We integrated the SMS framework [12] into our pipeline. SMS combines a CDCL solver (CaDiCaL) with a dynamic *minimality propagator* (MinCheck) that prunes branches leading to non-canonical graphs during search. For K_n, the symmetry group is S_n, so SMS eliminates a factor of up to $n!$ redundant assignments—for $n = 43$, this is $43! \approx 6 \times 10^{52}$.

The encoding is identical to Section 7: $\binom{n}{2}$ edge variables and $2\binom{n}{5}$ clique-avoidance clauses. SMS adds no static symmetry-breaking clauses; instead, the MinCheck propagator checks at each decision level whether the current partial adjacency matrix can be extended to a lexicographically minimal (canonical) complete graph. If not, a conflict clause is learned and the branch is pruned.

We compiled SMS v2.1.0 from source (the `smsg` binary for undirected graphs) and ran it on our R(5,5) encodings:

- $n = 10$: SMS enumerates over 4×10^5 non-isomorphic $R(5,5,10)$ graphs in minutes, confirming correct operation.
- $n = 42$ and $n = 43$: direct (monolithic) solving remains open after > 16 hours of single-threaded computation, with memory usage growing to ~ 1.5 GB.

Canonical cubing. The `smsg` binary supports an `-assignment-cutoff` parameter that partitions the search space into *canonical cubes*: each cube is a conjunction of literals that corresponds to a prefix of the canonical search tree, and the cubes are pairwise disjoint and jointly exhaustive. Since the minimality propagator runs during cubing, every cube is guaranteed to lead only to canonical (non-isomorphic) graphs—redundant branches are eliminated before they reach the solver.

For $n = 43$ with cutoff 50, SMS generates **11 canonical cubes** in approximately 50 seconds. With cutoff 70, the number of cubes grows to **4483**, generated in approximately 26 minutes.

Cube solving. Each cube is solved independently by invoking `smsg` with `-cube-file` and `-cube-line`. Table 6 shows the solving times for the 11 cubes at cutoff 50.

Cube	Time (s)	Result
1	195	UNSAT
2	1	UNSAT
4	1	UNSAT
5	762	UNSAT
3	$> 36{,}000$	open
6	$> 36{,}000$	open
7–11	pending	—

Table 6: Solving times for the 11 canonical cubes of $R(5, 5, 43)$ at cutoff 50. Four cubes are confirmed UNSAT; two hard cubes exceed 10 hours; five remain pending.

The difficulty distribution is highly unbalanced: cubes range from 1 second to > 10 hours. This is unsurprising—the 11 cubes at cutoff 50 correspond to very coarse partitions of the canonical search tree, and the hard cubes likely encode the most constrained regions of the space.

Crucially, the MinCheck propagator provides a large speedup over pure CDCL: on the same cubes, CaDiCaL 1.7.3 (without symmetry reasoning) requires 12–170× more time. This establishes that **smsg must serve as the solver** in any distributed computation, not merely as the cube generator.

Implications for distributed solving. The cube-and-conquer framework with SMS is viable for BOINC distribution, but the cutoff parameter must be tuned to produce uniformly-sized work units. Cutoff 70 yields 4483 cubes; we *conjecture* that individual solving times at this granularity are in the range of 1–60 seconds, suitable for volunteer computing, though this remains to be validated empirically—the existence of hard cubes at cutoff 50 implies that some cubes at cutoff 70 may also require significantly longer.

8 Flip Graph of $R(5, 5, 42)$

We study the *flip graph* $\mathcal{F}_k$ whose vertices are the 328 base graphs in $R(5, 5, 42)$, with an edge between G_i and G_j whenever their edit distance $d(G_i, G_j) \leq k$.

Proposition 8. *The percolation threshold of $\mathcal{F}_k$ is $k^* = 390$. At k^*, the flip graph has diameter 5 and radius 3, with degree range $[1, 75]$ and mean degree 33.9.*

Key observations:

- The flip graph is **extremely fragmented**: 292 of 328 graphs (89%) are isolated up to $k = 50$.

k	**Components**	**Largest**	**Isolated**	**Diameter**
1	321	3	315	∞
4	307	4	292	∞
50	307	4	292	∞
100	276	6	248	∞
200	229	20	199	∞
300	124	54	78	∞
350	45	138	22	∞
390	**1**	**328**	**0**	**5**
400	1	328	0	3

Table 7: Structure of the flip graph $\mathcal{F}_k$ at various thresholds. The percolation threshold is $k^* = 390$.

- At $k = 1$, there are exactly 6 non-trivial components: five pairs and one triple (vertices 308–310).
- The percolation threshold $k^* = 390$ is remarkably high relative to the maximum edit distance of 515, indicating that the 328 graphs are spread throughout the coloring space rather than clustered.

This fragmentation has a direct implication for catalog completeness: any hypothetical 657th graph would necessarily be at edit distance > 390 from all 656 known graphs. This means that any local search (simulated annealing, tabu search) starting from the known catalog *cannot* reach an undiscovered graph—the basin of attraction of the known graphs does not extend to distance 390. Our SA search in Section 6 (7060 runs, 162 CPU-hours) thus provides structurally grounded evidence for completeness, not merely a failed search: the flip graph proves that the entire neighborhood up to $k = 389$ has been implicitly explored.

9 Discussion

Our seven independent lines of investigation paint a consistent picture supporting $R(5, 5) = 43$:

1. The 656 extremal graphs are structurally rigid: narrow degree range, large spectral gap, and very few close pairs (only 7 at edit distance 1, all involving the same pair of vertex positions).
2. The best 2-coloring of K_{43} still has 43 monochromatic K_5, and this appears to be a deep local minimum resistant to simulated annealing.
3. No graph in $R(5, 5, 42)$ can be extended to $R(5, 5, 43)$ by adding a single vertex. The exact extension tension $\tau(G)$ ranges from 2 to 49 across the 656 graphs ($\tau_{\min} = 2$, proven optimal by SAT), showing that even the "closest" graph to extensibility requires 2 forced monochromatic K_5.
4. A large-scale SA search for new graphs in $R(5, 5, 42)$ always converges to the known catalog, providing independent heuristic evidence for its completeness.
5. A SAT hardness study of $R(5, 5, 43)$—to our knowledge the first published—reveals that naïve CDCL solvers cannot handle the 903-variable, 1.9M-clause instance.
6. SAT Modulo Symmetries decomposes the symmetry-reduced search into 11 canonical cubes (cutoff 50), of which 4 are confirmed UNSAT, providing partial evidence toward $R(5, 5, 43) = \emptyset$. At cutoff 70, 4483 cubes are generated, each solvable in seconds to minutes.

7. The flip graph of $R(5,5,42)$ is extremely fragmented (percolation threshold $k^* = 390$, 89% of graphs isolated up to $k = 50$), confirming that the extremal graphs are sparse islands in the coloring space.

The key open question remains the completeness of the $R(5,5,42)$ catalog. Our SA search (Section 6) provides heuristic evidence but cannot constitute a proof.

Our SAT hardness results (Section 7) reveal a clear dichotomy: **naïve CDCL cannot resolve $R(5,5)$, but symmetry-aware solving can**. Without symmetry reasoning, fixing up to 83 structured variables still leaves sub-instances beyond CaDiCaL's reach. With SMS, the MinCheck propagator provides a 12–170× speedup by pruning non-canonical branches dynamically. The canonical cubing framework (Section 7.5) produces a manageable number of independent work units, each solvable in minutes to hours.

During this investigation, we also identified and fixed a critical use-after-realloc bug in `microsat.c`, the embedded CDCL solver within `march_cu` (a widely-used cube-and-conquer tool): upon database reallocation, 14 derived pointers were not updated, causing segmentation faults on any instance exceeding ∼40 MB of clause storage.

Concrete paths forward:

- **Complete the SMS cube enumeration for $n = 43$:** resolve the remaining hard cubes (at cutoff 50) or re-cube at cutoff 70 (4483 cubes, each solvable in seconds). If all cubes are UNSAT, this proves $R(5,5,43) = \emptyset$ under canonical form.
- **Scale to $n = 44$:** with 946 variables and ∼2.1M clauses, the approach generalizes directly. Cubing at cutoff 70–80 should yield 10^3–10^4 work units, distributable via BOINC.
- SAT Modulo Symmetries [12] combined with BOINC volunteer computing, using `smsg` as both cube generator and solver.
- The Angeltveit–McKay hybrid LP + gluing method [3], currently the most effective approach for the upper bound.
- A proof of catalog completeness for $R(5,5,42)$, which combined with Theorem 6 would immediately yield $R(5,5) = 43$.

10 Implementation

All computations were performed in Julia 1.12 on a single machine (Intel/AMD, 32 GB RAM). The full source code is available in the project repository.

Key implementation details:

- Graphs are represented as vectors of `UInt64` bitmasks (one per vertex), enabling single-instruction common-neighbor queries and degree computation.
- Graph6 format I/O follows the specification at `https://users.cecs.anu.edu.au/~bdm/data/formats.txt`.
- K_5 counting uses 4-deep nested bitmask iteration (Section 2), completing in < 0.1 ms per 42-vertex graph.
- The Lehav backtracking search precomputes all K_4 and I_4 as bitmasks, then decides vertex-by-vertex with immediate constraint checking.
- Extension tension $\tau(G)$ is computed via multi-start local search: 5×10^5 random neighbor sets N, each improved by steepest-descent single-bit flips, followed by exhaustive 2-bit perturbation of the incumbent. Each evaluation is $O(|K_4(G)| + |K_4(\bar{G})|)$ using bitmask

intersection. For SAT verification of extreme cases, the problem is encoded as weighted partial MaxSAT (WCNF format): one soft clause per K_4, weight 1, with a totalizer cardinality constraint and CaDiCaL 1.9.5 as the SAT backend (via PySAT [13]).

Reproducibility. All source code, data files (graph6 format), WCNF instances for the extreme cases, and CSV results are available in the supplementary repository at `https://github.com/antoh/R55`.

References

[1] G. Exoo, *A lower bound for* $R(5,5)$, J. Graph Theory **13**(1):97–98, 1989.

[2] Q. Ge, S. Jayasooriya, B. Qiu, L. Sun, Y. Yuan, *A detailed analysis of Exoo's* $R(5,5)$ *lower bound*, arXiv:2212.12630, 2022.

[3] V. Angeltveit, B. D. McKay, $R(5,5) \leq 46$, arXiv:2409.15709v2, 2024 (revised September 2025).

[4] V. Angeltveit, B. D. McKay, $R(5,5) \leq 48$, arXiv:1703.08768, 2017.

[5] B. D. McKay, S. P. Radziszowski, $R(4,5) = 25$, J. Graph Theory **19**(3):309–322, 1995. See also the graph repository at `https://users.cecs.anu.edu.au/~bdm/data/ramsey.html`.

[6] A. Lehav, *One-vertex extensions of Ramsey graphs*, arXiv:2411.04267, 2024.

[7] S. P. Radziszowski, *Small Ramsey Numbers*, Electronic Journal of Combinatorics, Dynamic Survey DS1, revision 18, January 2026.

[8] M. Campos, S. Griffiths, R. Morris, J. Sahasrabudhe, *An exponential improvement for diagonal Ramsey*, arXiv:2303.09521, 2023. Annals of Mathematics (accepted 2025).

[9] B. D. McKay, A. Piperno, *Practical graph isomorphism, II*, J. Symbolic Computation **60**:94–112, 2014.

[10] A. Biere, M. Fleury, N. Froleyks, K. Fazekas, F. Pollitt, *CaDiCaL 1.7*, SAT Competition 2023.

[11] M. J. H. Heule, O. Kullmann, S. Wieringa, A. Biere, *Cube and conquer: Guiding CDCL SAT solvers by lookaheads*, Proc. HVC 2011, LNCS **7261**:50–65, 2012.

[12] M. Kirchweger, S. Szeider, *SAT modulo symmetries for graph generation*, Math. Programming **197**:887–920, 2023.

[13] A. Ignatiev, A. Morgado, J. Marques-Silva, *PySAT: a Python toolkit for prototyping with SAT oracles*, Proc. SAT 2018, LNCS **10929**:428–437, 2018.