


FRAMEWORK step 1:

File -> New -> Sweave

(This gives you a skeleton starting point. It is “untitled” so save it with a descriptive name and .Rnw suffix.)

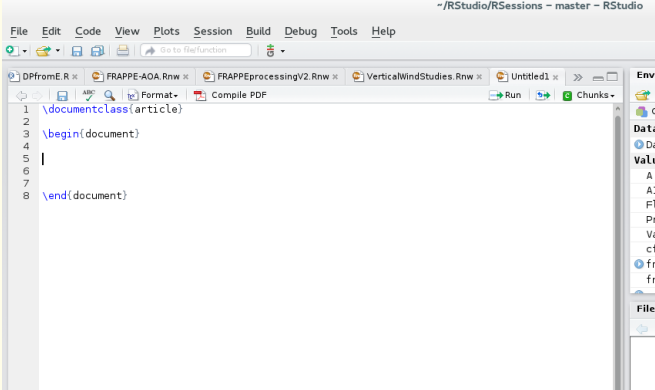

The screenshot shows the RStudio application window. The title bar reads "~ /RStudio/RSessions - master - RStudio". The menu bar includes File, Edit, Code, View, Plots, Session, Build, Debug, Tools, and Help. The toolbar contains icons for file operations and a search bar labeled "Go to file/function". The tab bar shows several open files: DPfromE.R, FRAPPE-AOA.Rnw, FRAPPEprocessingV2.Rnw, VerticalWindStudies.Rnw, and an untitled document. The main editor area displays the skeleton code for a Sweave document:

```
1 \documentclass{article}
2
3 \begin{document}
4
5 |
6
7
8 \end{document}
```

On the right side, there is a sidebar with a "Chunks" pane and an "Environment" pane. The "Environment" pane shows a list of objects: A, A1, F1, Pr, Va, cf, fn, and fr.