


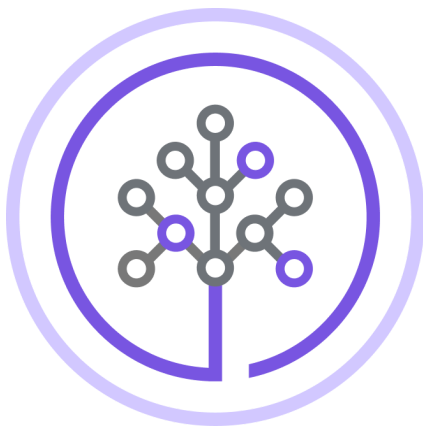

Skills Network


Getting started with RStudio and Installing packages

Objectives of Exercise:

After completing this lab, you will be able to:

- Load the datasets
- Install libraries

Step 1 - Click the plus symbol on the top left and click R Script.

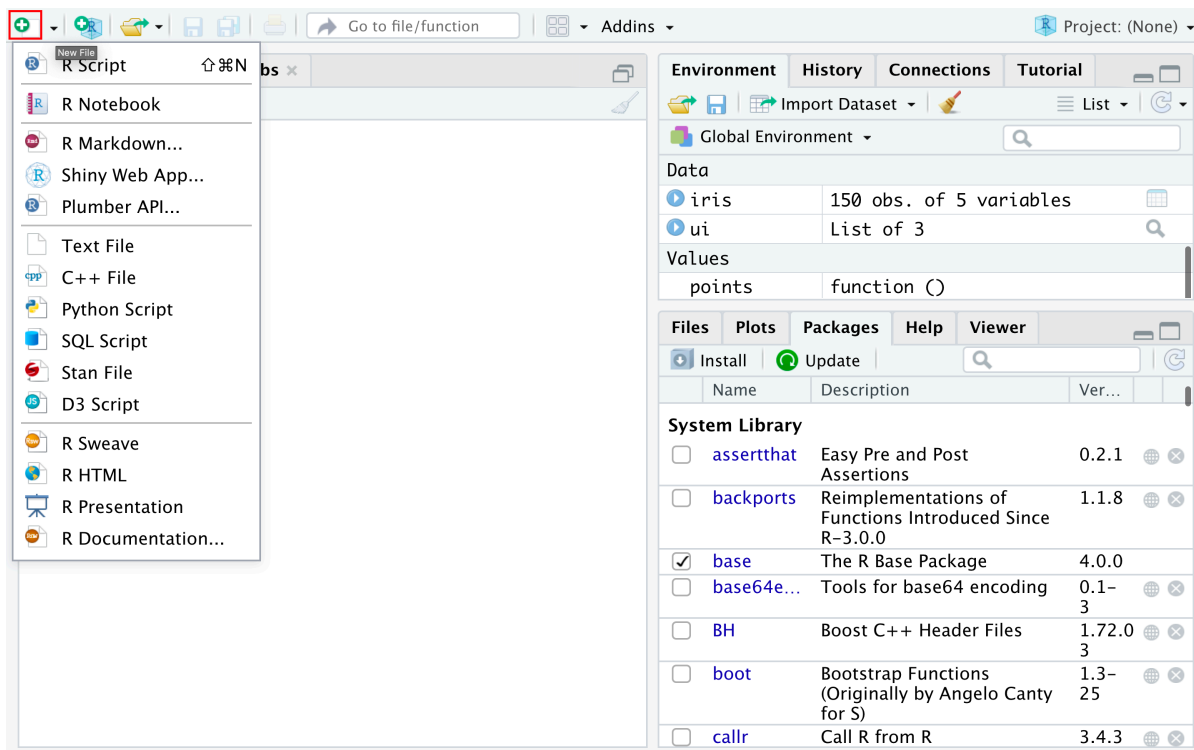

An untitled R Script panel opens. It would look like this.

The screenshot shows the RStudio IDE interface. The top toolbar has a red box around the 'Run' button (a green play icon). The editor window on the left is titled 'Untitled1' and contains a single line of code: '1'. The console window at the bottom left is empty. The right-hand pane shows the 'Environment' tab with a table of objects: 'iris' (150 obs. of 5 variables) and 'ui' (List of 3). Below this is the 'Files' tab showing the 'System Library' with a list of installed R packages including 'assertthat', 'backports', 'base', 'base64e...', 'BH', 'boot', and 'callr'.

Step 2 - Now you load the iris dataset. Enter the following lines into the editor window that appears. Then select all the text, and click Run just above the editor window.

```
library(datasets)
data(iris)
View(iris)
```


The screenshot shows the RStudio interface. The source editor has three lines of code: `library(datasets)`, `data(iris)`, and `View(iris)`. The console is empty. The environment pane shows the Global Environment with 'iris' (150 obs. of 5 variables) and 'ui' (List of 3). The system library pane shows installed packages like `assertthat`, `backports`, `base`, `base64e...`, `BH`, `boot`, and `callr`.

Step 3 - You are taken to the data view tab to inspect your dataset. The dataset contains five columns and the first four are floating point type while the last column is a label of data type string which contains the category value. You can see there are total 150 entries of which you can see the first 7.

The screenshot shows the RStudio interface with the data view tab selected. The data is displayed in a table with columns: `Sepal.Length`, `Sepal.Width`, `Petal.Length`, `Petal.Width`, and `Species`. The first 7 rows are visible. The console shows the commands: `library(datasets)`, `data(iris)`, and `View(iris)`. The environment pane shows the Global Environment with 'iris' (150 obs. of 5 variables) and 'ui' (List of 3). The system library pane shows installed packages like `assertthat`, `backports`, `base`, `base64e...`, `BH`, `boot`, and `callr`.

Step 4 - Now you can find the different species present in the data set. Enter the following command in the editor window and click Run.

```
unique(iris$Species)
```

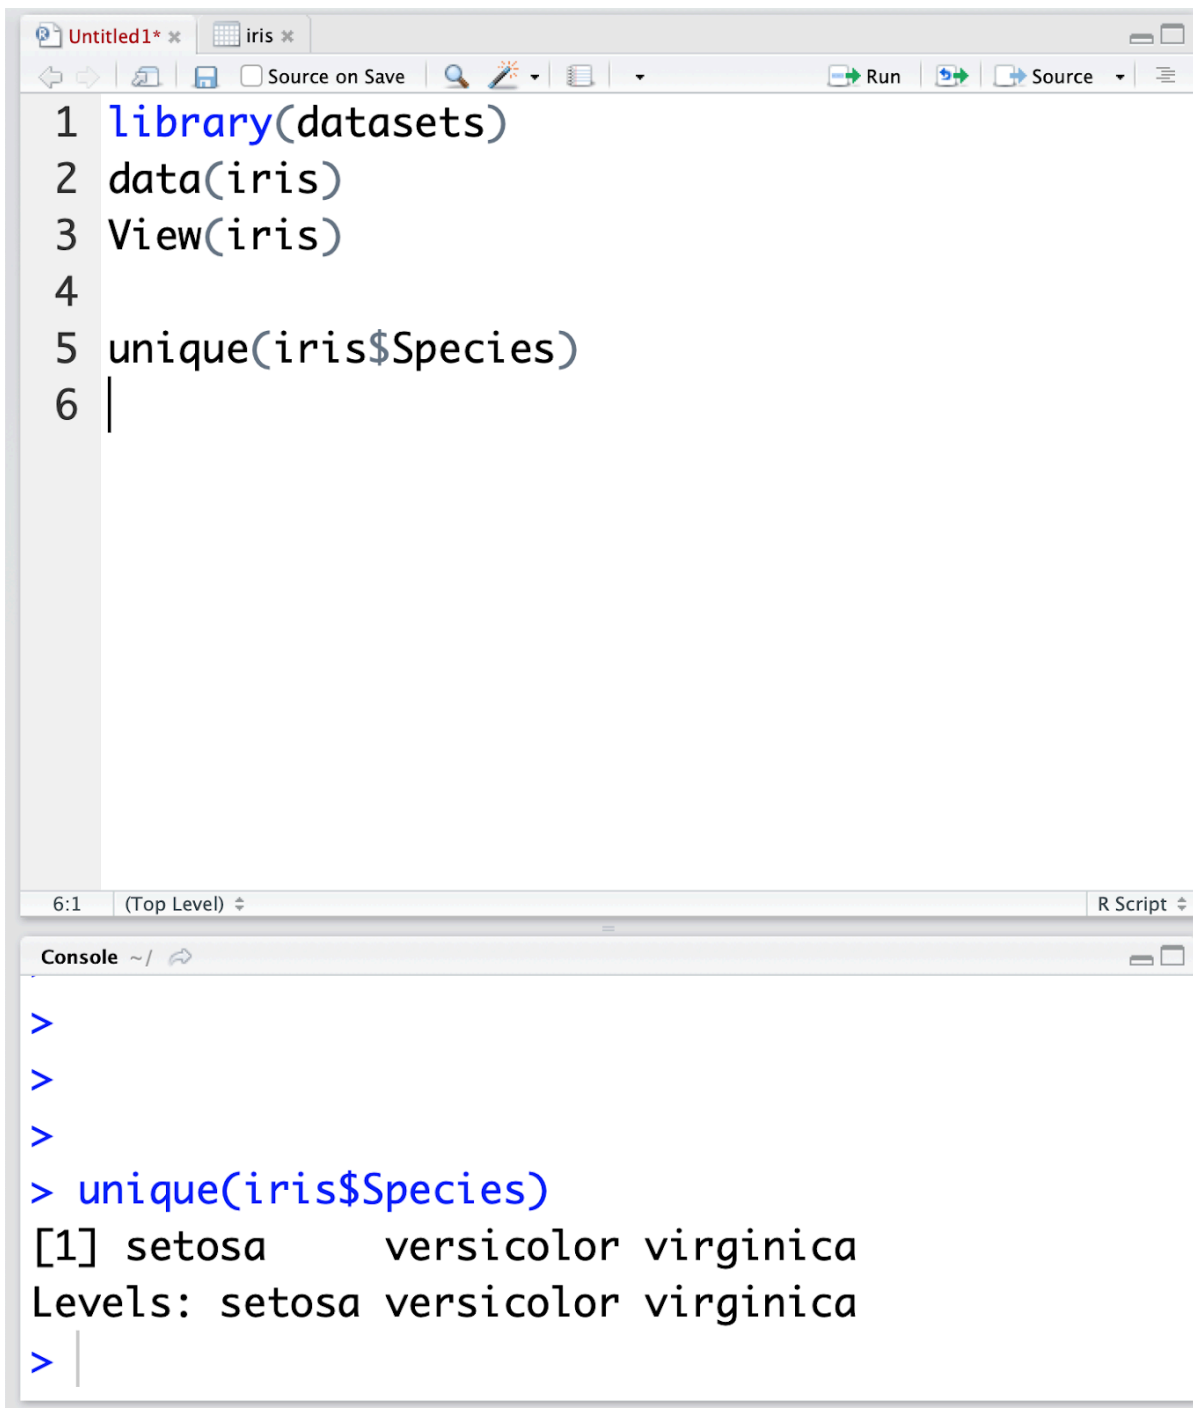

The screenshot shows the RStudio interface. The top window, titled 'Untitled1*' and 'iris', contains the following R code:

```
1 library(datasets)
2 data(iris)
3 View(iris)
4
5 unique(iris$Species)
6 |
```

The bottom window, titled 'Console', shows the output of the executed command:

```
>
>
>
> unique(iris$Species)
[1] setosa      versicolor virginica
Levels: setosa versicolor virginica
> |
```

In the Console window at the bottom you can see the result of the executed command and know that there are only three different species present in the dataset.

This concludes the lab; I hope you enjoyed it!

Author(s)

Romeo

Other Contributor(s)

Lavanya

IBM Corporation 2020. All rights reserved.