



Transport Layer

Introduction to Networking
CT043-3-1 & Version VE1

1. Introduction to Networking
2. Basic Switch and End Device (IOS)
3. Protocols & Models
4. Network access (Physical Layer)
5. Data Link Layer
6. Ethernet
7. Basic Router Config. (Network Layer)
8. IPv4
9. IPv6
10. Transport layer
11. Application layer
12. Network Security Fundamental
13. Build a Small network

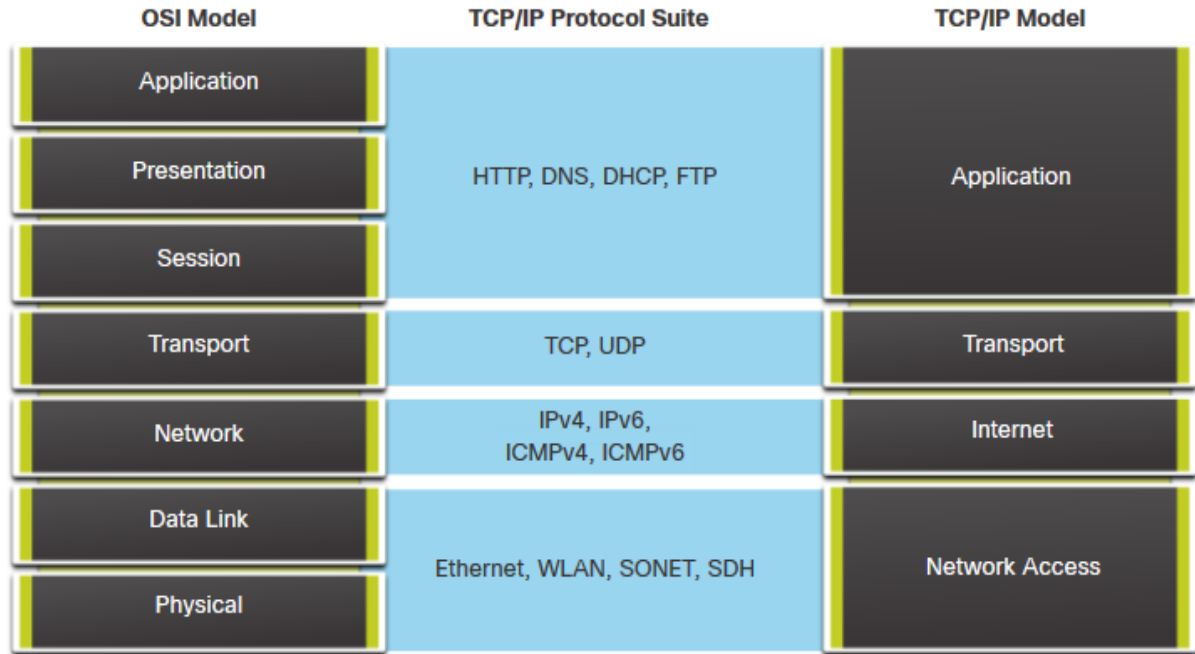

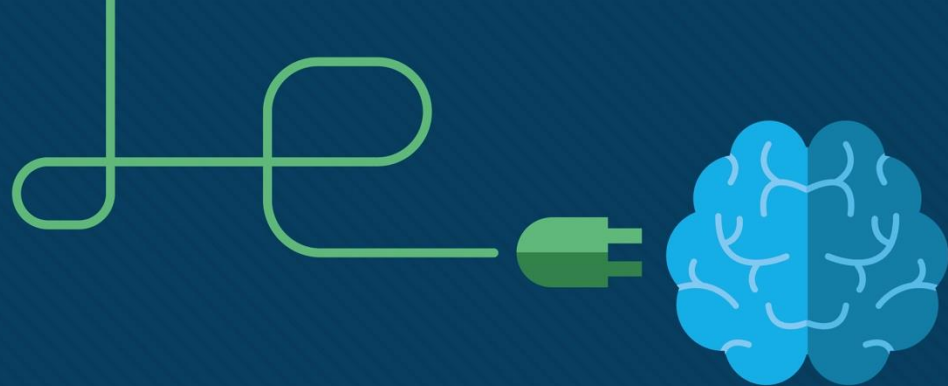

Transport Layer



Topics and Structure of the lesson

Topic Title	Topic Objective
Transportation of Data	Explain the purpose of the transport layer in managing the transportation of data in end-to-end communication.
TCP Overview	Explain characteristics of TCP.
UDP Overview	Explain characteristics of UDP.
Port Numbers	Explain how TCP and UDP use port numbers.
TCP Communication Process	Explain how TCP session establishment and termination processes facilitate reliable communication.
Reliability and Flow Control	Explain how TCP protocol data units are transmitted and acknowledged to guarantee delivery.
UDP Communication	Compare the operations of transport layer protocols in supporting end-to-end communication.

Key Terms you must be able to use:

If you have mastered this topic, you should be able to use the following terms correctly in your exams:

- Transportation of Data
- TCP / UDP overview
- TCP Features/Header
- UDP Features/Header
- Port Numbers and Group
- Multiple separate communications
- Socket Pairs
- TCP communication Process
- Reliability and flow control
- UDP Communication Process


Transportation of Data

Transportation of Data

Role of the Transport Layer

The transport layer is:

- Responsible for **logical communications** between applications running on different hosts.
- The link between the application layer and the lower layers that are responsible for network transmission.

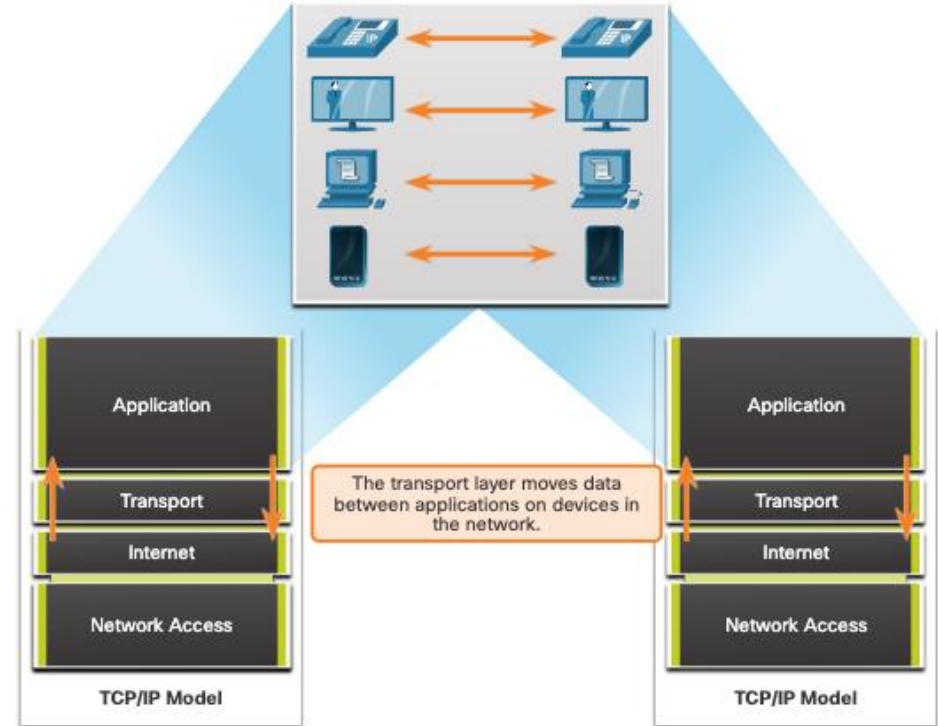


Transportation of Data

Transport Layer Responsibilities

The transport layer has the following responsibilities:


- **Tracking** individual conversations
- **Segmenting** data and **reassembling** segments
- **Adds header** information
- Identify, separate, and manage multiple conversations
- Uses **segmentation** and **multiplexing** to enable different communication conversations to be interleaved on the same network

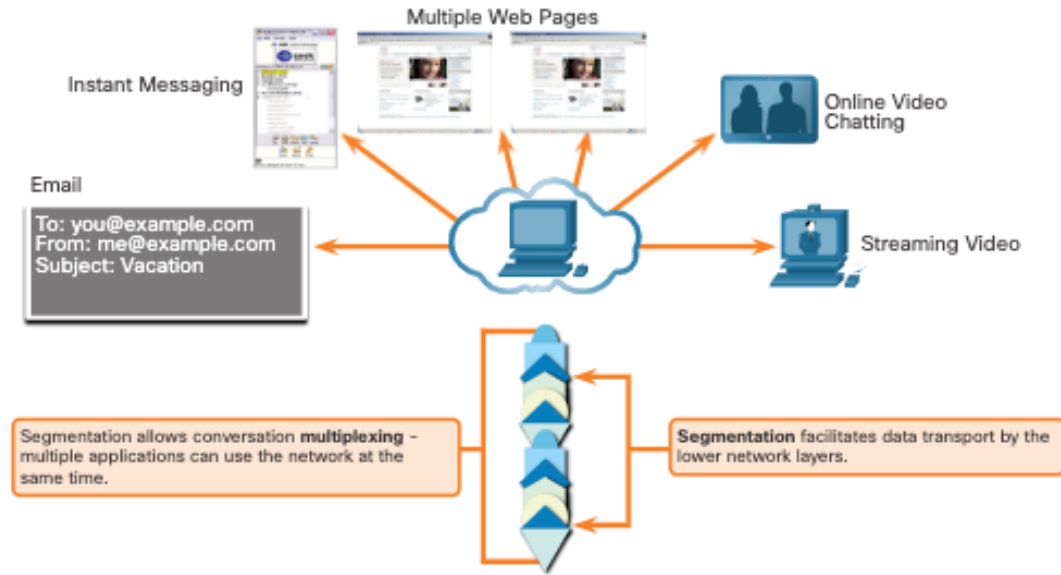

Transportation of Data

Transport Layer Protocols

- IP does not specify how the delivery or transportation of the packets takes place.
- Transport layer protocols specify how to transfer messages between hosts and are responsible for **managing reliability requirements** of a conversation.
- The transport layer includes the TCP and UDP protocols.

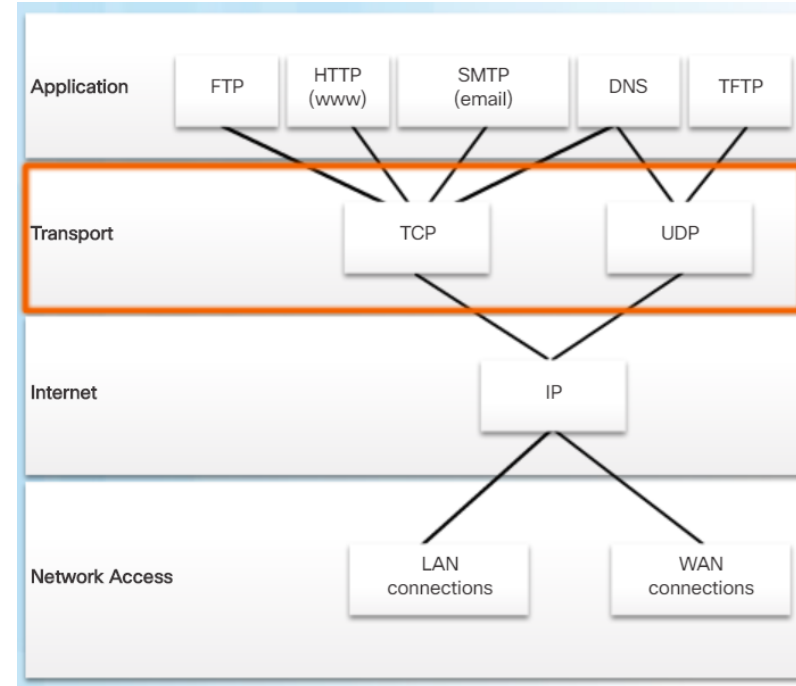


Transportation of Data

Transmission Control Protocol

TCP provides reliability and flow control. TCP basic operations:

- **Number** and **track data segments** transmitted to a specific host from a specific application
- **Acknowledge** received data
- **Retransmit** any unacknowledged data after a certain amount of time
- **Sequence data** that might arrive in wrong order
- **Send data at an efficient rate** that is acceptable by the receiver

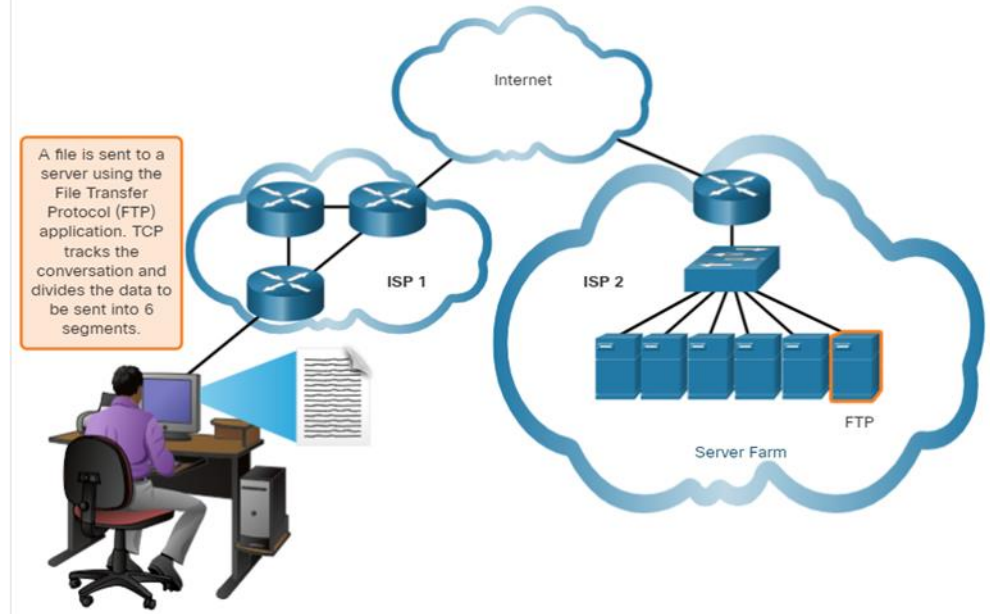


Transportation of Data

User Datagram Protocol (UDP)

UDP provides the basic functions for delivering datagrams between the appropriate applications, with very little overhead and data checking.

- UDP is a **connectionless protocol**.
- UDP is known as a **best-effort delivery** protocol because there is no acknowledgment that the data is received at the destination.

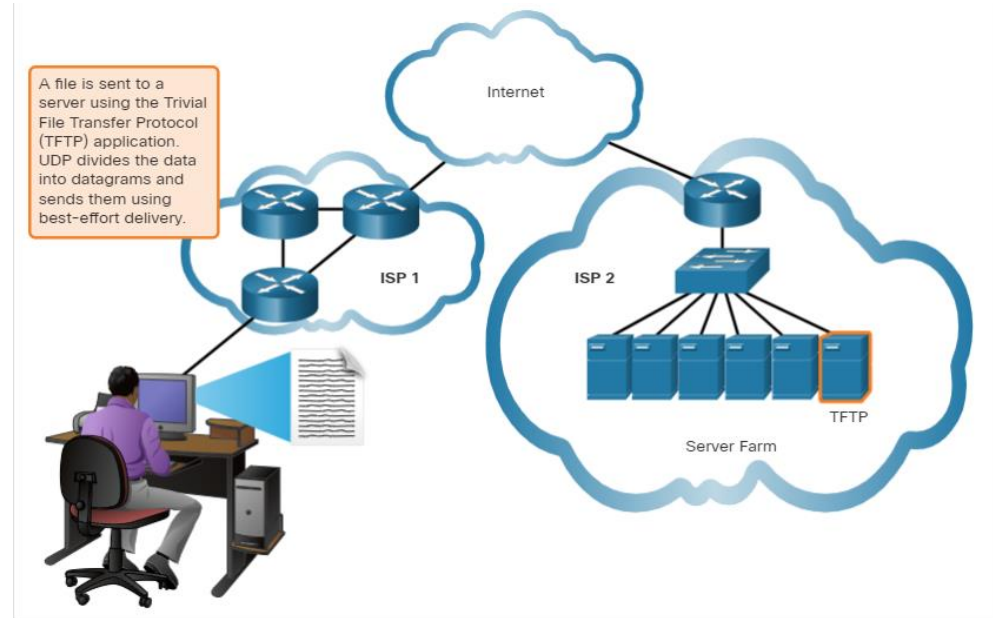

The Right Transport Layer Protocol for the Right Application

UDP is also used by **request-and-reply** applications where the data is minimal, and retransmission can be done quickly.

If it is important that all the data arrives and that it can be processed in its proper sequence, TCP is used as the transport protocol.

UDP



VoIP
(IP telephony)



DNS
(Domain Name Resolution)

Required protocol properties:

- Fast
- Low overhead
- Does not require acknowledgements
- Does not resend lost data
- Delivers data as it arrives

TCP



SMTP/IMAP
(Email)



HTTP/HTTPS
(World Wide Web)

Required protocol properties:

- Reliable
- Acknowledges data
- Resends lost data
- Delivers data in sequenced order

TCP Overview

TCP Overview

TCP Features

- **Establishes a Session** - TCP is a connection-oriented protocol that negotiates and establishes a permanent connection (or session) between source and destination devices prior to forwarding any traffic.
- **Ensures Reliable Delivery** - For many reasons, it is possible for a segment to become corrupted or lost completely, as it is transmitted over the network. TCP ensures that each segment that is sent by the source arrives at the destination.
- **Provides Same-Order Delivery** - Because networks may provide multiple routes that can have different transmission rates, data can arrive in the wrong order.
- **Supports Flow Control** - Network hosts have limited resources (i.e., memory and processing power). When TCP is aware that these resources are overtaxed, it can request that the sending application reduce the rate of data flow.

TCP Overview

TCP Header


TCP is a stateful protocol which means it keeps track of the state of the communication session.

TCP records which information it has sent, and which information has been acknowledged.

Establishes a Session

Ensures Reliable Delivery

Provides Same-Order Delivery

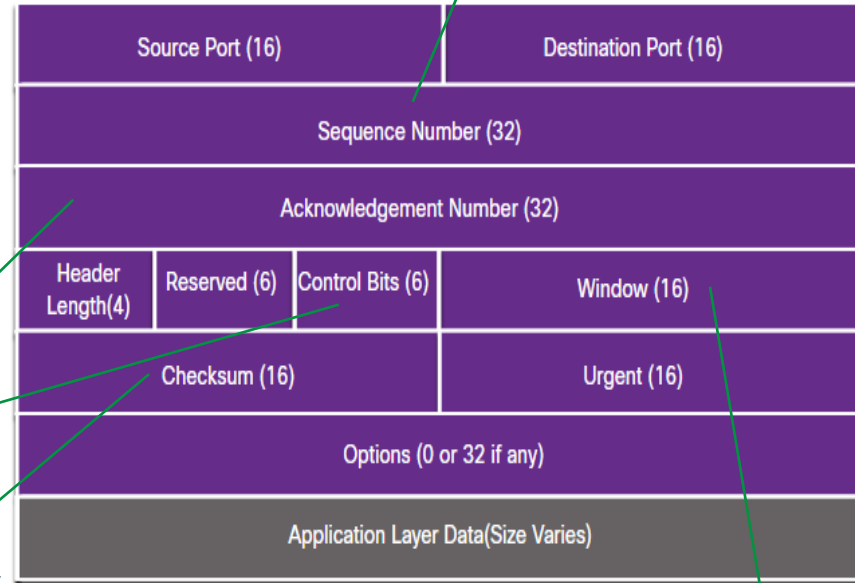

Supports Flow Control

TCP Overview


TCP Header Fields

TCP Header Field	Description
Source Port	A 16-bit field used to identify the source application by port number.
Destination Port	A 16-bit field used to identify the destination application by port number.
Sequence Number	A 32-bit field used for data reassembly purposes.
Acknowledgment Number	A 32-bit field used to indicate that data has been received and the next byte expected from the source.
Header Length	A 4-bit field known as "data offset" that indicates the length of the TCP segment header.
Reserved	A 6-bit field that is reserved for future use.
Control bits	A 6-bit field used that includes bit codes, or flags, which indicate the purpose and function of the TCP segment.
Window size	A 16-bit field used to indicate the number of bytes that can be accepted at one time.
Checksum	A 16-bit field used for error checking of the segment header and data.
Urgent	A 16-bit field used to indicate if the contained data is urgent.

TCP Overview

Applications that use TCP

TCP handles all tasks associated with dividing the data stream into segments, providing reliability, controlling data flow, and reordering segments.

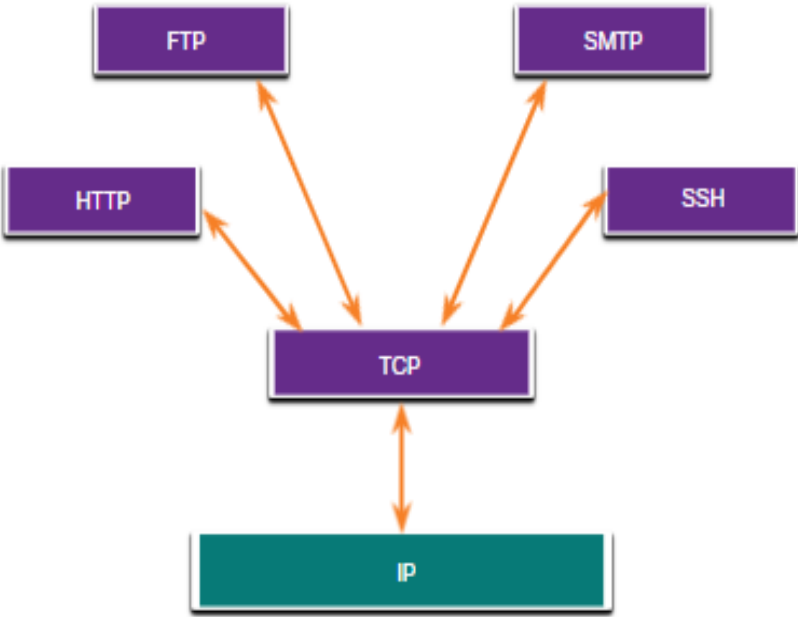

UDP Overview

UDP Features


UDP features include the following:

- Data is reconstructed in the order that it is received.
- Any segments that are lost are not resent.
- There is no session establishment.
- The sender is not informed about resource availability.

UDP Overview

UDP Header

The UDP header is far simpler than the TCP header because it only has four fields and requires 8 bytes (i.e. 64 bits).

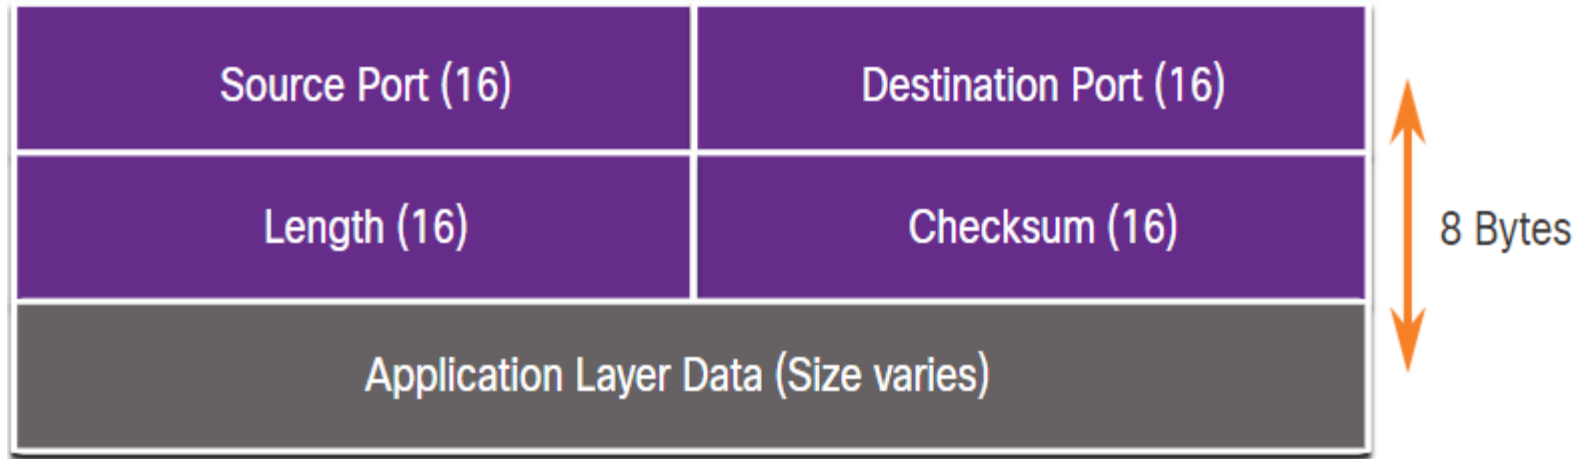

UDP Overview

UDP Header Fields


The table identifies and describes the four fields in a UDP header.

UDP Header Field	Description
Source Port	A 16-bit field used to identify the source application by port number.
Destination Port	A 16-bit field used to identify the destination application by port number.
Length	A 16-bit field that indicates the length of the UDP datagram header.
Checksum	A 16-bit field used for error checking of the datagram header and data.

UDP Overview

Applications that use UDP

- **Live video and multimedia applications** - These applications can tolerate some data loss but require little or no delay. Examples include VoIP and live streaming video.
- **Simple request and reply applications** - Applications with simple transactions where a host sends a request and may or may not receive a reply. Examples include DNS and DHCP.
- Applications that handle **reliability themselves** - Unidirectional communications where flow control, error detection, acknowledgments, and error recovery is not required, or can be handled by the application. Examples include SNMP and TFTP.

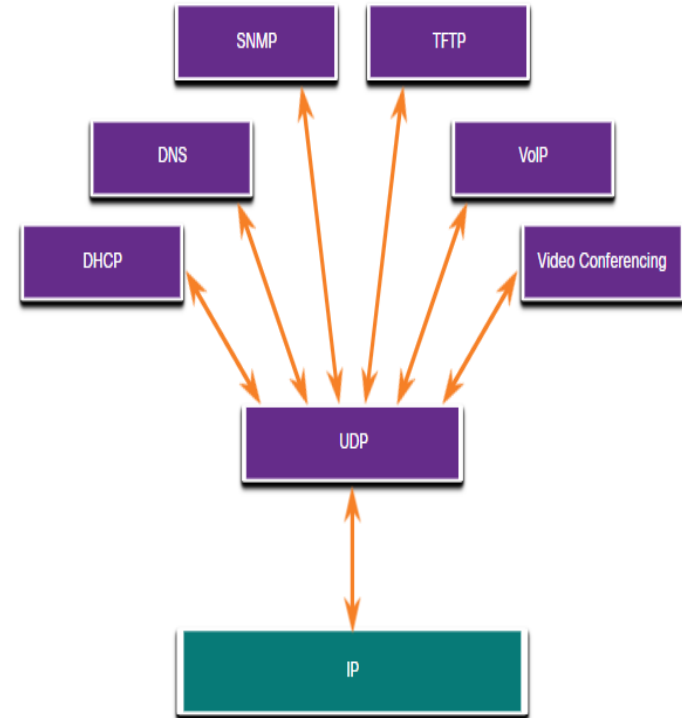

Check your understanding

Transport Layer part 1



quizizz.com/join

Port Numbers

Multiple Separate Communications

TCP and UDP transport layer protocols use **port numbers** to **manage multiple, simultaneous conversations**.

The **source port number** is **associated** with the **originating application** on the **local host** whereas the **destination port number** is **associated** with the **destination application** on the **remote host**.



Source Port (16)


The diagram consists of two adjacent purple rectangular boxes with white borders. The left box is labeled 'Source Port (16)' and the right box is labeled 'Destination Port (16)'. These boxes represent the source and destination port fields in a network packet header.

Destination Port (16)

Port numbers

Socket Pairs

- The source and destination ports are placed within the segment.
- The segments are then encapsulated within an IP packet.
- The **combination** of the **source IP address** and **source port number**, **or** the **destination IP address** and **destination port number** is **known as a socket**.
- Sockets enable multiple processes, running on a client, to distinguish themselves from each other, and multiple connections to a server process to be distinguished from each other.

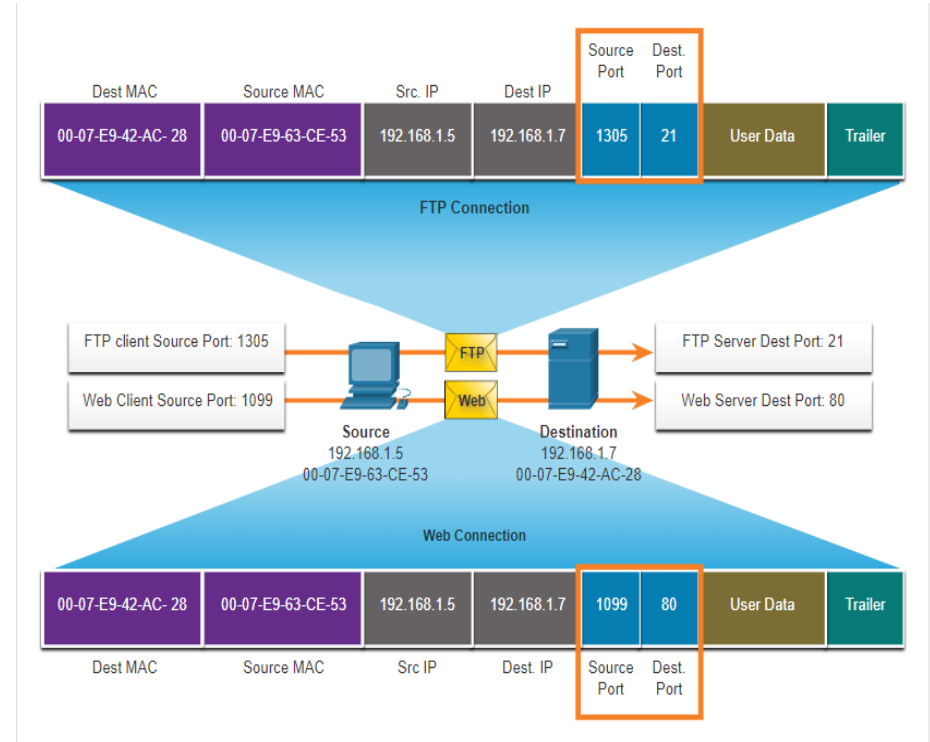

Port Numbers

Port Number Groups

Port Group	Number Range	Description
Well-known Ports	0 to 1,023	•These port numbers are reserved for common or popular services and applications such as web browsers, email clients, and remote access clients. •Defined well-known ports for common server applications enables clients to easily identify the associated service required.
Registered Ports	1,024 to 49,151	•These port numbers are assigned by IANA to a requesting entity to use with specific processes or applications. •These processes are primarily individual applications that a user has chosen to install, rather than common applications that would receive a well-known port number. •For example, Cisco has registered port 1812 for its RADIUS server authentication process.
Private and/or Dynamic Ports	49,152 to 65,535	•These ports are also known as ephemeral ports. •The client's OS usually assign port numbers dynamically when a connection to a service is initiated. •The dynamic port is then used to identify the client application during communication.

Port Number Groups (Cont.)

Well-Known Port Numbers

Port Number	Protocol	Application
20	TCP	File Transfer Protocol (FTP) - Data
21	TCP	File Transfer Protocol (FTP) - Control
22	TCP	Secure Shell (SSH)
23	TCP	Telnet
25	TCP	Simple Mail Transfer Protocol (SMTP)
53	UDP, TCP	Domain Name Service (DNS)
67	UDP	Dynamic Host Configuration Protocol (DHCP) - Server
68	UDP	Dynamic Host Configuration Protocol - Client
69	UDP	Trivial File Transfer Protocol (TFTP)
80	TCP	Hypertext Transfer Protocol (HTTP)
110	TCP	Post Office Protocol version 3 (POP3)
143	TCP	Internet Message Access Protocol (IMAP)
161	UDP	Simple Network Management Protocol (SNMP)
443	TCP	Hypertext Transfer Protocol Secure (HTTPS)

The netstat Command

Unexplained TCP connections can pose a major security threat. Netstat is an important tool to verify connections.

```
C:\> netstat
```

```
Active Connections
```

Proto	Local Address	Foreign Address	State
TCP	192.168.1.124:3126	192.168.0.2:netbios-ssn	ESTABLISHED
TCP	192.168.1.124:3158	207.138.126.152:http	ESTABLISHED
TCP	192.168.1.124:3159	207.138.126.169:http	ESTABLISHED
TCP	192.168.1.124:3160	207.138.126.169:http	ESTABLISHED
TCP	192.168.1.124:3161	sc.msn.com:http	ESTABLISHED
TCP	192.168.1.124:3166	www.cisco.com:http	ESTABLISHED


TCP Communication Process

TCP Communication Process

TCP Server Processes

Each application process running on a server is configured to use a port number.

- An individual server cannot have two services assigned to the same port number within the same transport layer services.
- An active server application assigned to a specific port is considered open.
- Any incoming client request addressed to an open port is accepted and processed by the server application bound to that port.
 - There can be many ports open simultaneously on a server, one for each active server application.

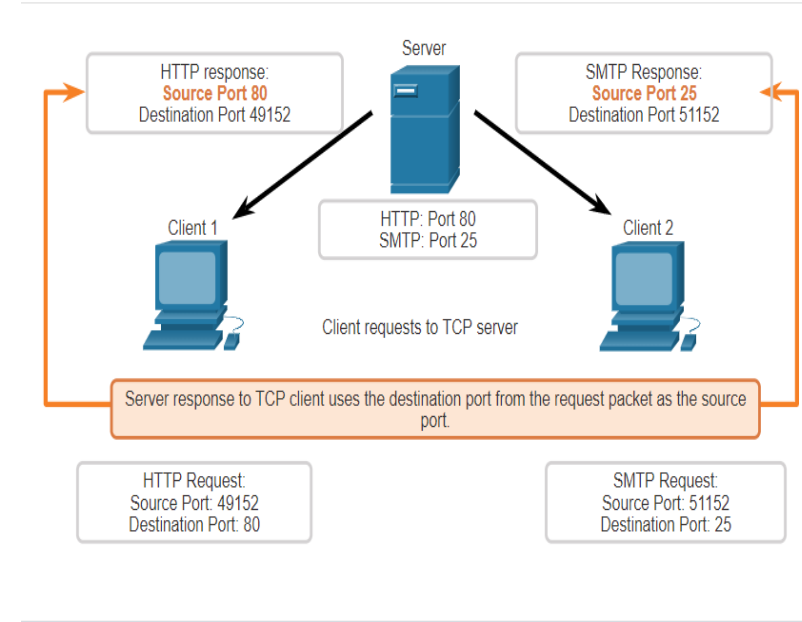

TCP Overview

** TCP Features

- **Establishes a Session** - TCP is a connection-oriented protocol that negotiates and establishes a permanent connection (or session) between source and destination devices prior to forwarding any traffic.
- **Ensures Reliable Delivery** - For many reasons, it is possible for a segment to become corrupted or lost completely, as it is transmitted over the network. TCP ensures that each segment that is sent by the source arrives at the destination.
- **Provides Same-Order Delivery** - Because networks may provide multiple routes that can have different transmission rates, data can arrive in the wrong order.
- **Supports Flow Control** - Network hosts have limited resources (i.e., memory and processing power). When TCP is aware that these resources are overtaxed, it can request that the sending application reduce the rate of data flow.


TCP Communication Process

TCP Connection Establishment

TCP Connection Establishment - The three-way handshake

A TCP connection is established in three steps:

- Step 1: The initiating client requests a client-to-server communication session with the server.
- Step 2: The server acknowledges the client-to-server communication session and requests a server-to-client communication session.
- Step 3: The initiating client acknowledges the server-to-client communication session.

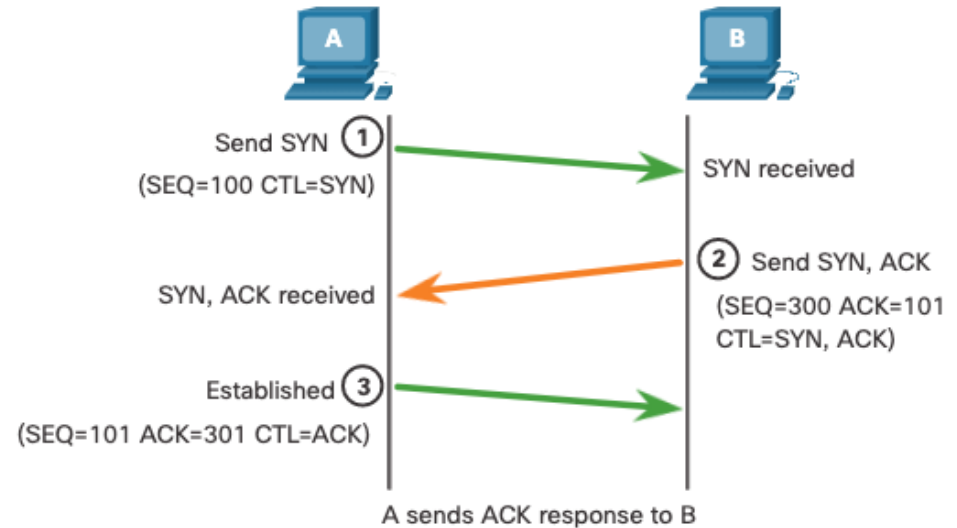


TCP Communication Process

Session Termination

- Step 1: When the client has no more data to send in the stream, it sends a segment with the FIN flag set.
- Step 2: The server sends an ACK to acknowledge the receipt of the FIN to terminate the session from client to server.
- Step 3: The server sends a FIN to the client to terminate the server-to-client session.
- Step 4: The client responds with an ACK to acknowledge the FIN from the server.

When all segments have been acknowledged, the session is closed.

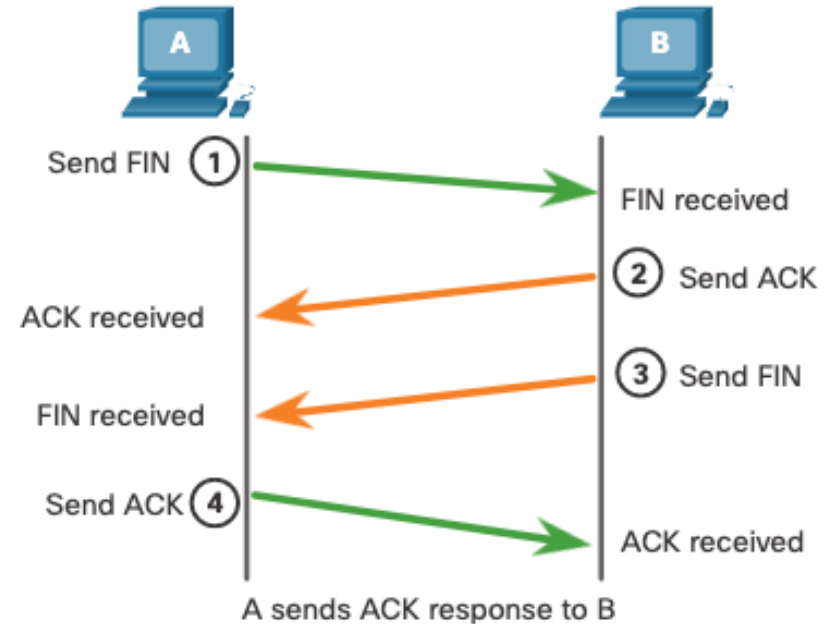

TCP Communication Process

TCP Three-Way Handshake Analysis

Functions of the Three-Way Handshake:

- It establishes that the destination device is **present** on the network.
- It **verifies** that the destination device has an **active service** and is **accepting requests** on the destination port number that the initiating client intends to use.
- It informs the destination device that the source client **intends to establish** a communication session on that port number.

After the communication is completed the **sessions are closed**, and the connection is **terminated**.


The connection and session mechanisms enable **TCP reliability function**.

TCP Communication Process

TCP Three-Way Handshake Analysis (Cont.)

The six control bit flags are as follows:

- **URG** - Urgent pointer field significant
- **ACK** - Acknowledgment flag used in connection establishment and session termination
- **PSH** - Push function
- **RST** - Reset the connection when an error or timeout occurs
- **SYN** - Synchronize sequence numbers used in connection establishment
- **FIN** - No more data from sender and used in session termination

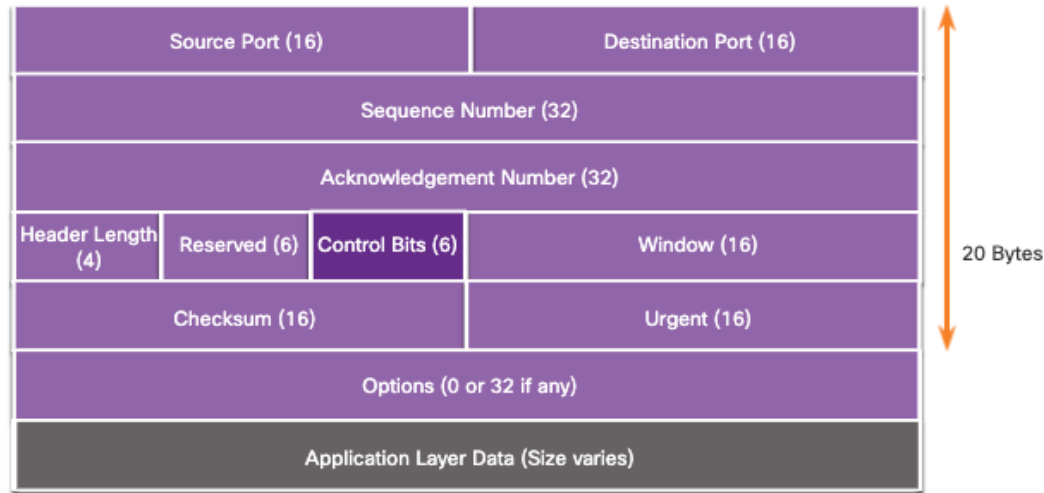

Reliability and Flow Control


TCP Overview

TCP Features

- **Establishes a Session** - TCP is a connection-oriented protocol that negotiates and establishes a permanent connection (or session) between source and destination devices prior to forwarding any traffic.
- **Ensures Reliable Delivery** - For many reasons, it is possible for a segment to become corrupted or lost completely, as it is transmitted over the network. TCP ensures that each segment that is sent by the source arrives at the destination.
- **Provides Same-Order Delivery** - Because networks may provide multiple routes that can have different transmission rates, data can arrive in the wrong order.
- **Supports Flow Control** - Network hosts have limited resources (i.e., memory and processing power). When TCP is aware that these resources are overtaxed, it can request that the sending application reduce the rate of data flow.

TCP Reliability- Guaranteed and Ordered Delivery

- TCP segments use **sequence numbers** to **uniquely identify** and **acknowledge each segment**, keep **track of segment order**, and indicate how to reassemble and reorder received segments.
- An **initial sequence number (ISN)** is **randomly** chosen during the TCP session setup. The ISN is then incremented by the number of transmitted bytes.
- The receiving TCP process buffers the segment data until all data is received and reassembled.
- Segments received out of order are held for later processing.
- The data is delivered to the application layer only when it has been completely received and reassembled.

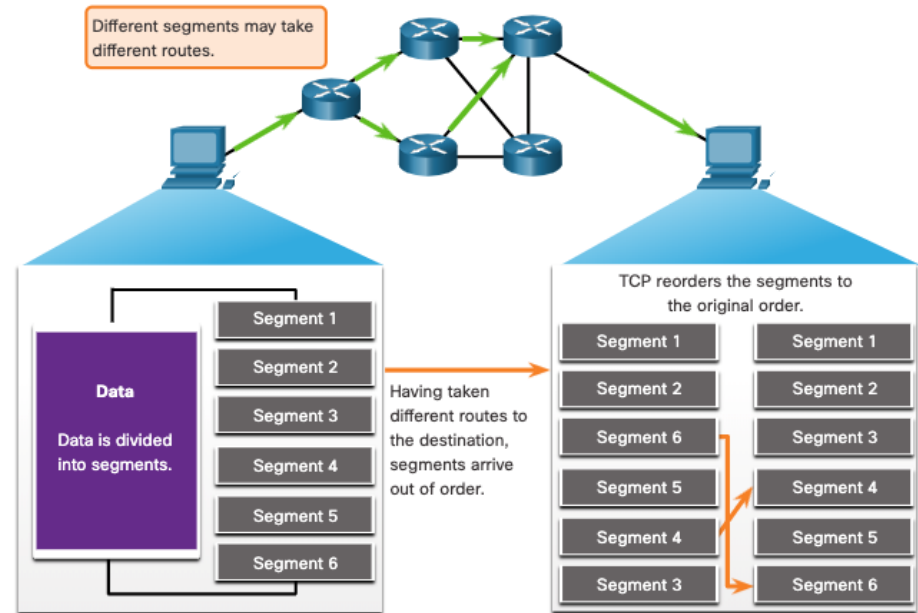

TCP Overview

TCP Features


- **Establishes a Session** - TCP is a connection-oriented protocol that negotiates and establishes a permanent connection (or session) between source and destination devices prior to forwarding any traffic.
- **Ensures Reliable Delivery** - For many reasons, it is possible for a segment to become corrupted or lost completely, as it is transmitted over the network. TCP ensures that each segment that is sent by the source arrives at the destination.
- **Provides Same-Order Delivery** - Because networks may provide multiple routes that can have different transmission rates, data can arrive in the wrong order.
- **Supports Flow Control** - Network hosts have limited resources (i.e., memory and processing power). When TCP is aware that these resources are overtaxed, it can request that the sending application reduce the rate of data flow.

Reliability and Flow Control

TCP Reliability – Data Loss and Retransmission


No matter how well designed a network is, data loss occasionally occurs.

TCP provides methods of managing these segment losses. Among these is a mechanism to **retransmit segments for unacknowledged data**.

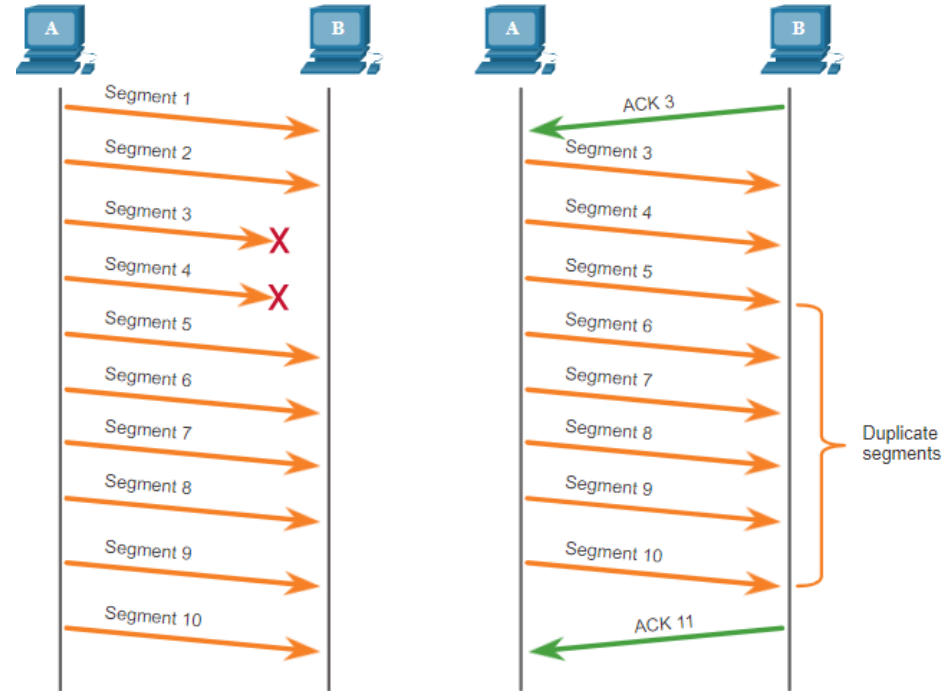

Host operating systems today typically employ an optional TCP feature called **selective acknowledgment (SACK)**, negotiated during the three-way handshake.

If both hosts support SACK, the receiver can explicitly acknowledge which segments (bytes) were received including any discontinuous segments.

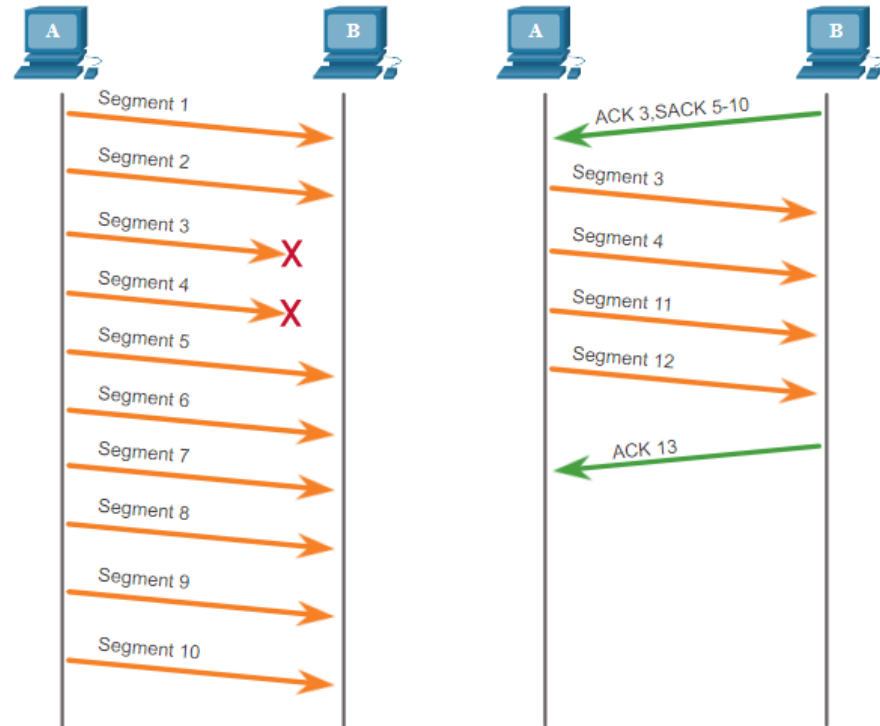

TCP Overview


TCP Features

- **Establishes a Session** - TCP is a connection-oriented protocol that negotiates and establishes a permanent connection (or session) between source and destination devices prior to forwarding any traffic.
- **Ensures Reliable Delivery** - For many reasons, it is possible for a segment to become corrupted or lost completely, as it is transmitted over the network. TCP ensures that each segment that is sent by the source arrives at the destination.
- **Provides Same-Order Delivery** - Because networks may provide multiple routes that can have different transmission rates, data can arrive in the wrong order.
- **Supports Flow Control** - Network hosts have limited resources (i.e., memory and processing power). When TCP is aware that these resources are overtaxed, it can request that the sending application reduce the rate of data flow.

TCP Flow Control – Window Size and Acknowledgments

TCP also provides mechanisms for flow control as follows:

- Flow control is the **amount of data** that the **destination** can **receive** and **process** reliably.
- Flow control helps maintain the reliability of TCP transmission by **adjusting the rate of data flow** between source and destination for a given session.

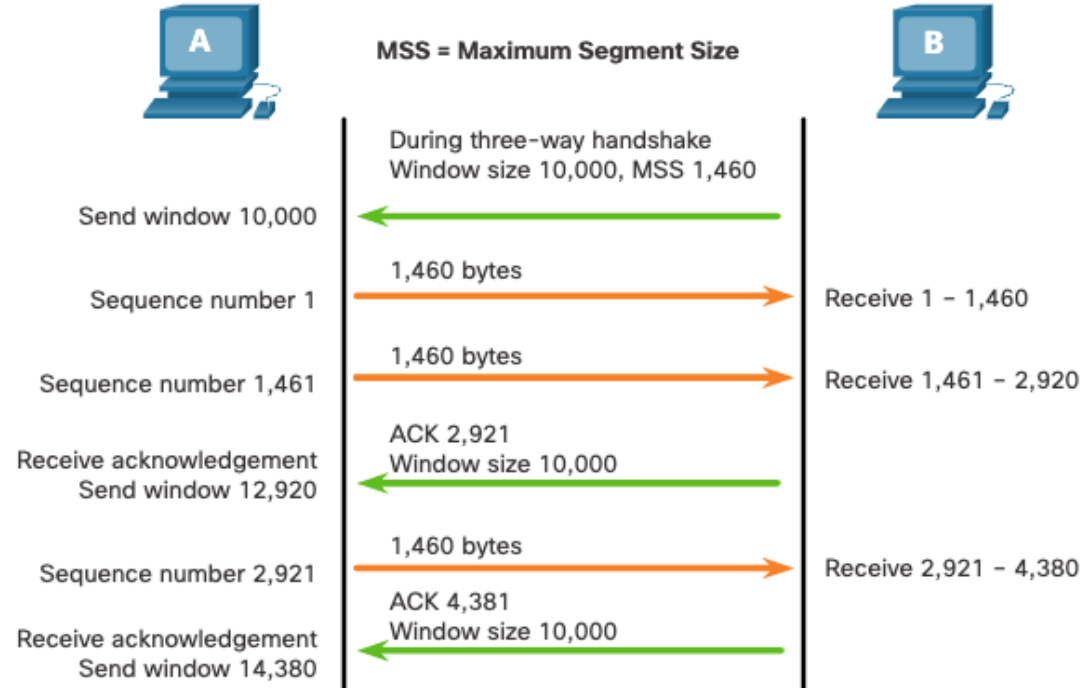


TCP Flow Control – Congestion Avoidance

When congestion occurs on a network, it results in packets being discarded by the overloaded router.

To avoid and control congestion, TCP employs several congestion handling mechanisms, **timers**, and **algorithms**.


If the source determines that the TCP segments are not being acknowledged in a **timely manner**, it **reduce the number** of bytes it sends before receiving an acknowledgment.

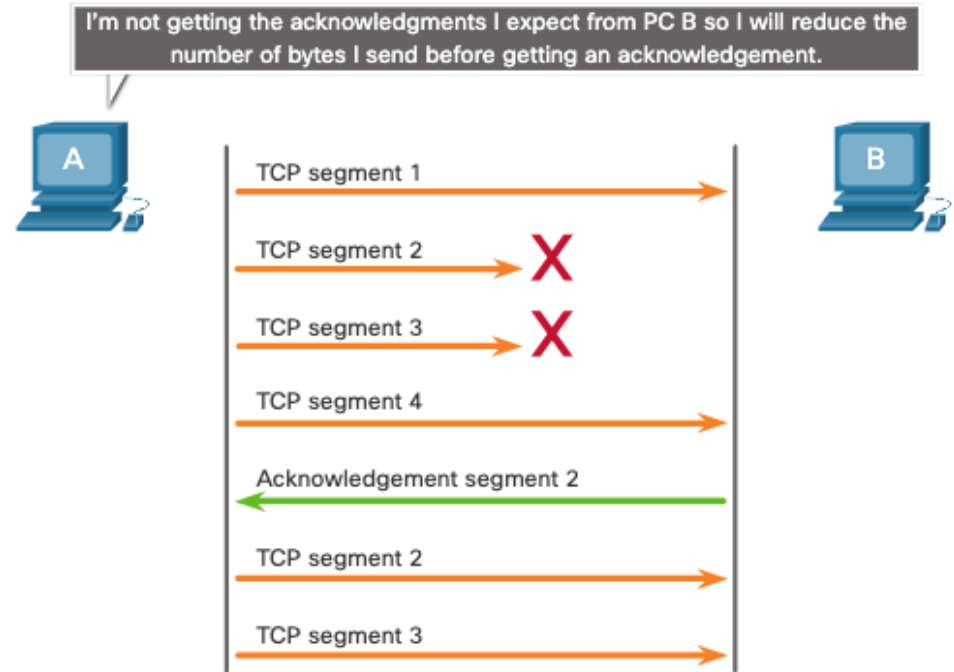

UDP Communication


UDP Low Overhead versus Reliability

UDP does not establish a connection. UDP provides low overhead data transport because it has a small datagram header and no network management traffic.

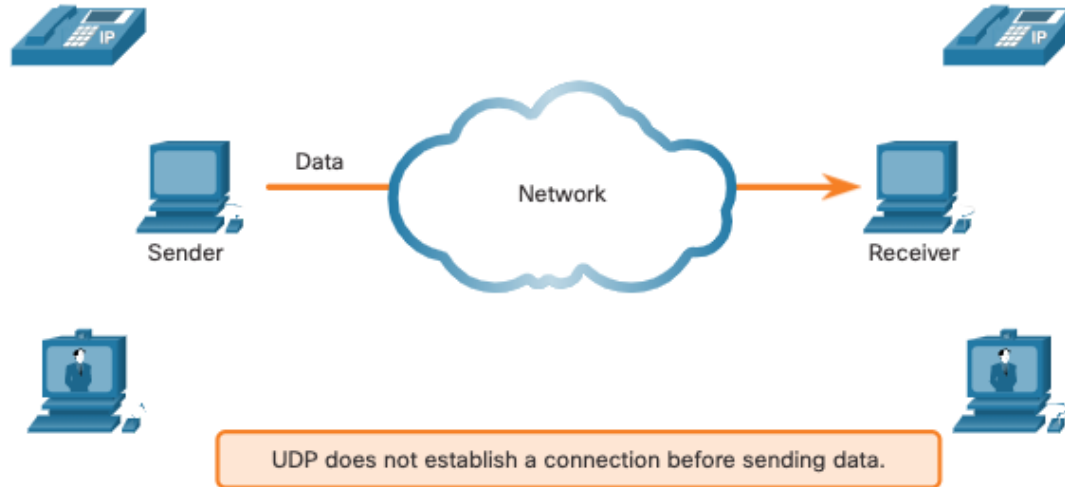

UDP Datagram Reassembly


- UDP does not track sequence numbers the way TCP does.
- UDP has no way to reorder the datagrams into their transmission order.
- UDP simply reassembles the data in the order that it was received and forwards it to the application.

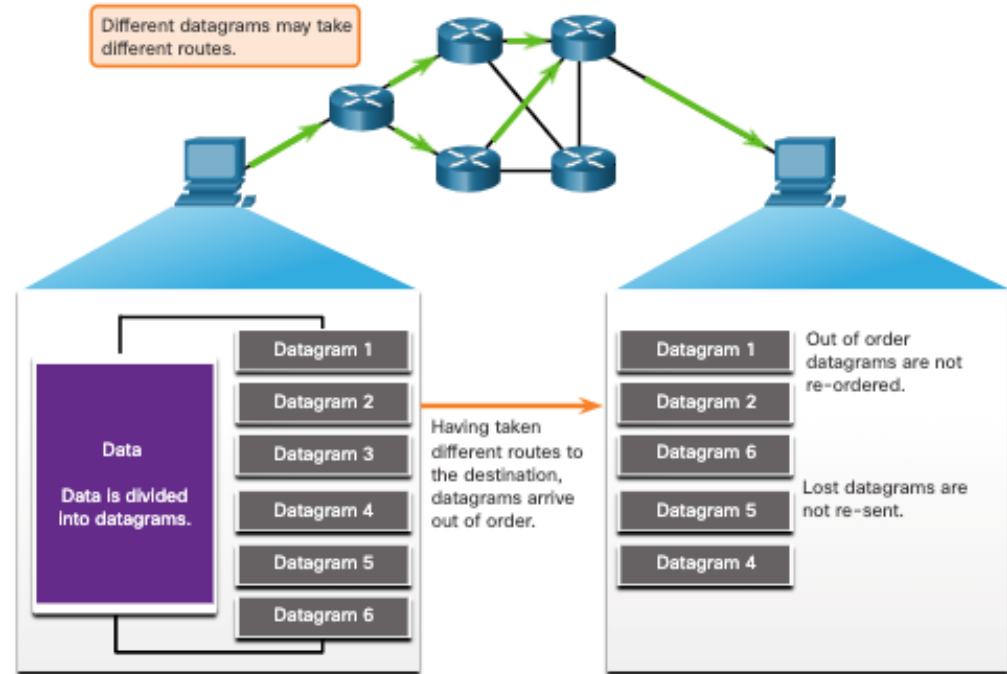

UDP Server Processes and Requests

UDP-based server applications are assigned well-known or registered port numbers.


UDP receives a datagram destined for one of these ports, it forwards the application data to the appropriate application based on its port number.

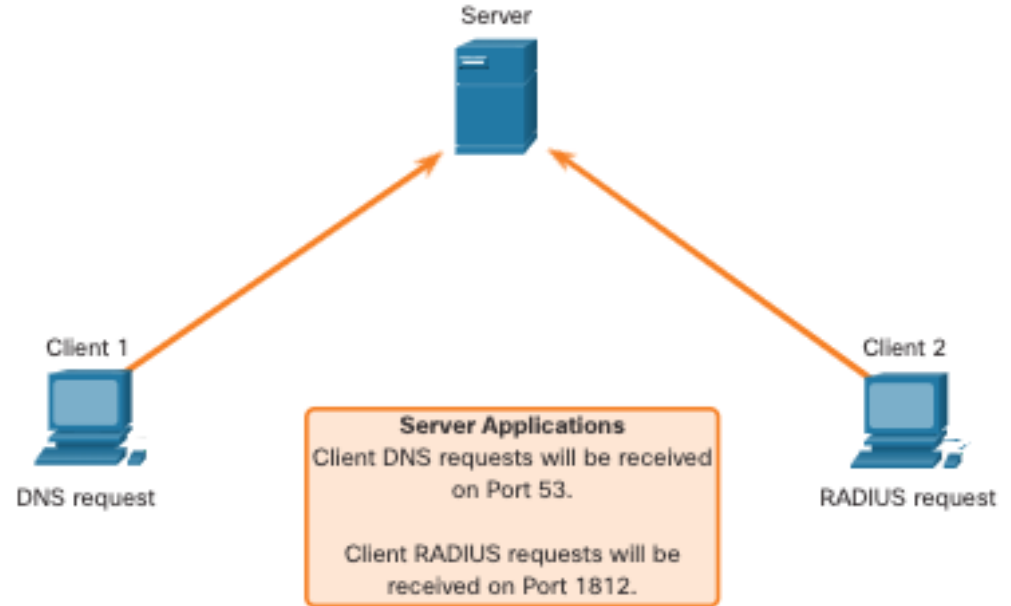

UDP Communication

UDP Client Processes

- The UDP client process dynamically selects a port number from the range of port numbers and uses this as the source port for the conversation.
- The destination port is usually the well-known or registered port number assigned to the server process.
- After a client has selected the source and destination ports, the same pair of ports are used in the header of all datagrams in the transaction.

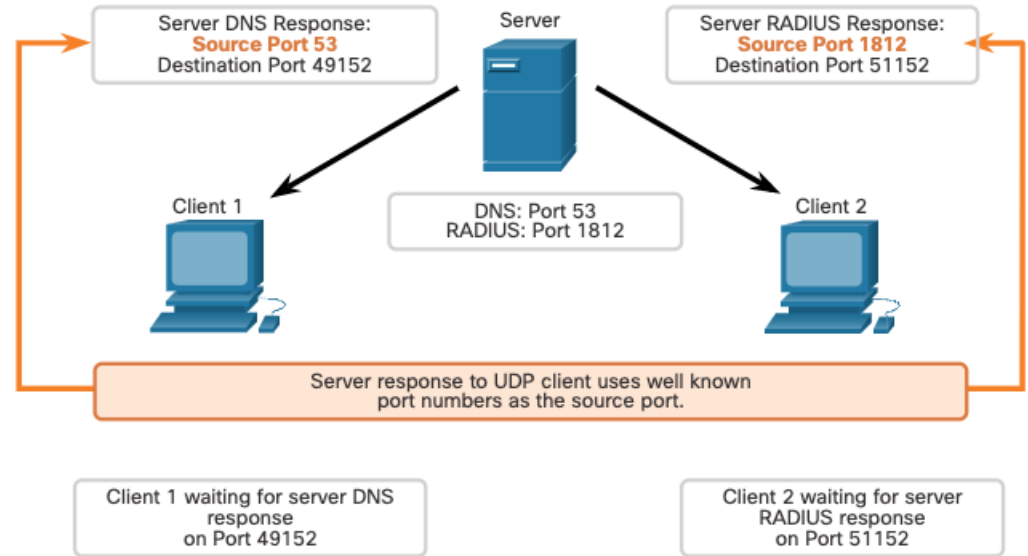

Check your understanding Transport Layer part 2



quizizz.com/join

Summary

Summary of Main Teaching Points

- Advantages of UDP over TCP.
- Difference between a socket and a port
- How does three-way handshake work it?
- What would happen if TCP were used instead of UDP for some applications that use UDP?

Question and Answer Session



Q & A

What we will cover next

Application layer



