Table	e of Contents	
2.	Introduction 3	
3.	Project SCOPE 3	
4.	<b>Key Contacts and Stakeholders</b>	4
5.	<b>Project Resource Requirements</b>	4
5.1	<b>Software Resource Requirements</b>	4
6.	ER Diagram 5	
7.	<b>Tables and Constraints</b> 6	
8.	Analytics	
<b>9.</b> ]	Implementation	6
10.	Work break down 23	
11.	REVIEW EVALUATION 62	

## INTRODUCTION

Cricket Tournament Management system is a great platform for many cricket lovers to organize the cricket tournaments. They can store, manage and display stats of their tournaments. Cricket lovers can show their talent through this software by organizing tournament among their schools, societies, companies etc.

This online cricket tournament management system allows you to create your own cricket tournament add teams, organize matches within tournaments. This system stores and provides information of teams, match fixtures, player info, tournament info etc.

## PROJECT SCOPE

The Cricket Tournament Management System is divided into two modules:

### **Tournament Manager**

- a. Create Tournament.
- b. Add Teams to the tournaments.
- c. Add/Drop Players from Team.
- d. Auto generate match schedule.
- e. Insert the match stats and player scores after the end of every match, which will be displayed in view tournament module.

### **View Tournament**

- a. View all the tournament created
- b. Show matches inside every tournament in order of schedule.
- c. Show statistics and result of every match and individual player performance in each match.
- d. Display the result of the tournament.
- e. View Player/Team History.

### **FUTURE SCOPE OF THE PROJECT**

- Mobile App can be developed
- SMS score service
- · Live Scoreboard
- · Featuring scores from other parts of the state
- Our website will be connected with other major websites so that international match score could be featured

# **KEY CONTACTS AND STAKEHOLDERS**


Name	Registration Number	Phone Number	
AYUSH NIGAM	15BCE0638	9717174800	
ARIHANT CHORDIYA	15BCE0295	9884542120	
ANURANJAN SRIVASTAVA	15BCE0002		
NAMAN GARG	15BCE0665		
ABHINAV REKHI	15BCE0962		
ANIRUDH VATTIKUTI	15BCE565		

# PROJECT RESOURCE REQUIREMENTS

Software Resource Requirements

- MYSQL 5.5
- CSS
- PHP 5
- SQL SERVER

# **ER Diagram**

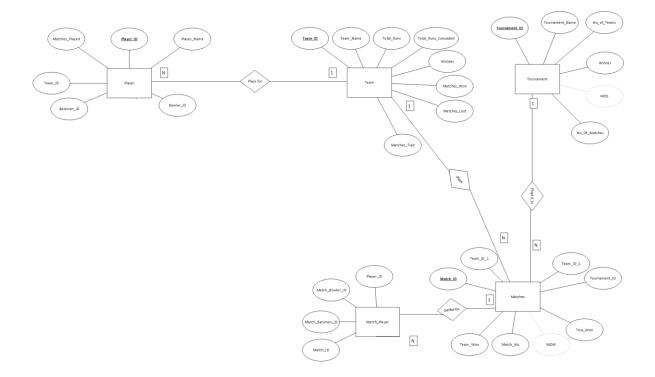

## **Tables and Constraints**

# **Tournament:**

Attribute	Data Type	Constraint
Tournament_ID	NUMBER(20)	PRIMARY KEY
Tournament_Name	VARCHAR(20)	NOT NULL, UNIQUE
No_Of_Teams	NUMBER(20)	
Winner	VARCHAR(20)	
MOS	NUMBER(20)	FOREIGN KEY OF PLAYER_ID
		IN PLAYER TABLE
No_Of_Matches	NUMBER(20)	

# **Matches:**

Attribute	Data Type	Constraint
Team_ID_1	NUMBER(20)	FOREIGN KEY OF TEAM_ID IN
		TEAM TABLE
Team_ID_2	NUMBER(20)	FOREIGN KEY OF TEAM_ID IN
		TEAM TABLE
Match_ID	NUMBER(20)	PRIMARY KEY
Tournament_ID	NUMBER(20)	FOREIGN KEY OF
		TOURNAMENT_ID IN
		TOURANMENT TABLE
Team_Won	VARCHAR(20)	
Match_No	NUMBER(20)	
MOM	NUMBER(20)	FOREIGN KEY OF PLAYER_ID
		IN PLAYER TABLE
Toss_Won	VARCHAR(20)	

# Match\_Player:

Attributes	Data Type	Constraints
Player_ID	NUMBER(20)	PRIMARY KEY
Match_ID	NUMBER(20)	FOREIGN KEY OF MATCH_ID IN TABLE MATCHES TABLE

NUMBER(20)	FOREIGN KEY OF
	MATCH_BATSMAN_ID IN
	TABLE MATCH_BATSMAN
NUMBER(20)	FOREIGN KEY OF
, ,	MATCH BOWLER ID IN
	TABLE MATCH_BOWLER
NUMBER(20)	PRIMARY KEY
NUMBER(20)	
VARCHAR(20)	
NUMBER(20)	
	NUMBER(20)  NUMBER(20)  NUMBER(20)  NUMBER(20)  NUMBER(20)  NUMBER(20)  NUMBER(20)  VARCHAR(20)  NUMBER(20)  NUMBER(20)

# Team:

Attribute	Data Type	Constraint
Team_ID	NUMBER(20)	PRIMARY KEY
Team_Name	VARCHAR(20)	NOT NULL, UNIQUE
Total_Runs	VARCHAR(20)	
Total_Runs_Conceded	NUMBER(20)	
Wickets	NUMBER(20)	
Matches_Won	NUMBER(20)	
Matches_Lost	NUMBER(20)	
Matches Tied	NUMBER(20)	

# **PLAYER:**

Attribute	Data Type	Constraint
Player_ID	NUMBER(20)	PRIMARY KEY
Player_Name	VARCHAR(20)	NOT NULL

Matches_Played	NUMBER(20)	
Team_ID	NUMBER(20)	FOREIGN KEY OF TEAM_ID IN
_		TEAM TABLE
Batsman_ID	NUMBER(20)	FOREIGN KEY OF
		BATSMAN_ID IN BATSMAN
		TABLE
Bowler_ID	NUMBER(20)	FOREIGN KEY OF BOWLER_ID
		IN BOWLER TABLE
Batsman_ID	NUMBER(20)	
Total_Runs	NUMBER(20)	
Balls_Faced	NUMBER(20)	
NotOuts	VARCHAR(20)	
Avg	NUMBER(20)	
BSR	NUMBER(20)	
6s	NUMBER(20)	
4s	NUMBER(20)	
50s	NUMBER(20)	
100s	NUMBER(20)	
Highest_Score	NUMBER(20)	
Bowler_ID	NUMBER(20)	
Wickets Taken	NUMBER(20)	
Balls Delivered	NUMBER(20)	
Runs Conceded	NUMBER(20)	
Maidens	NUMBER(20)	
WSR	NUMBER(20)	
Econ	NUMBER(20)	

# **ANALYTICS**

List all the analytics done in the project. Clear design and algorithms of the analytics should be specified here.

Data Involved	Inference	Uses
TOURNAMENTS	LEAGUES AND KNOCKOUTS	This gives the user options for tournament type of his choice having knockout or league rules.
TEAM INFORMATION	TEAM NAME AND ITS ID	This gives the User and Admin a summary of the teams and its major details. Also the Admin an change these details wherever necessary.
HIGHLIGHTS AND RESULTS	FIXTURES, SCORE CARDS AND SUMMARY	The admin can update fixtures, score cards and results of the match. User can view these data and give some suggestions to Admin.
PLAYER DETAILS	PLAYER NAME, POSITIONS, BATTING AND BOWLING STYLES	While creating a player the admin can set the mentioned attributes and the user can view all the players as well as players of a specific team.
FIXTURES AND SCORECARD	MATCH DETAILS SUCH AS VENUE, DATE AND TEAM DETAILS.	Each match is automatically simulated and can be also edited manually. User can view the compete scorecard after the completion of the match.

# Algorithm:

### Data analysis1:

- User login details are analysed
- User enters his/her login details in a php form and the entries are matched from the database
   <form class="login" method="post" action="login\_form.php">
   <input type="submit" value="Login"</input></form>
- If the login details are valid and correct, user gets access to the tournaments

## Data analysis2:

- Match Simulation
- if(\$\_GET[valuetype] == "dismisstype")
- •

```
if(!mysqli_query($cnn,"UPDATE batperformance SET dismisstype='$_GET[codevalue]' WHERE
batperformanceid='$_GET[batperformanceid]'"))
      {
              mysqli_error($cnn);
      }
}
if($_GET[valuetype] == "cid")
      if(!mysqli_query($cnn,"UPDATE batperformance SET catchid='$_GET[codevalue]' WHERE
batperformanceid='$_GET[batperformanceid]'"))
      {
              mysqli_error($cnn);
      }
}
if($_GET[valuetype] == "bid")
{
      if(!mysqli_query($cnn,"UPDATE batperformance SET bowledid='$_GET[codevalue]' WHERE
batperformanceid='$_GET[batperformanceid]'"))
      {
              mysqli_error($cnn);
      }
}
if($_GET[valuetype] == "runs")
{
      if(!mysqli_query($cnn,"UPDATE batperformance SET runs='$_GET[codevalue]' WHERE
batperformanceid='$_GET[batperformanceid]'"))
              mysqli_error($cnn);
      }
if($_GET[valuetype] == "balls")
{
      if(!mysqli_query($cnn,"UPDATE batperformance SET balls='$_GET[codevalue]' WHERE
batperformanceid='$_GET[batperformanceid]'"))
              mysqli_error($cnn);
      }
if($_GET[valuetype] == "fours")
```

- \$selectquery = mysqli\_query(\$cnn, "SELECT \* FROM fixtures where fixtureid='\$\_GET[editid]'");
- \$delres2 = mysqli\_query(\$cnn, "DELETE FROM fixtures where fixtureid='\$\_GET[delid]'");
- \$insres = mysqli\_query(\$cnn, "UPDATE fixtures SET levelid='\$\_POST[levelid]',level='\$\_POST[level]',tournamentid = '\$\_GET[tournamentid]',teamid1 = '\$\_POST[team1]',teamid2 = '\$\_POST[team2]',venue = '\$\_POST[venue]',fixdatetime = '\$fixdatetime' WHERE fixtureid ='\$\_GET[editid]'");

#### Data analysis3:

- \$insres = mysqli\_query(\$cnn, "INSERT INTO fixtures (levelid,level,tournamentid,teamid1,teamid2,venue,fixdatetime) values ('\$\_POST[levelid]','\$\_POST[level]','\$\_GET[tournamentid]','\$\_POST[team1]','\$\_POST[team2]','\$\_POST[venue]','\$fixdatetime')");
- \$qres = mysqli\_query(\$cnn, "select tournaments.\*,tournamentteams.\*,teams.\* from tournaments INNER JOIN tournamentteams INNER JOIN teams ON tournaments.tournamentid=tournamentteams.tournamentid AND tournamentteams.teamid= teams.teamid where tournamentteams.teamid='\$arrrecteams[teamid]' ");
- \$qtournamentteamsview = mysqli\_query(\$cnn, "SELECT \* FROM fixtures where tournamentid = '\$\_GET[tournamentid]' AND levelid='\$arrtournamentlevel[levelid]'");

#### Data analysis4:


- SCORECARD
- \$sqloversplayed1 = "SELECT SUM(overs)
- FROM fixtures INNER JOIN
- results ON fixtures.fixtureid = results.fixtureid RIGHT OUTER JOIN
- bowlingperformance LEFT OUTER JOIN
- players ON bowlingperformance.playerid = players.playerid ON results.resultid = bowlingperformance.resultid WHERE players.teamid='\$team2id'"

•


 \$insres = mysqli\_query(\$cnn, "INSERT INTO results (fixtureid,team1score,team2score,tossid,comment) values ('\$\_GET[fixid]','\$\_POST[team1score]','\$\_POST[team2score]','\$\_POST[tossid]','\$\_POST[comment]')");


# **Implementation**

Cricket Tournament Management System

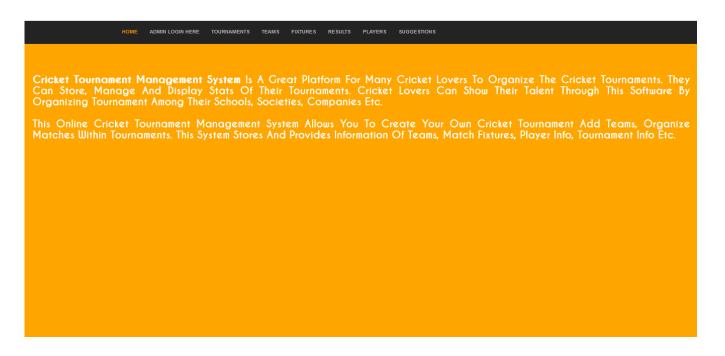


#### Cricket Tournament Management System

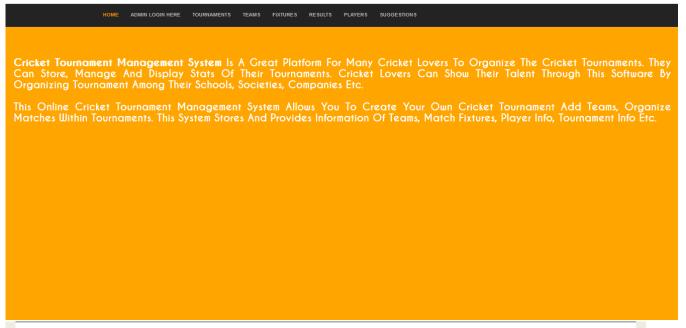


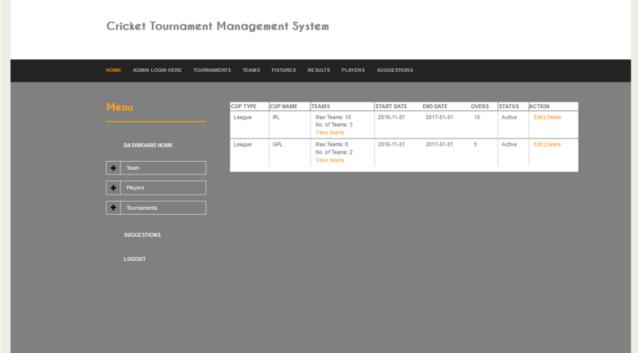



#### Cricket Tournament Management System

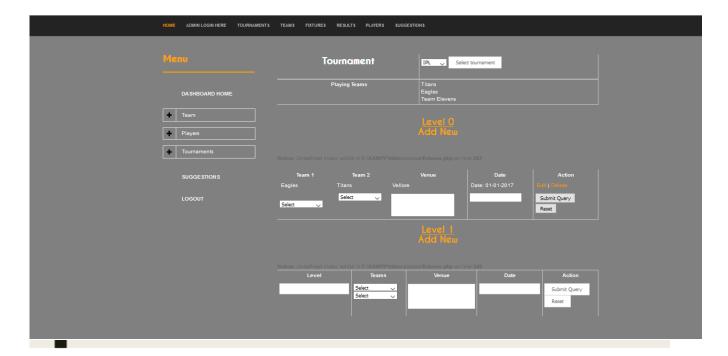



#### Cricket Tournament Management System

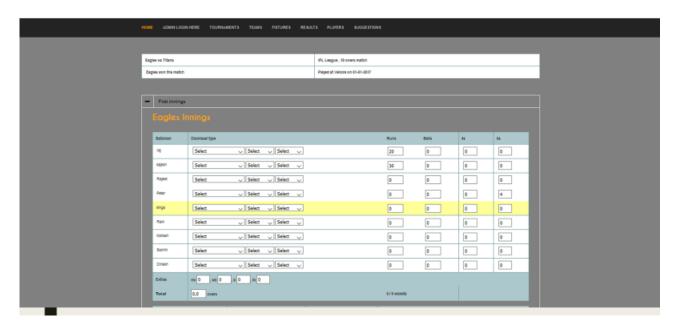


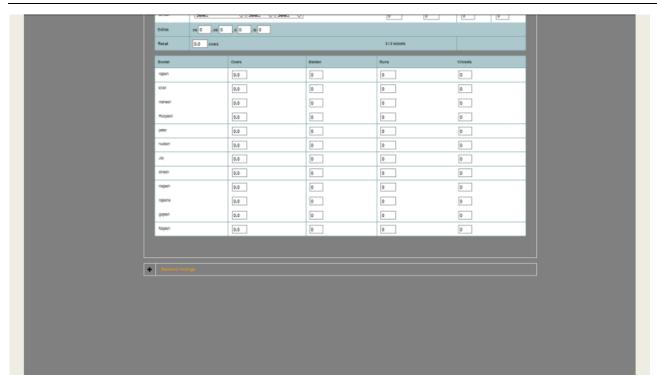


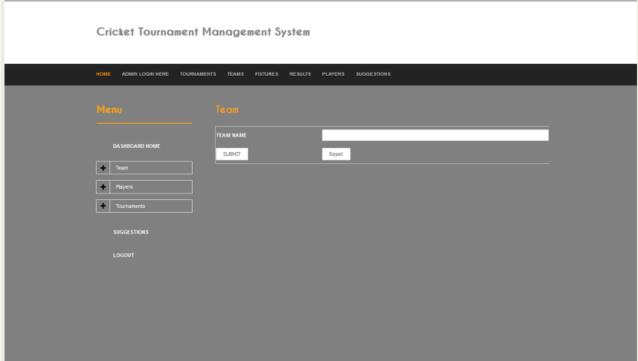

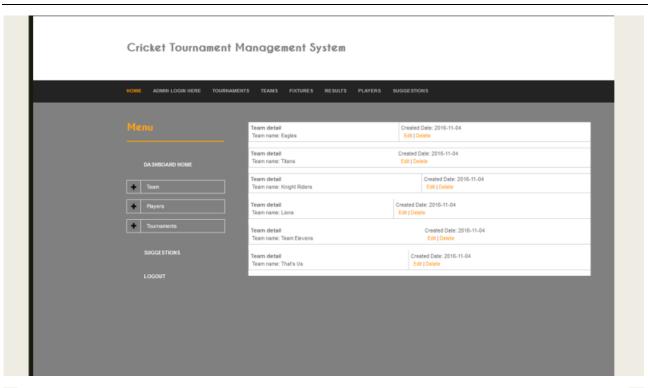

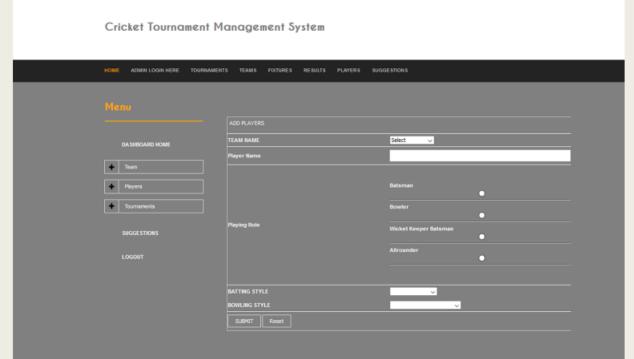

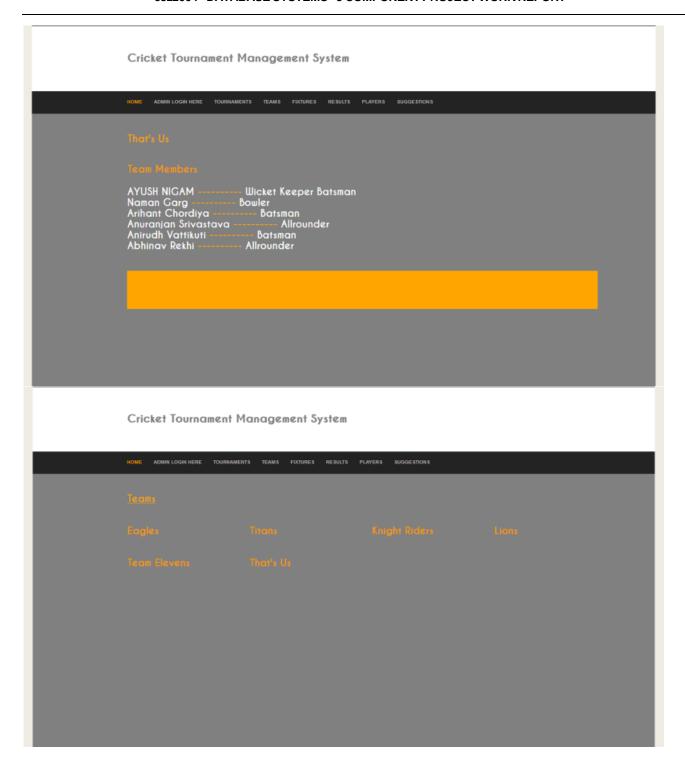

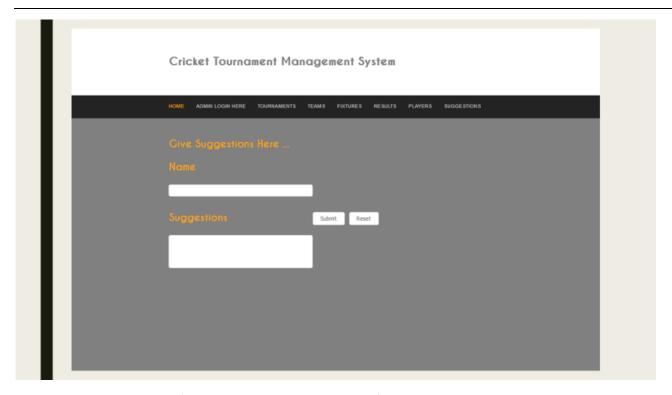

For Every Team Member in your team Repeat the steps given below

### 1. 15BCE0565 Anirudh Vattikuti

ER DIAGRAM AND DATABASE SCHEMA

```
CREATE TABLE `batperformance` (
    `batperformanceid` int(10) NOT NULL,
    `resultid` int(10) NOT NULL,
    `playerid` int(10) NOT NULL,
    `catchid` int(10) NOT NULL,
    `bowledid` int(10) NOT NULL,
    `bowledid` int(10) NOT NULL,
    `tinsisstype` varchar(25) NOT NULL,
    `runs` int(10) NOT NULL,
    `balls` int(10) NOT NULL,
    `sixes` int(10) NOT NULL,
    `dismissovers` float(10,1) NOT NULL,
    `fow` int(10) NOT NULL
```

)

```
CREATE TABLE 'bowlingperformance' (
 `bowlperformanceid` int(10) NOT NULL,
 'resultid' int(10) NOT NULL,
 `playerid` int(10) NOT NULL,
 `overs` float(10,1) NOT NULL,
 'maidens' int(10) NOT NULL,
 `runs` int(10) NOT NULL,
 `wickets` int(10) NOT NULL
)
2. 15BCE0002 Anuranjan Srivastava
DATABASE IMPLEMENTATION AND SQL QUERIES
CREATE TABLE `fixtures` (
 `fixtureid` int(10) NOT NULL,
 `tournamentid` int(10) NOT NULL,
 `teamid1` int(10) NOT NULL,
 `teamid2` int(10) NOT NULL,
 `levelid` int(10) NOT NULL,
 `level` varchar(25) NOT NULL,
 'venue' varchar(25) NOT NULL,
 `fixdatetime` date NOT NULL
)
CREATE TABLE `players` (
 `playerid` int(10) NOT NULL,
 `teamid` int(10) NOT NULL,
 `name` varchar(50) NOT NULL,
 'playingrole' varchar(50) NOT NULL,
 `battingstyle` varchar(50) NOT NULL,
```

```
`bowlingstyle` varchar(50) NOT NULL,
 `createddate` date NOT NULL
)
CREATE TABLE `results` (
 `resultid` int(10) NOT NULL,
 `fixtureid` int(10) NOT NULL,
 `team1score` int(10) NOT NULL,
 `team2score` int(10) NOT NULL,
 `tossid` int(10) NOT NULL,
 `comment` text NOT NULL
)
CREATE TABLE `scrapbook` (
 `sbid` int(10) NOT NULL,
 `typeid` int(10) NOT NULL,
 `name` varchar(20) NOT NULL,
 `posttype` varchar(10) NOT NULL,
 'message' text NOT NULL,
 `status` varchar(25) NOT NULL,
 'sdatetime' datetime NOT NULL
)
CREATE TABLE `teams` (
 `teamid` int(10) NOT NULL,
 `teamname` varchar(50) NOT NULL,
 `createddate` date NOT NULL
)
CREATE TABLE `tournaments` (
 `tournamentid` int(10) NOT NULL,
```

```
`type` varchar(25) NOT NULL,
 'name' varchar(50) NOT NULL,
 'noofteams' int(10) NOT NULL,
 `startdate` date NOT NULL,
 'enddate' date NOT NULL,
 'overs' int(10) NOT NULL,
 `status` varchar(10) NOT NULL
)
CREATE TABLE `tournamentteams` (
 `tournamentteamsid` int(10) NOT NULL,
 `tournamentid` int(10) NOT NULL,
 `teamid` int(10) NOT NULL,
 `playerid` int(10) NOT NULL,
 `playertype` varchar(20) NOT NULL,
 'description' text NOT NULL,
 `status` varchar(10) NOT NULL
)
CREATE TABLE `users` (
 `userid` int(10) NOT NULL,
 `name` varchar(25) NOT NULL,
 `username` varchar(20) NOT NULL,
 'password' varchar(20) NOT NULL,
 `status` varchar(10) NOT NULL
)
if($_GET[valuetype] == "dismisstype")
{
       if(!mysqli_query($cnn,"UPDATE batperformance SET dismisstype='$_GET[codevalue]' WHERE
batperformanceid='$_GET[batperformanceid]'"))
```

```
{
              mysqli_error($cnn);
       }
}
if($_GET[valuetype] == "cid")
{
       if(!mysqli_query($cnn,"UPDATE batperformance SET catchid='$_GET[codevalue]' WHERE
batperformanceid='$_GET[batperformanceid]'"))
       {
              mysqli_error($cnn);
       }
}
if($_GET[valuetype] == "bid")
{
       if(!mysqli_query($cnn,"UPDATE batperformance SET bowledid='$_GET[codevalue]' WHERE
batperformanceid='$_GET[batperformanceid]'"))
       {
              mysqli_error($cnn);
       }
}
if($_GET[valuetype] == "runs")
{
       if(!mysqli_query($cnn,"UPDATE batperformance SET runs='$_GET[codevalue]' WHERE
batperformanceid='$_GET[batperformanceid]'"))
       {
              mysqli_error($cnn);
       }
}
if($_GET[valuetype] == "balls")
```

```
{
      if(!mysqli_query($cnn,"UPDATE batperformance SET balls='$_GET[codevalue]' WHERE
batperformanceid='$_GET[batperformanceid]'"))
      {
             mysqli_error($cnn);
      }
}
if($_GET[valuetype] == "fours")
{
      if(!mysqli_query($cnn,"UPDATE batperformance SET fours='$_GET[codevalue]' WHERE
batperformanceid='$_GET[batperformanceid]'"))
      {
             mysqli_error($cnn);
      }
if($_GET[valuetype] == "sixes")
{
      if(!mysqli_query($cnn,"UPDATE batperformance SET sixes='$_GET[codevalue]' WHERE
batperformanceid='$_GET[batperformanceid]'"))
             mysqli_error($cnn);
      }
}
3. 15BCE0638 NAMAN GARG
BASIC FRONT END
<FORM METHOD="POST" ACTION="" ENCTYPE="MULTIPART/FORM-DATA">
<INPUT TYPE="HIDDEN" NAME="SETVAR" VALUE="<?PHP ECHO $ SESSION[SETVAR];</pre>
?>">
<INPUT TYPE="HIDDEN" NAME="CUPID" VALUE="<?PHP ECHO $RSARRAY[CUPID]; ?>">
```

```
<TABLE STYLE="BORDER-COLOR: ORANGE;" HEIGHT=550 WIDTH=550>
<?PHP
$QRESULT="CREATE TOURNAMENT";
$QRESULTI=1;?>
<TR>
      <TH HEIGHT="32" STYLE="BACKGROUND-COLOR: GREY"</p>
COLSPAN="2"> <H6>&NBSP;<?PHP ECHO "<FONT COLOR='ORANGE'> CREATE
TOURNAMENT</FONT>"; ?><BR><?PHP ECHO "<FONT
COLOR='ORANGE'>
</FONT>"; ?></H6></TH>
 </TR>
?>
<TR>
     <TH HEIGHT="32" STYLE="BACKGROUND-COLOR: GREY">&NBSP;&NBSP;<?PHP</p>
ECHO "<FONT COLOR="WHITE">TOURNAMENT TYPE</FONT>"; ?></TH>
     < TH >
          <SELECT NAME=TYPE STYLE="BACKGROUND-COLOR: ORANGE:COLOR:</p>
WHITE"
                <?PHP
                     $ARRADTYPE = ARRAY("SELECT","LEAGUE","KNOCK OUT");
               FOREACH($ARRADTYPE AS $VALUE)
               {
                     IF($VALUE == $RSARRAY[TYPE])
                     ECHO "<OPTION VALUE='$VALUE'
SELECTED>$VALUE</OPTION>";
                     }
                     ELSE
                     ECHO "<OPTION VALUE='$VALUE'>$VALUE</OPTION>";
```

```
}
                }
                ?>
          </SELECT>
     </TH>
</TR>
<TR>
     <TH HEIGHT="32" STYLE="BACKGROUND-COLOR:</p>
GREY"><BR>&NBSP;&NBSP;<?PHP ECHO "<FONT COLOR='WHITE'>TOURNAMENT
NAME</FONT>"; ?></TH>
     < TH >
          <BR><INPUT STYLE="BACKGROUND-COLOR: ORANGE;COLOR: WHITE"</p>
TYPE=TEXT NAME=NAME VALUE="<?PHP ECHO $RSARRAY['NAME']; ?>">
     </TH>
</TR>
\langle BR \rangle
<TR>
     <TH HEIGHT="32" STYLE="BACKGROUND-COLOR:</p>
GREY"><BR>&NBSP;&NBSP;<?PHP ECHO "<FONT COLOR='WHITE'>MAXIMUM NUMBER
OF TEAMS</FONT>"; ?></TH>
     <TH>
          <BR><INPUT STYLE="BACKGROUND-COLOR: ORANGE:COLOR: WHITE"</p>
TYPE=TEXT NAME=NOOFTEAMS VALUE="<?PHP ECHO $RSARRAY['NOOFTEAMS']; ?>">
     </TH>
</TR>
<TR>
```

```
<TH HEIGHT="32" STYLE="BACKGROUND-COLOR:</p>
GREY"><BR>&NBSP;&NBSP;<?PHP ECHO "<FONT COLOR='WHITE'>TOURNAMENT START
DATE</FONT>"; ?></TH>
     <TH>
          <BR><INPUT STYLE="BACKGROUND-COLOR: ORANGE:COLOR: WHITE"</p>
TYPE="DATE" NAME="STARTDATE" VALUE="<?PHP ECHO $RSARRAY['STARTDATE'];
?>">
     </TH>
</TR>
<TR>
     <TH HEIGHT="32" STYLE="BACKGROUND-COLOR:</p>
GREY"><BR>&NBSP;&NBSP;<?PHP ECHO "<FONT COLOR='WHITE'>TOURNAMENT END
DATE</FONT>"; ?></TH>
     <TH>
          <BR><INPUT STYLE="BACKGROUND-COLOR: ORANGE;COLOR: WHITE"</p>
TYPE="DATE" NAME="ENDDATE" VALUE="<?PHP ECHO $RSARRAY['ENDDATE']; ?>">
     </TH>
</TR>
<TR>
     <TH HEIGHT="32" STYLE="BACKGROUND-COLOR:</p>
GREY"><BR>&NBSP;&NBSP;<?PHP ECHO "<FONT COLOR='WHITE'>OVERS</FONT>";
?></TH>
     < TH >
          <BR><INPUT STYLE="BACKGROUND-COLOR: ORANGE:COLOR: WHITE"</p>
TYPE=TEXT NAME=OVERS VALUE="<?PHP ECHO $RSARRAY['OVERS']; ?>">
     </TH>
</TR>
<TR>
     <TH HEIGHT="32" STYLE="BACKGROUND-COLOR:</p>
GREY"><BR>&NBSP;&NBSP;<?PHP ECHO "<FONT COLOR="WHITE">STATUS</FONT>";
?></TH>
```

```
< TH >
          <P ALIGN="CENTER" STYLE="COLOR: WHITE"><B>ACTIVE
   <INPUT STYLE="BACKGROUND-COLOR: ORANGE;COLOR: WHITE" TYPE=RADIO</p>
NAME=STATUS VALUE=ACTIVE
   <?PHP
          IF($RSARRAY['STATUS']== "ACTIVE")
                     ECHO "CHECKED";
          ?>
   >
          INACTIVE</B></P>
   <INPUT TYPE=RADIO NAME=STATUS VALUE=INACTIVE</p>
   <?PHP
          IF($RSARRAY['STATUS']== "INACTIVE")
                     ECHO "CHECKED";
           ?>
   >
     </TH>
</TR>
<TR>
     <TH>
          <INPUT TYPE=SUBMIT NAME="SUBMIT" VALUE=SUBMIT>
     </TH>
     < TH >
          <INPUT TYPE=RESET>
     </TH>
```

```
</TR>
</TABLE>
</FORM>
4. 15BCE0295 ARIHANT CHORDIYA
FRONT END
<DIV CLASS="WRAPPER ROW3" STYLE="BACKGROUND-COLOR: GREY">
<DIV ID="CONTAINER">
 <!--
######## -->
 <DIV ID="SIDEBAR_1" CLASS="SIDEBAR ONE_QUARTER FIRST">
        <?PHP
        INCLUDE("ADMINMENU.PHP");
        ?>
 </DIV>
 <!--
######## -->
 <DIV ID="PORTFOLIO" CLASS="THREE_QUARTER">
<TABLE WIDTH="737" HEIGHT="78" BORDER="1" STYLE="COLOR: WHITE">
<TR>
 <TD WIDTH="317" HEIGHT="30"><DIV ALIGN="CENTER">
  <H2><STRONG>TOURNAMENT</STRONG></H2>
  </DIV></TD>
 <TD WIDTH="404" ALIGN="LEFT">
  <FORM METHOD="GET" ACTION="">
  <SELECT NAME="TOURNAMENTID">
   <OPTION VALUE="">SELECT</OPTION>
```

```
<?PHP
               $SQLTEAMS = "SELECT * FROM TOURNAMENTS WHERE
STATUS='ACTIVE'";
               $SQLQUERY = MYSQLI_QUERY($CNN,$SQLTEAMS);
               WHILE($RSRES = MYSQLI_FETCH_ARRAY($SQLQUERY))
               {
                    IF($RSRES["TOURNAMENTID"]== $_GET["TOURNAMENTID"])
                    {
                    ECHO "<OPTION VALUE='$RSRES[TOURNAMENTID]'
SELECTED>$RSRES[NAME]</OPTION>";
                     }
                    ELSE
                    ECHO "<OPTION
VALUE='$RSRES[TOURNAMENTID]'>$RSRES[NAME]</OPTION>";
               }
          ?>
    </SELECT>
   <INPUT TYPE="SUBMIT" NAME="SUBMITTOURNAMENT" VALUE="SELECT
TOURNAMENT">
   </FORM>
</TD>
</TR>
<TR>
 <TD HEIGHT="40" ALIGN="CENTER"><STRONG>&NBSP;PLAYING
TEAMS</STRONG></TD>
     <TD><?PHP
$QRESTEAMS = MYSQLI_QUERY($CNN, "SELECT DISTINCT TEAMID FROM
TOURNAMENTTEAMS WHERE TOURNAMENTID = '$_GET[TOURNAMENTID]'");
     WHILE($ARRRECTEAMS = MYSQLI_FETCH_ARRAY($QRESTEAMS))
```

```
{
?>
<FONT STYLE="COLOR: WHITE">
<?PHP
$QRES = MYSQLI QUERY($CNN, "SELECT
TOURNAMENTS.*, TOURNAMENTTEAMS.*, TEAMS.* FROM TOURNAMENTS INNER JOIN
TOURNAMENTTEAMS INNER JOIN TEAMS ON
TOURNAMENTS.TOURNAMENTID=TOURNAMENTTEAMS.TOURNAMENTID AND
TOURNAMENTTEAMS.TEAMID= TEAMS.TEAMID WHERE
TOURNAMENTTEAMS.TEAMID='$ARRRECTEAMS[TEAMID]' ");
$ARREC = MYSQLI FETCH ARRAY($QRES);
     ECHO "$ARRREC[TEAMNAME] <BR>";
          $PLAYINGTEAMID[] = $ARRREC['TEAMID'];
          $PLAYINGTEAMNAME[] = $ARRREC['TEAMNAME'];
     }
 ?>
 </FONT>
 </TD>
 </TR>
</TABLE>
\langle BR \rangle
<FONT STYLE="COLOR: WHITE">
<?PHP
IF(ISSET($RESDEL2))
{
ECHO "<STRONG>RECORD DELETED SUCCESSFULLY..</STRONG>":
}
IF (ISSET($_GET['INSREC']))
IF(\$\_GET['INSREC'] == 1)
{
ECHO "<STRONG>RECORD INSERTED SUCCESSFULLY...</STRONG>";
```

```
}
IF (ISSET($_GET['UPDREC']))
IF(\$\_GET['UPDREC'] == 1)
{
     ECHO "<STRONG>RECORD UPDATED SUCCESSFULLY...</STRONG>":
}
?>
</FONT>
<?PHP
$LEVELID=" ";
IF (ISSET($_GET['TOURNAMENTID']))
{ $QTOURNAMENTLEVEL = MYSQLI QUERY($CNN, "SELECT DISTINCT LEVELID, LEVEL
FROM FIXTURES WHERE TOURNAMENTID = '$_GET[TOURNAMENTID]'");
     WHILE($ARRTOURNAMENTLEVEL =
MYSQLI_FETCH_ARRAY($QTOURNAMENTLEVEL))
?>
<H2 STYLE="COLOR: ORANGE" ALIGN="CENTER"><U>LEVEL <?PHP ECHO</p>
$ARRTOURNAMENTLEVEL['LEVELID']. $ARRTOURNAMENTLEVEL['LEVEL'];
?></U><BR>ADD NEW</H2>
<TABLE WIDTH="734" STYLE="COLOR: WHITE">
 <TR>
 <TD WIDTH="67" ALIGN="CENTER"><STRONG>TEAM 1</STRONG></TD>
 <TD WIDTH="67" ALIGN="CENTER"><STRONG>TEAM 2</STRONG></TD>
 <TD WIDTH="161" ALIGN="CENTER"><STRONG>VENUE</STRONG></TD>
 <TD WIDTH="144" ALIGN="CENTER"><STRONG>DATE</STRONG></TD>
 <TD WIDTH="144" ALIGN="CENTER"><STRONG>ACTION</STRONG></TD>
 </TR>
<?PHP
```

```
$QTOURNAMENTTEAMSVIEW = MYSQLI_QUERY($CNN, "SELECT * FROM FIXTURES
WHERE TOURNAMENTID = '$_GET[TOURNAMENTID]' AND
LEVELID='$ARRTOURNAMENTLEVEL[LEVELID]'");
     WHILE($ARRTOURNAMENTTEAMSVIEW =
MYSQLI_FETCH_ARRAY($QTOURNAMENTTEAMSVIEW))
     {
               $QTEAMSVIEWTEAMS1 = MYSQLI_QUERY($CNN, "SELECT * FROM
TEAMS WHERE TEAMID = '$ARRTOURNAMENTTEAMSVIEW[TEAMID1]'");
               $ARRTEAMS1 = MYSQLI_FETCH_ARRAY($QTEAMSVIEWTEAMS1);
               $QTEAMSVIEWTEAMS2 = MYSQLI_QUERY($CNN, "SELECT * FROM
TEAMS WHERE TEAMID = '$ARRTOURNAMENTTEAMSVIEW[TEAMID2]'");
               $ARRTEAMS2 = MYSQLI_FETCH_ARRAY($QTEAMSVIEWTEAMS2);
     ECHO "<TR><TD>&NBSP;";
     IF($ARRTEAMS1['TEAMNAME'] == "")
     {
          ECHO "TBC";
     ELSE
     ECHO $ARRTEAMS1['TEAMNAME'];
     ECHO "</TD><TD>&NBSP;";
     IF($ARRTEAMS2['TEAMNAME'] == "")
          ECHO "TBC";
     ELSE
```

{

```
ECHO $ARRTEAMS2['TEAMNAME'];
     }
     ECHO "</TD>
 <TD>&NBSP;$ARRTOURNAMENTTEAMSVIEW[VENUE]</TD>
 <TD>&NBSP:":
     $PHPDATE = STRTOTIME($ARRTOURNAMENTTEAMSVIEW['FIXDATETIME']);
     ECHO "DATE: ".$MYSQLDATE = DATE( 'D-M-Y', $PHPDATE );
     //ECHO DATE_FORMAT($ARRTOURNAMENTTEAMSVIEW[FIXDATETIME], 'Y-M-D
H:I:S');
     ECHO "<BR />";
     ECHO "</TD>";
     ECHO "<TD>&NBSP;";
     ECHO "<A
HREF='FIXTURES.PHP?TOURNAMENTID=$_GET[TOURNAMENTID]&EDITID=$ARRTOURN
AMENTTEAMSVIEW[FIXTUREID]'>EDIT</A> | <A
HREF='FIXTURES.PHP?TOURNAMENTID=$ GET[TOURNAMENTID]&DELID=$ARRTOURNA
MENTTEAMSVIEW[FIXTUREID]'>DELETE</A>";
     ECHO "</TD>
     </TR>";
     }
}
?>
 <TR>
 <TD>&NBSP;
 <FORM METHOD="POST" NAME="FORM1" ACTION="">
<INPUT TYPE="HIDDEN" NAME="SETVAR" VALUE="<?PHP ECHO $_SESSION["SETVAR"];</pre>
?>">
<INPUT TYPE="HIDDEN" NAME="LEVELID" VALUE="<?PHP ECHO</p>
$ARRTOURNAMENTLEVEL['LEVELID']; ?>" />
```

```
<INPUT TYPE="HIDDEN" NAME="LEVEL" VALUE="<?PHP ECHO</p>
$ARRTOURNAMENTLEVEL['LEVEL']; ?>" />
 <SELECT NAME="TEAM1">
 <OPTION VALUE="">SELECT</OPTION>
 <?PHP
          FOR($I=0; $I < COUNT($PLAYINGTEAMID); $I++)
                IF($RSARRAY[TEAMID1] == $PLAYINGTEAMID[$I])
                ECHO "<OPTION VALUE='$PLAYINGTEAMID[$I]'
SELECTED>$PLAYINGTEAMNAME[$I]</OPTION>";
                ELSE
                ECHO "<OPTION
VALUE='$PLAYINGTEAMID[$I]'>$PLAYINGTEAMNAME[$I]</OPTION>";
     ?>
 </SELECT>
 </TD>
 <TD>&NBSP;
 <SELECT NAME="TEAM2">
 <OPTION VALUE="">SELECT</OPTION>
 <?PHP
          FOR($I=0; $I < COUNT($PLAYINGTEAMID); $I++)
           {
                IF($RSARRAY[TEAMID2] == $PLAYINGTEAMID[$I])
                ECHO "<OPTION VALUE='$PLAYINGTEAMID[$I]'
SELECTED>$PLAYINGTEAMNAME[$I]</OPTION>";
```

```
}
                ELSE
                 {
                ECHO "<OPTION
VALUE='$PLAYINGTEAMID[$I]'>$PLAYINGTEAMNAME[$I]</OPTION>";
                 }
           }
     ?>
 </SELECT>
 </TD>
  <?PHP
  //IF(ISSET($_GET['EDITID']))
     //
           {
     $SELECTQUERY = MYSQLI_QUERY($CNN, "SELECT * FROM FIXTURES WHERE
FIXTUREID='$_GET[EDITID]'");
           $RSARRAY = MYSQLI_FETCH_ARRAY($SELECTQUERY); //}
           ?>
 <TD><TEXTAREA NAME="VENUE" ID="VENUE"><?PHP ECHO $RSARRAY['VENUE'];
?></TEXTAREA></TD>
     <?PHP
           $PHPFIXDATE = STRTOTIME($RSARRAY['FIXDATETIME']);
           $MYSQLDATE = DATE( 'Y-M-D', $PHPFIXDATE );
     ?>
 <TD><INPUT TYPE="DATE" NAME="FIXDATE" VALUE="<?PHP ECHO $MYSQLDATE; ?>"
/><BR /></TD>
 \langle BR \rangle
   <TD><INPUT TYPE="SUBMIT" VALUE"SUBMIT" NAME="SUBMIT" />
           <INPUT TYPE="RESET" />
                 </FORM>
 </TD>
```

```
</TR>
</TABLE>
<?PHP
$LEVELID = $ARRTOURNAMENTLEVEL['LEVELID'];
?>
<H2 STYLE="COLOR: ORANGE" ALIGN="CENTER"><U>LEVEL <?PHP ECHO $LEVELID =</p>
$LEVELID+1; ?></U><BR>ADD NEW</H2>
<FORM METHOD="POST" NAME="FORM1" ACTION="">
<INPUT TYPE="HIDDEN" NAME="SETVAR" VALUE="<?PHP ECHO $_SESSION["SETVAR"];</pre>
?>">
<INPUT TYPE="HIDDEN" NAME="LEVELID" VALUE="<?PHP ECHO $LEVELID; ?> " />
<TABLE WIDTH="734" BORDER="1" STYLE="COLOR: WHITE">
<TR>
 <TD WIDTH="168" ALIGN="CENTER"><STRONG>LEVEL</STRONG></TD>
 <TD WIDTH="73" ALIGN="CENTER"><STRONG>TEAMS</STRONG></TD>
 <TD WIDTH="161" ALIGN="CENTER"><STRONG>VENUE</STRONG></TD>
 <TD WIDTH="147" ALIGN="CENTER"><STRONG>DATE</STRONG></TD>
 <TD WIDTH="64" ALIGN="CENTER"><STRONG>ACTION</STRONG></TD>
</TR>
<TR>
  <TD ALIGN="CENTER" VALIGN="MIDDLE">
<INPUT TYPE="TEXT" NAME="LEVEL" />
 </TD>
 < TD >
 <SELECT NAME="TEAM1">
```

```
<OPTION VALUE="">SELECT</OPTION>
 <OPTION VALUE="">TBC</OPTION>
 <?PHP
          FOR($I=0; $I < COUNT($PLAYINGTEAMID); $I++)
           {
                IF($RSARRAY[TEAMID1] == $PLAYINGTEAMID[$I])
                ECHO "<OPTION VALUE='$PLAYINGTEAMID[$I]'
SELECTED>$PLAYINGTEAMNAME[$I]</OPTION>";
                }
                ELSE
                ECHO "<OPTION
VALUE='$PLAYINGTEAMID[$I]'>$PLAYINGTEAMNAME[$I]</OPTION>";
           }
     ?>
 </SELECT>
 <SELECT NAME="TEAM2">
 <OPTION VALUE="">SELECT</OPTION>
 <OPTION VALUE="">TBC</OPTION>
 <?PHP
          FOR($I=0; $I < COUNT($PLAYINGTEAMID); $I++)
                IF($RSARRAY[TEAMID2] == $PLAYINGTEAMID[$I])
                ECHO "<OPTION VALUE='$PLAYINGTEAMID[$I]'
SELECTED>$PLAYINGTEAMNAME[$I]</OPTION>";
                }
```

```
ELSE
                {
                ECHO "<OPTION
VALUE='$PLAYINGTEAMID[$I]'>$PLAYINGTEAMNAME[$I]</OPTION>";
                }
           }
     ?>
 </SELECT>
 </TD>
 <?PHP
$SELECTQUERY = MYSQLI_QUERY($CNN, "SELECT * FROM FIXTURES WHERE
FIXTUREID='$_GET[EDITID]'");
$RSARRAY = MYSQLI_FETCH_ARRAY($SELECTQUERY); ?>
 <TD><TEXTAREA NAME="VENUE" ID="VENUE"><?PHP ECHO $RSARRAY['VENUE'];
?></TEXTAREA></TD>
 <TD>
     <?PHP
          $PHPFIXDATE = STRTOTIME($RSARRAY['FIXDATETIME']);
          $MYSQLDATE = DATE( 'Y-M-D', $PHPFIXDATE );
     ?>
 <INPUT TYPE="DATE" NAME="FIXDATE" VALUE="<?PHP ECHO $MYSQLDATE; ?>"
/></TD>
   <TD><INPUT TYPE="SUBMIT" VALUE"SUBMIT" NAME="SUBMIT" />
          <INPUT TYPE="RESET" />
 </TD>
</TR>
</TABLE>
```

```
</FORM>
<P>&NBSP;</P>
 </DIV>
5. 15BCE0638 AYUSH NIGAM
COMPLETE FRONT END AND BACK END
<?PHP
SESSION_START();
INCLUDE("HEADER.PHP");
INCLUDE("DBCONNECTION.PHP");
?>
<?PHP
$EXTRAS=0;
$RUNS=0;
?>
<SCRIPT>
FUNCTION UPDATEREC(BATPERFORMANCEID, VALUETYPE, CODEVALUE)
{
ALERT(BATPERFORMANCEID);
ALERT(VALUETYPE);
ALERT(CODEVALUE);
*/
IF (WINDOW.XMLHTTPREQUEST)
{// CODE FOR IE7+, FIREFOX, CHROME, OPERA, SAFARI
XMLHTTP=NEW XMLHTTPREQUEST();
```

```
}
ELSE
{// CODE FOR IE6, IE5
XMLHTTP=NEW ACTIVEXOBJECT("MICROSOFT.XMLHTTP");
}
XMLHTTP.ONREADYSTATECHANGE=FUNCTION()
IF (XMLHTTP.READYSTATE==4 && XMLHTTP.STATUS==200)
 DOCUMENT.GETELEMENTBYID("TXTHINT").INNERHTML=XMLHTTP.RESPONSETEXT;
 }
XMLHTTP.OPEN("GET", "AJAXSCOREBOARD.PHP?BATPERFORMANCEID="+BATPERFORM
ANCEID+"&VALUETYPE="+VALUETYPE+"&CODEVALUE="+CODEVALUE,TRUE);
XMLHTTP.SEND();
}
</SCRIPT>
<?PHP
//RETRIEVE RECORDS USING GET METHOD
$RESULTID = $_GET['RESULTID'];
//RECORDS FROM RESULTS
$$QLRESULTS = "SELECT * FROM RESULTS WHERE RESULTID='$RESULTID'";
$QRESULTS = MYSQLI_QUERY($CNN,$SQLRESULTS);
$RSRESULTS = MYSQLI_FETCH_ARRAY($QRESULTS);
```

```
$FIXTUREID = $RSRESULTS['FIXTUREID'];
$TOSSID = $RSRESULTS['TOSSID'];
// RETRIVE PLAYING TEAMS RECORD
$SQLFIXTUREID = "SELECT * FROM FIXTURES WHERE FIXTUREID='$FIXTUREID'";
$QFIXTUREID = MYSQLI_QUERY($CNN,$SQLFIXTUREID);
$RSFIXTUREID = MYSQLI_FETCH_ARRAY($QFIXTUREID);
$TEAM1ID = $RSFIXTUREID['TEAMID1'];
$TEAM2ID = $RSFIXTUREID['TEAMID2'];
$TOURNAMENTID = $RSFIXTUREID['TOURNAMENTID'];
//RECORDS FROM TOURNAMENTS
$SQLTOURNAMENTS = "SELECT * FROM TOURNAMENTS WHERE
TOURNAMENTID='$TOURNAMENTID'";
$QTOURNAMENTS = MYSQLI_QUERY($CNN,$SQLTOURNAMENTS);
$RSTOURNAMENTS = MYSQLI FETCH ARRAY($QTOURNAMENTS);
//TEAM1 INFORMATION
$SQLTEAM1 = "SELECT * FROM TEAMS WHERE TEAMID='$TEAM1ID'";
$QTEAM1 = MYSQLI_QUERY($CNN,$SQLTEAM1);
$RSTEAM1 = MYSQLI_FETCH_ARRAY($QTEAM1);
//TEAM2 INFORMATION
$SQLTEAM2 = "SELECT * FROM TEAMS WHERE TEAMID='$TEAM2ID'";
$QTEAM2 = MYSQLI QUERY($CNN,$SQLTEAM2);
$RSTEAM2 = MYSQLI_FETCH_ARRAY($QTEAM2);
$SQLOVERSPLAYED2 = "SELECT SUM(OVERS)
        FIXTURES INNER JOIN
FROM
```

RESULTS ON FIXTURES.FIXTUREID = RESULTS.FIXTUREID RIGHT OUTER **JOIN BOWLINGPERFORMANCE LEFT OUTER JOIN** PLAYERS ON BOWLINGPERFORMANCE.PLAYERID = PLAYERS.PLAYERID ON RESULTS.RESULTID = BOWLINGPERFORMANCE.RESULTID WHERE PLAYERS.TEAMID='\$TEAM1ID'" \$QOVERSPLAYED2 = MYSQLI\_QUERY(\$CNN,\$SQLOVERSPLAYED2); \$RSOVERSPLAYED2 = MYSQLI FETCH ARRAY(\$QOVERSPLAYED2); \$OVERSPLAYED2 = \$RSOVERSPLAYED2[0]; //ENDS HERE: CODE TO COUNT NUBMER OF OVERS PLAYED BY TEAM 2 //CODE TO CHECK FIRST BATTING TEAM AND SECOND BATTING TEAM \$RSTEAM1 \$RSTEAM2 IF(\$TEAM1ID == \$TOSSID) { \$FIRSTBAT = \$TEAM1ID; \$SECONDBAT = \$TEAM2ID; } **ELSE** { \$FIRSTBAT = \$TEAM2ID; \$SECONDBAT = \$TEAM1ID; } // \$SQLINSBAT = "SELECT \* FROM BATPERFORMANCE WHERE RESULTID='\$\_GET[RESULTID]'"; \$QINSBAT = MYSQLI\_QUERY(\$CNN,\$SQLINSBAT); IF(MYSQLI NUM ROWS(\$QINSBAT) == 0)

{

```
///INSERT TEAM 1
    $SOLINSBAT = "SELECT * FROM PLAYERS WHERE TEAMID='$FIRSTBAT'";
    $QINSBAT = MYSQLI_QUERY($CNN,$SQLINSBAT);
    WHILE($RSINSBAT = MYSQLI_FETCH_ARRAY($QINSBAT))
        $INSRES = MYSQLI_QUERY($CNN, "INSERT INTO BATPERFORMANCE
(RESULTID, PLAYERID, CATCHID) VALUES
('$_GET[RESULTID]','$RSINSBAT[PLAYERID]','0')");
    //BOWLING PERFORMANCE
    $SQLINSBAT = "SELECT * FROM PLAYERS WHERE TEAMID='$SECONDBAT'";
    $QINSBAT = MYSQLI_QUERY($CNN,$SQLINSBAT);
    WHILE($RSINSBAT = MYSQLI FETCH ARRAY($QINSBAT))
    {
        $INSRES = MYSQLI_QUERY($CNN, "INSERT INTO BOWLINGPERFORMANCE
(RESULTID, PLAYERID) VALUES ('$_GET[RESULTID]', '$RSINSBAT[PLAYERID]')");
    }
    //INSERT TEAM1 EXTRAS
        $INSRES = MYSQLI QUERY($CNN, "INSERT INTO BATPERFORMANCE
(RESULTID, PLAYERID, CATCHID, DISMISSTYPE) VALUES
('$_GET[RESULTID]','0','$FIRSTBAT','EXTRAS')");
    ///INSERT TEAM 2
    $$QLINSBAT = "SELECT * FROM PLAYERS WHERE TEAMID='$$ECONDBAT'";
```

```
$QINSBAT = MYSQLI_QUERY($CNN,$SQLINSBAT);
     WHILE($RSINSBAT = MYSQLI_FETCH_ARRAY($QINSBAT))
     {
          $INSRES = MYSQLI QUERY($CNN, "INSERT INTO BATPERFORMANCE
(RESULTID, PLAYERID, CATCHID) VALUES
('$_GET[RESULTID]','$RSINSBAT[PLAYERID]','0')");
     }
     //INSERT TEAM2 EXTRAS
          $INSRES = MYSQLI QUERY($CNN, "INSERT INTO BATPERFORMANCE
(RESULTID, PLAYERID, CATCHID, DISMISSTYPE) VALUES
('$_GET[RESULTID]','0','$SECONDBAT','EXTRAS')");
     //BOWLING PERFORMANCE
     $SQLINSBAT = "SELECT * FROM PLAYERS WHERE TEAMID='$FIRSTBAT'";
     $QINSBAT = MYSQLI_QUERY($CNN,$SQLINSBAT);
     WHILE($RSINSBAT = MYSQLI_FETCH_ARRAY($QINSBAT))
     {
          $INSRES = MYSQLI QUERY($CNN, "INSERT INTO BOWLINGPERFORMANCE
(RESULTID, PLAYERID) VALUES ('$_GET[RESULTID]', '$RSINSBAT[PLAYERID]')");
     }
}
//BATTING PERFORMANCE OF TEAM1 AND TEAM2
$SQLSCOREBOARD = "SELECT BATPERFORMANCE.*, PLAYERS.*, RESULTS.*,
FIXTURES.*
FROM PLAYERS RIGHT OUTER JOIN
```

BATPERFORMANCE ON PLAYERS.PLAYERID = BATPERFORMANCE.PLAYERID LEFT OUTER JOIN

FIXTURES INNER JOIN

RESULTS ON FIXTURES.FIXTUREID = RESULTS.FIXTUREID ON BATPERFORMANCE.RESULTID = RESULTS.RESULTID";

//BOWLING PERFORMANCE OF TEAM1 AND TEAM2

\$\$QLBOWINGPERFORMANCE = "SELECT PLAYERS.\*, BOWLINGPERFORMANCE.\*, RESULTS.\*, FIXTURES.\*

FROM FIXTURES INNER JOIN

RESULTS ON FIXTURES.FIXTUREID = RESULTS.FIXTUREID RIGHT OUTER

**JOIN** 

**BOWLINGPERFORMANCE LEFT OUTER JOIN** 

PLAYERS ON BOWLINGPERFORMANCE.PLAYERID = PLAYERS.PLAYERID ON RESULTS.RESULTID = BOWLINGPERFORMANCE.RESULTID"

•

//STARTS HERE: CODE TO COUNT NUMBER OF OVERS PLAYED BY TEAM 1

\$SQLOVERSPLAYED1 = "SELECT SUM(OVERS)

FROM FIXTURES INNER JOIN

RESULTS ON FIXTURES.FIXTUREID = RESULTS.FIXTUREID RIGHT OUTER

**JOIN** 

**BOWLINGPERFORMANCE LEFT OUTER JOIN** 

PLAYERS ON BOWLINGPERFORMANCE.PLAYERID = PLAYERS.PLAYERID ON RESULTS.RESULTID = BOWLINGPERFORMANCE.RESULTID WHERE PLAYERS.TEAMID='\$TEAM2ID'"

•

\$QOVERSPLAYED1 = MYSQLI\_QUERY(\$CNN,\$SQLOVERSPLAYED1);

\$RSOVERSPLAYED1 = MYSQLI\_FETCH\_ARRAY(\$QOVERSPLAYED1);

\$OVERSPLAYED1 = \$RSOVERSPLAYED1[0];

//ENDS HERE: CODE TO COUNT NUBMER OF OVERS PLAYED BY TEAM 1

## //STARTS HERE: CODE TO COUNT NUMBER OF OVERS PLAYED BY TEAM 2

```
?>
<!-- CONTENT -->
<DIV CLASS="WRAPPER ROW3" STYLE="BACKGROUND-COLOR: GREY">
<DIV ID="CONTAINER">
<!--
######### -->
 <!--
######### -->
  <SECTION CLASS="CLEAR">
  <TABLE WIDTH="341" CLASS="TFTABLE" >
    <TR>
     <TD>&NBSP;<STRONG><?PHP ECHO UCFIRST($RSTEAM1['TEAMNAME']). " VS ".
UCFIRST($RSTEAM2['TEAMNAME']); ?></STRONG></TD>
     <TD>&NBSP;<STRONG><?PHP ECHO UCFIRST($RSTOURNAMENTS['NAME']); ?>
<?PHP ECHO $RSTOURNAMENTS['TYPE']; ?> <?PHP ECHO $RSFIXTUREID['LEVEL']; ?>
              , <?PHP ECHO $RSTOURNAMENTS['OVERS']; ?> OVERS MATCH
</STRONG>
     </TD>
    </TR>
    <TR>
     <TD>&NBSP;<STRONG><?PHP ECHO $RSRESULTS['COMMENT'];
?></STRONG></TD>
     <TD>&NBSP;<STRONG>PLAYED AT <?PHP ECHO $RSFIXTUREID['VENUE']; ?> ON
```

```
<?PHP
                     $DATESRC = $RSFIXTUREID['FIXDATETIME'];
                     $DATETIME = DATE_CREATE($DATESRC);
                     ECHO DATE_FORMAT($DATETIME,"D-M-Y");
                     //ECHO DATE_FORMAT($RSFIXTUREID[FIXDATETIME],"D-M-
Y");
                     ?></STRONG>
      </TD>
     </TR>
    </TABLE>
</SECTION>
<!-- FIRST BATTING TEAM STATISTICS STARTS HERE -->
 <DIV CLASS="TOGGLE-WRAPPER"><A HREF="JAVASCRIPT:VOID(0)" CLASS="TOGGLE-</pre>
TITLE ORANGE"><SPAN>FIRST INNINGS</SPAN></A>
 <DIV CLASS="TOGGLE-CONTENT">
  <SECTION>
   <H1 STYLE="COLOR: ORANGE"><?PHP ECHO $RSTEAM1['TEAMNAME']; ?>
INNINGS</H1>
   <TABLE CLASS="TFTABLE">
     <TR>
      <TH>BATSMAN</TH>
      <TH>DISMISSAL TYPE</TH>
      <TH>RUNS</TH>
      <TH>BALLS</TH>
      <TH>4S</TH>
      <TH>6S</TH>
     </TR>
<?PHP
```

```
NOWICKETS = 0;
$QSCOREBOARD1 = MYSQLI_QUERY($CNN,$SQLSCOREBOARD);
WHILE($RSSCOREBOARD1 = MYSQLI_FETCH_ARRAY($QSCOREBOARD1))
          $NB = $RSSCOREBOARD1['RUNS'];
          $WB = $RSSCOREBOARD1['BALLS'];
          B = RSSCOREBOARD1[FOURS'];
          $LB = $RSSCOREBOARD1['SIXES'];
     IF($RSSCOREBOARD1[13] == $TEAM1ID)
     {
          //WICKETS CODE
          IF($RSSCOREBOARD1['DISMISSTYPE'] != "NOT OUT")
          {
                $NOWICKETS = $NOWICKETS +1;
          }
                           ECHO "<TR>
                            <TD>&NBSP;$RSSCOREBOARD1[NAME]</TD>
                            <TD>&NBSP;";
                           ?>
   <SELECT NAME="DISMISSTYPE" ID="DISMISSTYPE"</p>
ONCHANGE="UPDATEREC(<?PHP ECHO $RSSCOREBOARD1[BATPERFORMANCEID];
?>,'DISMISSTYPE',THIS.VALUE)">
   <?PHP
          $ARR = ARRAY("SELECT","NOT OUT","CAUGHT","BOWLED","LBW","RUN
OUT", "STUMPED", "HIT WICKET", "TIMED OUT", "HANDLING THE BALL", "OBSTRUCTING
THE FIELD", "HITTING THE BALL TWICE", "RETIRED HURT");
          FOREACH($ARR AS $VALUE)
                           IF($RSSCOREBOARD1[DISMISSTYPE] == $VALUE )
```

```
{
                                ECHO "<OPTION VALUE='$VALUE'
SELECTED>$VALUE</OPTION>":
                           }
                          ELSE
                                ECHO "<OPTION
VALUE='$VALUE'>$VALUE</OPTION>";
                           }
           }
           ?>
  </SELECT>
      <SELECT NAME="CID" ID="CID" ONCHANGE="UPDATEREC(<?PHP ECHO</p>
$RSSCOREBOARD1[BATPERFORMANCEID]; ?>,'CID',THIS.VALUE)">
      <OPTION VALUE="">SELECT</OPTION>
         <?PHP
                     //CATCHID
                     $SQLCATCHID = "SELECT * FROM PLAYERS WHERE
TEAMID='$TEAM2ID'";
                     $QCATCHID = MYSQLI QUERY($CNN,$SQLCATCHID);
                          WHILE($RSCATCHID =
MYSQLI_FETCH_ARRAY($QCATCHID))
                                IF($RSSCOREBOARD1[CATCHID] ==
$RSCATCHID[PLAYERID])
                                ECHO "<OPTION VALUE='$RSCATCHID[PLAYERID]'
SELECTED>$RSCATCHID[NAME]</OPTION>";
                                }
                                ELSE
```

```
ECHO "<OPTION
VALUE='$RSCATCHID[PLAYERID]'>$RSCATCHID[NAME]</OPTION>";
                          }
                          ?>
                     </SELECT>
                     <SELECT NAME="BID" ID="BID"
ONCHANGE="UPDATEREC(<?PHP ECHO $RSSCOREBOARD1[BATPERFORMANCEID];
?>,'BID',THIS.VALUE)">
           <OPTION VALUE="">SELECT</OPTION>
        <?PHP
                                $SQLCATCHID = "SELECT * FROM PLAYERS
WHERE TEAMID='$TEAM2ID'";
                                $QCATCHID =
MYSQLI_QUERY($CNN,$SQLCATCHID);
                                WHILE($RSCATCHID =
MYSQLI_FETCH_ARRAY($QCATCHID))
                                IF($RSSCOREBOARD1[BOWLEDID] ==
$RSCATCHID[PLAYERID])
                                          {
                                          ECHO "<OPTION
VALUE='$RSCATCHID[PLAYERID]' SELECTED>$RSCATCHID[NAME]</OPTION>";
                                          }
                                          ELSE
                                          ECHO "<OPTION
VALUE='$RSCATCHID[PLAYERID]'>$RSCATCHID[NAME]</OPTION>";
                                          }
                                }
```

```
</SELECT>
<?PHP
                            ECHO "</TD><TD>&NBSP;";
                            ?>
<INPUT TYPE='TEXT' NAME='RUNS' VALUE='<?PHP ECHO $RSSCOREBOARD1['RUNS']; ?>'
SIZE='3' ONKEYUP="UPDATEREC(<?PHP ECHO
$RSSCOREBOARD1['BATPERFORMANCEID']; ?>,'RUNS',THIS.VALUE)">
                             </TD>
                             <TD>&NBSP;
<INPUT TYPE='TEXT' NAME='BALLS' VALUE='<?PHP ECHO $RSSCOREBOARD1['BALLS'];</pre>
?>'SIZE='3' ONKEYUP="UPDATEREC(<?PHP ECHO
$RSSCOREBOARD1['BATPERFORMANCEID']; ?>,'BALLS',THIS.VALUE)"></TD>
                             <TD>&NBSP;
<INPUT TYPE='TEXT' NAME='FOURS' VALUE='<?PHP ECHO $RSSCOREBOARD1['FOURS'];</pre>
?>'SIZE='2' ONKEYUP="UPDATEREC(<?PHP ECHO
$RSSCOREBOARD1['BATPERFORMANCEID']; ?>,'FOURS',THIS.VALUE)"></TD>
                             <TD>&NBSP;
<INPUT TYPE='TEXT' NAME='SIXES' VALUE='<?PHP ECHO $RSSCOREBOARD1['SIXES']; ?>'
SIZE='2' ONKEYUP="UPDATEREC(<?PHP ECHO
$RSSCOREBOARD1['BATPERFORMANCEID']; ?>,'SIXES',THIS.VALUE)"></TD>
                            </TR>
<?PHP
     }
}
?>
     <TR>
      <TH>EXTRAS</TH>
      <TH> <?PHP ECHO "
                 NB <INPUT TYPE='TEXT' NAME='NB' VALUE='$NB' SIZE='2' >,
                 WB < INPUT TYPE='TEXT' NAME='NB' VALUE='$WB' SIZE='2' >,
                 B < INPUT TYPE='TEXT' NAME='NB' VALUE='$B' SIZE='2' >,
                 LB <INPUT TYPE="TEXT" NAME='NB' VALUE='$LB' SIZE='2' > "; ?></TH>
```

```
<TH COLSPAN="5" ALIGN="LEFT"></TH>
     </TR>
     <TR>
      <TH><STRONG>TOTAL</STRONG></TH>
      <TH><INPUT TYPE='TEXT' NAME='SIXES' VALUE='<?PHP ECHO $OVERSPLAYED1;</p>
?>' SIZE='3'> OVERS</TH>
      <TH COLSPAN="2" ALIGN="LEFT"> <?PHP ECHO $TOTALRUNS = $RUNS +</pre>
$EXTRAS; ?>
      /
      <?PHP
                 IF(NOWICKETS == 10)
                 {
                            ECHO "ALL OUT";
                 }
                 ELSE IF($NOWICKETS == 10)
                 {
                            ECHO $NOWICKETS. "WICKET";
                 }
                 ELSE
                 {
                            ECHO $NOWICKETS ." WICKETS";
                 }
      </TH>
      <TH COLSPAN="3" ALIGN="LEFT"> </TH>
     </TR>
   </TABLE>
   <TABLE CLASS="TFTABLE" >
```

```
<TR>
      <TH>BOWLER</TH>
      <TH>OVERS</TH>
      <TH>MAIDEN</TH>
      <TH>RUNS</TH>
      <TH>WICKETS</TH>
     </TR>
<?PHP
$QBOWLINGPERFORMANCE1 = MYSQLI_QUERY($CNN,$SQLBOWINGPERFORMANCE);
WHILE($RSBOWLINGPERFORMANCE1 =
MYSQLI_FETCH_ARRAY($QBOWLINGPERFORMANCE1))
{
     IF($RSBOWLINGPERFORMANCE1[1] == $TEAM2ID)
     {
                ECHO "<TR>
                <TD>&NBSP;$RSBOWLINGPERFORMANCE1[NAME]</TD>
                <TD>&NBSP;";
                ECHO "<INPUT TYPE='TEXT' NAME='MAIDENS'
VALUE='$RSBOWLINGPERFORMANCE1[OVERS]' SIZE='3'>";
                ECHO "</TD>
                <TD>&NBSP:<INPUT TYPE='TEXT' NAME='MAIDENS'
VALUE='$RSBOWLINGPERFORMANCE1[MAIDENS]' SIZE='2'></TD>
                <TD>&NBSP:<INPUT TYPE='TEXT' NAME='RUNS'
VALUE='$RSBOWLINGPERFORMANCE1[RUNS]' SIZE='3'></TD>
                <TD>&NBSP;<INPUT TYPE='TEXT' NAME='WICKETS'
VALUE='$RSBOWLINGPERFORMANCE1[WICKETS]' SIZE='2'></TD>
                </TR>";
     }
}
?>
```

```
</TABLE>
  </SECTION>
 </DIV>
 </DIV>
<!-- FIRST BATTING TEAM STATISTICS ENDS HERE -->
<!-- SECOND BATTING TEAM STATISTICS STARTS HERE -->
 <DIV CLASS="TOGGLE-WRAPPER"><A HREF="JAVASCRIPT:VOID(0)" CLASS="TOGGLE-</pre>
TITLE ORANGE"><SPAN>SECOND INNINGS</SPAN></A>
 <DIV CLASS="TOGGLE-CONTENT">
  <SECTION>
   <H1 STYLE="COLOR: ORANGE"><?PHP ECHO $RSTEAM2['TEAMNAME']; ?>
INNINGS</H1>
   <TABLE CLASS="TFTABLE">
     <TR>
      <TH>BATSMAN</TH>
      <TH>DISMISSAL TYPE</TH>
      <TH>RUNS</TH>
      <TH>BALLS</TH>
      <TH>4S</TH>
      <TH>6S</TH>
     </TR>
<?PHP
NOWICKETS = 0;
$QSCOREBOARD1 = MYSQLI_QUERY($CNN,$SQLSCOREBOARD);
WHILE(\$RSSCOREBOARD1 = MYSQLI\_FETCH\_ARRAY(\$QSCOREBOARD1))
```

```
{
     IF($RSSCOREBOARD1['CATCHID'] == $TEAM1ID &&
$RSSCOREBOARD1['DISMISSTYPE'] == "EXTRAS" )
     {
          $NB = $RSSCOREBOARD1['RUNS'];
          $WB = $RSSCOREBOARD1['BALLS'];
          $B = $RSSCOREBOARD1['FOURS'];
          $LB = $RSSCOREBOARD1['SIXES'];
     }
     IF($RSSCOREBOARD1[13] == $TEAM2ID)
     {
          //WICKETS CODE
          IF($RSSCOREBOARD1['DISMISSTYPE'] != "NOT OUT")
           {
                $NOWICKETS = $NOWICKETS +1;
           }
                           ECHO "<TR>
                            <TD>&NBSP;$RSSCOREBOARD1[NAME]</TD>
                            <TD>&NBSP;";
                           ?>
   <SELECT NAME="DISMISSTYPE" ID="DISMISSTYPE"</pre>
ONCHANGE="UPDATEREC(<?PHP ECHO $RSSCOREBOARD1[BATPERFORMANCEID];
?>,'DISMISSTYPE',THIS.VALUE)">
   <?PHP
          $ARR = ARRAY("SELECT","NOT OUT","CAUGHT","BOWLED","LBW","RUN
OUT", "STUMPED");
          FOREACH($ARR AS $VALUE)
           {
                           IF($RSSCOREBOARD1[DISMISSTYPE] == $VALUE )
```


```
ECHO "<OPTION VALUE='$VALUE'
SELECTED>$VALUE</OPTION>";
                           }
                          ELSE
                           {
                                ECHO "<OPTION
VALUE='$VALUE'>$VALUE</OPTION>";
                           }
          }
          ?>
  </SELECT>
      <SELECT NAME="CID" ID="CID" ONCHANGE="UPDATEREC(<?PHP ECHO</p>
$RSSCOREBOARD1[BATPERFORMANCEID]; ?>,'CID',THIS.VALUE)">
      <OPTION VALUE="">SELECT</OPTION>
         <?PHP
                     //CATCHID
                     $SQLCATCHID = "SELECT * FROM PLAYERS WHERE
TEAMID='$TEAM1ID'";
                     $QCATCHID = MYSQLI_QUERY($CNN,$SQLCATCHID);
                          WHILE($RSCATCHID =
MYSQLI_FETCH_ARRAY($QCATCHID))
                           {
                                IF($RSSCOREBOARD1[CATCHID] ==
$RSCATCHID[PLAYERID])
                                {
                                ECHO "<OPTION VALUE='$RSCATCHID[PLAYERID]'
SELECTED>$RSCATCHID[NAME]</OPTION>";
                                }
                                ELSE
```

```
ECHO "<OPTION
VALUE='$RSCATCHID[PLAYERID]'>$RSCATCHID[NAME]</OPTION>";
                          }
                          ?>
                     </SELECT>
                     <SELECT NAME="BID" ID="BID"
ONCHANGE="UPDATEREC(<?PHP ECHO $RSSCOREBOARD1[BATPERFORMANCEID];
?>,'BID',THIS.VALUE)">
           <OPTION VALUE="">SELECT</OPTION>
        <?PHP
                                $SQLCATCHID = "SELECT * FROM PLAYERS
WHERE TEAMID='$TEAM1ID'";
                                $QCATCHID =
MYSQLI_QUERY($CNN,$SQLCATCHID);
                                WHILE($RSCATCHID =
MYSQLI_FETCH_ARRAY($QCATCHID))
                                IF($RSSCOREBOARD1[BOWLEDID] ==
$RSCATCHID[PLAYERID])
                                          {
                                          ECHO "<OPTION
VALUE='$RSCATCHID[PLAYERID]' SELECTED>$RSCATCHID[NAME]</OPTION>";
                                          }
                                          ELSE
                                          ECHO "<OPTION
VALUE='$RSCATCHID[PLAYERID]'>$RSCATCHID[NAME]</OPTION>";
                                          }
                                }
```

```
</SELECT>
<?PHP
                            ECHO "</TD><TD>&NBSP;";
                            ?>
<INPUT TYPE='TEXT' NAME='RUNS' VALUE='<?PHP ECHO $RSSCOREBOARD1['RUNS']; ?>'
SIZE='3' ONKEYUP="UPDATEREC(<?PHP ECHO
$RSSCOREBOARD1['BATPERFORMANCEID']; ?>,'RUNS',THIS.VALUE)">
                             </TD>
                             <TD>&NBSP;
<INPUT TYPE='TEXT' NAME='BALLS' VALUE='<?PHP ECHO $RSSCOREBOARD1['BALLS'];</pre>
?>'SIZE='3' ONKEYUP="UPDATEREC(<?PHP ECHO
$RSSCOREBOARD1['BATPERFORMANCEID']; ?>,'BALLS',THIS.VALUE)"></TD>
                             <TD>&NBSP;
<INPUT TYPE='TEXT' NAME='FOURS' VALUE='<?PHP ECHO $RSSCOREBOARD1['FOURS'];</pre>
?>'SIZE='2' ONKEYUP="UPDATEREC(<?PHP ECHO
$RSSCOREBOARD1['BATPERFORMANCEID']; ?>,'FOURS',THIS.VALUE)"></TD>
                             <TD>&NBSP;
<INPUT TYPE='TEXT' NAME='SIXES' VALUE='<?PHP ECHO $RSSCOREBOARD1['SIXES']; ?>'
SIZE='2' ONKEYUP="UPDATEREC(<?PHP ECHO
$RSSCOREBOARD1['BATPERFORMANCEID']; ?>,'SIXES',THIS.VALUE)"></TD>
                            </TR>
<?PHP
     }
}
?>
     <TR>
      <TH>EXTRAS</TH>
      <TH> <?PHP ECHO "
                 NB <INPUT TYPE='TEXT' NAME='NB' VALUE='$NB' SIZE='2' >,
                 WB < INPUT TYPE='TEXT' NAME='NB' VALUE='$WB' SIZE='2' >,
                 B < INPUT TYPE='TEXT' NAME='NB' VALUE='$B' SIZE='2' >,
                 LB <INPUT TYPE="TEXT" NAME='NB' VALUE='$LB' SIZE='2' > "; ?></TH>
```

```
<TH COLSPAN="5" ALIGN="LEFT"></TH>
     </TR>
     <TR>
      <TH><STRONG>TOTAL</STRONG></TH>
      <TH><INPUT TYPE='TEXT' NAME='SIXES' VALUE='<?PHP ECHO $OVERSPLAYED1;</p>
?>' SIZE='3'> OVERS</TH>
      <TH COLSPAN="2" ALIGN="LEFT"> <?PHP ECHO $TOTALRUNS = $RUNS +</pre>
$EXTRAS; ?>
      /
      <?PHP
                 IF(NOWICKETS == 10)
                 {
                            ECHO "ALL OUT";
                 }
                 ELSE IF($NOWICKETS == 10)
                 {
                            ECHO $NOWICKETS. "WICKET";
                 }
                 ELSE
                 {
                            ECHO $NOWICKETS ." WICKETS";
                 }
      </TH>
      <TH COLSPAN="3" ALIGN="LEFT"> </TH>
     </TR>
   </TABLE>
   <TABLE CLASS="TFTABLE" >
```

```
<TR>
      <TH>BOWLER</TH>
      <TH>OVERS</TH>
      <TH>MAIDEN</TH>
      <TH>RUNS</TH>
      <TH>WICKETS</TH>
     </TR>
<?PHP
$QBOWLINGPERFORMANCE1 = MYSQLI_QUERY($CNN,$SQLBOWINGPERFORMANCE);
WHILE($RSBOWLINGPERFORMANCE1 =
MYSQLI_FETCH_ARRAY($QBOWLINGPERFORMANCE1))
{
     IF($RSBOWLINGPERFORMANCE1[1] == $TEAM1ID)
     {
                ECHO "<TR>
                <TD>&NBSP;$RSBOWLINGPERFORMANCE1[NAME]</TD>
                <TD>&NBSP;";
                ECHO "<INPUT TYPE='TEXT' NAME='MAIDENS'
VALUE='$RSBOWLINGPERFORMANCE1[OVERS]' SIZE='3'>";
                ECHO "</TD>
                <TD>&NBSP:<INPUT TYPE='TEXT' NAME='MAIDENS'
VALUE='$RSBOWLINGPERFORMANCE1[MAIDENS]' SIZE='3'></TD>
                <TD>&NBSP:<INPUT TYPE='TEXT' NAME='RUNS'
VALUE='$RSBOWLINGPERFORMANCE1[RUNS]' SIZE='3'></TD>
                <TD>&NBSP;<INPUT TYPE='TEXT' NAME='WICKETS'
VALUE='$RSBOWLINGPERFORMANCE1[WICKETS]' SIZE='3'></TD>
                </TR>";
     }
}
?>
```

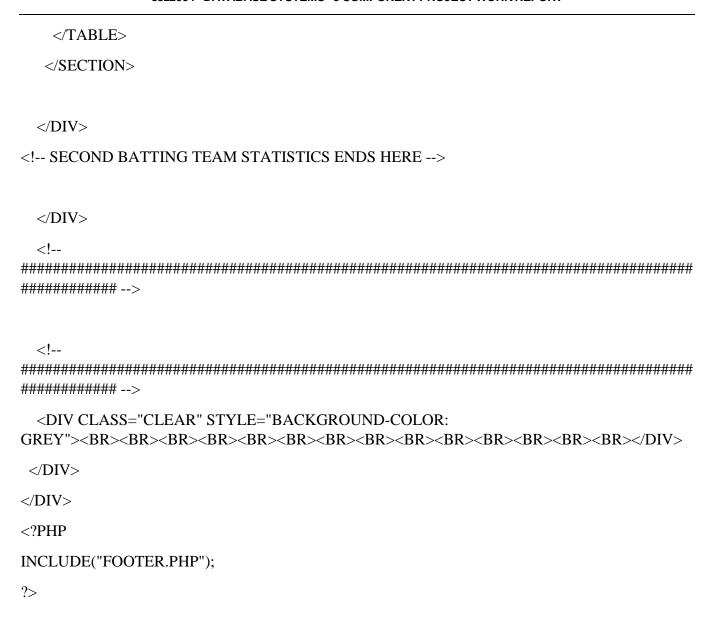

## WORK BREAK DOWN

Team Member Registration Number	Name	Work Assigned		
15BCE0565	Anirudh Vattikuti	ER DIAGRAM AND DATABASE SCHEMA		
15BCE0002	Anuranjan Srivastava	DATABASE IMPLEMENTATION AND SQL QUERIES		
15BCE0665	Naman Garg	BASIC FRONT END		
15BCE0295	Arihant Chordiya	FRONT END		
15BCE0638	AYUSH NIGAM	COMPLETE FRONT END AND BACK END		

## **REVIEW EVALUATION**

COMPONENT	MARKS	15BCE0565	15BCE0002	15BCE0665	15BCE0295	15BCE0638
Analytics	20					
Implementation	10					
Presentation	20					
TOTAL	50 MARKS					