



Predicting Research Paper Categories

by: Rowan Ellison (raelliso), Vivek Nagarajan (vmnagara), Weili Shi (sweili)
CSCI 1470 (Deep Learning), Department of Computer Science, Brown University

Introduction


Our model, given a research paper's title and abstract, performs the task of predicting which category/subject(s) the paper belongs to. Researchers and students who search for papers either for inspiration or citation may generally do so based on the categorization given to the paper. However, these categorizations can be (and are often) left out. By generating category(ies) for organization and easy lookups, people who are looking for papers can get better results and have an easier time. Additionally, the model could be helpful to people writing up or submitting papers online as a tool to autofill/suggest paper categories.

Abbreviation	Category full name
cs	Computer Science
math	Mathematics
nlin	Nonlinear Sciences
physics-astro-ph	Astrophysics
physics-cond-mat	Condensed Matter Physics
physics-gr-qc	Physics—General Relativity and Quantum Cosmology
physics-hep-ex	High Energy Physics—Experiment
physics-hep-lat	High Energy Physics—Lattice

Figure 1. Examples of arXiv categories.

Methodology

Our model consists of a transformer encoder which takes in the tokenized representation of a title and abstract and passes the encoded representation through a linear layer to output a class prediction. The transformer has a model dimension of 128, with 2 layers, 4 heads, and a feedforward network dimension of 256. In order to account for overfitting, we selected a dropout rate of either 0.25 or 0.5. For training, we employed a batch size of 32 and either 8 or 16 epochs. We arrived at these hyperparameter values by extensive testing and trial-and-error.

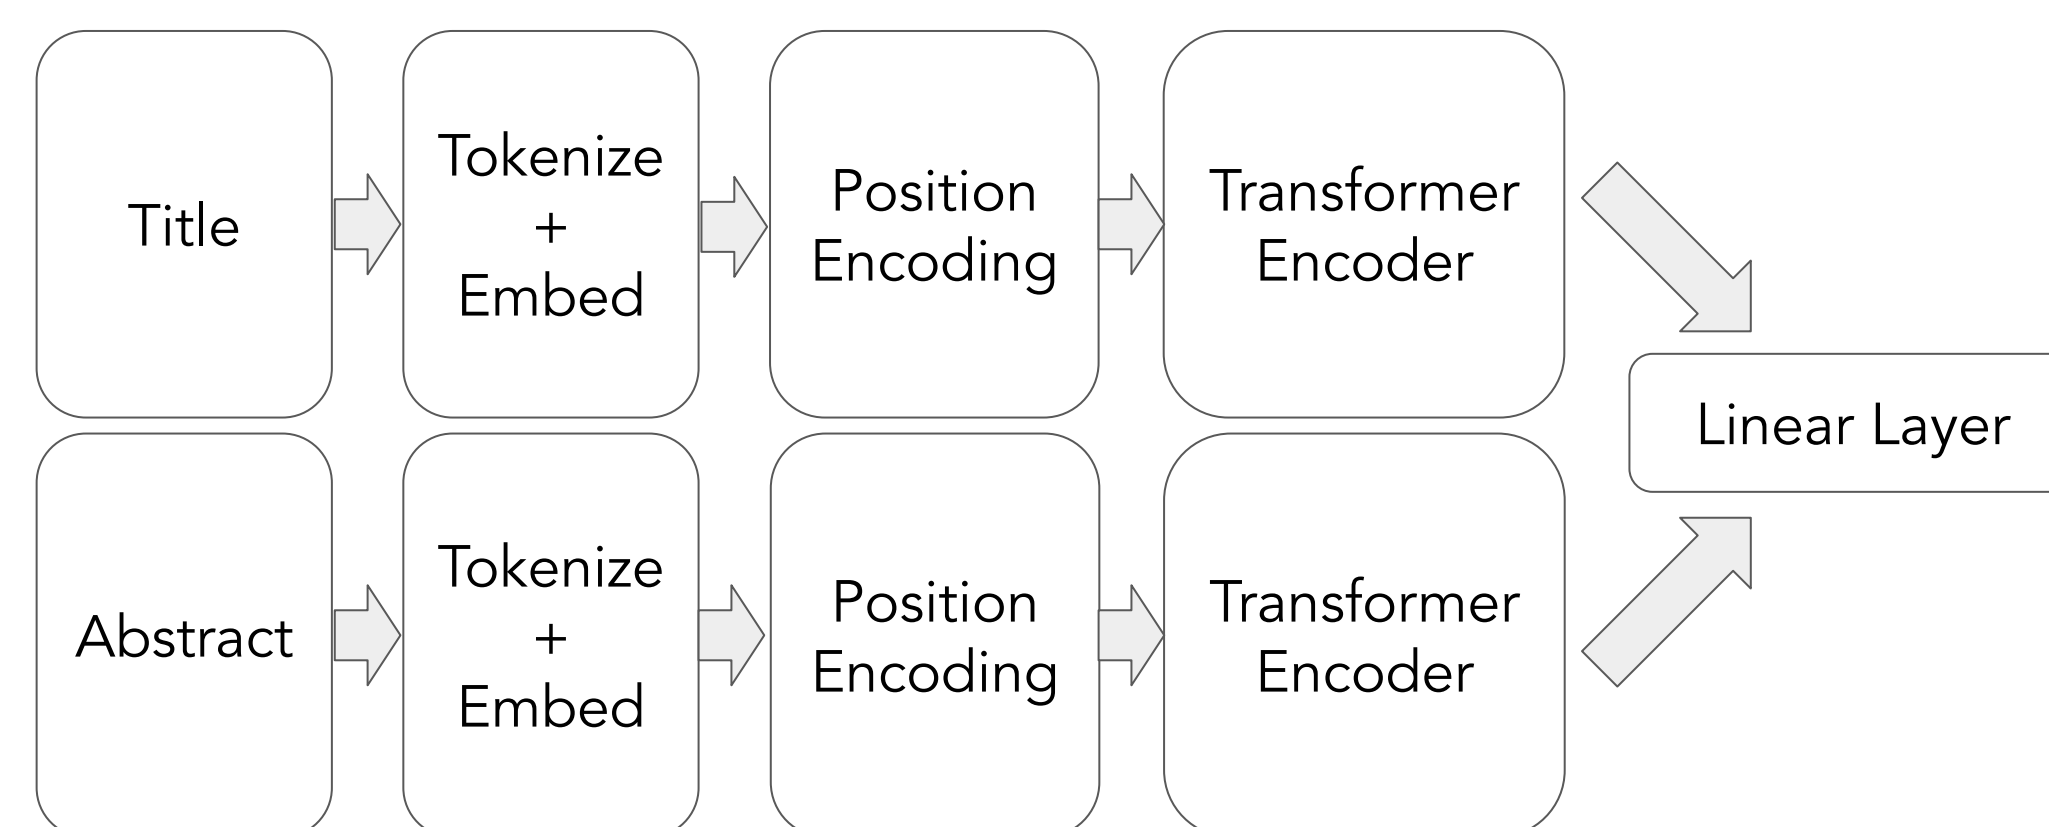

Data

We used arXiv's research paper database for our dataset. arXiv is a popular open-access archive containing more than two million scholarly articles in the fields of physics, mathematics, computer science, quantitative biology, quantitative finance, statistics, electrical engineering and systems science, and economics. For this project however, we only used ~40,000 papers from the database, and only extracted title, abstract, and category for each paper. Certain categories have a relatively large amount of papers, so they have sub-categories that we view as separate categories (see Figure 1). We used an 80/20 split for our training set and testing set.

Results

Our best test accuracy of 81.42% was achieved by training for 8 epochs, with 0.25 dropout, and separate encodings. All results are given below and include both the training accuracy and test accuracy over all epochs.

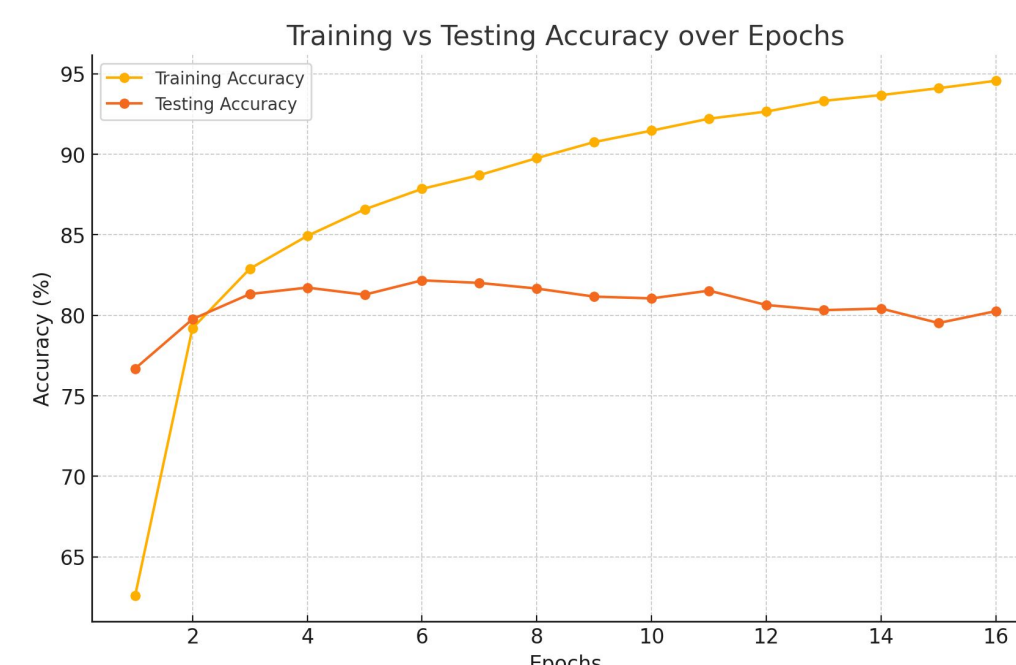


Figure 2. 16 epochs with 0.5 dropout and joint encoding

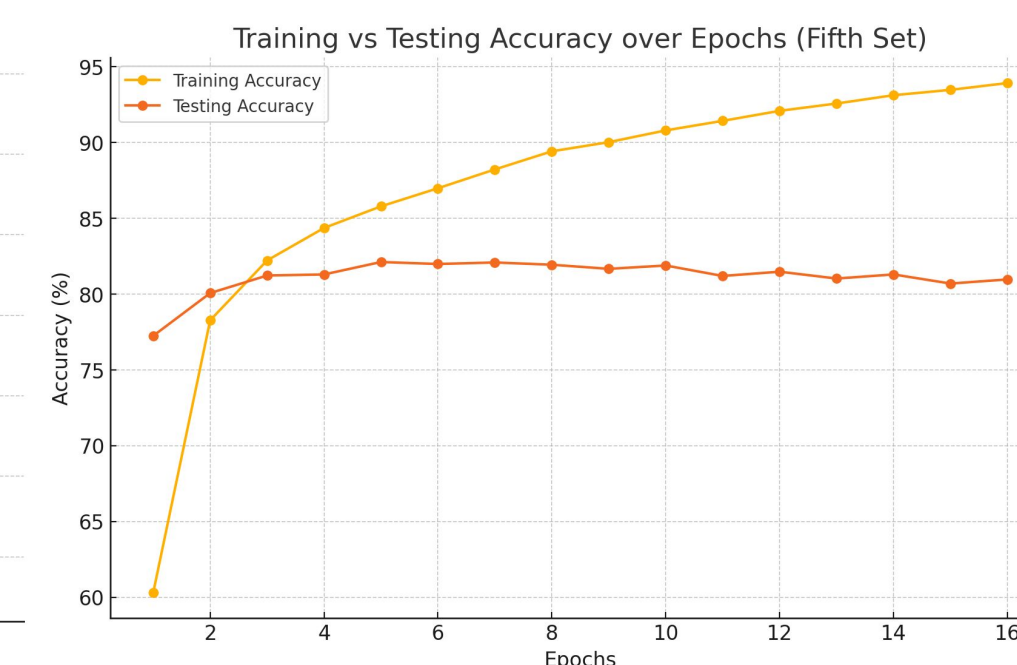


Figure 3. 16 epochs with 0.5 dropout and separate encoding

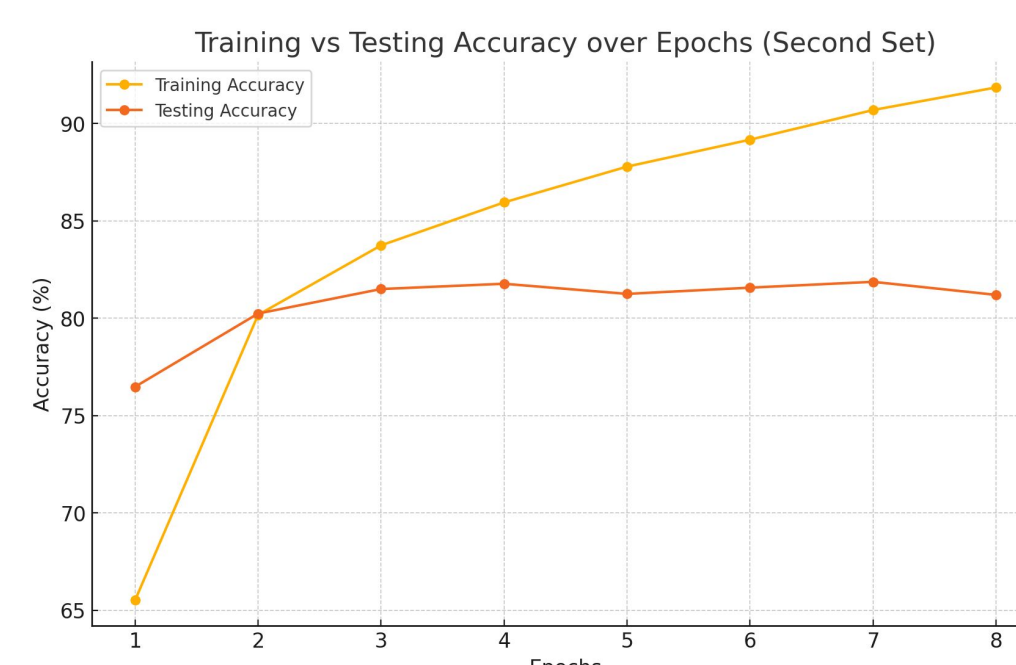


Figure 4. 8 epochs with 0.25 dropout and joint encoding

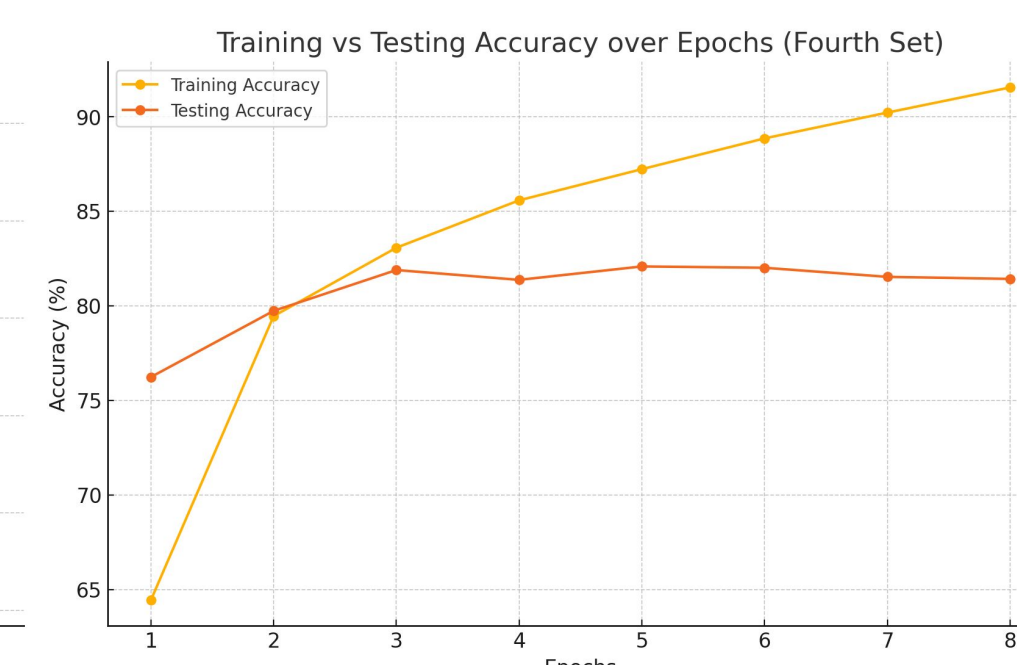


Figure 5. 8 epochs with 0.25 dropout and separate encoding

Hyperparameter Description	Training Accuracy	Test Accuracy
16 epochs, 0.5 dropout, joint	94.56%	80.26%
16 epochs, 0.25 dropout, joint	97.27%	80.08%
8 epochs, 0.25 dropout, separate	91.55%	81.42%
8 epochs, 0.25 dropout, joint	91.85%	81.20%

Figure 6. Training & test accuracies for various hyperparameters.

Discussion

The most successful model was able to reach 81.42% accuracy on the test set. This model trained for 8 epochs, had a dropout rate of 0.25, and used separate encodings for the title and abstract. Although the differences between the best model and models trained with different hyperparameters are marginal, there are possible reasons behind the best model's relative success. Training for fewer epochs lowered the risk of overfitting to the training dataset, which may be a problem that other models fell to, as can be seen by the 97.27% training accuracy when training for 16 epochs. This is supported by the higher dropout when training for 16 epochs performing better on the test set, as there is less risk of overfitting with higher dropout rate. When comparing the models that trained for 8 epochs with a 0.25 dropout rate, the model that encoded titles and abstracts separately performed better, although marginally. This could be attributed to the fact that the title and abstract contain different information by nature. If the model encoded these together, information from the title may be lost to the larger amount of tokens from the abstract. More concretely, titles are likely to include words that are major indicators of a paper's category. By encoding it together with the abstract, important information from the title is processed as though it were the same structure as an abstract, which may provide more tokens but more muddled information. Future work on this problem could involve varying more hyperparameters, such as the model dimensions, batch size, and the number of heads/layers. Because the model was able to quickly get high accuracy on the first attempt (~75%), not much thought was given to how altering model architecture (aside from encoding) could affect accuracy. Encoding the title and abstract through learned methods like gates may prove more effective. Since the data has many papers from large categories with many sub-categories, papers in these categories may be prone to misclassification. In the future, training more and training early would be an effective way to improve.