

Final Writeup/Reflection

Title: Predicting Research Paper Category from Title and Abstract

Who: Weili Shi (sweili), Rowan Ellison (raelliso), Vivek Nagarajan (vmnagara)


**Introduction:** Our model, given a research paper’s title and abstract, performs the task of predicting which category/subject(s) the paper belongs to. Researchers and students who search for papers either for inspiration or citation may generally do so based on the categorization given to the paper. However, these categorizations can be (and are often) left out. By generating category(ies) for organization and easy lookups, people who are looking for papers can get better results and have an easier time. Additionally, the model could be helpful to people writing up or submitting papers online as a tool to autofill/suggest paper categories.

**Methodology:** Our model consists of a transformer encoder which takes in the tokenized representation of a title and abstract and passes the encoded representation of the first token through a linear layer to output a class prediction. The transformer has a model dimension of 128, with 2 layers, 4 heads, and a feedforward network dimension of 256. In order to account for overfitting, we selected a dropout rate of either 0.25 or 0.5. For training, we employed a batch size of 32 and either 8 or 16 epochs. We arrived at these hyperparameter values by extensive testing and trial-and-error. We also compared three different kinds of implementations:

- 1. Joint encoding, in which the title of each paper was concatenated onto the abstract and the resulting sequence was then encoded before being passed through a linear layer.
- 2. Separate encodings, in which the title and abstract were passed through the same encoder but separately, and then the output encodings were concatenated and passed through a linear layer.
- 3. Cross attention, in which the title and abstract were encoded separately, the title encodings were used as queries, and the abstract encodings served as keys and values; so the model was able to selectively attend to relevant portions of the abstract based on the content of the title.


Results:

16 epochs, joint encoding, 0.5 dropout

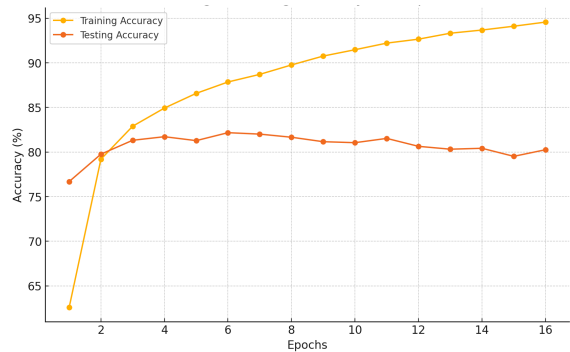

| Epochs | Training Accuracy | Testing Accuracy |
|--------|-------------------|------------------|
| 1      | 62.58375          | 76.69            |
| 2      | 79.1975           | 79.76            |

16 epochs, separate encodings, 0.5 dropout

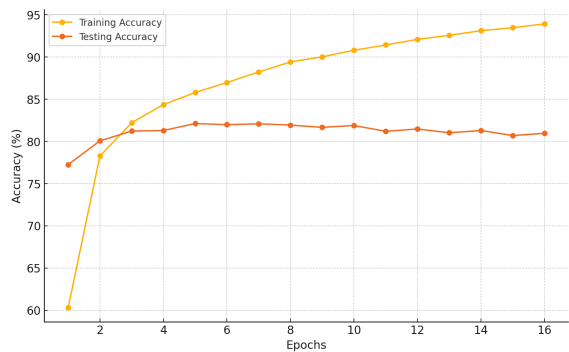


| Epochs | Training Accuracy | Testing Accuracy |
|--------|-------------------|------------------|
| 1      | 60.30375          | 77.25            |
| 2      | 78.27375          | 80.07            |


|    |          |       |
|----|----------|-------|
| 3  | 82.89375 | 81.32 |
| 4  | 84.93    | 81.72 |
| 5  | 86.5775  | 81.28 |
| 6  | 87.85125 | 82.17 |
| 7  | 88.705   | 82.01 |
| 8  | 89.76125 | 81.66 |
| 9  | 90.7575  | 81.16 |
| 10 | 91.4675  | 81.05 |
| 11 | 92.20875 | 81.53 |
| 12 | 92.65125 | 80.64 |
| 13 | 93.31875 | 80.32 |
| 14 | 93.675   | 80.42 |
| 15 | 94.1025  | 79.52 |
| 16 | 94.56375 | 80.26 |

|    |          |       |
|----|----------|-------|
| 3  | 82.22375 | 81.23 |
| 4  | 84.36625 | 81.3  |
| 5  | 85.7925  | 82.12 |
| 6  | 86.98625 | 81.99 |
| 7  | 88.2275  | 82.09 |
| 8  | 89.4225  | 81.94 |
| 9  | 90.0275  | 81.67 |
| 10 | 90.8025  | 81.89 |
| 11 | 91.43125 | 81.2  |
| 12 | 92.09375 | 81.48 |
| 13 | 92.57625 | 81.03 |
| 14 | 93.12375 | 81.3  |
| 15 | 93.47625 | 80.7  |
| 16 | 93.92625 | 80.97 |

8 epochs, joint encoding, 0.25 dropout

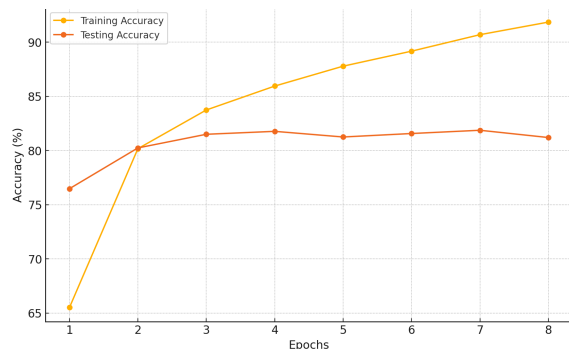

8 epochs, separate encodings, 0.25 dropout

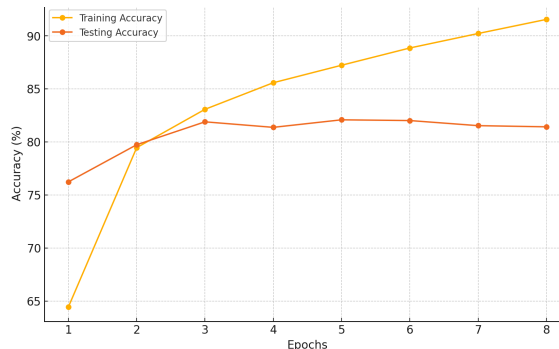


| Epochs | Training Accuracy | Testing Accuracy |
|--------|-------------------|------------------|
| 1      | 65.5225           | 76.48            |
| 2      | 80.1725           | 80.24            |
| 3      | 83.74125          | 81.5             |
| 4      | 85.9475           | 81.77            |
| 5      | 87.78375          | 81.25            |
| 6      | 89.16875          | 81.57            |
| 7      | 90.69             | 81.87            |
| 8      | 91.85             | 81.2             |

| Epochs | Training Accuracy | Testing Accuracy |
|--------|-------------------|------------------|
| 1      | 64.43             | 76.23            |
| 2      | 79.45375          | 79.73            |
| 3      | 83.06875          | 81.89            |
| 4      | 85.57625          | 81.37            |
| 5      | 87.225            | 82.08            |
| 6      | 88.8525           | 82.01            |
| 7      | 90.2175           | 81.53            |
| 8      | 91.54625          | 81.42            |


The above four graphs illustrate the difference between performance depending on whether we used joint encodings vs separate encodings. As you can see, there is a marginal (less than 1%) increase in testing accuracy when title and abstract are encoded separately. This also shows our process of testing and comparing different dropout rates and running the model for different numbers of epochs to test overfitting.

16 epochs, cross attention, 0.5 dropout

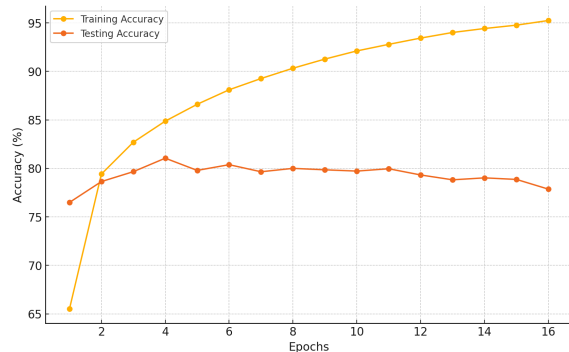

| Epochs | Training Accuracy | Testing Accuracy |
|--------|-------------------|------------------|
|--------|-------------------|------------------|

8 epochs, cross attention, 0.25 dropout

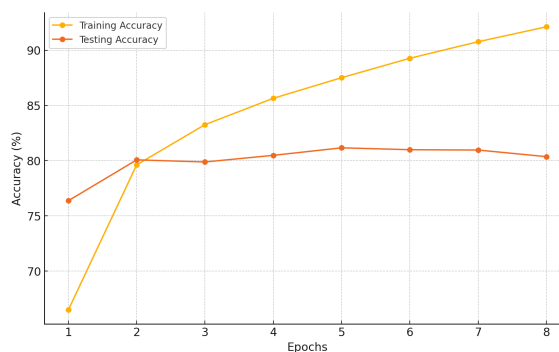

| Epochs | Training Accuracy | Testing Accuracy |
|--------|-------------------|------------------|
|--------|-------------------|------------------|

|    |          |       |   |          |       |
|----|----------|-------|---|----------|-------|
| 1  | 65.5125  | 76.49 | 1 | 66.4875  | 76.37 |
| 2  | 79.4125  | 78.64 | 2 | 79.62    | 80.07 |
| 3  | 82.69625 | 79.66 | 3 | 83.25875 | 79.88 |
| 4  | 84.87    | 81.05 | 4 | 85.64375 | 80.48 |
| 5  | 86.60625 | 79.79 | 5 | 87.5125  | 81.16 |
| 6  | 88.10125 | 80.38 | 6 | 89.27125 | 80.99 |
| 7  | 89.2625  | 79.65 | 7 | 90.77    | 80.96 |
| 8  | 90.3225  | 80.0  | 8 | 92.12125 | 80.36 |
| 9  | 91.26625 | 79.85 |   |          |       |
| 10 | 92.1075  | 79.72 |   |          |       |
| 11 | 92.785   | 79.96 |   |          |       |
| 12 | 93.4325  | 79.32 |   |          |       |
| 13 | 94.00875 | 78.82 |   |          |       |
| 14 | 94.4175  | 79.02 |   |          |       |
| 15 | 94.765   | 78.86 |   |          |       |
| 16 | 95.2425  | 77.86 |   |          |       |

The above two graphs demonstrate our results when using cross attention. We had hoped that the added complexity would allow us to capture more nuance and hence result in greater accuracy than separate encodings without cross attention, but this actually performed even worse than joint encodings.

**Challenges:** We had some trouble coordinating at first and coming up with an idea to pursue for the project; we wound up changing course a couple of times at the beginning, so this was sort of a challenge. When trying to get the model working at first, the biggest challenge was putting the tokenizer together for processing the title and abstract and adapting the model for separate encodings. Later on, we had trouble trying to make the model have larger jumps in performance when implementing different encoding methods. Although there were slight increases with separate encoding, the increases were not significant and could even be attributed to just randomness. We think that this could be solved by using more data with more categories, as well as improving the way in which we tokenize (we simply used a minimum frequency of 2 to prevent unique tokens from being introduced). Training the model, especially for our more complex implementations, could take up to or around 5 minutes per epoch on Oscar, which added additional challenges when it came to hyperparameter tuning, since training for even just 8 epochs could take more than half an hour.

### Reflection:

**How do you feel your project ultimately turned out? How did you do relative to your base/target/stretch goals?** We think the project turned out pretty well, as we were able to achieve a high accuracy on the test set (~80%). Our stretch goals shifted since we listed them in the check-in, as we wanted to focus more on the encodings and how that could affect model performance. We managed to meet the target goal of getting a good accuracy on a moderately sized subset, but we didn't train on all the categories that arXiv offered. In terms of our new goals, we met them by implementing two other methods of encoding, but in terms of our old goals, we didn't meet the stretch goal of multi-class classification and implementing a modified loss function.

**Did your model work out the way you expected it to?** For the most part, we were pleased with the high accuracy that the model achieved for all the model architectures. If anything, we would have liked to see more significant differences in performance for the different encoding methods (joint vs. separate vs. cross attention).

**How did your approach change over time? What kind of pivots did you make, if any?** We had originally planned to track improvement through how many categories we trained on and if we were able to implement multi-class classification. We pivoted midway though, as we thought that trying to use different encodings would be a more rigorous and interesting goal to work towards. We pretty quickly got a good model, so our approach had changed from trying to get things to work to just working on tweaking hyperparameters/encodings to get the best performance possible.

**Would you have done differently if you could do your project over again?** We would definitely train earlier and more often. We would also consider using some more data with more categories, as the dataset we used had many examples under some physics subcategory. We may have also tried to focus more on the tokenization of the titles and abstracts to make them more robust so that we could find more differences when we implemented different encodings.

**What do you think you can further improve on if you had more time?** We could incorporate more data, including more categories that arXiv offers in order to make a more robust model. Having more data as well as more categories would allow the model to generalize better, as it may have been overfitting to the smaller number of categories we trained on, which were relatively physics-heavy due to the subcategories that physics encompassed. Additionally, we could look at encoding the title and abstract with gates, which are learned. Thus, the model could generalize how to treat the abstract vs. the title.

**What are your biggest takeaways from this project/what did you learn?** We learned that adding complexity doesn't always make a model perform better. Despite separate encodings making sense in theory since titles and abstract have different information by nature, it didn't make a large difference in the accuracy of the model. Rather than trying first to improve encodings, we could have focused on other potential issues with our methodology, such as the way we tokenize the input data, as well as how much data and what categories we use. We also learned that we can only control how we use our data to a certain extent; even with uniform random selection and ensuring each category is included with the same amount of examples, there are things that you can't control. For example, some research paper titles are jokes/puns, and others are super serious. What the model learns from these extremities will definitely affect its performance, but we can't really manually go through and subjectively select the "right" data.