Figure S1. Keypoints tracked for different frames

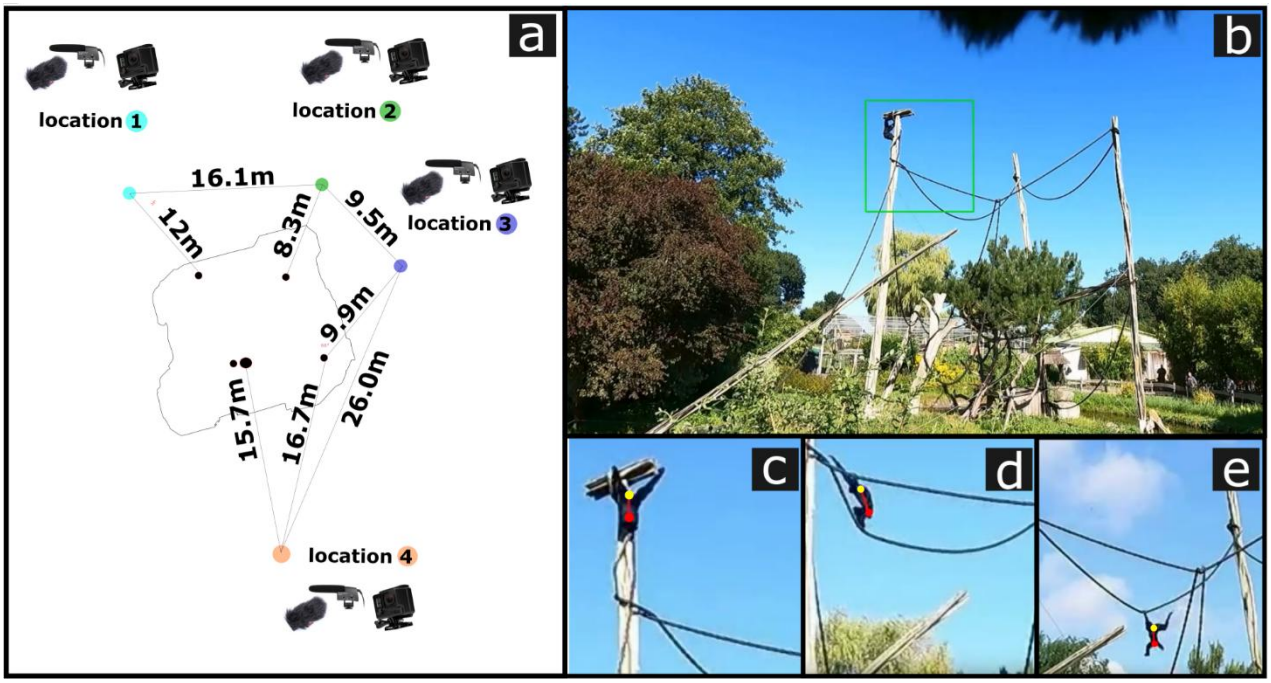

Note. Panel a) shows a sketch of the location with four different recording sites with camera and microphones and estimated distances obtained via laser-based distance estimation. b) Shows a frame from location 4 and an automatic selection of the frame denoted by the green rectangle. c-d) These subframes containing movement in the frame were then used for training DLC model to detect the two keypoints, shown in yellow (upper thorax, at T1) and red (sacrum). The Euclidean distance of the upper thorax to the sacrum was used to normalize kinematics expressed in pixel units to units relative to body size.