



* Kth Smallest Element in a BST

recursive
can use inorder traversal with global variable to count nodes.

Iterative.
stack is used.

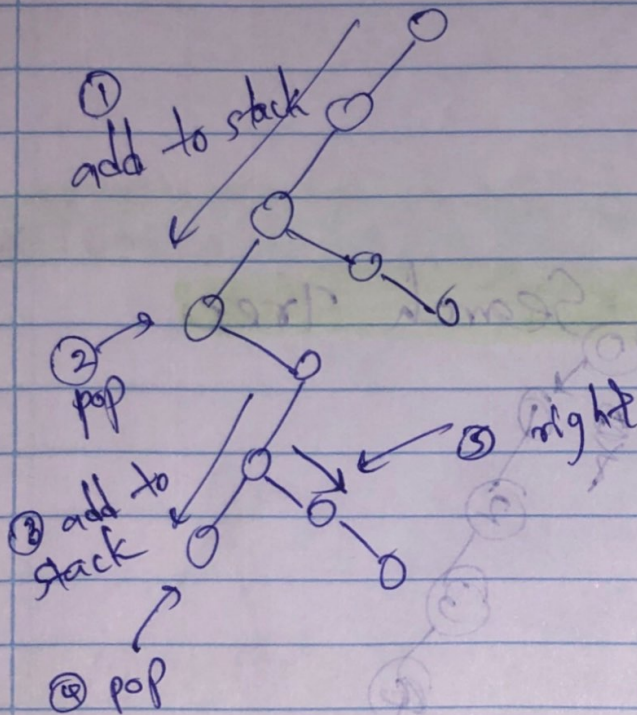

If we can update ~~data~~ nodes, keep count of total left & right.

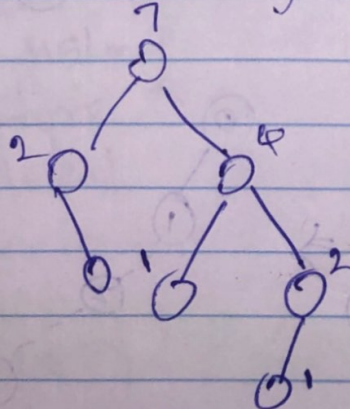

then we can search in relevant side.