


## \* Subsets

can use bitmask to generate all possible subsets & do the work

Can use backtracking

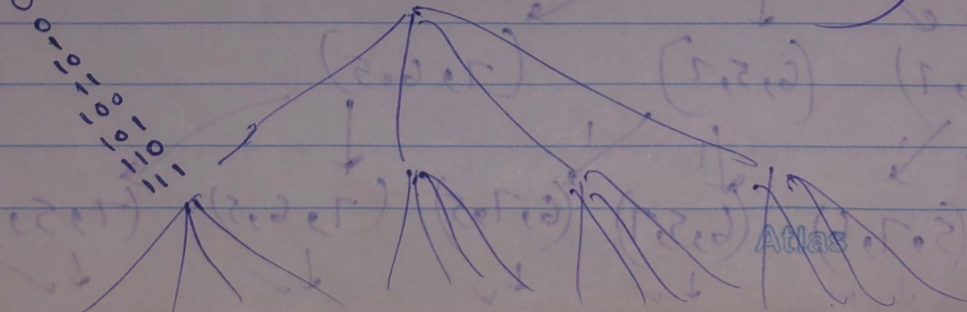


No: \_\_\_\_\_

Date: \_\_\_\_/\_\_\_\_/\_\_\_\_

- A beautiful way is using double backtracking; add number or not add number

1, 2, 3

()

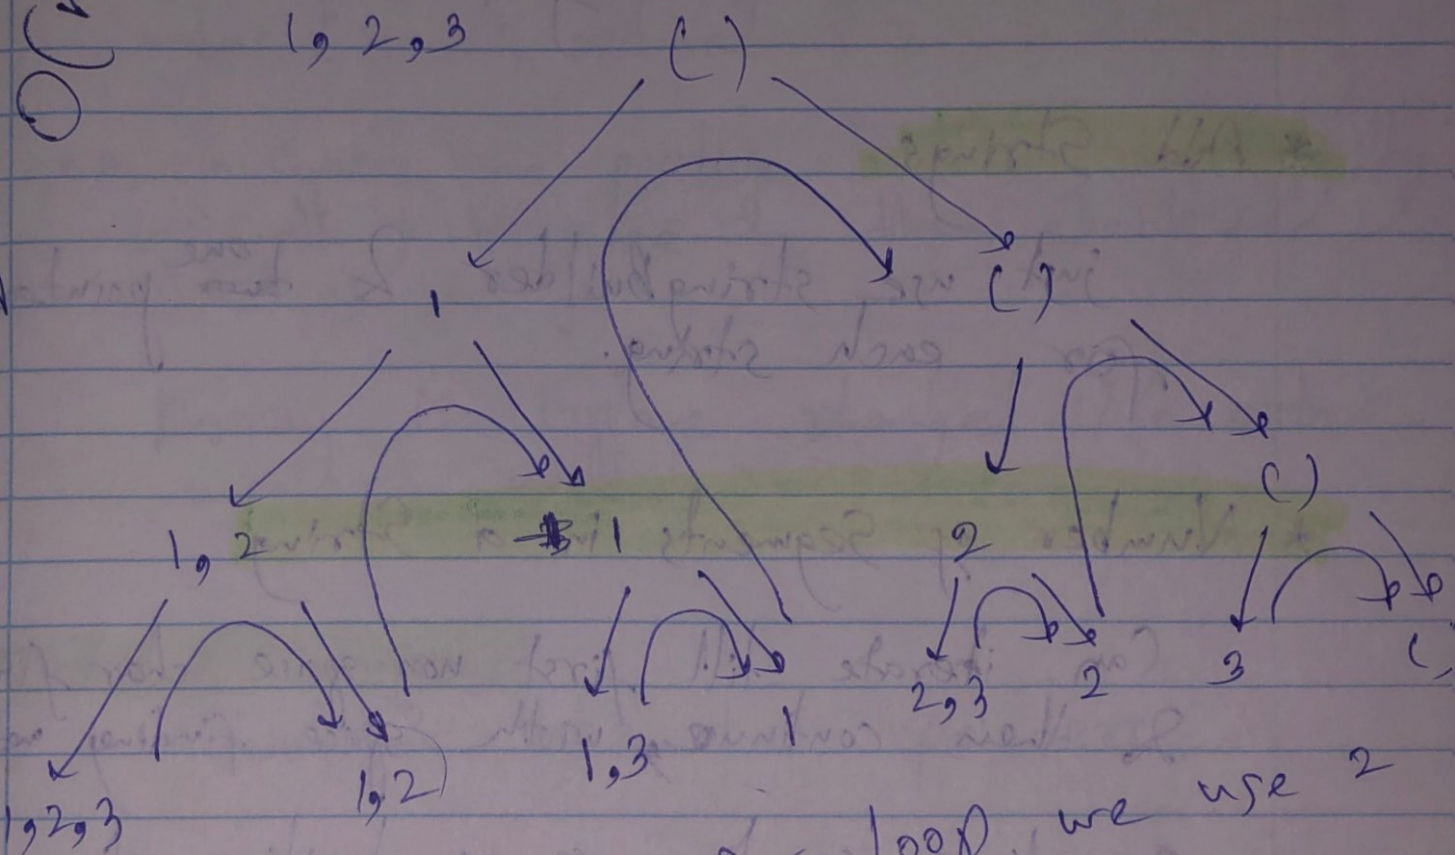

instead of for loop we use 2 backtrackings.