

* longest palindromic substring

* But the optimal approach is using 2 pointers.

Manacher's algorithm.


center
A B A B A B A B
1 3 5 7 9 3 1
take mirror
whatever for now

for the right elements to center, value should be at least mirror value.

Now we explore right elements of center

No: _____

Date: ____/____/____

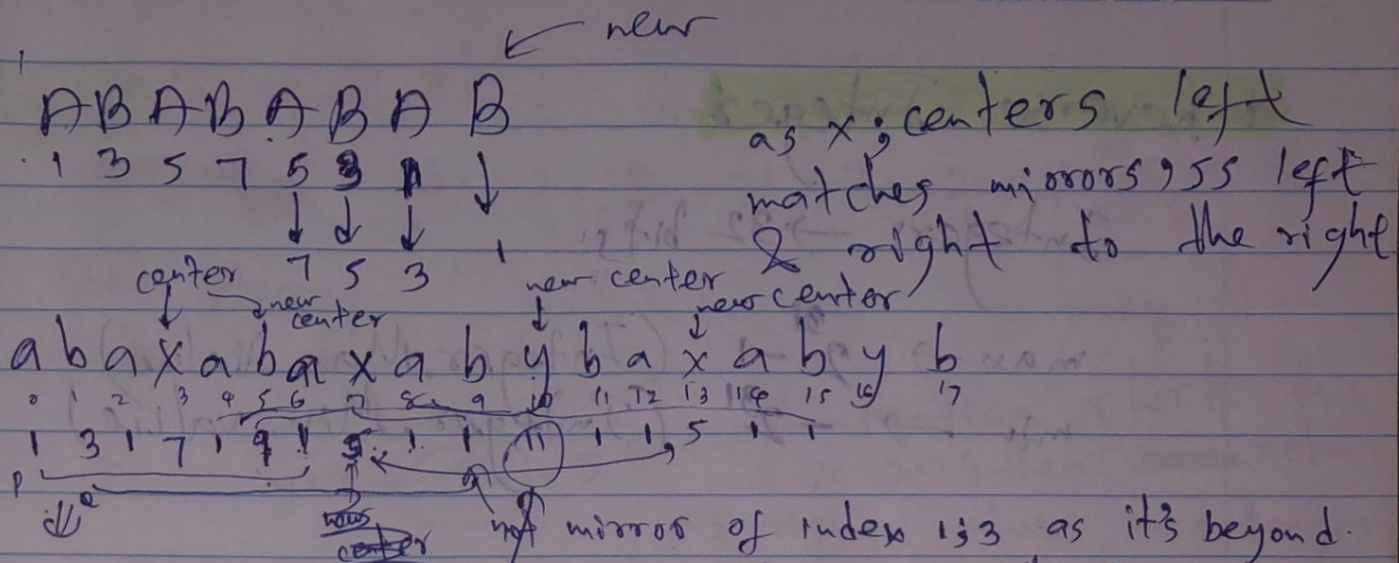

as p is going beyond the center of q, 7 is not taken as mirror.

max value