



* Path Sum II

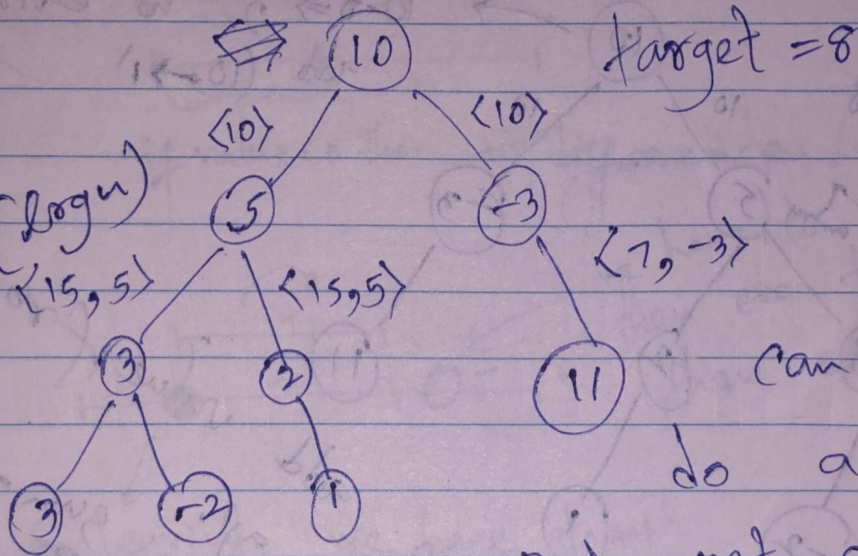

can use a list &
do a dfs.

But not efficient as
we are doing list element removing

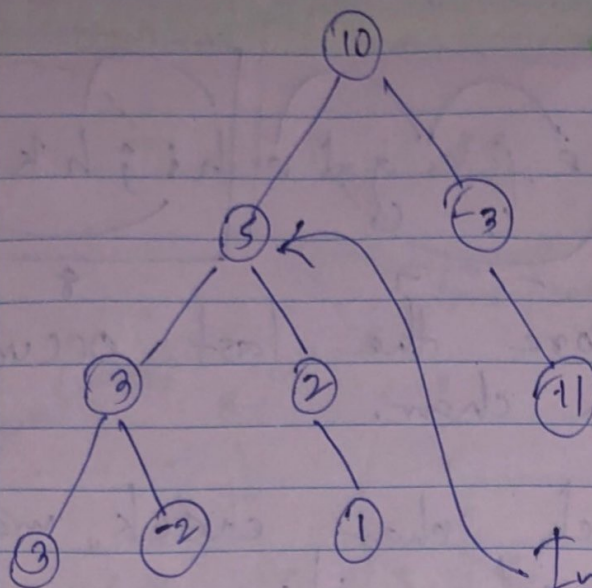

In each position can
do dfs from that position + start
from that node to left & right
completely.

$O(n^2)$
 $O(n)$
 $O(\log n)$

• can use a map for the traversal.

