来自服务端的Hello World

配置文件

依赖项

```xml
<dependencies>
    <dependency>
        <groupId>org.springframework.boot</groupId>
        <artifactId>spring-boot-starter-web</artifactId>
    </dependency>
    <dependency>
        <groupId>org.mybatis.spring.boot</groupId>
        <artifactId>mybatis-spring-boot-starter</artifactId>
        <version>3.0.5</version>
    </dependency>

    <dependency>
        <groupId>com.mysql</groupId>
        <artifactId>mysql-connector-j</artifactId>
        <scope>runtime</scope>
    </dependency>
    <dependency>
        <groupId>org.projectlombok</groupId>
        <artifactId>lombok</artifactId>
        <optional>true</optional>
    </dependency>
    <dependency>
        <groupId>org.springframework.boot</groupId>
        <artifactId>spring-boot-starter-test</artifactId>
        <scope>test</scope>
    </dependency>
    <dependency>
        <groupId>org.mybatis.spring.boot</groupId>
        <artifactId>mybatis-spring-boot-starter-test</artifactId>
        <version>3.0.5</version>
        <scope>test</scope>
    </dependency>
</dependencies>
```

包含springweb,lombok,mysql,mybatis

父工程

```xml
<parent>
    <groupId>org.springframework.boot</groupId>
    <artifactId>spring-boot-starter-parent</artifactId>
    <version>3.5.6</version>
    <relativePath/> <!-- lookup parent from repository -->
</parent>
```

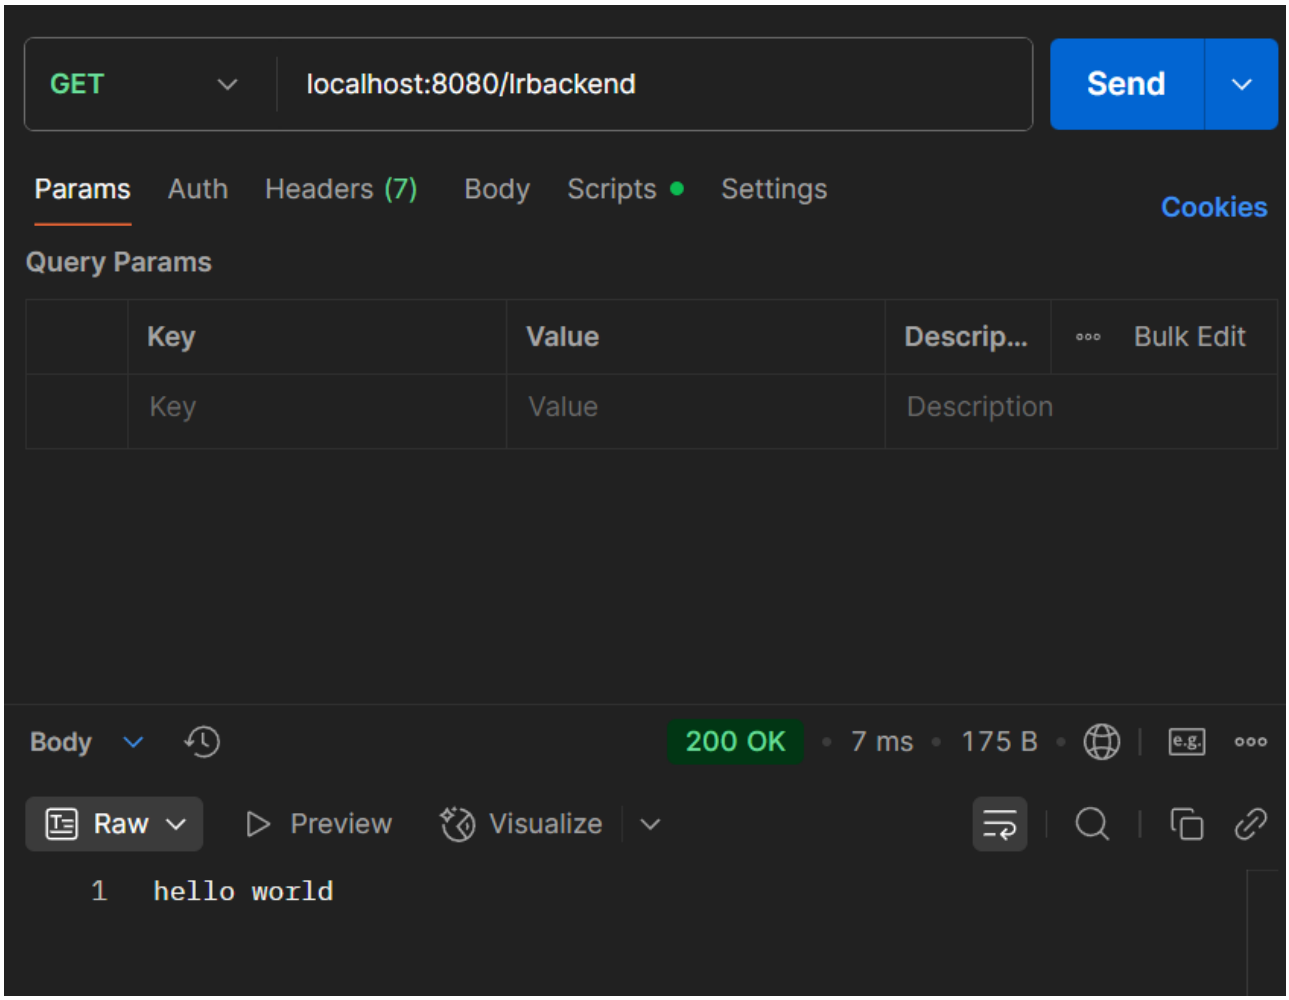
上面的依赖未标名版本号的原因

打包插件

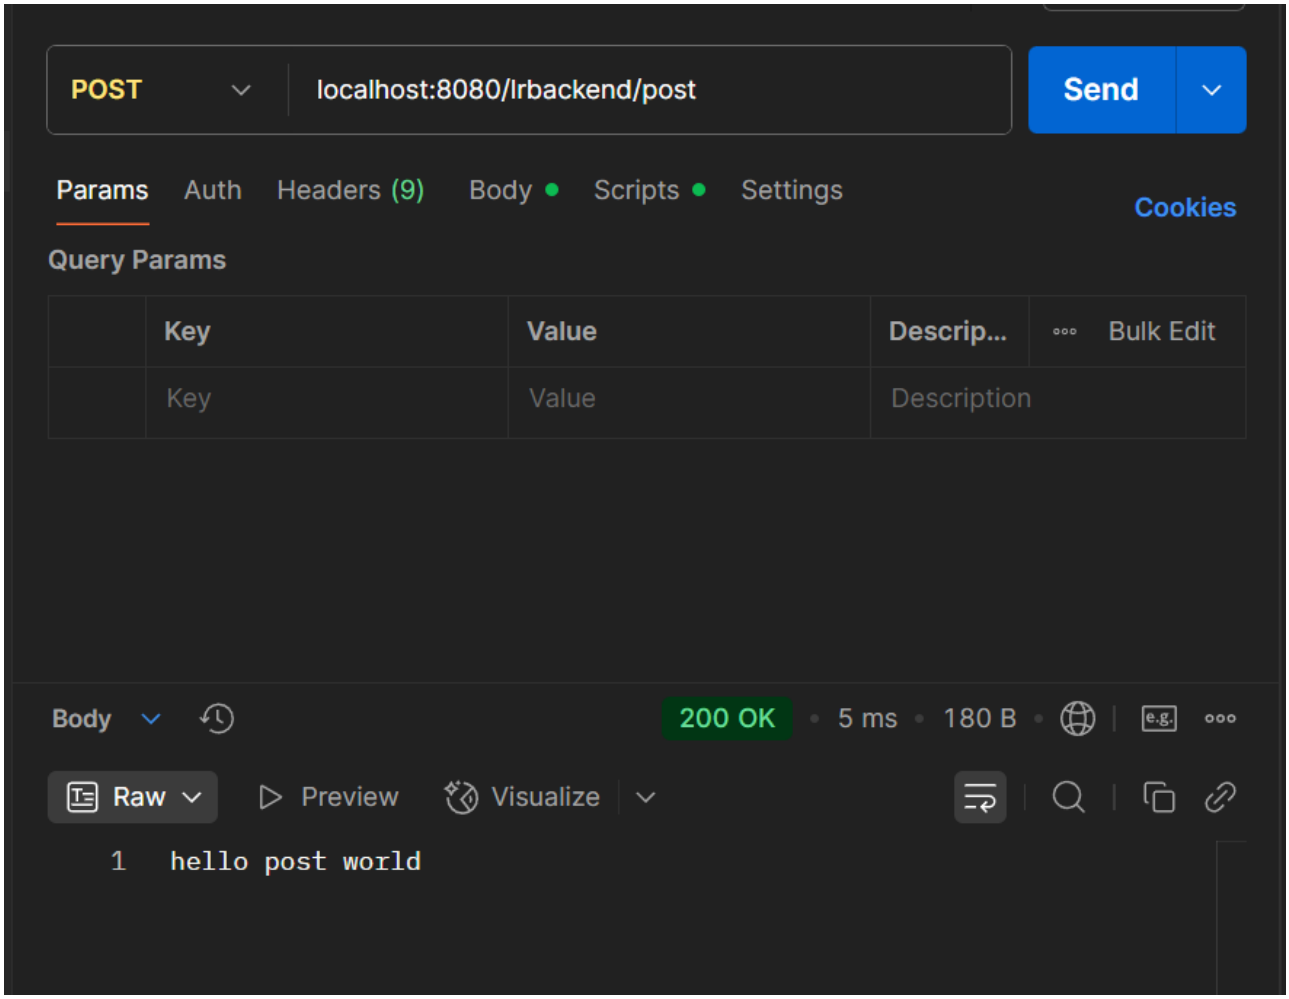
```xml
<build>
    <plugins>
        <plugin>
            <groupId>org.apache.maven.plugins</groupId>
            <artifactId>maven-compiler-plugin</artifactId>
            <configuration>
                <annotationProcessorPaths>
                    <path>
                        <groupId>org.projectlombok</groupId>
                        <artifactId>lombok</artifactId>
                    </path>
                </annotationProcessorPaths>
            </configuration>
        </plugin>
        <plugin>
            <groupId>org.springframework.boot</groupId>
            <artifactId>spring-boot-maven-plugin</artifactId>
            <configuration>
                <excludes>
                    <exclude>
                        <groupId>org.projectlombok</groupId>
                        <artifactId>lombok</artifactId>
                    </exclude>
                </excludes>
            </configuration>
        </plugin>
    </plugins>
</build>
```

运行结果

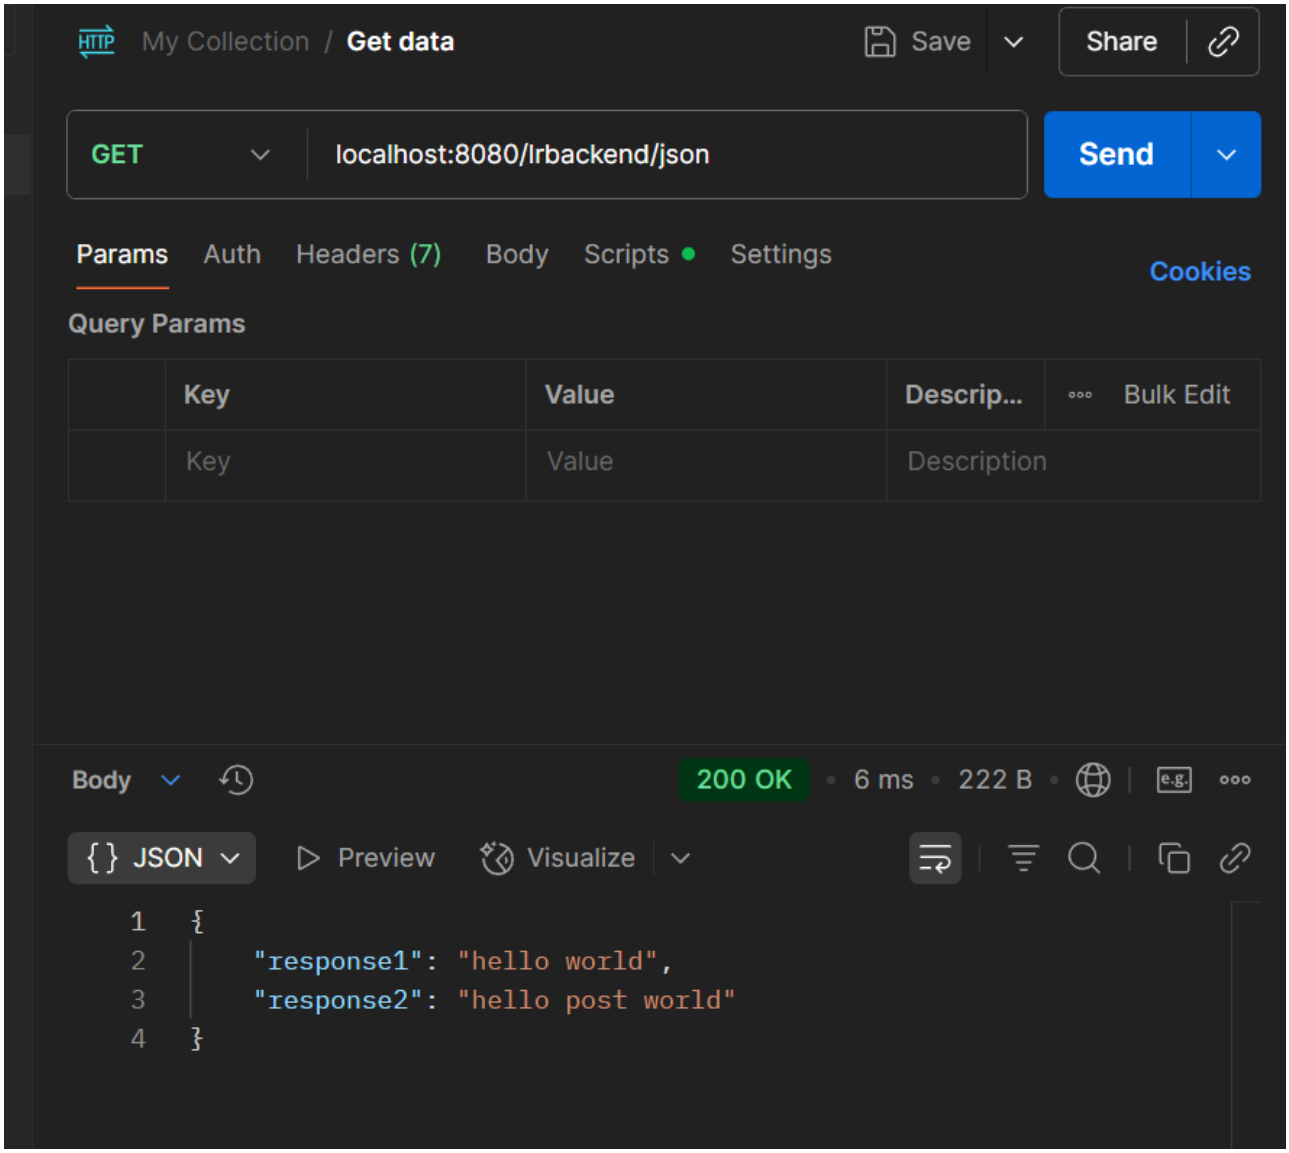
1. hello world



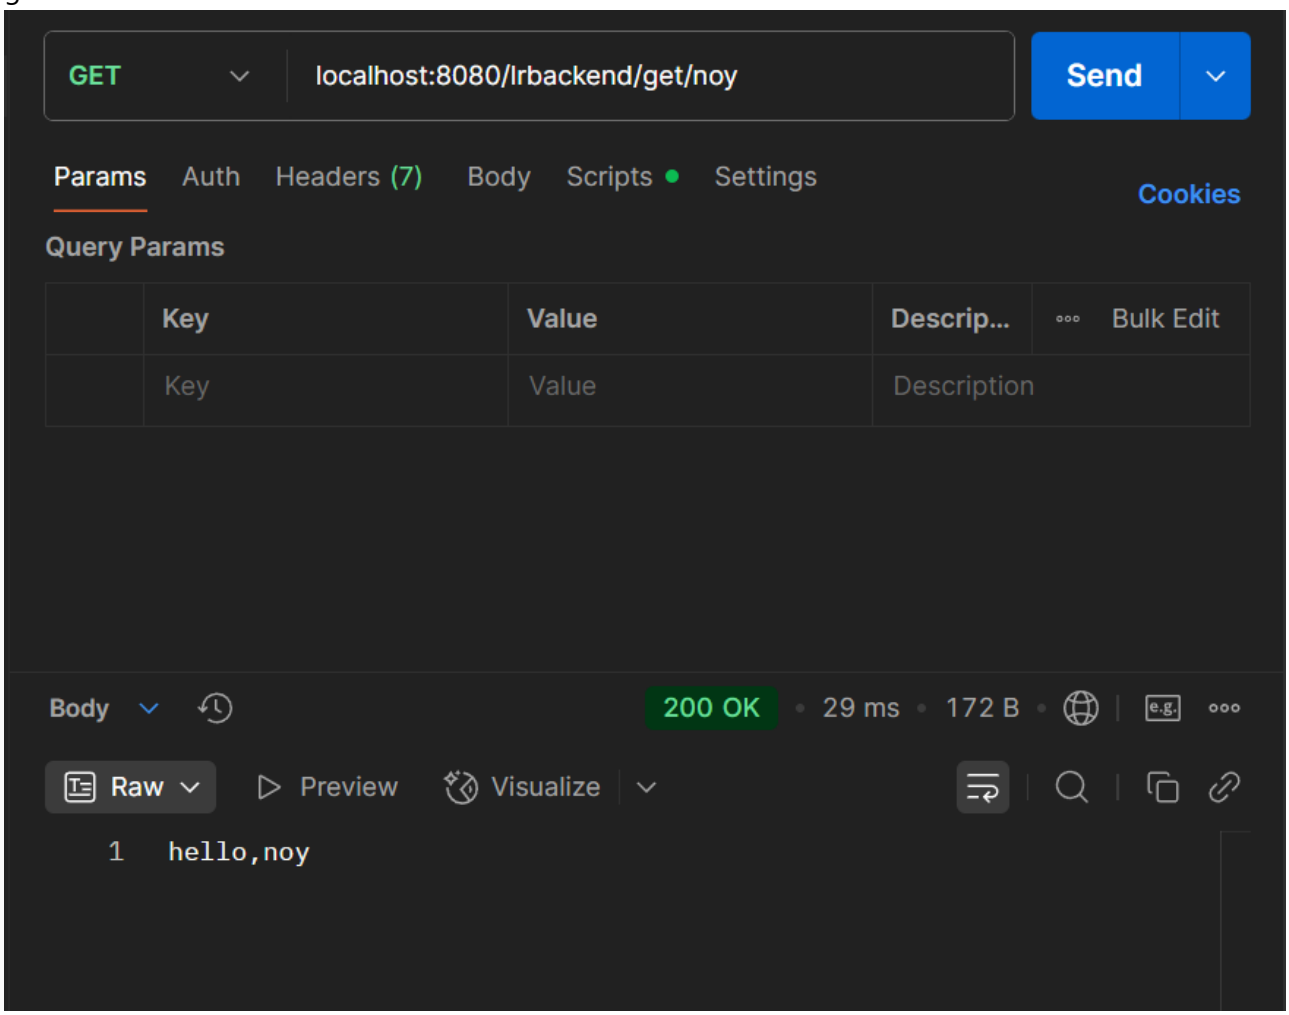
2. hello post world



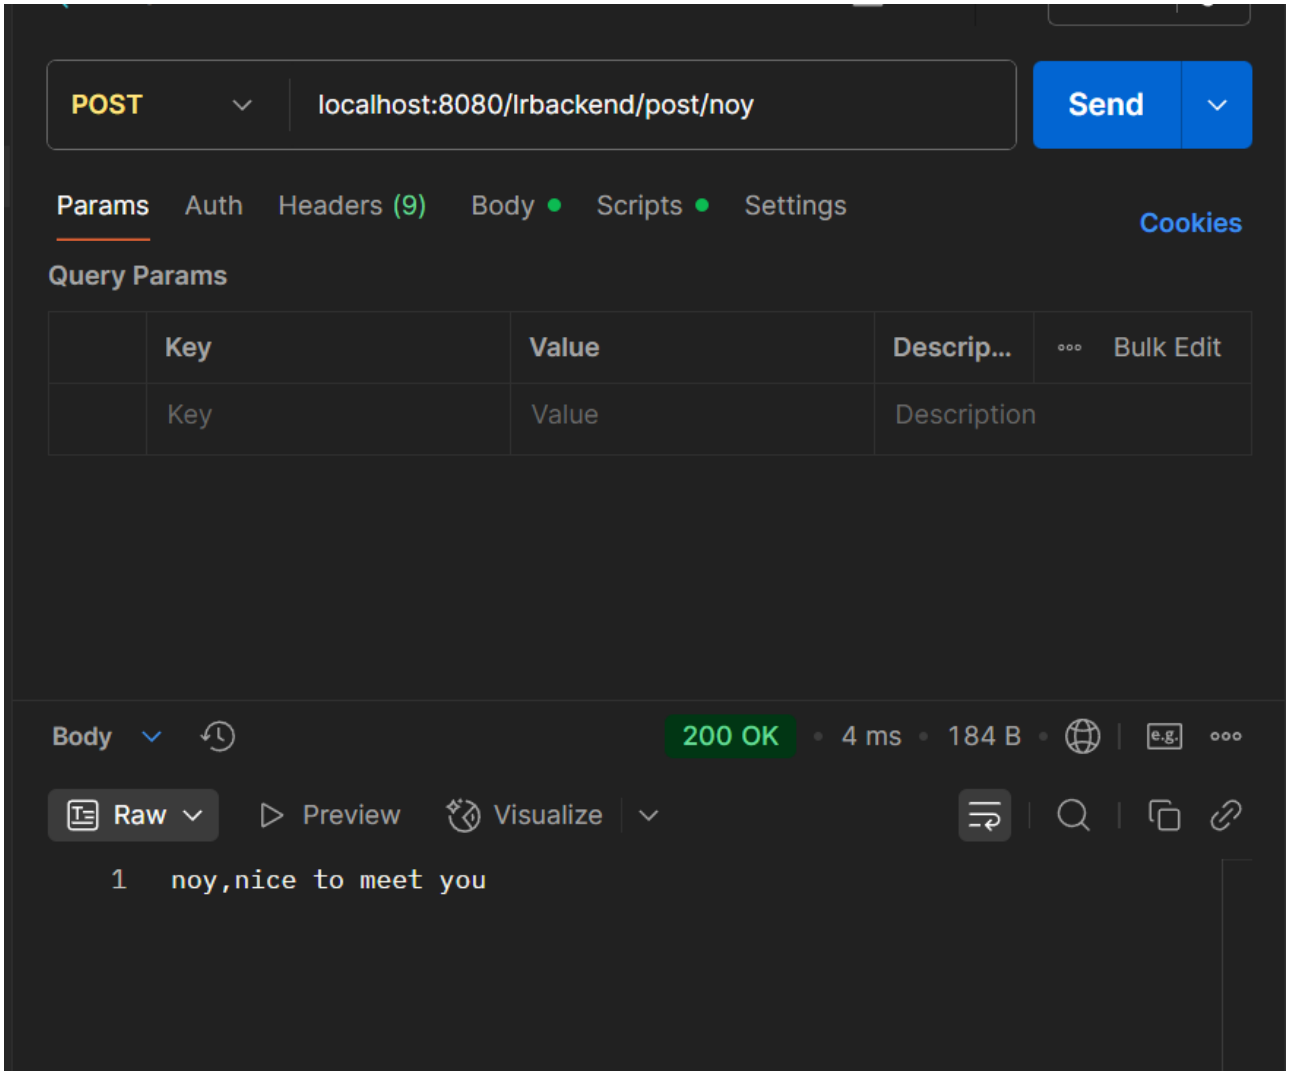
3. json格式


My Collection / Get data
Save
Share
GET
localhost:8080/lrbackend/json
Send
Params
Auth
Headers (7)
Body
Scripts
Settings
Cookies
Query Params
Key
Value
Descrip...
Bulk Edit
Key
Value
Description
Body
200 OK
6 ms
222 B
JSON
Preview
Visualize
{
"response1": "hello world",
"response2": "hello post world"
}

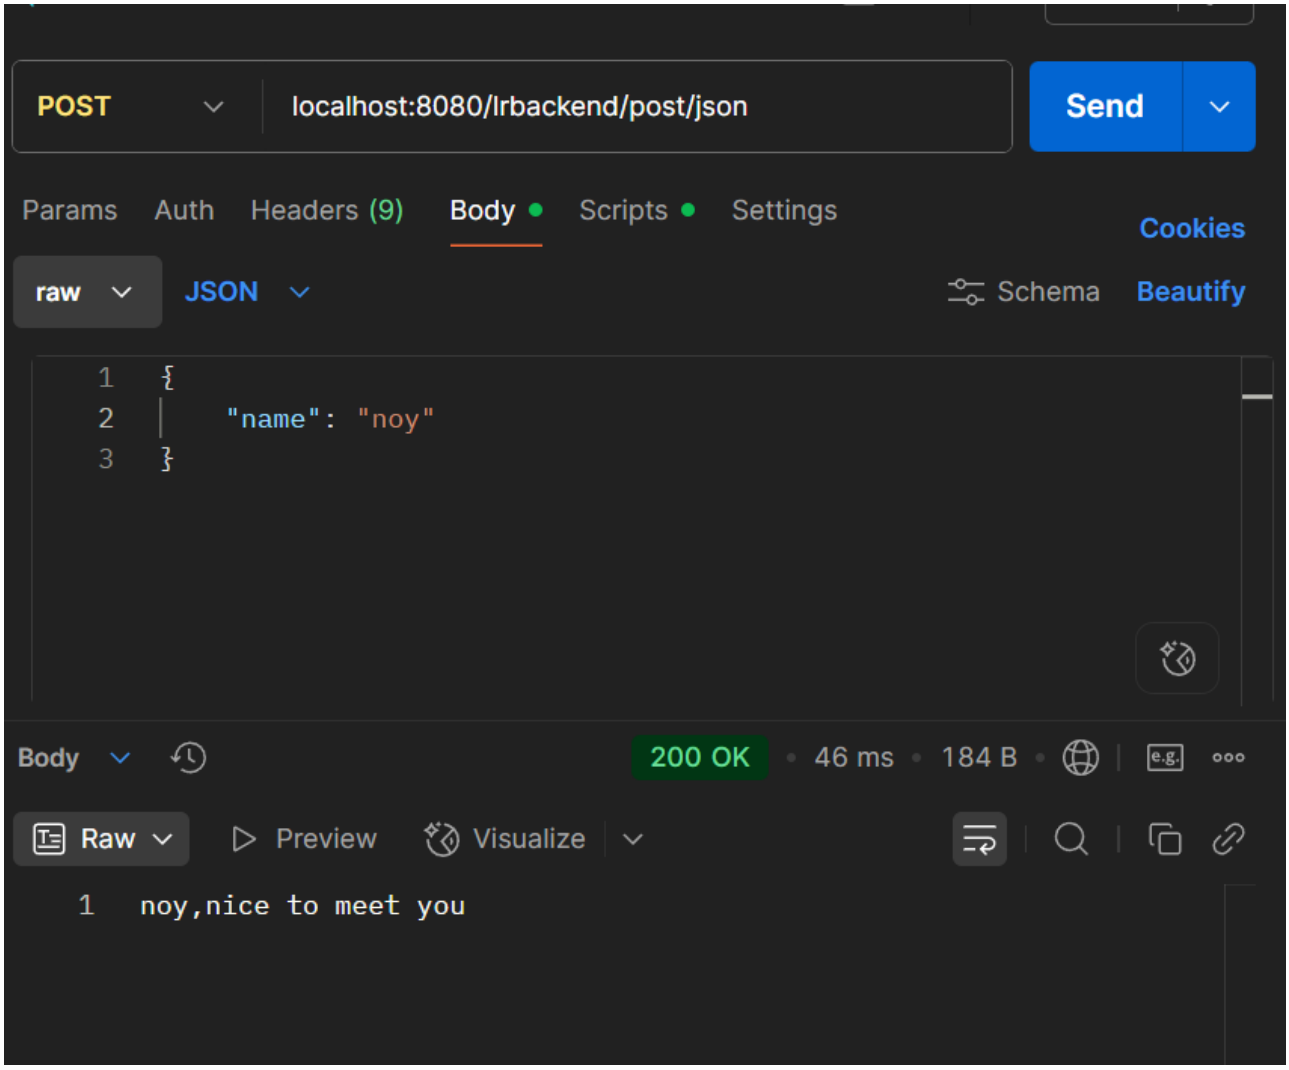
4. getname


GET
localhost:8080/lrbackend/get/noy
Send
Params
Auth
Headers (7)
Body
Scripts
Settings
Cookies
Query Params
Key
Value
Descrip...
Bulk Edit
Key
Value
Description
Body
200 OK
29 ms
172 B
Raw
Preview
Visualize
1 hello,noy

5. postname


POST
localhost:8080/lrbackend/post/noy
Send
Params
Auth
Headers (9)
Body
Scripts
Settings
Cookies
Query Params
Key
Value
Descrip...
Bulk Edit
Key
Value
Description
Body
200 OK
4 ms
184 B
Raw
Preview
Visualize
1 noy,nice to meet you

6. jsonname


POST
localhost:8080/lrbackend/post/json
Send
Params
Auth
Headers (9)
Body
Scripts
Settings
Cookies
raw
JSON
Schema
Beautify
1 {
2 "name": "noy"
3 }
Body
200 OK
46 ms
184 B
Raw
Preview
Visualize
1 noy,nice to meet you