


libraries/fc/include  
/fc/crypto/k1\_recover.hpp

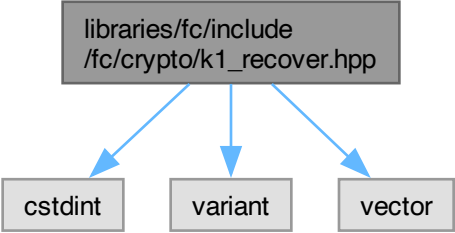

```
graph TD; A["libraries/fc/include  
/fc/crypto/k1_recover.hpp"] --> B["cstdint"]; A --> C["variant"]; A --> D["vector"];
```

The diagram illustrates the dependencies of the header file `libraries/fc/include/fc/crypto/k1_recover.hpp`. Three blue arrows point from the header file box to three separate boxes below it, labeled `cstdint`, `variant`, and `vector`.

`cstdint`

`variant`

`vector`