

Peppol


The future is open

SML Migration Plan 2026

Status: RC
Version: 1.0
Last Updated: 2026-02-16

OpenPeppol AISBL
Rond-point Schuman 6, box 5
1040 Brussels Belgium

info@peppol.eu
www.peppol.org
Last updated: 16.02.2026

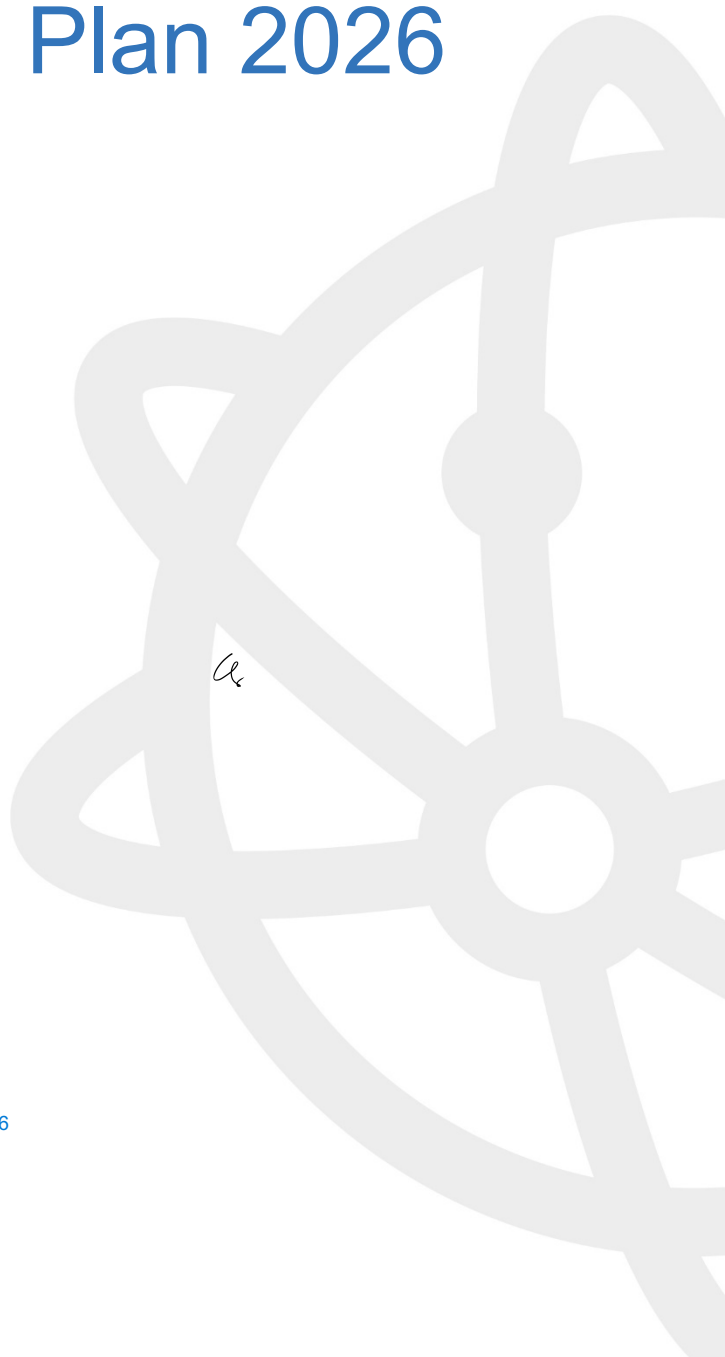

Contents

1	Glossary.....	3
2	Introduction	4
2.1	Key Benefits of Peppol insourcing.....	4
3	Management Summary	4
4	Architectural overview.....	5
5	Process Implementation	6
5.1	Access Point (AP) Overview.....	6
5.2	Access Point (AP) Obligations	7
5.3	Service Metadata Publisher (SMP) Overview	8
5.4	Service Metadata Publisher (SMP) Obligations	8
6	SML Migration Support.....	9

1 Glossary

Abbreviations and terms used in this document:

Abbreviation	Meaning
AP	Access Point
EC	European Commission
SMK	Service Metadata Locator (test) in the EC SML environment
SML	Service Metadata Locator (production) in EC and Peppol environment
SMP	Service Metadata Publisher
T-SML	Service Metadata Locator (test) in Peppol SML environment

2 Introduction

The insourcing of the Peppol SML was decided in June 2025. During the Autumn of 2025 Netcompany (<https://netcompany.com/>) was awarded a contract to support OpenPeppol in the migration process and host the insourced SML.

The initial reasons for insourcing of the SML from the European Commission (EC) was lack of SLAs, insecurity of funding of the EC SML, a cap of OpenPeppol entries and for OpenPeppol to gain more control of the SML and its features.

Within the last half year, the risk of continuing using the EC SML has increased to a level that may jeopardise the continuity of the Peppol Network.

2.1 Key Benefits of Peppol insourcing

Benefit	What changes	Why it matters
Clear continuity	SML / T-SML managed by OpenPeppol	No dependency on yearly EC funding decisions
Clear accountability	The hosting provider has responsibility to uphold SLA	The credibility of the network requires clear uptime requirements
Better control	With the URLs pointing to OpenPeppol owned domains, it opens up choices on service hosting.	If there is a need to change the hosting in the future it can be done without big disturbance to the network.

3 Management Summary

The PKI migration follows **two clearly defined milestones** with three months between T1 and T2 to give Peppol Service Providers predictable change windows:

Milestone	Target date	High-level action
T1-AP	2026-03-01 00:00:00 UTC	Service providers (AP) SHOULD start using the Peppol SML (new URLs).
T1-SMP	2026-03-01 00:00:00 UTC	Service providers (SMP) SHOULD start using the Peppol SML (new URLs).
T2-AP	2026-05-31 00:00:00 UTC	All Service providers (AP) MUST use the Peppol SML (new URLs).
T2-SMP	2026-05-31 00:00:00 UTC	All Service providers (SMP) MUST use the Peppol SML (new URLs).

Key principle of the migration: The only change from a Service Provider perspective are the new URLs for DNS Lookup (AP) as well as SML URLs for SMP and Participant Management.

The change will not require any additional Peppol Testbed verifications. However, the Testbed may of course be consulted to verify proper functioning using the existing test suites.

Tests can be performed towards the T-SML (formerly known as SMK in the EC SML).

4 Architectural overview

The Service Metadata Locator (SML) is part of the Peppol eDelivery Dynamic Discovery that consist of the SML and the Service Metadata Publisher.

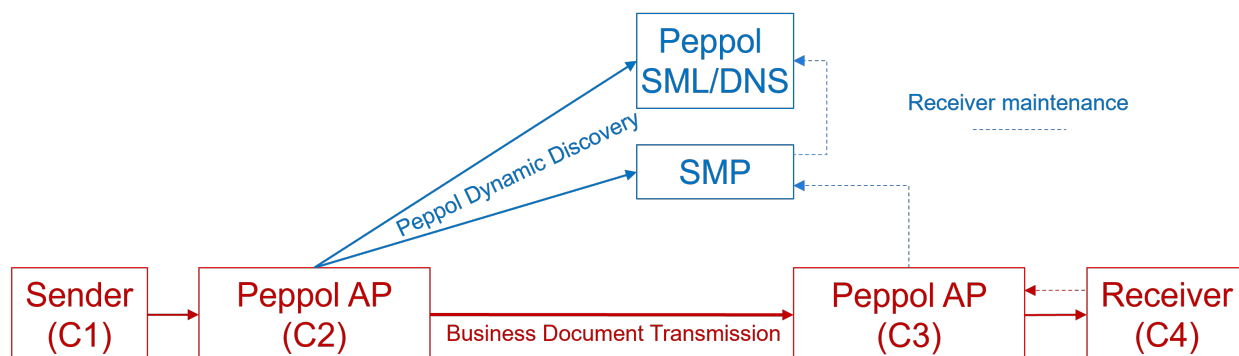


Figure 1


The Access Point (AP) usage of the Dynamic Discovery is as follows:

1. With the End-User Participant Id (C4), Lookup in the SML/DNS to locate the Service Metadata Publisher (SMP), where the Receiving Capabilities of the End-User (C4) are available.
2. With the End-User Participant Id (C4) Lookup in the located SMP to find the Receiving Capabilities of the End-User (C4) and the technical location and technical definitions of the receiving AP to allow transfer of Business Documents.


The SML has the following capabilities:

1. For an AP, make available a resolution between a Participant Identifier and the end-point address of the Service Metadata Publisher (SMP) for fetching additional participant data.
2. For an SMP, manage the connection between the Participant identified by End-User Participant Id and the end-point address of a SMP.

In practice this translates to an architecture with two external facing service modules along with an internal persistent repository as shown in the figures below.

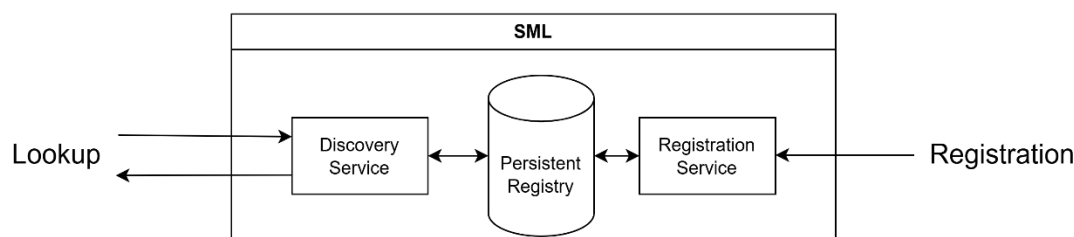

The Interfaces of the SML

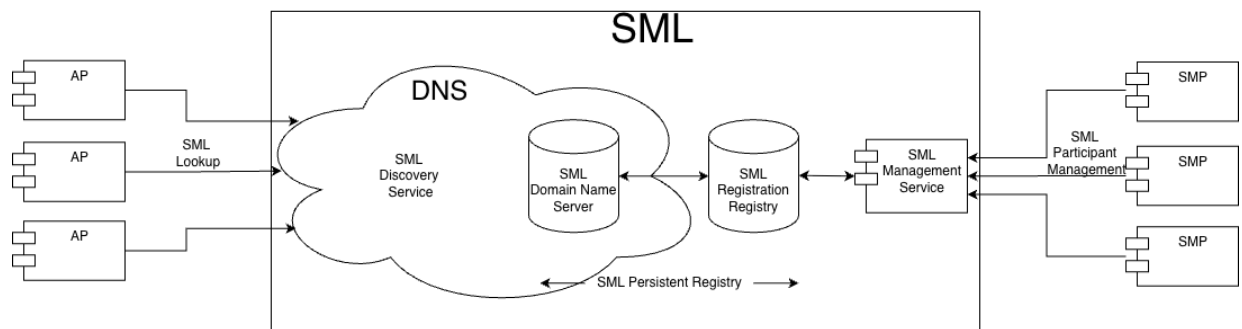

The SML interface connections to the Peppol Network

5 Process Implementation

This section sets out the actions required of every service provider in each migration phase, and the corresponding obligations for the other core components of the Peppol Network

5.1 Access Point (AP) Overview

- **before T1-AP:**
 - Business as usual under the EC SML/SMK.
- **between T1-AP and T2-AP:**
 - AP Service providers **SHOULD** change from EC SML/SMK lookup domain names to Peppol SML/T-SML lookup domain names.
- **after T2-AP:**
 - AP Service providers **MUST** use Peppol SML/T-SML lookup domain names.

Note: This applies to all lookups, both in test and production.

5.2 Access Point (AP) Obligations

SML/T-SML lookup by APs

Phase	MUST	SHOULD
Between T1 and T2		Generate Peppol SML/T-SML URLs
After T2	Generate Peppol SML/T-SML URLs	

Test Lookup EC Environment (SMK)	Test Lookup Peppol Environment (T-SML)
Domain: <code>acc.edelivery.tech.ec.europa.eu</code>	Domain: <code>participant.sml.test.tech.peppol.org</code>
Production Lookup EC Environment (SML)	Production Lookup Peppol Environment (SML)
Domain: <code>edelivery.tech.ec.europa.eu</code>	Domain: <code>participant.sml.prod.tech.peppol.org</code>

Example 1 on T-SML (Participant Information `iso6523-actorid-upis:9915:test`)

`eh5boavaktmbgzyh2a63dz4qov33fvp5nsdvqklucfraayoodw6a.iso6523-actorid-upis.acc.edelivery.tech.ec.europa.eu`

becomes

`eh5boavaktmbgzyh2a63dz4qov33fvp5nsdvqklucfraayoodw6a.iso6523-actorid-upis.participant.sml.test.tech.peppol.org`

Example 2 on SML (Participant Information `iso6523-actorid-upis:9915:test`):

`eh5boavaktmbgzyh2a63dz4qov33fvp5nsdvqklucfraayoodw6a.iso6523-actorid-upis.edelivery.tech.ec.europa.eu`

becomes

`eh5boavaktmbgzyh2a63dz4qov33fvp5nsdvqklucfraayoodw6a.iso6523-actorid-upis.participant.sml.prod.tech.peppol.org`

5.3 Service Metadata Publisher (SMP) Overview

- **before T1-SMP:**
 - Business as usual under the EC SML/SMK.
- **between T1-SMP and T2-SMP:**
 - SMP Service Providers **SHOULD** change from EC SML/SMK registration API to Peppol SML/T-SML registration API.
- **after T2-SMP:**
 - SMP Service Providers **MUST** use Peppol SML/T-SML registration API.

Note: This applies to all registrations, both in test and production.

5.4 Service Metadata Publisher (SMP) Obligations

SML/T-SML participant management by SMPs

Phase	MUST	SHOULD
Between T1 and T2		Use Peppol SML/T-SML registration URLs
After T2	Use Peppol SML/T-SML registration URLs	

Test Management Interface EC Environment (SMK)	Test Management Interface Peppol Environment (T-SML)
Domain: <code>https://acc.edelivery.tech.ec.europa.eu</code>	Domain: <code>https://api.sml.test.tech.peppol.org</code>
Service name: <code>edelivery-sml/</code>	Service name: <code>edelivery-sml/</code>
URL: <code>https://acc.edelivery.tech.ec.europa.eu/edelivery-sml/</code>	URL: <code>https://api.sml.test.tech.peppol.org/edelivery-sml/</code>
Production Management Interface EC Environment (SML)	Production Management Interface Peppol Environment (SML)
Domain: <code>https://edelivery.tech.ec.europa.eu</code>	Domain: <code>https://api.sml.prod.tech.peppol.org</code>
Service name: <code>edelivery-sml/</code>	Service name: <code>edelivery-sml/</code>
URL: <code>https://edelivery.tech.ec.europa.eu/edelivery-sml/</code>	URL: <code>https://api.sml.prod.tech.peppol.org/edelivery-sml/</code>

Note: The relative service paths `/manageservicemetadata` and `/manageparticipantidentifier` continue to exist and are not changed.

6 SML Migration Support

Any support requests regarding to this SML Migration need to be exclusively directed through the Peppol Service Desk, via a “General support” ticket¹. Don’t reach out to EC eDelivery support, as they are not able to support you on this migration.

¹ <https://openpeppol.atlassian.net/servicedesk/customer/portal/1/group/1/create/12>

Signing Certificate

Signer Events	Signature	Details
CS changsheng@sql.com.my Signer Authentication Level: Email	 Signature ID: CMT2RDUT7002CR22N3QWWCO6T IP Address: 121.123.175.185 Device: Windows - Firefox 153.0	Sent: 2026-08-21 09:40:29 AM (UTC) Viewed: 2026-08-21 09:40:34 AM (UTC) Signed: 2026-08-21 09:40:53 AM (UTC) Reason: I am a signer of this document