Table: `Employee`

```
+-------------+------+
| Column Name | Type |
+-------------+------+
| id          | int  |
| salary      | int  |
+-------------+------+
```

id is the primary key (column with unique values) for this table. Each row of this table contains information about the salary of an employee.

Write a solution to find the second highest **distinct** salary from the `Employee` table. If there is no second highest salary, return `null (return None in Pandas)`.

```mysql
# Write your MySQL query statement below
SELECT
    (SELECT DISTINCT salary
     FROM employee
     ORDER BY salary DESC
     LIMIT 1 OFFSET 1) AS SecondHighestSalary;
```

181. Employees Earning More Than Their Managers

Solved

Easy | Topics | Companies

SQL Schema > Pandas Schema >

Table: `Employee`

```
+-------------+---------+
| Column Name | Type    |
+-------------+---------+
| id          | int     |
| name        | varchar |
| salary      | int     |
| managerId   | int     |
+-------------+---------+
```

id is the primary key (column with unique values) for this table. Each row of this table indicates the ID of an employee, their name, salary, and the ID of their manager.

Write a solution to find the employees who earn more than their managers.

```mysql
# Write your MySQL query statement below
SELECT name AS Employee
FROM Employee e1
WHERE salary > (SELECT salary
                FROM Employee e2
                WHERE e2.id = e1.managerId);
```

Saved Ln 5, Col 34

Description | Accepted | Editorial | Solutions | Submissions

Easy | Topics | Companies

SQL Schema > Pandas Schema >

Table: `Person`

```
+-------------+---------+
| Column Name | Type    |
+-------------+---------+
| id          | int     |
| email       | varchar |
+-------------+---------+
```

id is the primary key (column with unique values) for this table. Each row of this table contains an email. The emails will not contain uppercase letters.

Write a solution to report all the duplicate emails. Note that it's guaranteed that the email field is not NULL.

Return the result table in **any order**.

Code

MySQL | Auto

```mysql
# Write your MySQL query statement below
SELECT email AS Email
FROM Person
GROUP BY email
HAVING COUNT(email) > 1;
```

SQL Schema > Pandas Schema >

Table: `Employee`

```
+--------------+---------+
| Column Name  | Type    |
+--------------+---------+
| id           | int     |
| name         | varchar |
| salary       | int     |
| departmentId | int     |
+--------------+---------+
```

id is the primary key (column with unique values) for this table.
departmentId is a foreign key (reference columns) of the ID from the `Department` table.
Each row of this table indicates the ID, name, and salary of an employee. It also contains the ID of their department.

Table: `Department`

```
+--------------+---------+
| Column Name  | Type    |
+--------------+---------+
| id           | int     |
| name         | varchar |
```

MySQL | Auto

```mysql
# Write your MySQL query statement below
SELECT d.name AS Department, e.name AS Employee, e.salary AS Salary
FROM Employee e
JOIN Department d ON e.departmentId = d.id
WHERE e.salary = (
    SELECT MAX(salary)
    FROM Employee e2
    WHERE e2.departmentId = e.departmentId
);
```

Saved | Upgrade to Cloud Saving | Ln 9, Col 3

Description | Accepted | Editorial | Solutions | Submissions

SQL Schema > Pandas Schema >

Table: `Teacher`

```
+-------------+------+
| Column Name | Type |
+-------------+------+
| teacher_id  | int  |
| subject_id  | int  |
| dept_id     | int  |
+-------------+------+
```

(subject_id, dept_id) is the primary key (combinations of columns with unique values) of this table.
Each row in this table indicates that the teacher with teacher_id teaches the subject subject_id in the department dept_id.

Write a solution to calculate the number of unique subjects each teacher teaches in the university.

Return the result table in **any order**.

The result format is shown in the following example.

Code

MySQL | Auto

```mysql
# Write your MySQL query statement below
SELECT teacher_id, COUNT(DISTINCT subject_id) AS cnt
FROM Teacher
GROUP BY teacher_id;
```

1965. Employees With Missing Information

Solved

Easy | Topics | Companies

SQL Schema > Pandas Schema >

Table: `Employees`

```
+-------------+---------+
| Column Name | Type    |
+-------------+---------+
| employee_id | int     |
| name        | varchar |
+-------------+---------+
```

employee_id is the column with unique values for this table.
Each row of this table indicates the name of the employee whose ID is employee_id.

Table: `Salaries`

```
+-------------+---------+
| Column Name | Type    |
+-------------+---------+
| employee_id | int     |
```

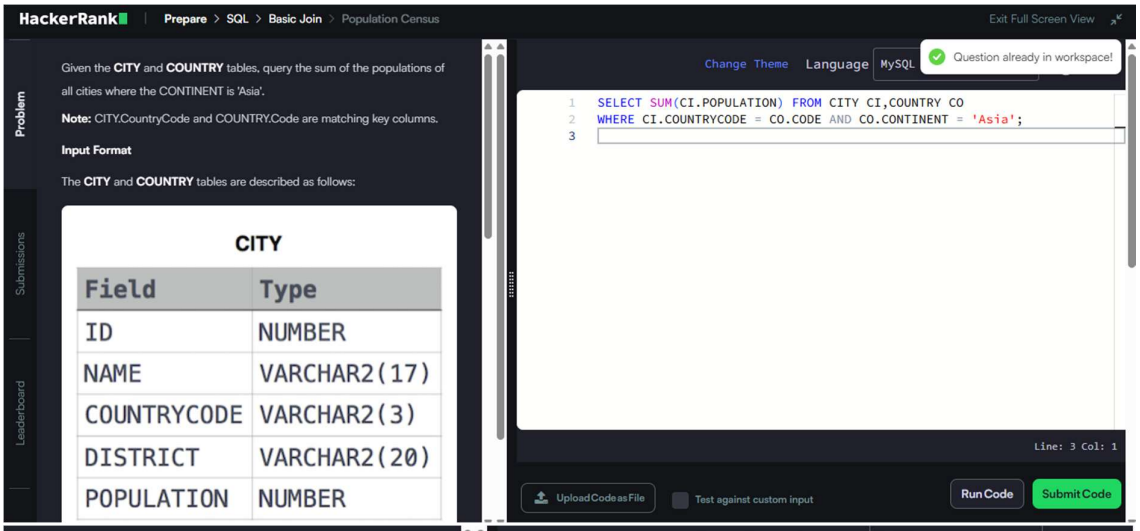
812 | 66 | 2 Online

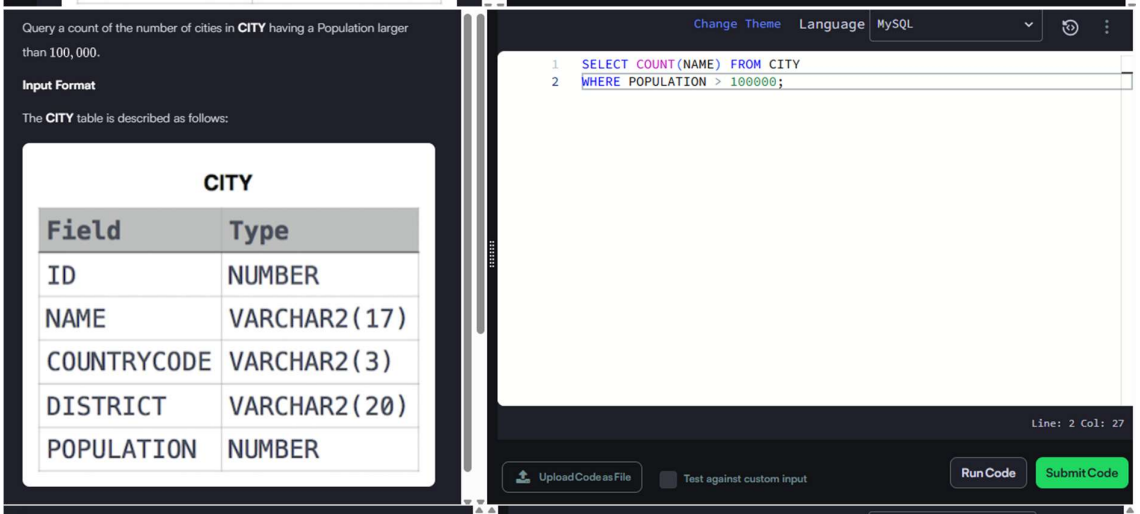
MySQL | Auto

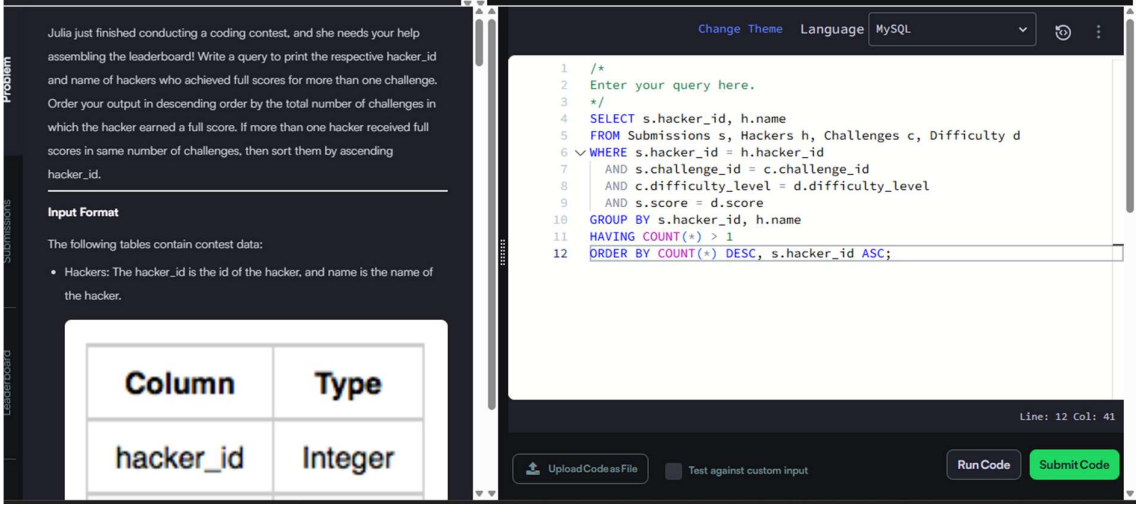
```mysql
# Write your MySQL query statement below
SELECT employee_id
FROM (
    SELECT employee_id FROM Employees
    UNION ALL
    SELECT employee_id FROM Salaries
) AS combined
GROUP BY employee_id
HAVING COUNT(*) = 1
ORDER BY employee_id;
```

Saved | Ln 10, Col 22

Testcase | Test Result


HackerRank
Prepare > SQL > Basic Join > Population Census
Exit Full Screen View
Problem
Submissions
Leaderboard
Given the CITY and COUNTRY tables, query the sum of the populations of all cities where the CONTINENT is 'Asia'.
Note: CITY.CountryCode and COUNTRY.Code are matching key columns.
Input Format
The CITY and COUNTRY tables are described as follows:
CITY
Field Type
ID NUMBER
NAME VARCHAR2(17)
COUNTRYCODE VARCHAR2(3)
DISTRICT VARCHAR2(20)
POPULATION NUMBER
Change Theme
Language
MySQL
Question already in workspace!
SELECT SUM(CI.POPULATION) FROM CITY CI,COUNTRY CO
WHERE CI.COUNTRYCODE = CO.CODE AND CO.CONTINENT = 'Asia';
Line: 3 Col: 1
Upload Code as File
Test against custom input
Run Code
Submit Code


Query a count of the number of cities in CITY having a Population larger than 100,000.
Input Format
The CITY table is described as follows:
CITY
Field Type
ID NUMBER
NAME VARCHAR2(17)
COUNTRYCODE VARCHAR2(3)
DISTRICT VARCHAR2(20)
POPULATION NUMBER
Change Theme
Language
MySQL
SELECT COUNT(NAME) FROM CITY
WHERE POPULATION > 100000;
Line: 2 Col: 27
Upload Code as File
Test against custom input
Run Code
Submit Code


Problem
Submissions
Leaderboard
Julia just finished conducting a coding contest, and she needs your help assembling the leaderboard! Write a query to print the respective hacker_id and name of hackers who achieved full scores for more than one challenge. Order your output in descending order by the total number of challenges in which the hacker earned a full score. If more than one hacker received full scores in same number of challenges, then sort them by ascending hacker_id.
Input Format
The following tables contain contest data:
Hackers: The hacker_id is the id of the hacker, and name is the name of the hacker.
Column Type
hacker_id Integer
Change Theme
Language
MySQL
/*
Enter your query here.
*/
SELECT s.hacker_id, h.name
FROM Submissions s, Hackers h, Challenges c, Difficulty d
WHERE s.hacker_id = h.hacker_id
AND s.challenge_id = c.challenge_id
AND c.difficulty_level = d.difficulty_level
AND s.score = d.score
GROUP BY s.hacker_id, h.name
HAVING COUNT(*) > 1
ORDER BY COUNT(*) DESC, s.hacker_id ASC;
Line: 12 Col: 41
Upload Code as File
Test against custom input
Run Code
Submit Code

You did such a great job helping Julia with her last coding contest challenge that she wants you to work on this one, too!

The total score of a hacker is the sum of their maximum scores for all of the challenges. Write a query to print the hacker_id, name, and total score of the hackers ordered by the descending score. If more than one hacker achieved the same total score, then sort the result by ascending hacker_id. Exclude all hackers with a total score of 0 from your result.

Input Format

The following tables contain contest data:

- Hackers: The hacker_id is the id of the hacker, and name is the name of the hacker.

Column	Type
hacker_id	Integer

Change Theme Language MySQL

```mysql
/*
Enter your query here.
*/
SELECT h.hacker_id, h.name, s.total_score
FROM Hackers h, (
    SELECT hacker_id, SUM(max_score) AS total_score
    FROM (
        SELECT hacker_id, challenge_id, MAX(score) AS max_score
        FROM Submissions
        GROUP BY hacker_id, challenge_id
    ) AS best_scores
    GROUP BY hacker_id
) AS s
WHERE h.hacker_id = s.hacker_id
  AND s.total_score > 0
ORDER BY s.total_score DESC, h.hacker_id ASC;
```

Line: 16 Col: 46

Upload Code as File | Test against custom input | Run Code | Submit Code

You are given three tables: Students, Friends and Packages. Students contains two columns: ID and Name. Friends contains two columns: ID and Friend_ID (ID of the ONLY best friend). Packages contains two columns: ID and Salary (offered salary in $ thousands per month).

Column	Type
ID	Integer
Name	String

Students

Column	Type
ID	Integer
Friend_ID	Integer

Change Theme Language MySQL

Added to workspace

```mysql
/*
Enter your query here.
*/
SELECT s.Name
FROM Students s, Friends f, Packages p1, Packages p2
WHERE s.ID = f.ID
  AND f.Friend_ID = p2.ID
  AND s.ID = p1.ID
  AND p2.Salary > p1.Salary
ORDER BY p2.Salary;
```

Line: 10 Col: 20

Upload Code as File | Test against custom input | Run Code | Submit Code

oneroadmap

Certificate Of Achievement

Proudly Presented to

Aaryan Nandkishor Raorane

For passing the One Roadmap Skill Certification Test in

SQL

Certified on: September 20, 2026
ID: CERT-33E1BEA9



gaurav ghai

Gaurav Ghai
CEO & Founder

Verify this certificate at: https://www.oneroadmap.io/skills/sql/certificate/CERT-33E1BEA9