



Matrix



Problem

Submissions

Leaderboard

Discussions

Editorial

The kingdom of Zions has n cities and $n - 1$ bidirectional roads. There is a unique path between any pair of cities.

Morpheus has found out that k machines are planning to destroy the whole kingdom. These machines are initially living in k different cities of the kingdom and they can launch an attack anytime. Neo has to destroy some of the roads in the kingdom to disrupt all connections among the machines. After destroying the necessary roads there should be no path between any two machines.

Since the attack may happen at any moment, Neo has to do this task as fast as possible. Each road in the kingdom takes a certain amount of time to destroy and only one road can be destroyed at a time.

You need to write a program that tells Neo the minimum amount of time he will require to destroy the necessary roads.

Input Format

The first line of the input contains two space-separated integers, n and k . Cities are numbered 0 to $n - 1$.

$n - 1$ lines follow, each containing three space-separated integers, $x y z$, which means that there is a bidirectional road connecting city x and city y , and to destroy this road it takes z units of time.

k lines follow, each containing an integer. The i^{th} integer is the id of the city in which the i^{th} machine is currently located.

Constraints

- $2 \leq n \leq 10^5$
- $2 \leq k \leq n$
- $1 \leq \text{time to destroy a road} \leq 10^6$

Output Format

Print in a single line the minimum time required to disrupt the connection among machines.


Sample Input

```
5 3
2 1 8
1 0 5
2 4 5
1 3 4
2
4
0
```

Sample Output

```
10
```

Explanation

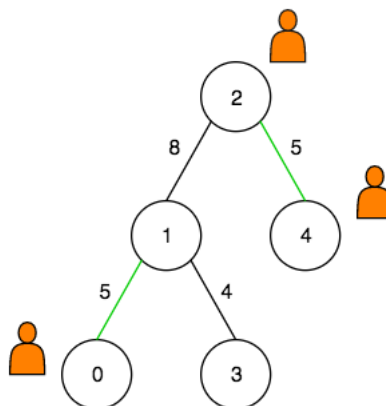

The machines are located at the cities 0, 2 and 4. Neo can destroy the road connecting city 2 and city 4 of weight 5, and the road connecting city 0 and city 1 of weight 5. As only one road can be destroyed at a time, the total minimum time taken is 10 units of time. After destroying these roads none of the machines can reach another machine via any path.

f t in

Submissions: [1640](#)

Max Score: 70

Difficulty: Hard

Rate This Challenge:

☆☆☆☆☆

[More](#)

Current Buffer (saved locally, editable)

Java 7

```

1 import java.io.*;
2 import java.util.*;
3 import java.text.*;
4 import java.math.*;
5 import java.util.regex.*;
6
7 public class Solution {
8
9     public static void main(String[] args) {
10         Scanner in = new Scanner(System.in);
11         int n = in.nextInt();
12         int k = in.nextInt();
13         for(int a0 = 0; a0 < n-1; a0++){
14             int x = in.nextInt();
15             int y = in.nextInt();
16             int z = in.nextInt();
17         }
18         for(int a0 = 0; a0 < k; a0++){
19             int m = in.nextInt();
20         }
21         in.close();
22     }
23 }
24

```

Line: 1 Col: 1

[Upload Code as File](#) ☐ Test against custom input

Run Code

Submit Code

Join us on IRC at [#hackerrank](#) on freenode for hugs or bugs.

