1 Continuous field $u(t_k, x)$

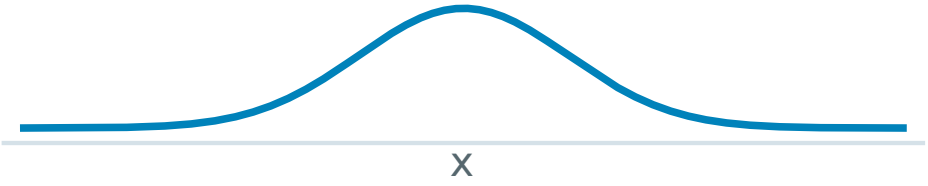

2 Discretise: grid values u_i^k

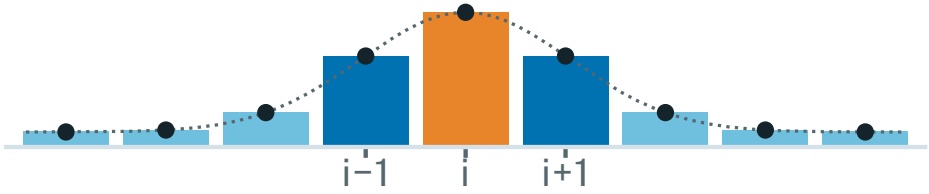

3 Standard stencil at cell i

$$f_i = \frac{1}{\Delta x^2} \sum_j \alpha_j \, u_j$$

the same weights α_j at every cell

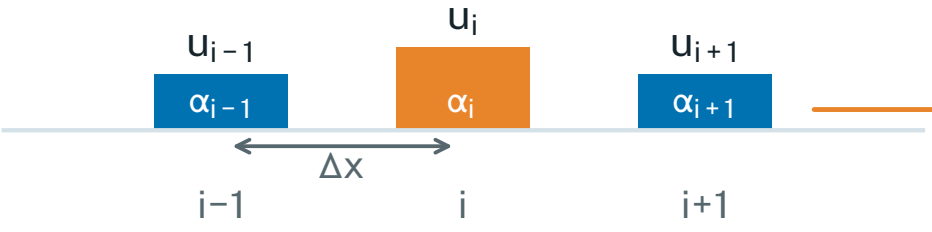

learn the weights

4 Learned stencil at cell i

$$f_i = \frac{1}{\Delta x^2} \sum_j \alpha_j(u;\, \theta) \, u_j$$

weights α_j computed by a network θ

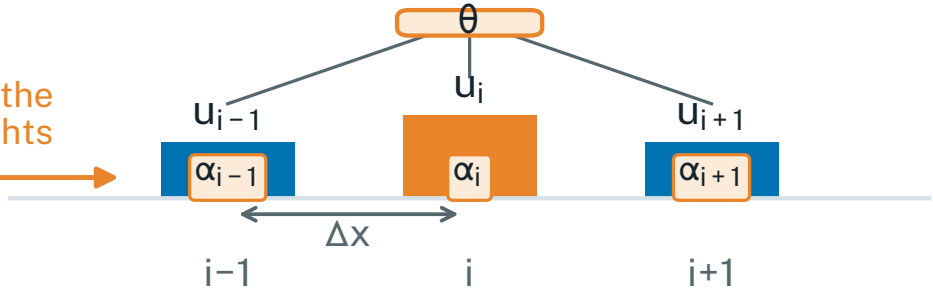

5 Slide the stencil: rates f_i

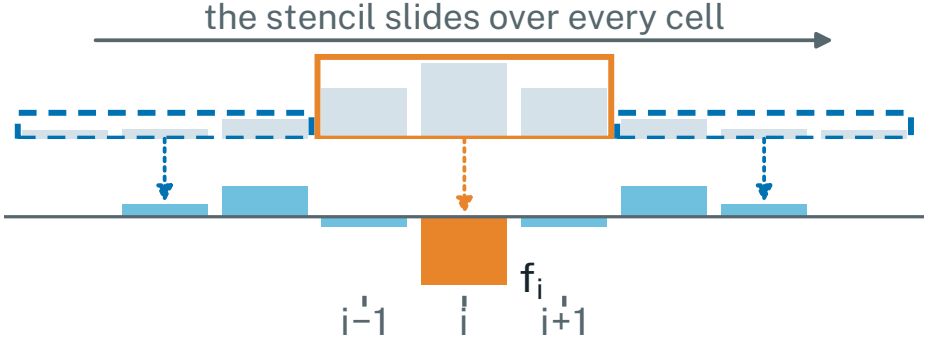

6 Time step: next state u_i^{k+1}

$$u_i^{k+1} = u_i^k + \Delta t \, f_i$$

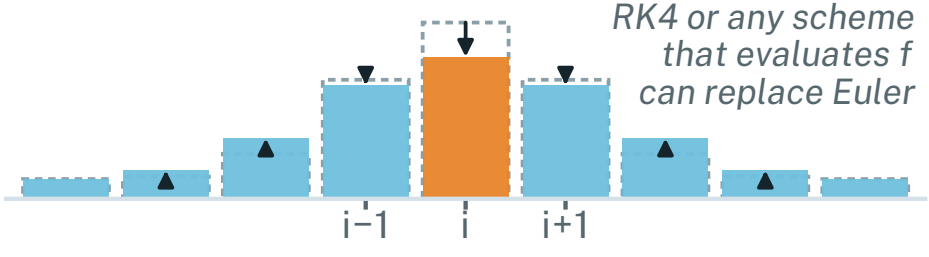

RK4 or any scheme that evaluates f can replace Euler