Server2 switch and recovery preparation

Operator preparation, not permission to deploy. F1 uses retained synthetic functional3 CLI evidence. The deadline image is historical S20c evidence, not this candidate or a complete release qualification.

1. Pin the full candidate and recovery pair

Before any switch, pin both exact release/config/source identities and the complete accepted API inventory, including widgets and forecastNarrative. Require native cold/partial/error parity, seven-day shadow, measured deadlines/capacity and an eligible prior full bundle. Keep legacy forwarding at zero. Read the maintained server2-cutover.md for all open host/data/approval gates.



Retained F1 local evidence only. A passing CLI rehearsal does not qualify two full releases or their host configuration.


Expected result: Any missing native family, narrative, current-state compatibility or eligible prior bundle keeps cutover blocked. No shadow, production action or notification is authorized by this manual.

Server2 switch and recovery preparation

Operator preparation, not permission to deploy. F1 uses retained synthetic functional3 CLI evidence. The deadline image is historical S20c evidence, not this candidate or a complete release qualification.

2. Verify the selected production listener

Use one upstream connection per request, no nginx upstream keepalive pool, while frontend reuse may stay enabled. Run the actual production nginx syntax and reused-client deadline checks. Pin body limits, logging, timeouts, cache and authorization/body forwarding explicitly. Preserve the native 501 deadline body/no-store contract.

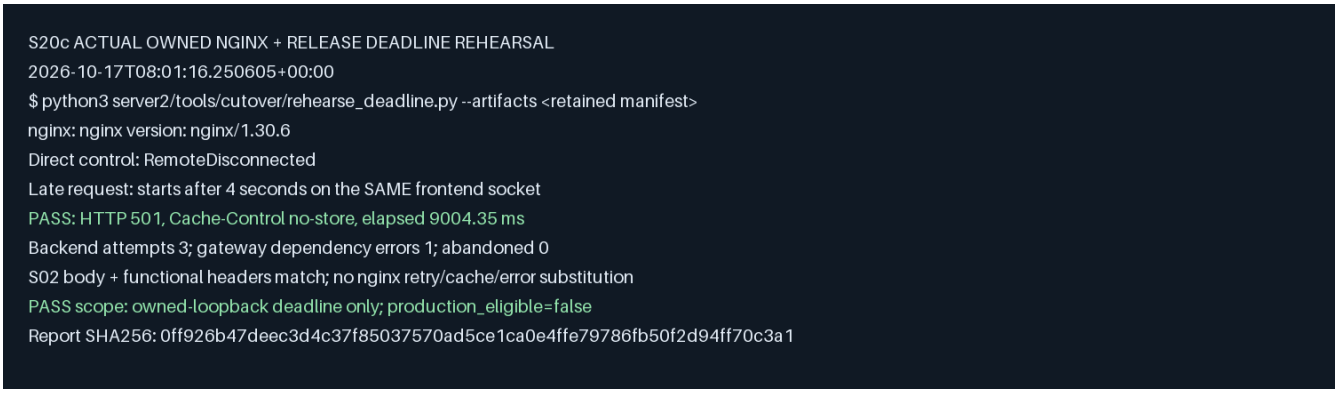

Historical S20c owned loopback receipt. Its original source/executable/timestamp remain separate; it is not a fresh test of this F1 candidate or EC2/CloudFront.

Expected result: Observed production configuration must preserve the deadline on reused connections. Local transport doubles do not prove every product mutation or host path.

Server2 switch and recovery preparation

Operator preparation, not permission to deploy. F1 uses retained synthetic functional3 CLI evidence. The deadline image is historical S20c evidence, not this candidate or a complete release qualification.

3. Stop senders and freeze edits before the final copy

After separately scoped AK authority, stop every legacy sender and supervisor, including gather-host loops, and freeze all registration editing ingress. Retain dated exit/quiescence evidence. Only then export complete pushes and alertpushes, including empty collections and prior baseline. Preserve Mongo documents. Preview a new immutable operation, inspect absence deletions/native protections, then apply one exact bounded payload. Keep bundle, operation and attempt together.



Source absence deletion and native-only preservation were checked on synthetic state. The tool parses evidence references; it cannot prove that real senders stopped or editors froze.

Expected result: Missing baseline, source scope, increasing generation, current fingerprint, custody or entry capacity blocks the final copy. Unknown outcomes use settle/readback/conditional void; never resend the original payload. A native/source conflict blocks the entire plan, not only one row; resolve complete source/baseline before a new plan.

Server2 switch and recovery preparation

Operator preparation, not permission to deploy. F1 uses retained synthetic functional3 CLI evidence. The deadline image is historical S20c evidence, not this candidate or a complete release qualification.

4. Complete state and rainfall handover before admission

After legacy owners quiesce, finish read-only warning/zone and kmastninfos copies with counts, rejects, cutoff and durable restore. Keep legacy rainfall statistics authoritative until shutdown. Current AWS/ASOS minute rns is the selected compatibility input; preserve cumulative values and establish a nonoverlapping owner/window boundary. This input decision alone is not verified runtime handover. Stop any prior native worker owner, start the exact candidate closed to traffic, then verify canonical restore and native-only wiring.



Two protected delivery objects are synthetic sentinels. No sender was constructed, no final Mongo copy or operational freeze occurred, and F2 activation remains gated.

Expected result: All state/credential/readiness/ownership evidence must pass before approved traffic admission. Weather and geocode switch together; no precollection or real test notifications.

Server2 switch and recovery preparation

Operator preparation, not permission to deploy. F1 uses retained synthetic functional3 CLI evidence. The deadline image is historical S20c evidence, not this candidate or a complete release qualification.

5. Recover only through an eligible native release

On an approved abort threshold, stop admission/scheduling and drain the current process. Confirm it exited before the previous compatible native release starts. Keep the same authoritative S3, current claims/results, final-copy marker and custody. Old writers that discard the marker are ineligible. Do not rewind snapshots, restore old registrations, replay failed/unknown sends, or fall back to legacy. Verify full restored API/cache/deadline/state behavior and singular ownership. If state and bundle both omit a predecessor, marker erasure is indistinguishable from first finalization; that old-writer state remains ineligible.



Local final-copy cases cover normal/committed-loss/unknown/partial-custody behavior. No actual previous binary pair, whole-host recovery or production switch is claimed. Functional3 also confirms fresh-process repeat settlement remains NOT_APPLIED without another PUT.

Expected result: No eligible genuine post-finalization full-feature pair means no cutover. Preserve uncertainty and original evidence; a local timer or successful limited probe is not recovery proof.