

Graft setup • TodayWeather

Quick manual | Verified 2026-10-03 | Graft 0.21.1 | Codex CLI 0.159.2

Install and build

Install Node 20.6+ and explicitly run `npm install --global @nanonets/graft@0.21.1`. From the checkout, run `./scripts/build-graft.sh`, then `graft check`. The wrapper reapplies focused scopes after cache deletion. Generated `graft/` stays ignored.

Paseo workspace preparation

New worktree setup builds the focused graph when Graft is on the daemon PATH. Setup runs once at creation. Use the `graft-build` workspace script for existing workspaces or refresh. Missing CLI or wrapper warns and skips; an installed build failure fails setup. No automatic install or hook trust.

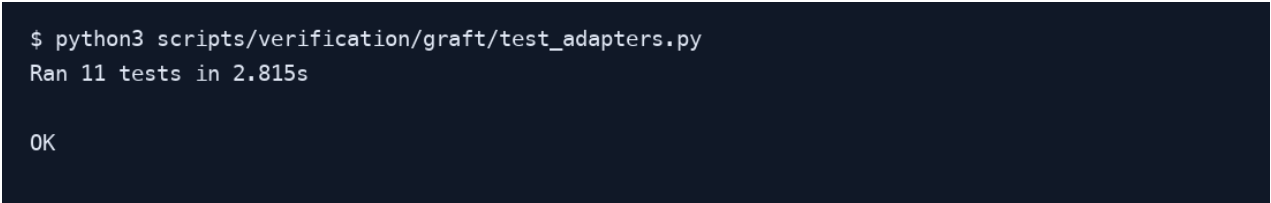
Find code

```
graft skeleton server/controllers/controllerManager.js
graft grep WeatherUtil --fixed --in client/www/js
```

Read the architecture index first. Use graph edges to navigate and verify relevant source before changing behavior. Native bundles and docs need direct inspection.

Verify offline adapters

```
python3 scripts/verification/graft/test_adapters.py
```

A terminal window with a dark background showing the execution of the test_adapters.py script. The output indicates that 11 tests were run in 2.815 seconds and the process ended with 'OK'.

```
$ python3 scripts/verification/graft/test_adapters.py
Ran 11 tests in 2.815s

OK
```

Rendered capture of actual CLI output; eleven tests passed.

Real Graft smoke

```
python3 scripts/verification/graft/smoke.py \
--output reports/verification/graft-smoke
```

Passed: fresh focused build, freshness, server/client queries, ignored cache, session-start/prompt hook outputs and six MCP tools. Final smoke isolated HOME and checked that hooks/MCP changed no tracked or user files, with both absent and outdated wiring stamps. No weather runtime or live provider calls were made.

Host setup and hook trust

Both hosts link to one canonical skill in `.agents/skills/graft/`. Claude project settings provide hooks/statusline and MCP. Codex project config enables hooks and Graft MCP. Restart the intended host.

Codex /hooks

Enter `/hooks`. Select each project Graft hook: `SessionStart`, `UserPromptSubmit`, `PostToolUse` and `Stop`. Inspect its command and press `t` to trust it. Avoid approving unrelated hooks. Account trust is never committed.

Linked worktrees

Codex reads hooks from the original checkout. Keep matching `.codex/config.toml` and `.codex/hooks.json` there. The command resolves the active worktree; a missing Graft shim safely skips execution. The isolated discovery check below found four untrusted hooks, as expected for a fresh account.

```
{
  "codex_version": "codex-cli 0.159.2",
  "hooks": [
    {
      "event": "postToolUse",
      "source": "original-repository/.codex/hooks.json",
      "trust": "untrusted"
    },
    {
      "event": "sessionStart",
      "source": "original-repository/.codex/hooks.json",
      "trust": "untrusted"
    },
    {
      "event": "userPromptSubmit",
      "source": "original-repository/.codex/hooks.json",
      "trust": "untrusted"
    },
    {
      "event": "stop",
      "source": "original-repository/.codex/hooks.json",
      "trust": "untrusted"
    }
  ],
  "user_configuration_isolated": true,
  "model_task_submitted": false
}
```

Rendered capture of actual isolated Codex discovery output. No model task was submitted.

Troubleshooting and limits

Missing CLI: install explicitly and check PATH. Build exits 127 with guidance; hooks no-op. Package lookup is bounded at 1.5 seconds. Stale cache: rerun the build wrapper. Hook discovery: check original checkout and restart. Hook/MCP guard requires the pinned 0.21.1 package; unsupported versions skip hooks or report MCP unavailable. Direct adapter execution does not prove a full Claude conversation used it. See editable `graft-manual.md` and `graft.md` for commands, provenance and selected evidence.