
Server2 rainfall hit-rate handover

F2 build17, source snapshot 3a31a023f21c4e7f62593e7b0b5ffd735518be0a. Prepare a future handover using actual owned local results. Use the protected hashed binary and a fresh output directory. Screenshots display retained receipts, not an additional execution or production approval.

1. Verify the cumulative normal flow

Run tools/rainfall_handover_smoke.py with --binary pointing to the qualified example and --output pointing to a new owned directory. Keep original ObjectIds and seed totals. Only canonical rain predictions are eligible; observed-dry is a miss. Check inactive zero-write behavior, one acknowledged increment, repeat/fresh-process idempotence, the later dry window and corrupt-authority partial statistics.

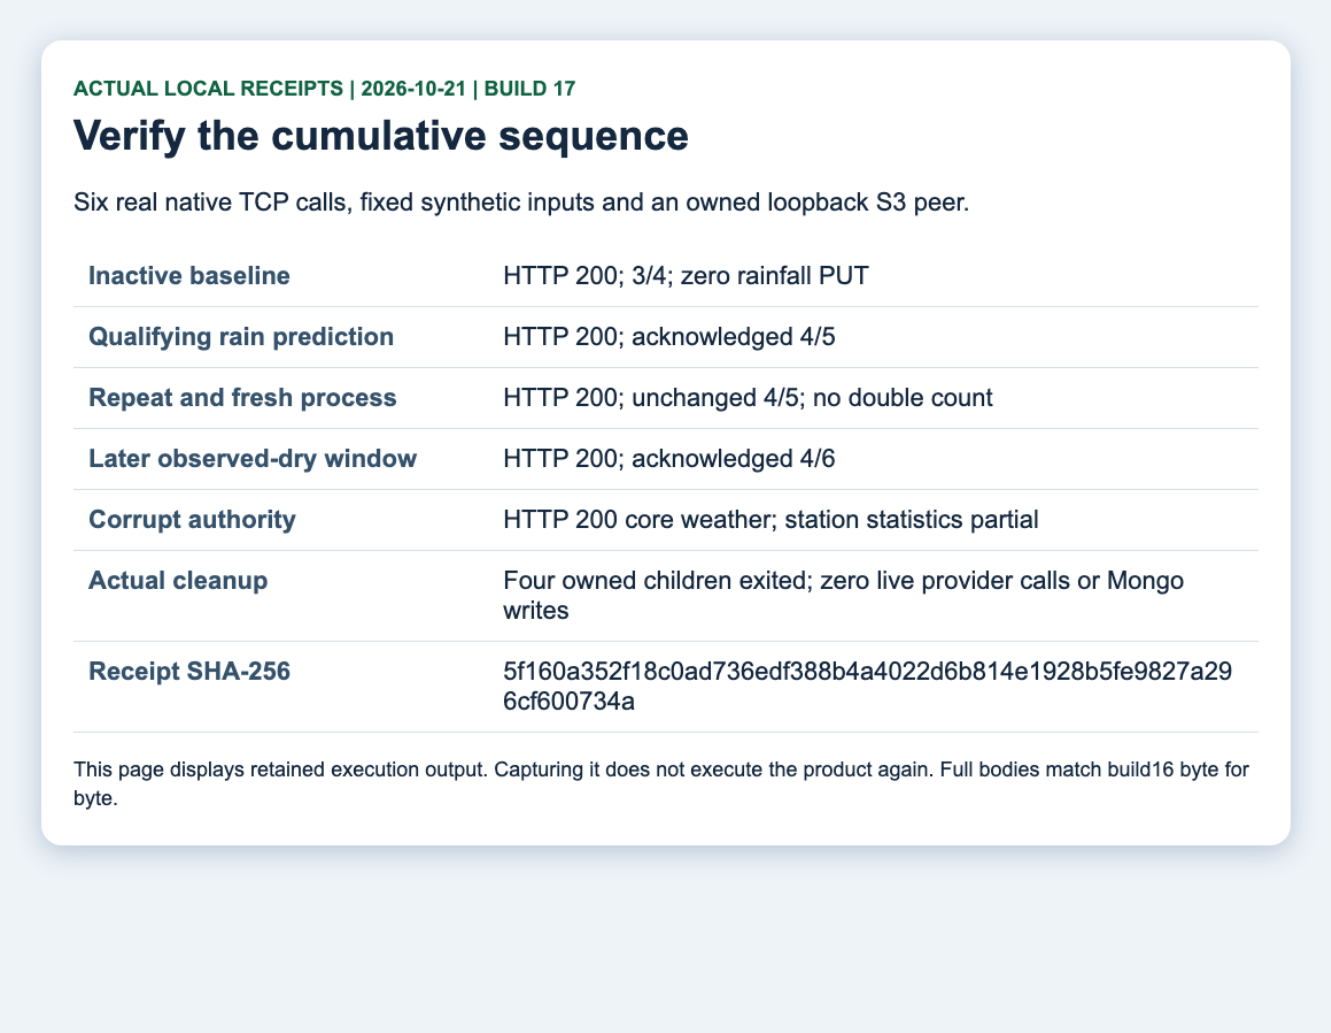

Actual build17: six HTTP200 responses; 3/4 inactive, 4/5 once and after repeat/reconstruction, then 4/6. Full bodies match build16.

Expected result: No repeated-window increment and no stale seed total after corrupt authority. Fixed clock, denied providers and owned S3; no production or signal test.

Server2 rainfall hit-rate handover

F2 build17, source snapshot 3a31a023f21c4e7f62593e7b0b5ffd735518be0a. Prepare a future handover using actual owned local results. Use the protected hashed binary and a fresh output directory. Screenshots display retained receipts, not an additional execution or production approval.

2. Verify the physical input and actual drain

Repeat with --pressure page and a fresh output directory. Preserve the original 46 raw records and 16MiB corpus. Allow only an acknowledged result before the existing Source cutoff; otherwise omit unconfirmed statistics and S16 inputs. Wait for actual owner drain, retire the old child and read the same S3 authority from a fresh process without reactivation.



Actual build17: active HTTP200 in 0.790s with acknowledged 3/5; drain and fresh-process readback retain exactly the same checkpoint.

Expected result: Observed active whole-child peak RSS 364,494,848 bytes. This is not a hard heap/RSS limit, production throughput or exact final-wire-flush proof.

Server2 rainfall hit-rate handover

F2 build17, source snapshot 3a31a023f21c4e7f62593e7b0b5ffd735518be0a. Prepare a future handover using actual owned local results. Use the protected hashed binary and a fresh output directory. Screenshots display retained receipts, not an additional execution or production approval.

3. Review activation and recovery separately

Keep legacy authoritative until its approved shutdown boundary. Preview the exact seed, namespace, epoch, high-water evidence and first eligible window. Both verify and activate require complete exact imported S06 seed proof even if a local file matches. Runtime never creates absent authority. Before an authorized switch, qualify both complete recovery bundles with checkpoint receipts, final-registration markers, claims and forecastNarrative.



ACTUAL LOCAL RECEIPTS | 2026-10-21 | BUILD 17

Bind the run and future handover

Repository preparation only. Production activation requires separate operational authority.

Committed source snapshot	3a31a023f21c4e7f62593e7b0b5ffd735518be0a
Native binary SHA-256	3f2db44591011092870e793ee4524541748fc1c282cd6d706e35b1f2856d944c
Current workspace tests	1,124 passed; 0 failed; 9 ignored; default scheduling
Operator / observer checks	1 activation prerequisite/readback test + 8 diagnostic tests passed
Future operator prerequisite	Exact complete imported S06 seed proof; a matching local file alone is insufficient
Future recovery gate	Both full recovery bundles must preserve checkpoint, registration markers, claims and narrative

The operator test used an owned peer, not production. The full workspace includes RuntimeServices checks; the normal/physical HTTP examples do not prove process signals or operational handover.

Current tests and binary/source identities bind the local record. The owned operator prerequisite/readback test passed; no production activation occurred.

Expected result: Separate 128 read tickets from eight mutation intents; join the same grid/end, independently validate input scope and preserve original deadlines. No checkpoint rewind or automatic resend.