
Server2 private runtime metrics

Operator guide for #2819 repository preparation. The screenshots present retained actual loopback reports and metric lines. No live operational actions or production eligibility.

1. Read the private metrics listener

Request GET /internal/metrics on the configured private listener. Keep this listener outside the public origin, nginx and CloudFront. Scraping reads attached atomic counters; it performs no provider, S3 or disk acquisition. The HTTP middleware can count the scrape itself.

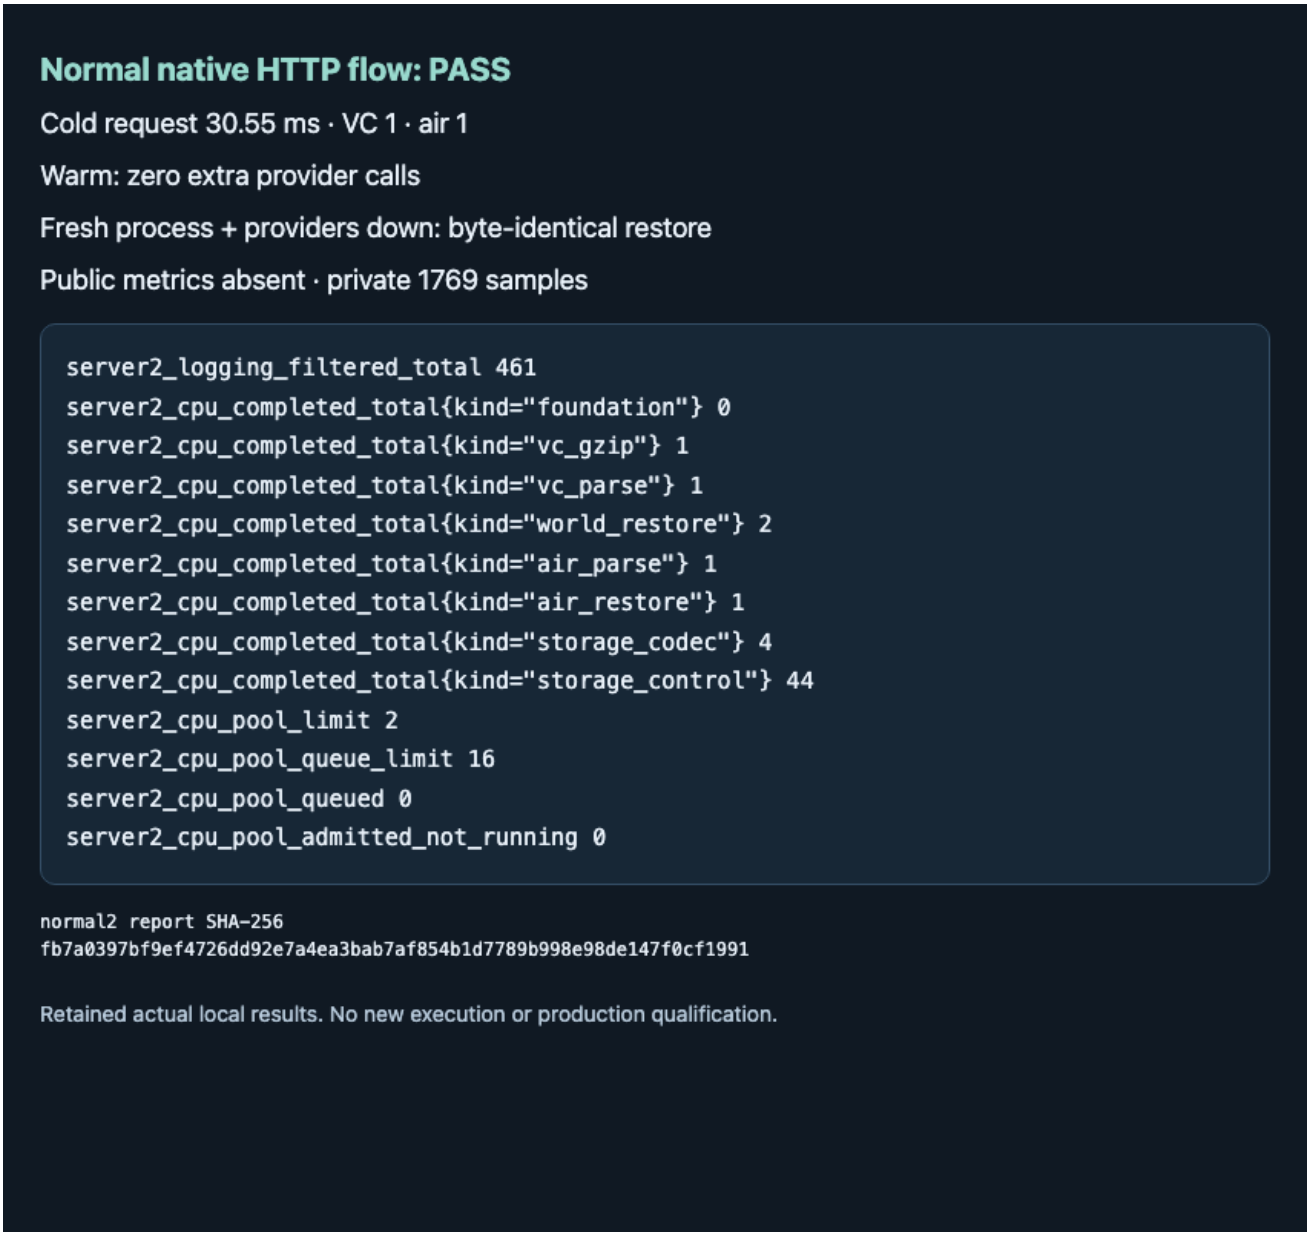

Actual normal2 cold, warm and fresh-process restore flow. Its selected release binary is 0ad01b2a...; all owned children retired.

Expected result: Private text is available with no-store, while the public route does not publish it. LOG_LEVEL=error filtered diagnostic lines while native CPU counters still increased. The one 30.55 ms local request is not a cold p95 or host qualification.

Server2 private runtime metrics

Operator guide for #2819 repository preparation. The screenshots present retained actual loopback reports and metric lines. No live operational actions or production eligibility.

2. Distinguish capacity from provider failure

Inspect CPU limit, queued, active, running and admitted-not-running together. The native waiting queue is bounded to 16 offers. An admitted blocking closure retains permits until it actually ends even if its caller leaves. Separate queued cancellation, started cancellation, panic and stopped counters.



Actual capacity3: one held CPU, unread owned log pipe, then actual holder release and recovery. The 2048 synthetic successes precede native traffic; three native other successes are separate. Current example syntax follows the final Clippy check.


Expected result: 501 occurs with zero VC/air attempts before release; 200 follows with one attempt each. Private metrics progress before stderr drain. Queue-full and rate-limited diagnostics do not remove native counters. The runner drains stderr, joins its drainer and retires all children.

Server2 private runtime metrics

Operator guide for #2819 repository preparation. The screenshots present retained actual loopback reports and metric lines. No live operational actions or production eligibility.

3. Respect metric and recovery limits

Use fixed operation/outcome labels and histogram buckets in seconds. Header latency stops at headers. S3 submitted payload and returned-body byte counters are logical transport observations, not billing. Process restarts reset counters. Saturation limits further interpretation. Preserve typed claims and journal outcomes as the durable authority.

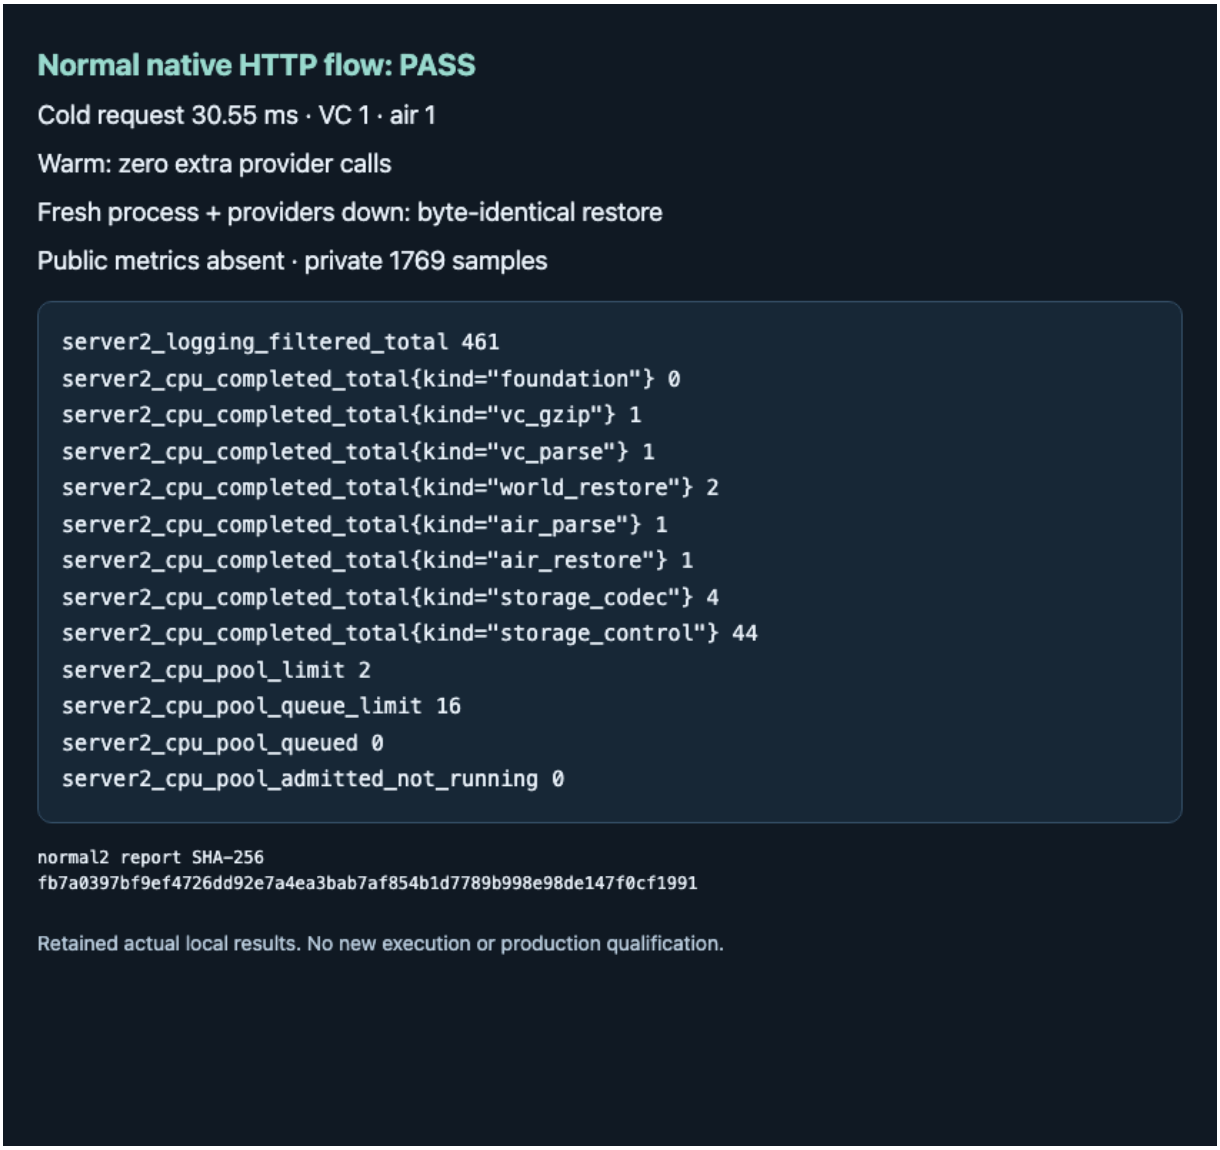

Selected actual private metrics: 1769 samples in this composition. The separate all-view/max-width tests enumerate 1790 samples and 164735 bytes with comments.

Expected result: Stay within the fixed 2048-series, 4096-u64 and 512 KiB budgets. Indexed is not CompleteSet; ambiguous writes do not authorize resend. Local KMA/warning/AirKorea, D2/F2 integration, total process RSS/CPU, host/IAM/quota, shadow and both full recovery releases remain separate gates.