
Server2 final registration copy

Operator procedure and retained local evidence. Source-bound current optimized CLI; functional3 only. Real cloud/Mongo/sender actions require separately scoped authority.

1. Validate and plan with preview

Use a pinned release/configuration and a private complete BUNDLE for both pushes and alertpushes. First obtain separate dated proof of sender exit and frozen edit ingress; the tool cannot establish either.
./push_registration_final_copy preview BUNDLE OPERATION
preview validates source id/store/database/fixed collection scope, target bucket/region, monotonic complete-export generation, raw/canonical/report hashes, counts, prior baseline and full native fingerprint. It creates a new owner-only immutable OPERATION and performs no S3 write. There are no separate validate or plan commands.

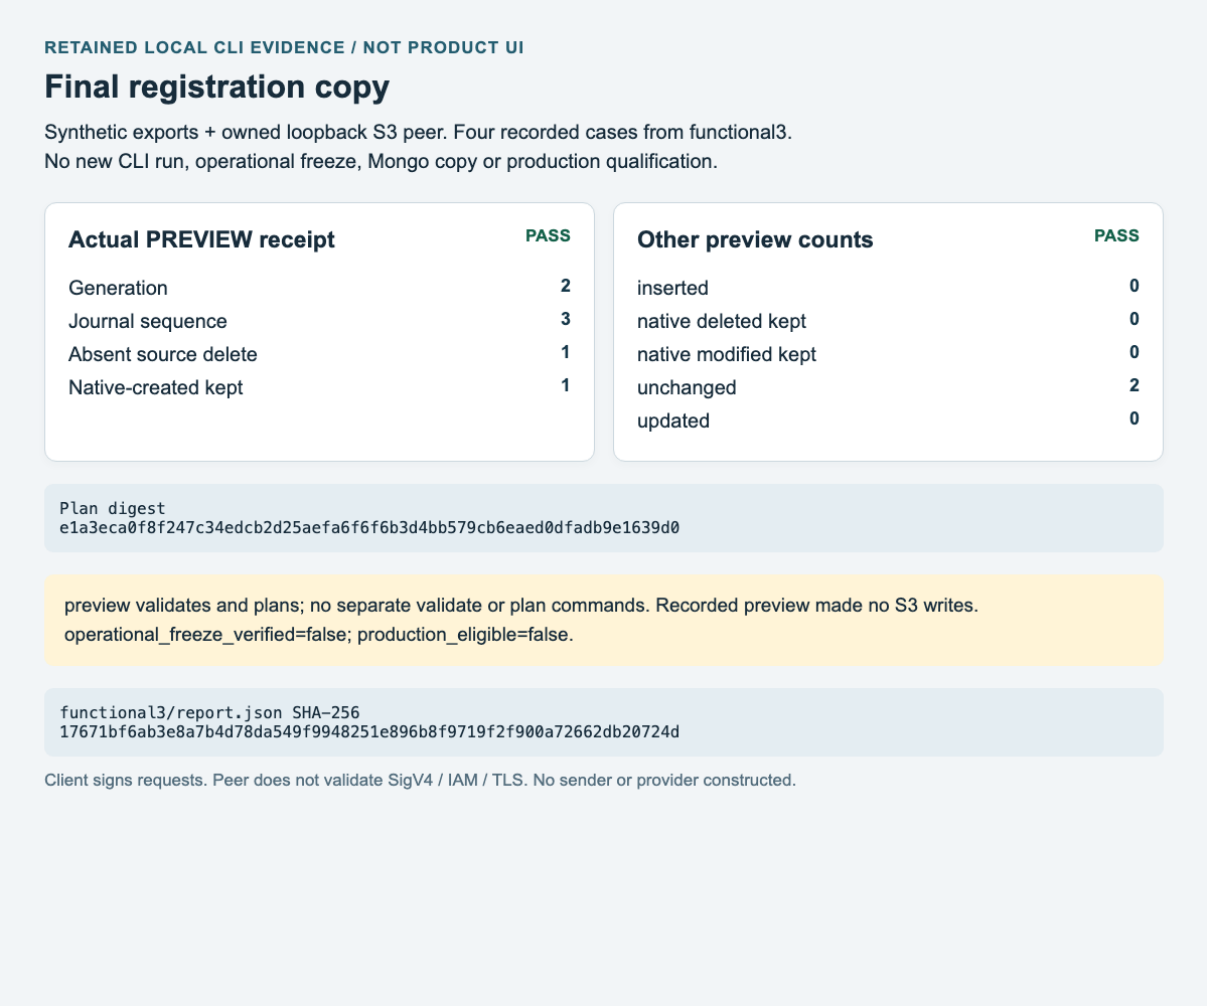

Retained actual PREVIEW receipt. The view is a labelled evidence presentation, not a product screen or new execution.


Expected result: Review the exact plan digest, counts and operation. Preserve original Mongo IDs and a safe monotonic export sequence, not file mtime. A native edit conflicting with source absence or a source change blocks the entire preview/copy. No partial plan or skipped-conflict success is returned. Preserve the error and reconcile complete source/baseline under the same stop/freeze gate; no aggregate conflict count is claimed.

Server2 final registration copy

Operator procedure and retained local evidence. Source-bound current optimized CLI; functional3 only. Real cloud/Mongo/sender actions require separately scoped authority.

2. Apply once and retain custody

Only with separately scoped write authority:
./push_registration_final_copy apply BUNDLE OPERATION
The CLI creates OPERATION.attempt.json with deterministic operation/body hashes, owner-only create_new, then fsyncs file and directory before the original conditional PUT. The checked encoded bytes are the bytes written. One journal entry must fit the default 1 MiB bound; no chunking, automatic replan or original-payload retry. Keep bundle, operation and attempt together. A snapshot failure after durable commit remains COMMITTED with snapshot_pending.

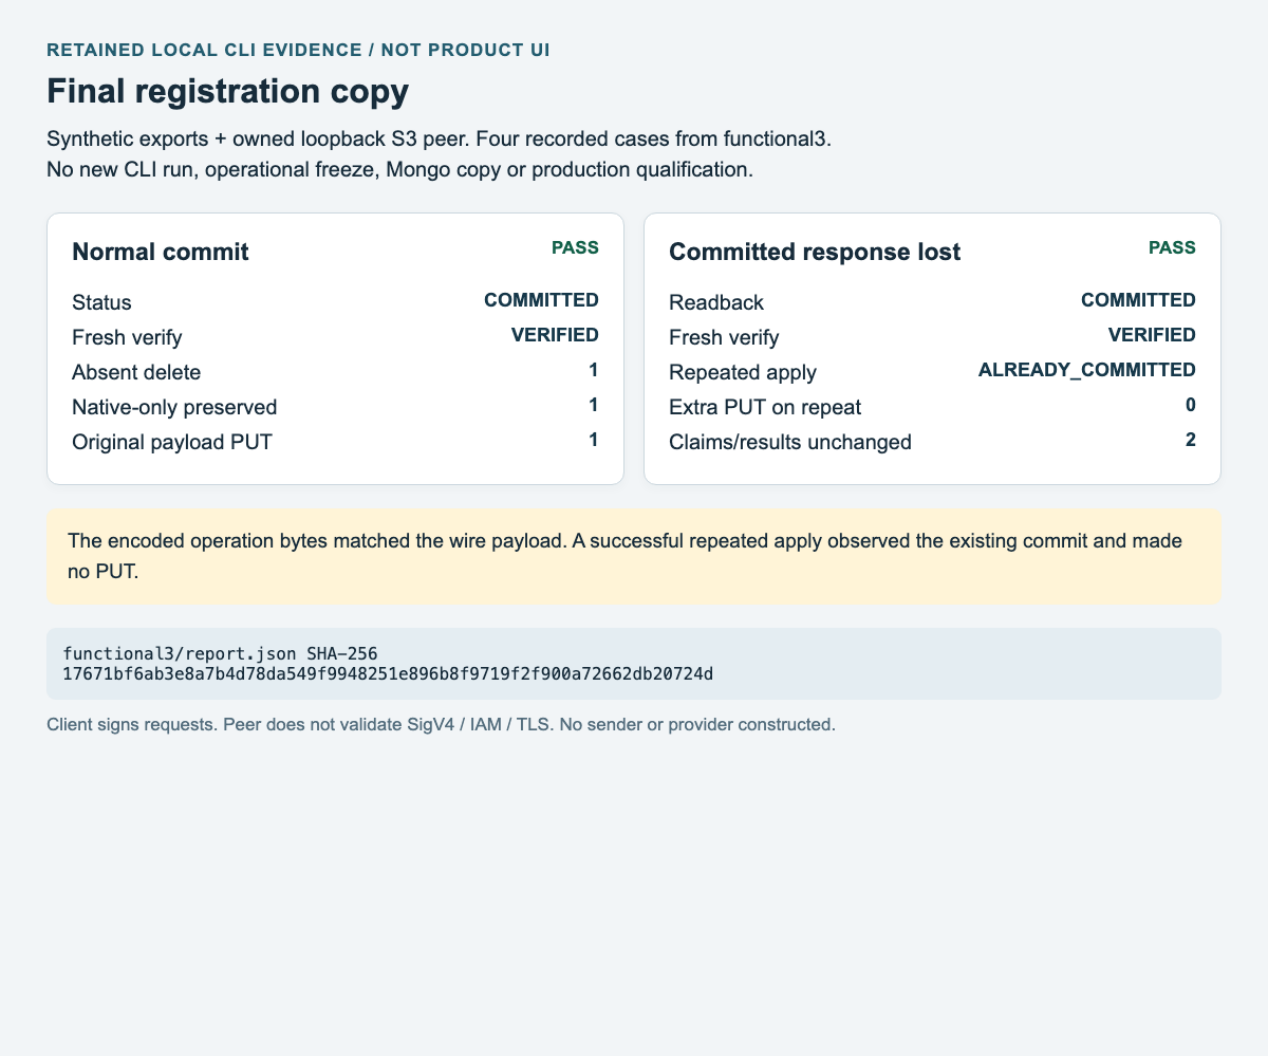

Normal and committed-response-loss cases each used one original PUT. Fresh verify succeeded and repeated apply performed no additional PUT.


Expected result: COMMITTED or ALREADY_COMMITTED permits read-only verification. A local custody receipt does not authenticate missing/copied custody globally, stop another writer or prove operational authority.

Server2 final registration copy

Operator procedure and retained local evidence. Source-bound current optimized CLI; functional3 only. Real cloud/Mongo/sender actions require separately scoped authority.

3. Settle unknown without resending

For SETTLEMENT_REQUIRED or uncertain custody, stop apply attempts and preserve all files:
./push_registration_final_copy settle BUNDLE OPERATION
Existing or partial/unreadable attempt custody never authorizes a second original PUT. settle uses the existing journal readback and conditional-void protocol only. It may report COMMITTED, STALE, NOT_APPLIED or SETTLEMENT_REQUIRED. NOT_APPLIED is a fenced absence outcome, not permission to reuse the same plan. Resolve a stale or failed settlement before any newly authorized plan. Missing/lost/copied custody cannot be authenticated by this local guard.

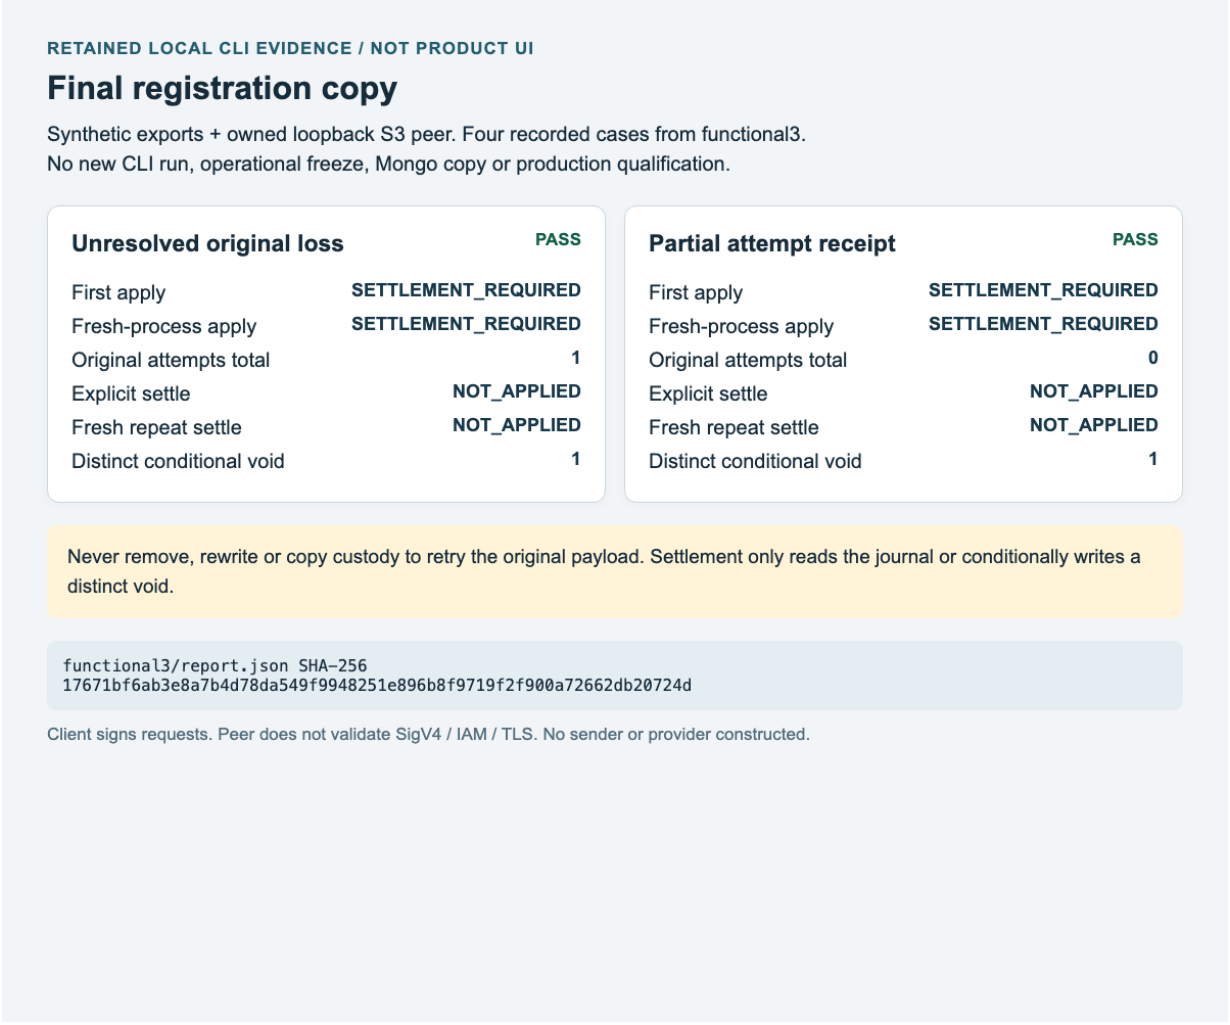

Two fresh-process apply attempts stayed blocked. Unknown sent the original once; partial custody sent it zero times. Explicit settlement wrote one distinct void in each case; fresh-process repeated settle returned NOT_APPLIED with no additional original or void PUT.


Expected result: Never delete/reset custody, rewind claims/journal state, replay a failed/unknown send, or resend the original final-copy payload. Same-Durable pending protection is not a global fence for arbitrary fresh callers.

Server2 final registration copy

Operator procedure and retained local evidence. Source-bound current optimized CLI; functional3 only. Real cloud/Mongo/sender actions require separately scoped authority.

4. Verify state and recovery boundaries

./push_registration_final_copy verify BUNDLE OPERATION
A fresh restore requires the exact journal bytes and source marker. VERIFIED additionally matches the predicted complete state at that sequence; later native edits may yield historical COMMITTED. source_absent_delete counts unchanged source-owned rows absent from final export; the old import deleted counter instead counts preserved native tombstones. The marker is canonical State plus optional journal/header and snapshot/head metadata, carried through catch-up and native compaction. Marker-dropping writers are ineligible. With no marker and no claimed predecessor, code cannot distinguish erased metadata from first finalization; do not reuse such state. Two genuine post-F1 full releases are required.

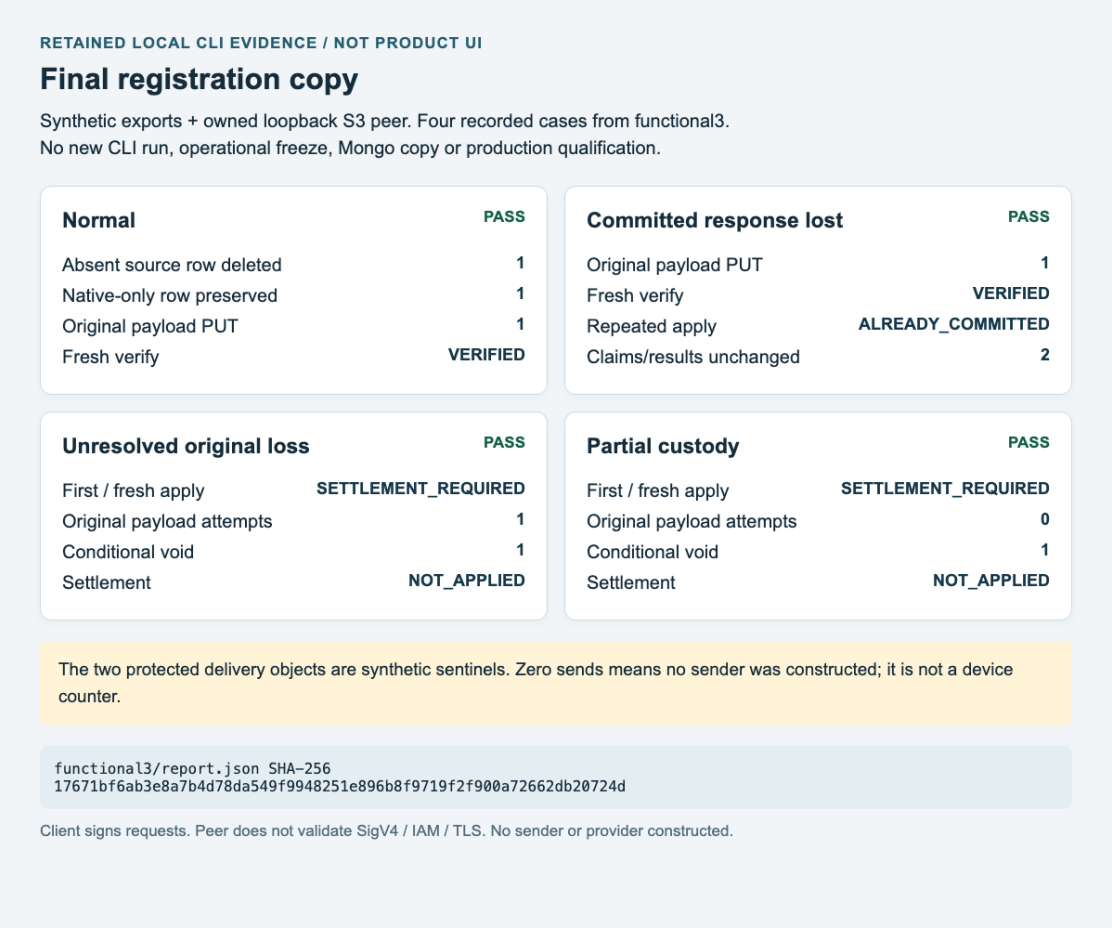

Four retained owned CLI cases passed. This is local synthetic state evidence; no actual freeze, final Mongo copy, host readiness or production approval is claimed.

Expected result: Use the release CLI with private bundle/operation/custody files and reviewed S3 settings. It does not read legacy assets; the owned launcher is only for isolated verification. Keep claim ownership and the same authoritative S3 state; do not rewind. The Markdown manual records assets, bounds, exit codes and operational gates.