

INTEGRATING WAZUH

WITH

SURICATA



FOLLOW ME ON LINKEDIN

www.linkedin.com/in/aamirsohail-as/

PREPARED BY: AAMIR SOHAIL

Integrating Wazuh and Suricata for Advanced Security Monitoring

Integrating Wazuh and Suricata enhances security monitoring by combining their respective strengths. Wazuh, a SIEM tool, offers robust log analysis and compliance monitoring, while Suricata provides advanced network threat detection with deep packet inspection. This integration allows for seamless correlation of network and host-based security data, improving threat visibility and response capabilities. By leveraging Suricata's network alerts within Wazuh's broader security framework, organizations gain a unified and comprehensive view of their security landscape.

Installing Suricata:

1. Command: `sudo apt-get install suricata -y`

```
root@ubuntuvictim:~# sudo apt-get install suricata -y
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  linux-headers-4.15.0-20 linux-headers-4.15.0-20-generic linux-image-4.15.0-20-generic
  linux-modules-4.15.0-20-generic linux-modules-extra-4.15.0-20-generic
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  fonts-lato libhiredis0.13 libhttp-0.5.23-1 liblua5.1-2 liblua5.1-common libnet1
  libnetfilter-log1 libnetfilter-queue1 libprelude23 libruby2.5 oinkmaster prelude-utils rake
  ruby ruby-did-you-mean ruby-minitest ruby-net-telnet ruby-power-assert ruby-test-unit ruby2.5
  rubygems-integration snort-rules-default suricata-suricata-oinkmaster
Suggested packages:
  ri ruby-dev bundler snort | snort-pgsql | snort-mysql libtcmalloc-minimal4
The following NEW packages will be installed:
  fonts-lato libhiredis0.13 libhttp-0.5.23-1 liblua5.1-2 liblua5.1-common libnet1
  libnetfilter-log1 libnetfilter-queue1 libprelude23 libruby2.5 oinkmaster prelude-utils rake
  ruby ruby-did-you-mean ruby-minitest ruby-net-telnet ruby-power-assert ruby-test-unit ruby2.5
  rubygems-integration snort-rules-default suricata-suricata-oinkmaster
0 upgraded, 24 newly installed, 0 to remove and 0 not upgraded.
Need to get 7,852 kB of archives.
After this operation, 35.5 MB of additional disk space will be used.
```

2. Now the suricata is installed and now I will download there rules

```
ubuntu-victim@ubuntuvictim:~$ cd /
ubuntu-victim@ubuntuvictim:/$ cdn tmp
Command 'cdn' not found, but there are 18 similar ones.
ubuntu-victim@ubuntuvictim:/$ cd tmp
ubuntu-victim@ubuntuvictim:/tmp$ sudo curl -LO https://rules.emergingthreats.net/open/suricata-6.
0.8/emerging.rules.tar.gz
[sudo] password for ubuntu-victim:
  % Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left   Speed
 3 4315k    3 147k    0     0  24594      0  0:02:59  0:00:06  0:02:53 36973
```

3. Now open where we download the suricata rules
Here i run simple ls to show to file which we downloaded.

```

ubuntu-victim@ubuntuvictim:/tmp$ ls
config-err-3lxKtC
emerging.rules.tar.gz
hsperfdata_root
ssh-nAxpKuch8tZT
systemd-private-749357eb911f41a89515c7b03ded3bff-apache2.service-fKQIs1
systemd-private-749357eb911f41a89515c7b03ded3bff-bolt.service-DomS8b
systemd-private-749357eb911f41a89515c7b03ded3bff-colord.service-jdMxB6
systemd-private-749357eb911f41a89515c7b03ded3bff-dovecot.service-NprFgo
systemd-private-749357eb911f41a89515c7b03ded3bff-fwupd.service-kglN0o
systemd-private-749357eb911f41a89515c7b03ded3bff-ModemManager.service-Et9ou1
systemd-private-749357eb911f41a89515c7b03ded3bff-rtkit-daemon.service-LNpnfu
systemd-private-749357eb911f41a89515c7b03ded3bff-systemd-resolved.service-vrko85
vboxquest-Module.symvers

```

4. Now i will extract this

```

ubuntu-victim@ubuntuvictim:/tmp$ sudo tar -xvzf emerging.rules.tar.gz
rules/
rules/3coresec.rules
rules/BSD-License.txt
rules/LICENSE
rules/botcc.portgrouped.rules
rules/botcc.rules
rules/ciarmy.rules
rules/classification.config
rules/compromised-ips.txt
rules/compromised.rules
rules/drop.rules
rules/dshield.rules
rules/emerging-activex.rules
rules/emerging-adware.rules

```

5. Now here i move the rules into suricata rules directory

```

ubuntu-victim@ubuntuvictim:/tmp$ sudo mv rules/* /etc/suricata/rules/
ubuntu-victim@ubuntuvictim:/tmp$ cd ..

ubuntu-victim@ubuntuvictim:/$ cd etc/suricata/
ubuntu-victim@ubuntuvictim:/etc/suricata$ ls
classification.config  rules  suricata.yaml
reference.config       suricata-oinkmaster.conf  threshold.config
ubuntu-victim@ubuntuvictim:/etc/suricata$ sudo chmod 777 /rules/*.rules
chmod: cannot access '/rules/*.rules': No such file or directory

```

6. Now i give them the permissions and also i check the rules

```
ubuntu-victim@ubuntu-victim: /etc/suricata$ sudo chmod 777 rules/*.rules
ubuntu-victim@ubuntu-victim: /etc/suricata$ cd rules
ubuntu-victim@ubuntu-victim: /etc/suricata/rules$ ls
3coresec.rules          emerging-exploit_kit.rules      emerging-smtp.rules
app-layer-events.rules  emerging-exploit.rules         emerging-snmp.rules
botcc.portgrouped.rules emerging-ftp.rules              emerging-sql.rules
botcc.rules             emerging-games.rules           emerging-telnet.rules
BSD-License.txt         emerging-hunting.rules         emerging-tftp.rules
ciarmy.rules            emerging-icmp_info.rules       emerging-user_agents.rules
classification.config   emerging-icmp.rules            emerging-voip.rules
compromised-ips.txt     emerging-imap.rules            emerging-web_client.rules
compromised.rules       emerging-inappropriate.rules  emerging-web_server.rules
decoder-events.rules    emerging-info.rules            emerging-web_specific_apps.rules
dnp3-events.rules       emerging-ja3.rules             emerging-worm.rules
dns-events.rules        emerging-malware.rules         files.rules
drop.rules              emerging-misc.rules            gpl-2.0.txt
dshield.rules           emerging-mobile_malware.rules  http-events.rules
emerging-activex.rules  emerging-netbios.rules        LICENSE
emerging-adware_pup.rules emerging-p2p.rules              modbus-events.rules
emerging-attack_response.rules emerging-phishing.rules        sid-msg.map
emerging-chat.rules     emerging-policy.rules          smtp-events.rules
emerging-coinminer.rules emerging-pop3.rules             stream-events.rules
emerging-current_events.rules emerging-rpc.rules              suricata-5.0-enhanced-open.txt
emerging-deleted.rules  emerging-scada.rules           threatview_CS_c2.rules
emerging-dns.rules       emerging-scan.rules            tls-events.rules
emerging-dos.rules       emerging-shellcode.rules       tor.rules
```

7. Now come back from rules

```
ubuntu-victim@ubuntu-victim: /etc/suricata/rules$ cd ..
ubuntu-victim@ubuntu-victim: /etc/suricata$
```

8. Now to configure suricata first I check my ubuntu IP and the route

```
ubuntu-victim@ubuntu-victim: ~$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 08:00:27:15:a0:8b brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.13/24 brd 192.168.18.255 scope global dynamic noprefixroute enp0s3
        valid_lft 3278sec preferred_lft 3278sec
    inet6 2407:d000:b:8f5e:91d7:bc9d:b247:4518/64 scope global temporary dynamic
        valid_lft 86000sec preferred_lft 82577sec
    inet6 2407:d000:b:8f5e:507b:601f:6c36:87c7/64 scope global dynamic mngtmpaddr noprefixroute
        valid_lft 86000sec preferred_lft 86000sec
    inet6 fe80::bea2:9d2c:65d1:741b/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
ubuntu-victim@ubuntu-victim: ~$ route -n
Kernel IP routing table
Destination    Gateway         Genmask         Flags Metric Ref    Use Iface
0.0.0.0        192.168.18.1   0.0.0.0         UG    100    0      0 enp0s3
192.168.18.0   0.0.0.0        255.255.255.0   U     100    0      0 enp0s3
ubuntu-victim@ubuntu-victim: ~$
```

Here we will edit the suricata.yaml

```
ubuntu-victim@ubuntu-victim:/etc/suricata$ ls
classification.config  rules                               suricata.yaml
reference.config       suricata-oinkmaster.conf  threshold.config
ubuntu-victim@ubuntu-victim:/etc/suricata$ sudo nano suricata.yaml
```

```
GNU nano 2.9.3 suricata.yaml

%YAML 1.1
---

# Suricata configuration file. In addition to the comments describing all
# options in this file, full documentation can be found at:
# https://redmine.openinfosecfoundation.org/projects/suricata/wiki/Suricatayaml

##
## Step 1: inform Suricata about your network
##

vars:
  # more specific is better for alert accuracy and performance
  address-groups:
    HOME_NET: "[192.168.0.0/16,10.0.0.0/8,172.16.0.0/12]"
    #HOME_NET: "[192.168.0.0/16]"
    #HOME_NET: "[10.0.0.0/8]"
    #HOME_NET: "[172.16.0.0/12]"
    #HOME_NET: "any"

    EXTERNAL_NET: "!$HOME_NET"
    #EXTERNAL_NET: "any"

    HTTP_SERVERS: "$HOME_NET"
    SMTP_SERVERS: "$HOME_NET"
    SQL_SERVERS: "$HOME_NET"
    DNS_SERVERS: "$HOME_NET"
    TELNET_SERVERS: "$HOME_NET"
    AIM_SERVERS: "$EXTERNAL_NET"
```

Now i will change the HOME_NET and EXTERNAL_NET

```
GNU nano 2.9.3 suricata.yaml

%YAML 1.1
---

# Suricata configuration file. In addition to the comments describing all
# options in this file, full documentation can be found at:
# https://redmine.openinfosecfoundation.org/projects/suricata/wiki/Suricatayaml

##
## Step 1: inform Suricata about your network
##

vars:
  # more specific is better for alert accuracy and performance
  address-groups:
    #HOME_NET: "[192.168.0.0/16,10.0.0.0/8,172.16.0.0/12]"
    HOME_NET: "[192.168.18.0/24]"
    #HOME_NET: "[10.0.0.0/8]"
    #HOME_NET: "[172.16.0.0/12]"
    #HOME_NET: "any"

    #EXTERNAL_NET: "!$HOME_NET"
    EXTERNAL_NET: "any"

    HTTP_SERVERS: "$HOME_NET"
    SMTP_SERVERS: "$HOME_NET"
    SQL_SERVERS: "$HOME_NET"
    DNS_SERVERS: "$HOME_NET"
    TELNET_SERVERS: "$HOME_NET"
    AIM_SERVERS: "$EXTERNAL_NET"
    DNP3_SERVER: "$HOME_NET"
    DNP3_CLIENT: "$HOME_NET"
```

Now also edit rules-file in the same page suricata.yaml

```
GNU nano 2.9.3 suricata.yaml

port-groups:
  HTTP_PORTS: "80"
  SHELLCODE_PORTS: "!80"
  ORACLE_PORTS: 1521
  SSH_PORTS: 22
  DNP3_PORTS: 20000
  MODBUS_PORTS: 502

##
## Step 2: select the rules to enable or disable
##

default-rule-path: /etc/suricata/rules
rule-files:
- botcc.rules
- ciarmy.rules
- compromised.rules
- drop.rules
- dsshield.rules
# - emerging-activex.rules
- emerging-attack_response.rules
- emerging-chat.rules
- emerging-current_events.rules
- emerging-dns.rules
- emerging-dos.rules
- emerging-exploit.rules
- emerging-ftp.rules
# - emerging-games.rules
```

So the above is the rules-file now i will also change this, here i comment some and also add the rules

```
GNU nano 2.9.3 suricata.yaml

port-groups:
  HTTP_PORTS: "80"
  SHELLCODE_PORTS: "!80"
  ORACLE_PORTS: 1521
  SSH_PORTS: 22
  DNP3_PORTS: 20000
  MODBUS_PORTS: 502

##
## Step 2: select the rules to enable or disable
##

default-rule-path: /etc/suricata/rules
rule-files:
- "*.rules"
# - botcc.rules
# - ciarmy.rules
# - compromised.rules
# - drop.rules
# - dsshield.rules
# - emerging-activex.rules
- emerging-attack_response.rules
- emerging-chat.rules
- emerging-current_events.rules
- emerging-dns.rules
- emerging-dos.rules
- emerging-exploit.rules
- emerging-ftp.rules
# - emerging-games.rules
```

Now Interface Configuration

```
GNU nano 2.9.3 suricata.yaml

    facility: local5
    format: "[%i] <%d> -- "
    # type: json

##
## Step 4: configure common capture settings
##
## See "Advanced Capture Options" below for more options, including NETMAP
## and PF_RING.
##

# Linux high speed capture support
af-packet:
- interface: eth0
  # Number of receive threads. "auto" uses the number of cores
  #threads: auto
  # Default clusterid. AF_PACKET will load balance packets based on flow.
  cluster-id: 99
  # Default AF_PACKET cluster type. AF_PACKET can load balance per flow or per hash.
  # This is only supported for Linux kernel > 3.1
  # possible value are:
  # * cluster_round_robin: round robin load balancing
  # * cluster_flow: all packets of a given flow are send to the same socket
  # * cluster_cpu: all packets treated in kernel by a CPU are send to the same socket
  # * cluster_qm: all packets linked by network card to a RSS queue are sent to the same
  # socket. Requires at least Linux 3.14.
  # * cluster_random: packets are sent randomly to sockets but with an equipartition.
  # Requires at least Linux 3.14.
```

My network interface is enp0s3

Everyone can find it through this command - ifconfig

```
ubuntu-victim@ubuntu-victim:~$ ifconfig
enp0s3: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.18.13 netmask 255.255.255.0 broadcast 192.168.18.255
    inet6 fe80::bea2:9d2c:65d1:741b prefixlen 64 scopeid 0x20<link>
    inet6 2407:d000:b:8f5e:91d7:bc9d:b247:4518 prefixlen 64 scopeid 0x0<global>
    inet6 2407:d000:b:8f5e:507b:601f:6c36:87c7 prefixlen 64 scopeid 0x0<global>
    ether 08:00:27:15:a0:8b txqueuelen 1000 (Ethernet)
    RX packets 224988 bytes 220894691 (220.8 MB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 9367 bytes 3210182 (3.2 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 742 bytes 202291 (202.2 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 742 bytes 202291 (202.2 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

Changing interface

```
GNU nano 2.9.3 suricata.yaml

    facility: local5
    format: "[%i] <%d> -- "
    # type: json

##
## Step 4: configure common capture settings
##
## See "Advanced Capture Options" below for more options, including NETMAP
## and PF_RING.
##


# Linux high speed capture support
af-packet:
- interface: enp0s3
  # Number of receive threads. "auto" uses the number of cores
  #threads: auto
  # Default clusterId. AF_PACKET will load balance packets based on flow.
  cluster-id: 99
  # Default AF_PACKET cluster type. AF_PACKET can load balance per flow or per hash.
  # This is only supported for Linux kernel > 3.1
  # possible value are:
  # * cluster_round_robin: round robin load balancing
  # * cluster_flow: all packets of a given flow are send to the same socket
  # * cluster_cpu: all packets treated in kernel by a CPU are send to the same socket
  # * cluster_qm: all packets linked by network card to a RSS queue are sent to the same
  # socket. Requires at least Linux 3.14.
  # * cluster_random: packets are sent randomly to sockets but with an equipartition.
  # Requires at least Linux 3.14.
```

Now i will save it and enable and restart suricata and also here i check there status so it is active.


```
ubuntu-victim@ubuntuvictim:/etc/suricata$ sudo systemctl enable suricata
Synchronizing state of suricata.service with SysV service script with /lib/systemd/systemd-sysv-i
nstall.
Executing: /lib/systemd/systemd-sysv-install enable suricata
ubuntu-victim@ubuntuvictim:/etc/suricata$ sudo systemctl start suricata
ubuntu-victim@ubuntuvictim:/etc/suricata$ sudo systemctl status suricata
● suricata.service - Suricata IDS/IDP daemon
   Loaded: loaded (/lib/systemd/system/suricata.service; enabled; vendor preset: enabled)
   Active: active (running) since Mon 2024-08-12 22:12:28 PKT; 25min ago
     Docs: man:suricata(8)
           man:suricatasc(8)
           https://redmine.openinfosecfoundation.org/projects/suricata/wiki
  Main PID: 27619 (Suricata-Main)
    Tasks: 8 (limit: 4654)
   CGroup: /system.slice/suricata.service
           └─27619 /usr/bin/suricata -D --af-packet -c /etc/suricata/suricata.yaml --pidfile /var

12 22:12:28 ubuntuvictim systemd[1]: Starting Suricata IDS/IDP daemon...
12 22:12:28 ubuntuvictim suricata[27616]: 12/8/2024 -- 22:12:28 - <Notice> - This is Suricat
12 22:12:28 ubuntuvictim suricata[27616]: 12/8/2024 -- 22:12:28 - <Warning> - [ERRCODE: SC_E
12 22:12:28 ubuntuvictim systemd[1]: Started Suricata IDS/IDP daemon.
lines 1-15/15 (END)
```

9. Now i will allow all the Promiscuous Mode

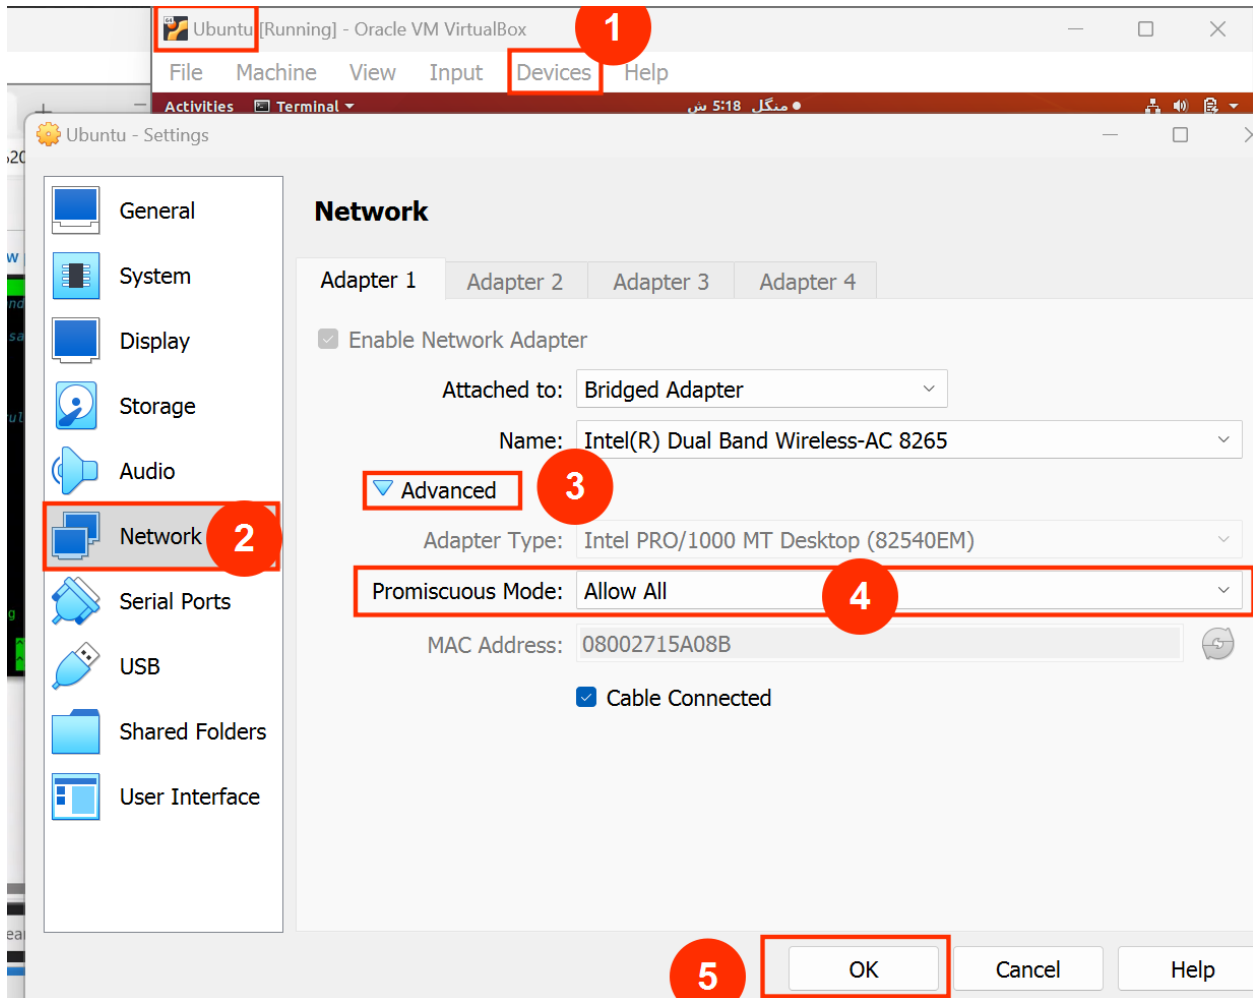

10. Now i already add the agent

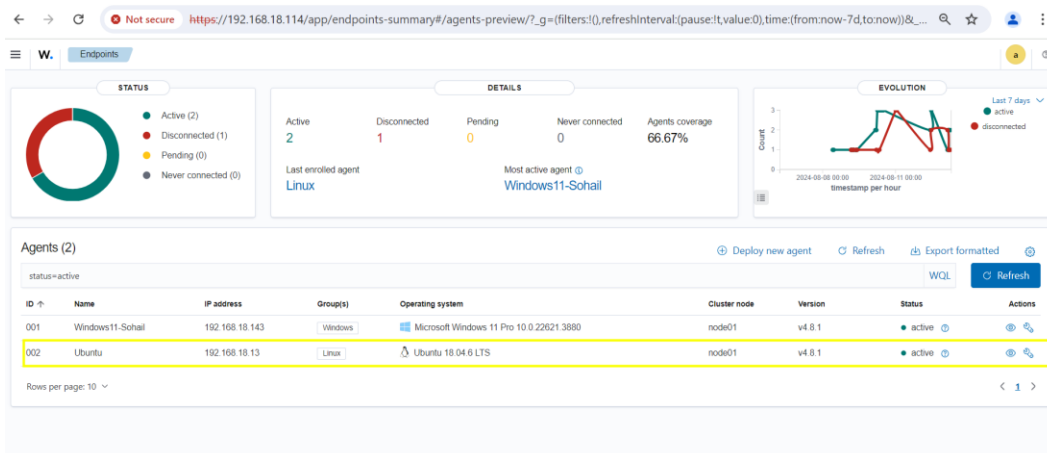

11. So now i will configure suricata logs into wazuh-agent .

Open the ossec.conf file

```
ubuntu-victim@ubuntuvictim:/$ sudo -i
root@ubuntuvictim:~# cd /var/ossec/etc
root@ubuntuvictim:/var/ossec/etc# ls
client.keys          local_internal_options.conf  ossec.conf  shared
internal_options.conf  localtime                  ossec.copy  wpk_root.pem
root@ubuntuvictim:/var/ossec/etc# nano ossec.conf
```

```
root@ubuntuvictim: /var/ossec/etc
File Edit View Search Terminal Help
GNU nano 2.9.3 ossec.conf

<auto_restart>yes</auto_restart>
<crypto_method>aes</crypto_method>
<enrollment>
  <enabled>yes</enabled>
  <agent_name>Ubuntu</agent_name>
  <groups>Linux</groups>
  <authorization_pass_path>etc/authd.pass</authorization_pass_path>
</enrollment>
</client>

<client_buffer>
  <!-- Agent buffer options -->
  <disabled>no</disabled>
  <queue_size>5000</queue_size>
  <events_per_second>500</events_per_second>
</client_buffer>

<!-- Suricata Integration -->
  <localfile>
    <log_format>json</log_format>
    <location>/var/log/suricata/eve.json</location>
  </localfile>

  <!-- Policy monitoring -->
  <rootcheck>
    <disabled>no</disabled>
    <check_files>yes</check_files>
    <check_trojans>yes</check_trojans>
    <check_dev>yes</check_dev>
```

added

12. Now let me show the location of suricata logs, the eve.json

```
root@ubuntuvictim:~# cd /var
root@ubuntuvictim:/var# ls
agentx  cache  lib  lock  mail  opt  run  spool  www
backups crash local log metrics ossec snap tmp
root@ubuntuvictim:/var# cd log
root@ubuntuvictim:/var/log# ls
alternatives.log      auth.log.4.gz      kern.log             suricata             unattended-upgrades
alternatives.log.1    boot.log           kern.log.1          syslog              vboxadd-install.log
alternatives.log.2.gz bootstrap.log       kern.log.2.gz       syslog.1            vboxadd-setup.log
apache2               bttmp              kern.log.3.gz       syslog.2.gz         vboxadd-setup.log.1
appport.log           bttmp.1            kern.log.4.gz       syslog.3.gz         vboxadd-setup.log.2
appport.log.1         cups               lastlog              syslog.4.gz         vboxadd-setup.log.3
appport.log.2.gz      dpkg.log           mail.err             syslog.5.gz         vboxadd-setup.log.4
appport.log.3.gz      dpkg.log.1         mail.err.1           syslog.6.gz         vsftpd.log
appport.log.4.gz      dpkg.log.2.gz     mail.log              syslog.7.gz         vsftpd.log.1
appport.log.5.gz      faillog            mail.log.1           sysstat             vsftpd.log.2
appport.log.6.gz      fontconfig.log     mail.log.2.gz        tallylog            vsftpd.log.3
appport.log.7.gz      gdm3               mail.log.3.gz        ubuntu-advantage.log wtmp
apt                   gpu-manager.log    mail.log.4.gz        ufw.log             wtmp.1
auth.log              hp                 mysql                 ufw.log.1
auth.log.1            installer          postgresql            ufw.log.2.gz
auth.log.2.gz         journal            samba                 ufw.log.3.gz
auth.log.3.gz         journal            speech-dispatcher     ufw.log.4.gz
root@ubuntuvictim:/var/log# cd suricata/
root@ubuntuvictim:/var/log/suricata# ls
eve.json fast.log stats.log suricata.log
root@ubuntuvictim:/var/log/suricata#
```

13. Now save this and restart the wazuh-agent

```
root@ubuntuvictim:/var/ossec/etc# sudo systemctl restart wazuh-agent
root@ubuntuvictim:/var/ossec/etc#
```



14. Now i perform network scanning using nmap tool in kali linux



192.168.18.13 this is ubuntu IP

```
(kali@kali)-[~]
└─$ sudo nmap -sT 192.168.18.13
[sudo] password for kali:
Starting Nmap 7.94SVN ( https://nmap.org ) at 2024-08-13 18:11 PKT
Nmap scan report for 192.168.18.13
Host is up (0.00084s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT      STATE SERVICE
21/tcp    open  ftp
22/tcp    open  ssh
25/tcp    open  smtp
80/tcp    open  http
139/tcp   open  netbios-ssn
445/tcp   open  microsoft-ds
MAC Address: 08:00:27:15:A0:8B (Oracle VirtualBox virtual NIC)

Nmap done: 1 IP address (1 host up) scanned in 4.45 seconds
```

15. Now Open the wazuh dashboard to check the events

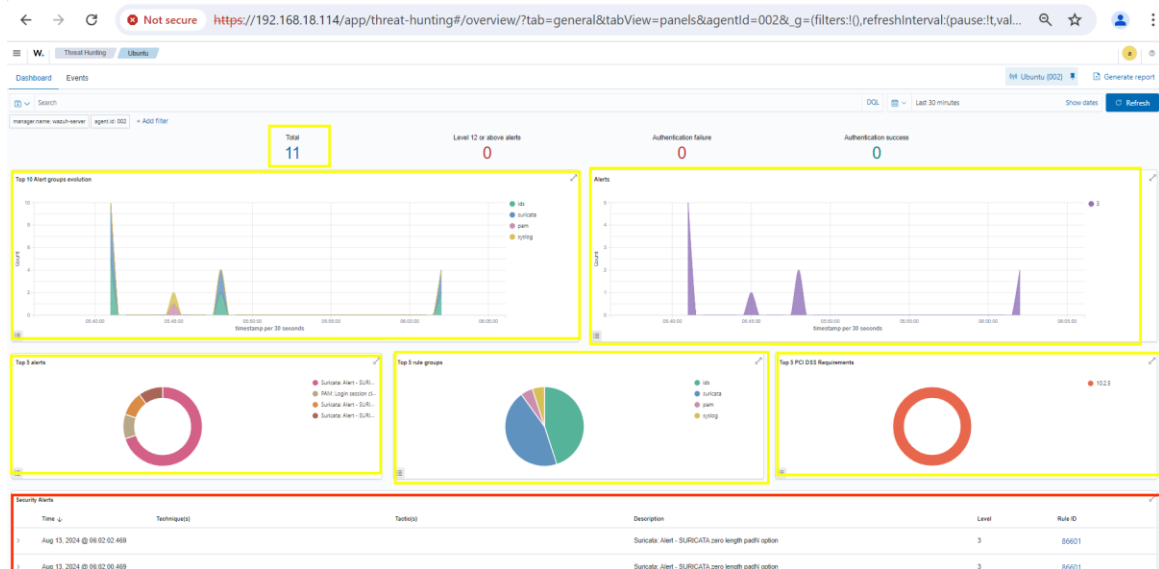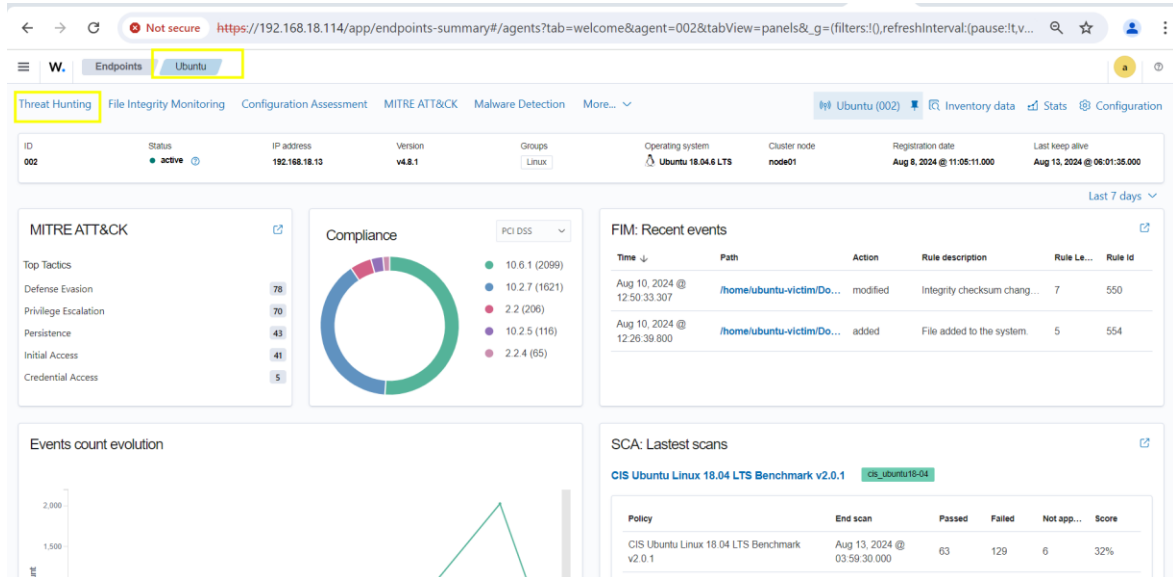

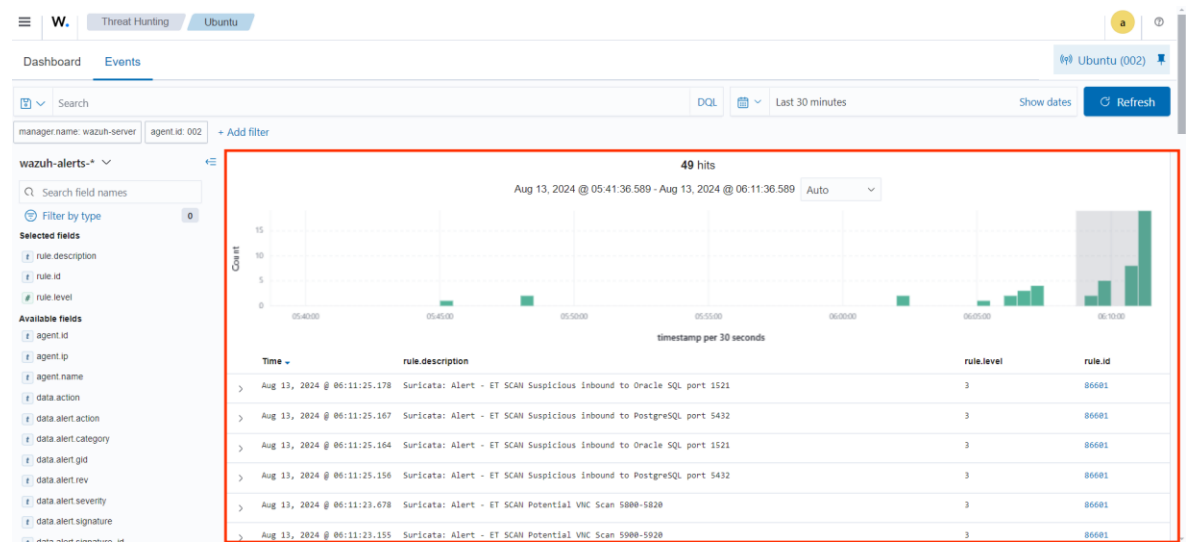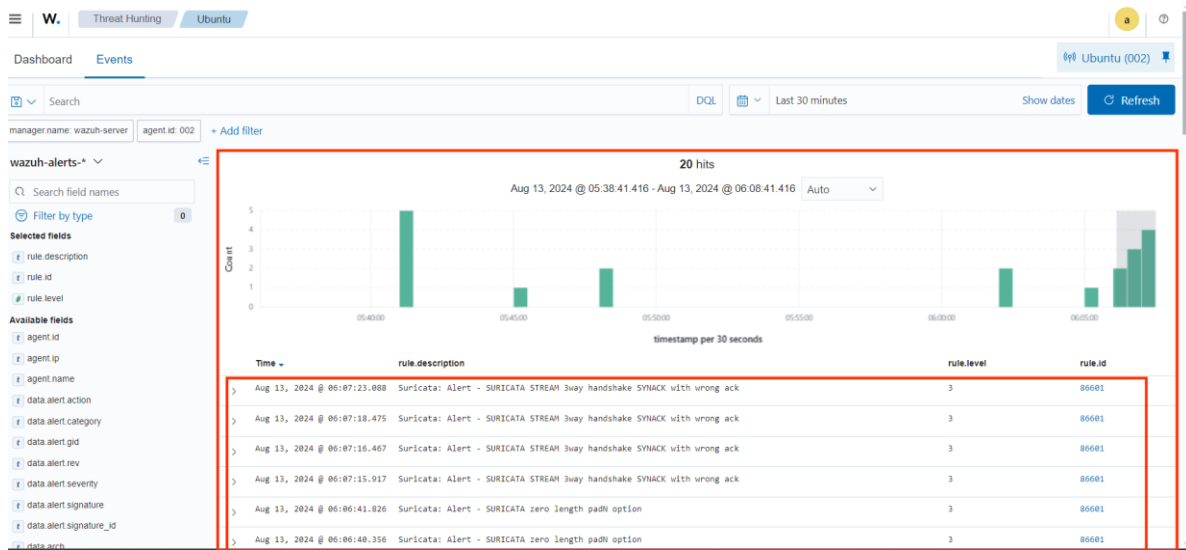

← → ↻ Not secure https://192.168.18.114/app/threat-hunting#/overview/?tab=genera... ☆

W. Threat Hunting Ubuntu

Aug 13, 2024 @ 06:11:25:178 Suricata: Alert - ET SCAN Suspicious Inbound to Oracle SQL port 1521 06001

Expanded document View surrounding documents View single document

Table JSON

agent.name	Ubuntu
data.action	allowed
data.alert.action	allowed
data.alert.category	Potentially Bad Traffic
data.alert.gid	1
data.alert.rev	3
data.alert.severity	2
data.alert.signature	ET SCAN Suspicious Inbound to Oracle SQL port 1521
data.alert.signature_id	2010936
data.arch	amd64
data.command	sqlmap
data.dest_ip	192.168.18.13
data.dest_port	1521
data.dpkg_status	install
data.dsuser	root
data.euid	0
data.event_type	Alert
data.extra_data	
data.file	
data.flow_id	
data.gid	1
data.icmp_code	
data.icmp_type	

Ubuntu [Running] - Oracle VM VirtualBox

File Machine View Input Devices Help

Activities Terminal

ubuntu-victim@ubuntu-victim:~\$

```
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 08:00:27:1c:4a:8b brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.13/24 brd 192.168.18.255 scope global dynamic noprefixroute enp0s3
        valid_lft 1790sec preferred_lft 1790sec
    inet6 2407:d900:b:8f5e:91d7:bc9d:b247:451b/64 scope global temporary dynamic
    inet6 2407:d900:b:8f5e:587b:601f:6c36:87c7/64 scope global dynamic mngtnpaddr noprefixroute
        valid_lft 86213sec preferred_lft 77925sec
    inet6 fe80::ba21:9d2c:45d1:741b/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
ubuntu-victim@ubuntu-victim:~$
```