

EGLL/LHR

Apt Elev **83'**
N51 28.7 W000 27.7

31 MAY 24


(10-9)

Eff 13 Jun

LONDON, UK

HEATHROW

*D-ATIS Departure	*HEATHROW Delivery (Cpt)	*Ground			Tower	
121.935	121.980	121.905	121.705	121.855	118.505	118.705

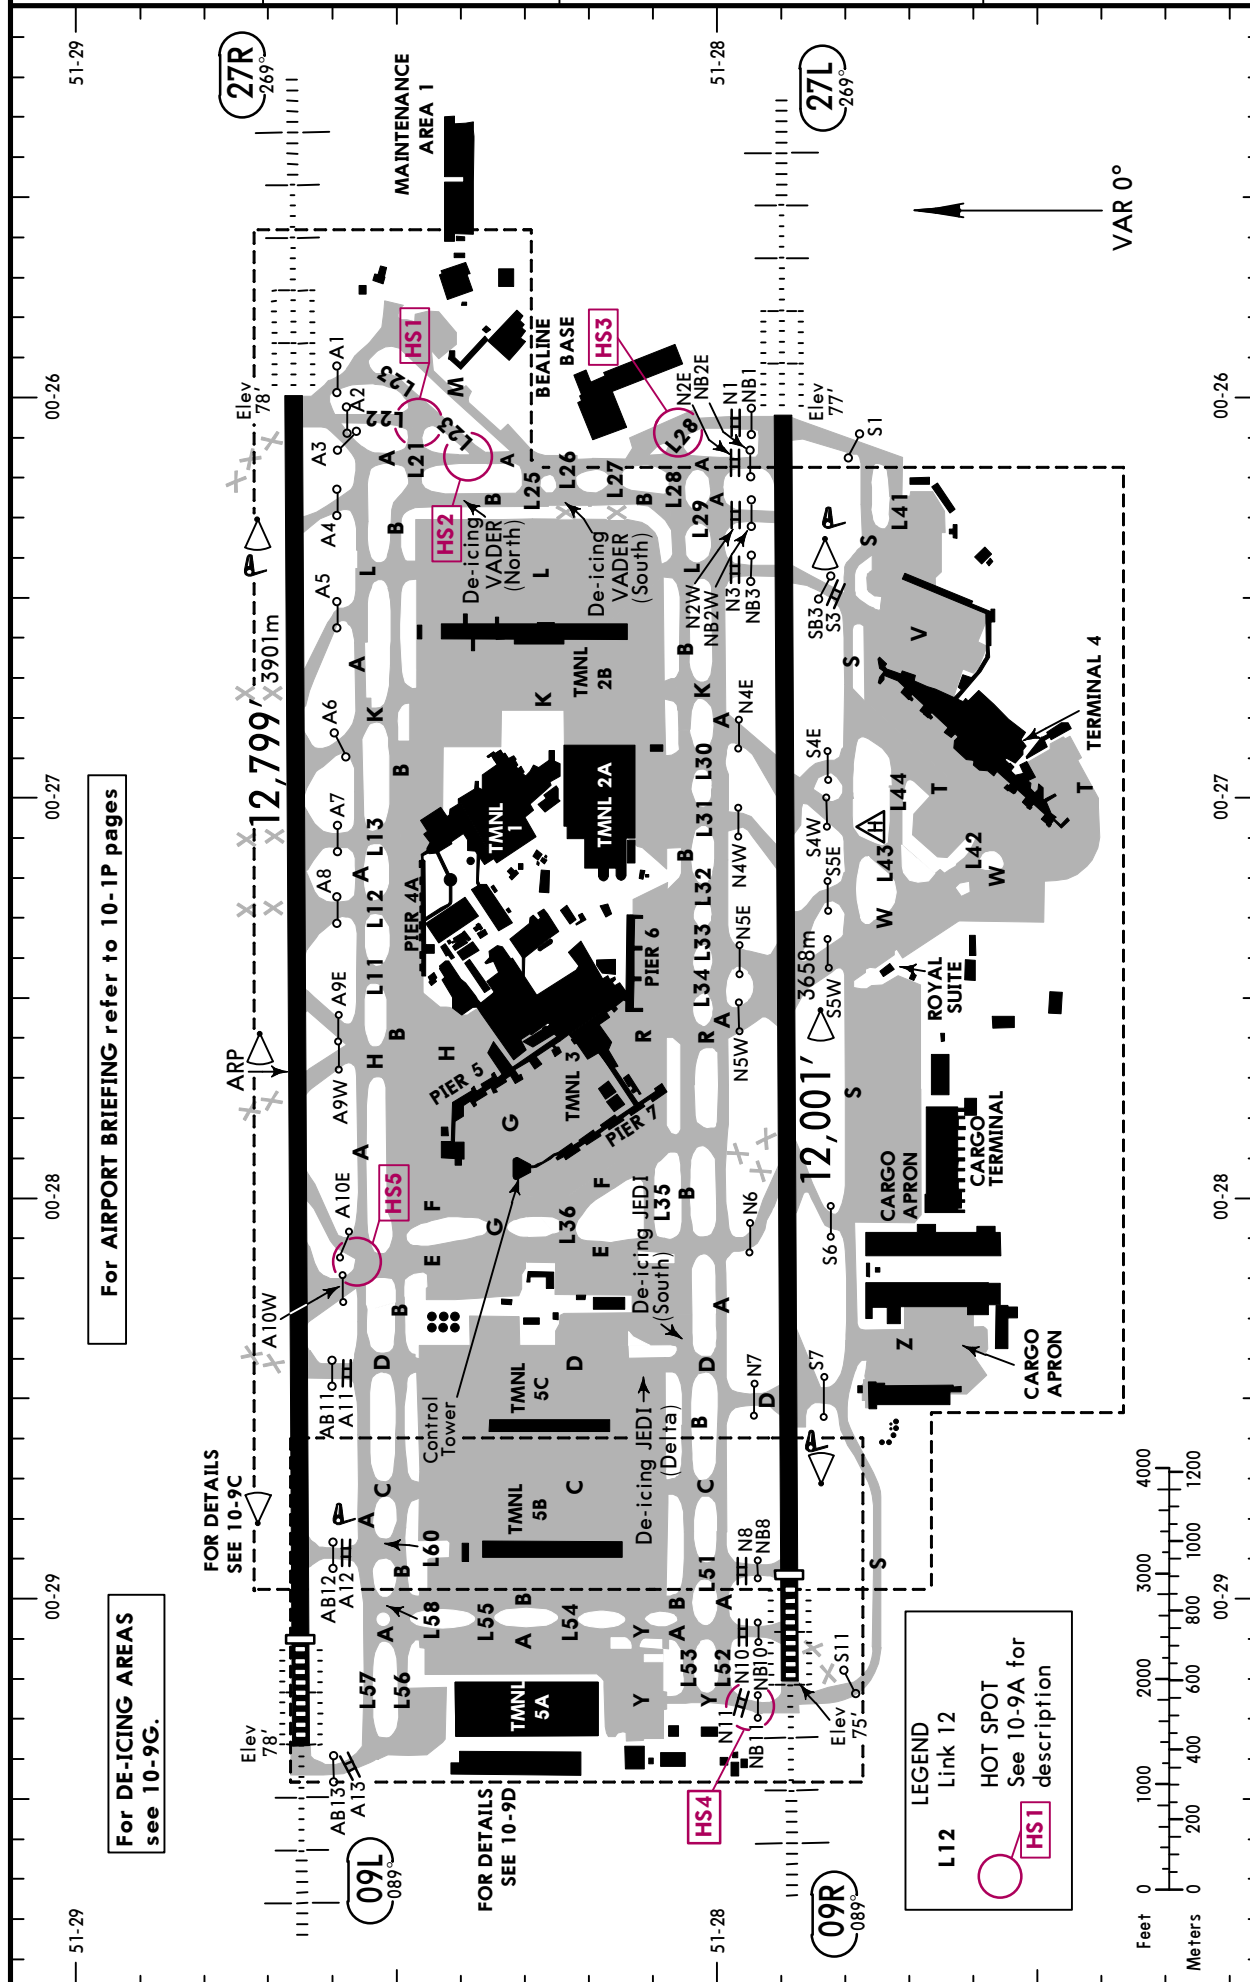

CHANGES: Closed taxiways.



© JEPPESEN, 2007, 2024. ALL RIGHTS RESERVED.

EGLL/LHR

LONDON, UK
HEATHROW

ADDITIONAL RUNWAY INFORMATION																																															
RWY		USABLE LENGTHS		TAKE-OFF	WIDTH																																										
		Threshold	Glide Slope																																												
09L ① 27R	HIRL(60m) CL(15m) HIALS-II TDZ PAPI-L(3.0°) RVR	11,785' 3592m	10,813' 3296m	③	164' 50m																																										
		②	11,642' 3548m																																												
① RWY grooved. ② LDA 12,736' 3882m ③ TAKE-OFF RUN AVAILABLE RWY 09L: From rwy head 12,799' (3901m) twy A12 int 11,030' (3362m) twy A11 int 9311' (2838m) twy A10W int 8730' (2661m) twy A10E int 7723' (2354m) twy A9W int 6535' (1992m) twy A9E int 5869' (1789m) RWY 27R: From rwy head 12,736' (3882m) twy A4 int 11,611' (3539m) twy A5 int 10,289' (3136m) twy A6 int 9390' (2862m) twy A7 int 8586' (2617m) twy A8 int 7920' (2414m) twy A9E int 7028' (2142m) twy A9W int 6388' (1947m)																																															
09R ④ 27L	HIRL(60m) CL(15m) HIALS-II TDZ PAPI-L(3.0°) RVR	10,991' 3350m	9958' 3035m	⑥	164' 50m																																										
	HIRL(60m) CL(15m) HIALS-II TDZ PAPI-L(3.0°) ⑤ RVR		10,907' 3324m																																												
④ RWY grooved. ⑤ HST - N6 ⑥ TAKE-OFF RUN AVAILABLE RWY 09R: From rwy head 12,001' (3658m) twy N10 int 11,575' (3528m) twy N8 int 10,994' (3351m) twy S7 int 9360' (2853m) twy N7 int 9357' (2852m) twy N6 int 7628' (2325m) twy S6 int 7362' (2244m) twy N5W int 5591' (1704m) RWY 27L: From rwy head 12,001' (3658m) twy N2E int 11,601' (3536m) twy N2W int 11,089' (3380m) twy N3 int 10,577' (3224m) twy S3 int 10,538' (3212m) twy N4E int 8865' (2702m) twy S4W int 8550' (2606m) twy S4E int 8494' (2589m) twy N4W int 8009' (2441m) twy S5E int 7290' (2222m) twy N5E int 6860' (2091m) twy S5W int 6827' (2081m)																																															
HOT SPOTS (For information only, not to be construed as ATC instructions.) HS1 HS2 HS3 HS4 HS5 Pilots are to maintain a good lookout at all times and are responsible for wing tip clearance. Pilots of Code F ACFT must take care - Link 28 East of TWY A is not Code F compliant. Pilots are to ensure they have clearance to enter the runway before crossing the holding point. Mis-route hotspot. After vacating runway, pilots to be aware of potential to mis-route.																																															
SEQUENCING OF AIRCRAFT GROUND MOVEMENTS FOR TAKE-OFF IN LOW VISIBILITY When the reported RVR is below 400m do not request start-up until the reported RVR is equal to or greater than the appropriate value as shown below: <table><tr><th>AIRCRAFT TAKE-OFF MINIMA</th><th>MINIMUM RVR FOR START-UP</th></tr><tr><td>350m RVR</td><td>300m</td></tr><tr><td>300m RVR</td><td>250m</td></tr><tr><td>250m RVR</td><td>200m</td></tr><tr><td>200m RVR</td><td>150m</td></tr><tr><td>150m RVR</td><td>150m</td></tr><tr><td>100m RVR</td><td>100m</td></tr><tr><td>75m RVR</td><td>75m</td></tr></table>						AIRCRAFT TAKE-OFF MINIMA	MINIMUM RVR FOR START-UP	350m RVR	300m	300m RVR	250m	250m RVR	200m	200m RVR	150m	150m RVR	150m	100m RVR	100m	75m RVR	75m																										
AIRCRAFT TAKE-OFF MINIMA	MINIMUM RVR FOR START-UP																																														
350m RVR	300m																																														
300m RVR	250m																																														
250m RVR	200m																																														
200m RVR	150m																																														
150m RVR	150m																																														
100m RVR	100m																																														
75m RVR	75m																																														
Standard TAKE-OFF <table><tr><th colspan="6">Low Visibility Take-off</th></tr><tr><th>①</th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>HIRL, CL & relevant RVR</td><td>RL, CL & relevant RVR</td><td>RL & CL</td><td>Day: RL & RCLM Night: RL or CL</td><td>Day: RL or RCLM Night: RL or CL</td><td>Adequate vis ref (Day only)</td></tr><tr><td>A</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>B</td><td>TDZ, MID, RO</td><td>TDZ, MID, RO</td><td></td><td></td><td></td></tr><tr><td>C</td><td>RVR 125m</td><td>RVR 150m</td><td>RVR 200m</td><td>RVR 300m</td><td>400m</td></tr><tr><td>D</td><td></td><td></td><td></td><td></td><td>500m</td></tr></table> ① RVR 75m with approved guidance system or HUD/HUDLS.						Low Visibility Take-off						①						HIRL, CL & relevant RVR	RL, CL & relevant RVR	RL & CL	Day: RL & RCLM Night: RL or CL	Day: RL or RCLM Night: RL or CL	Adequate vis ref (Day only)	A						B	TDZ, MID, RO	TDZ, MID, RO				C	RVR 125m	RVR 150m	RVR 200m	RVR 300m	400m	D					500m
Low Visibility Take-off																																															
①																																															
HIRL, CL & relevant RVR	RL, CL & relevant RVR	RL & CL	Day: RL & RCLM Night: RL or CL	Day: RL or RCLM Night: RL or CL	Adequate vis ref (Day only)																																										
A																																															
B	TDZ, MID, RO	TDZ, MID, RO																																													
C	RVR 125m	RVR 150m	RVR 200m	RVR 300m	400m																																										
D					500m																																										




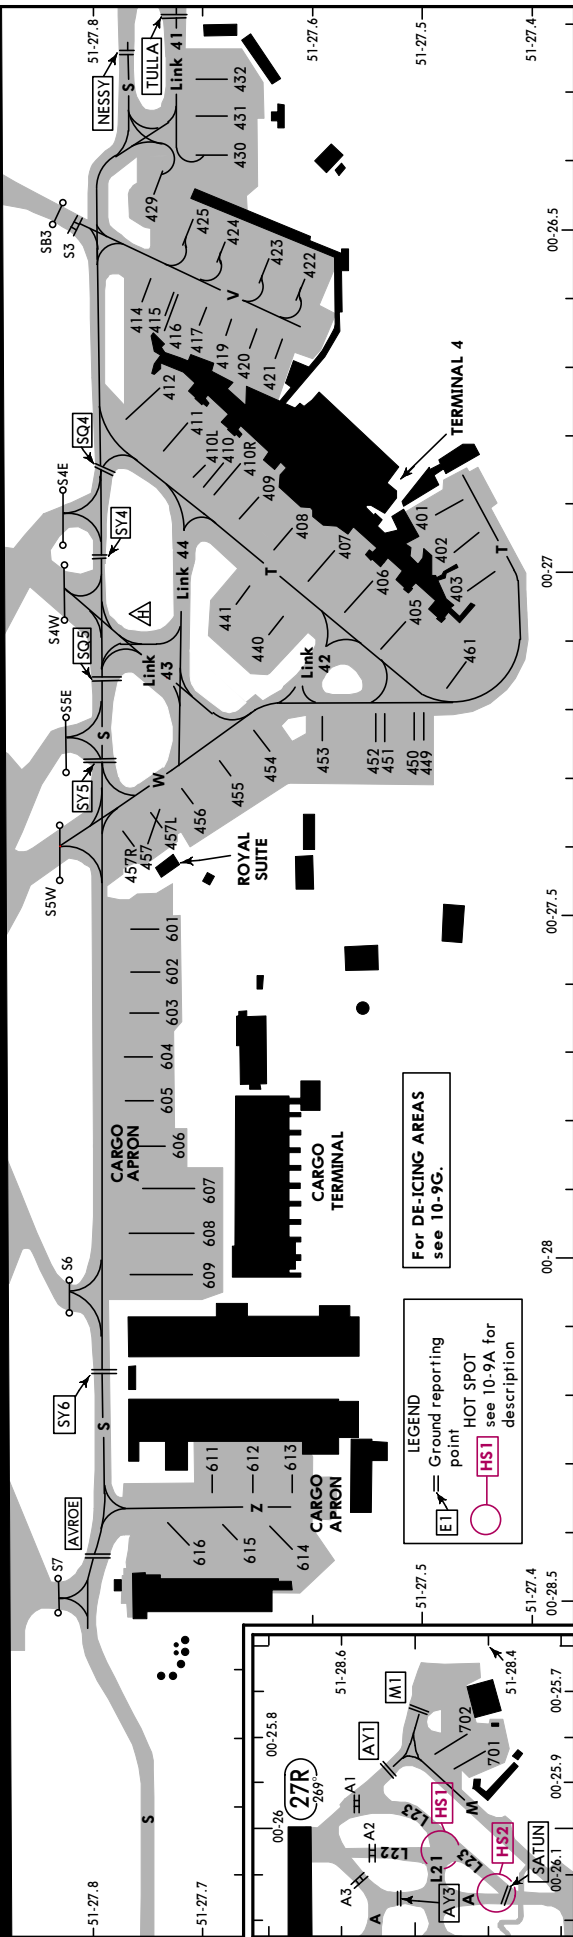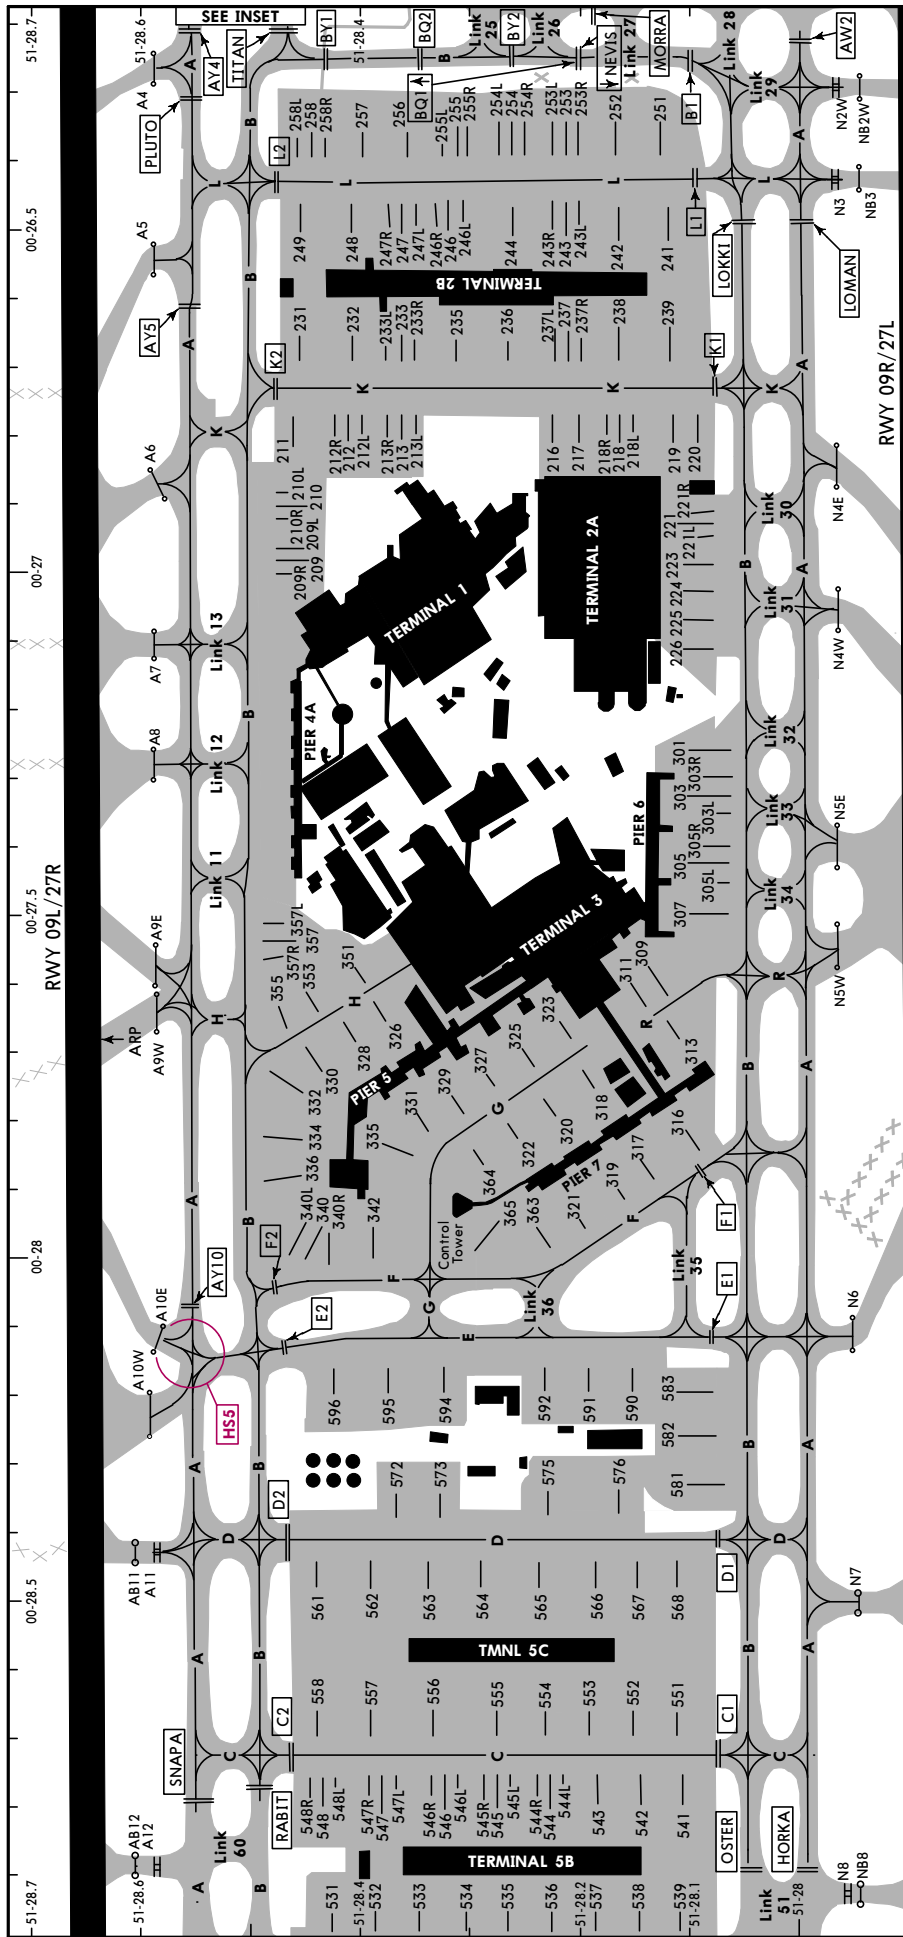

EGLL/LHR

JEPPesen
31 MAY 24 (10-9D) Eff 13 Jun

LONDON, UK
HEATHROW

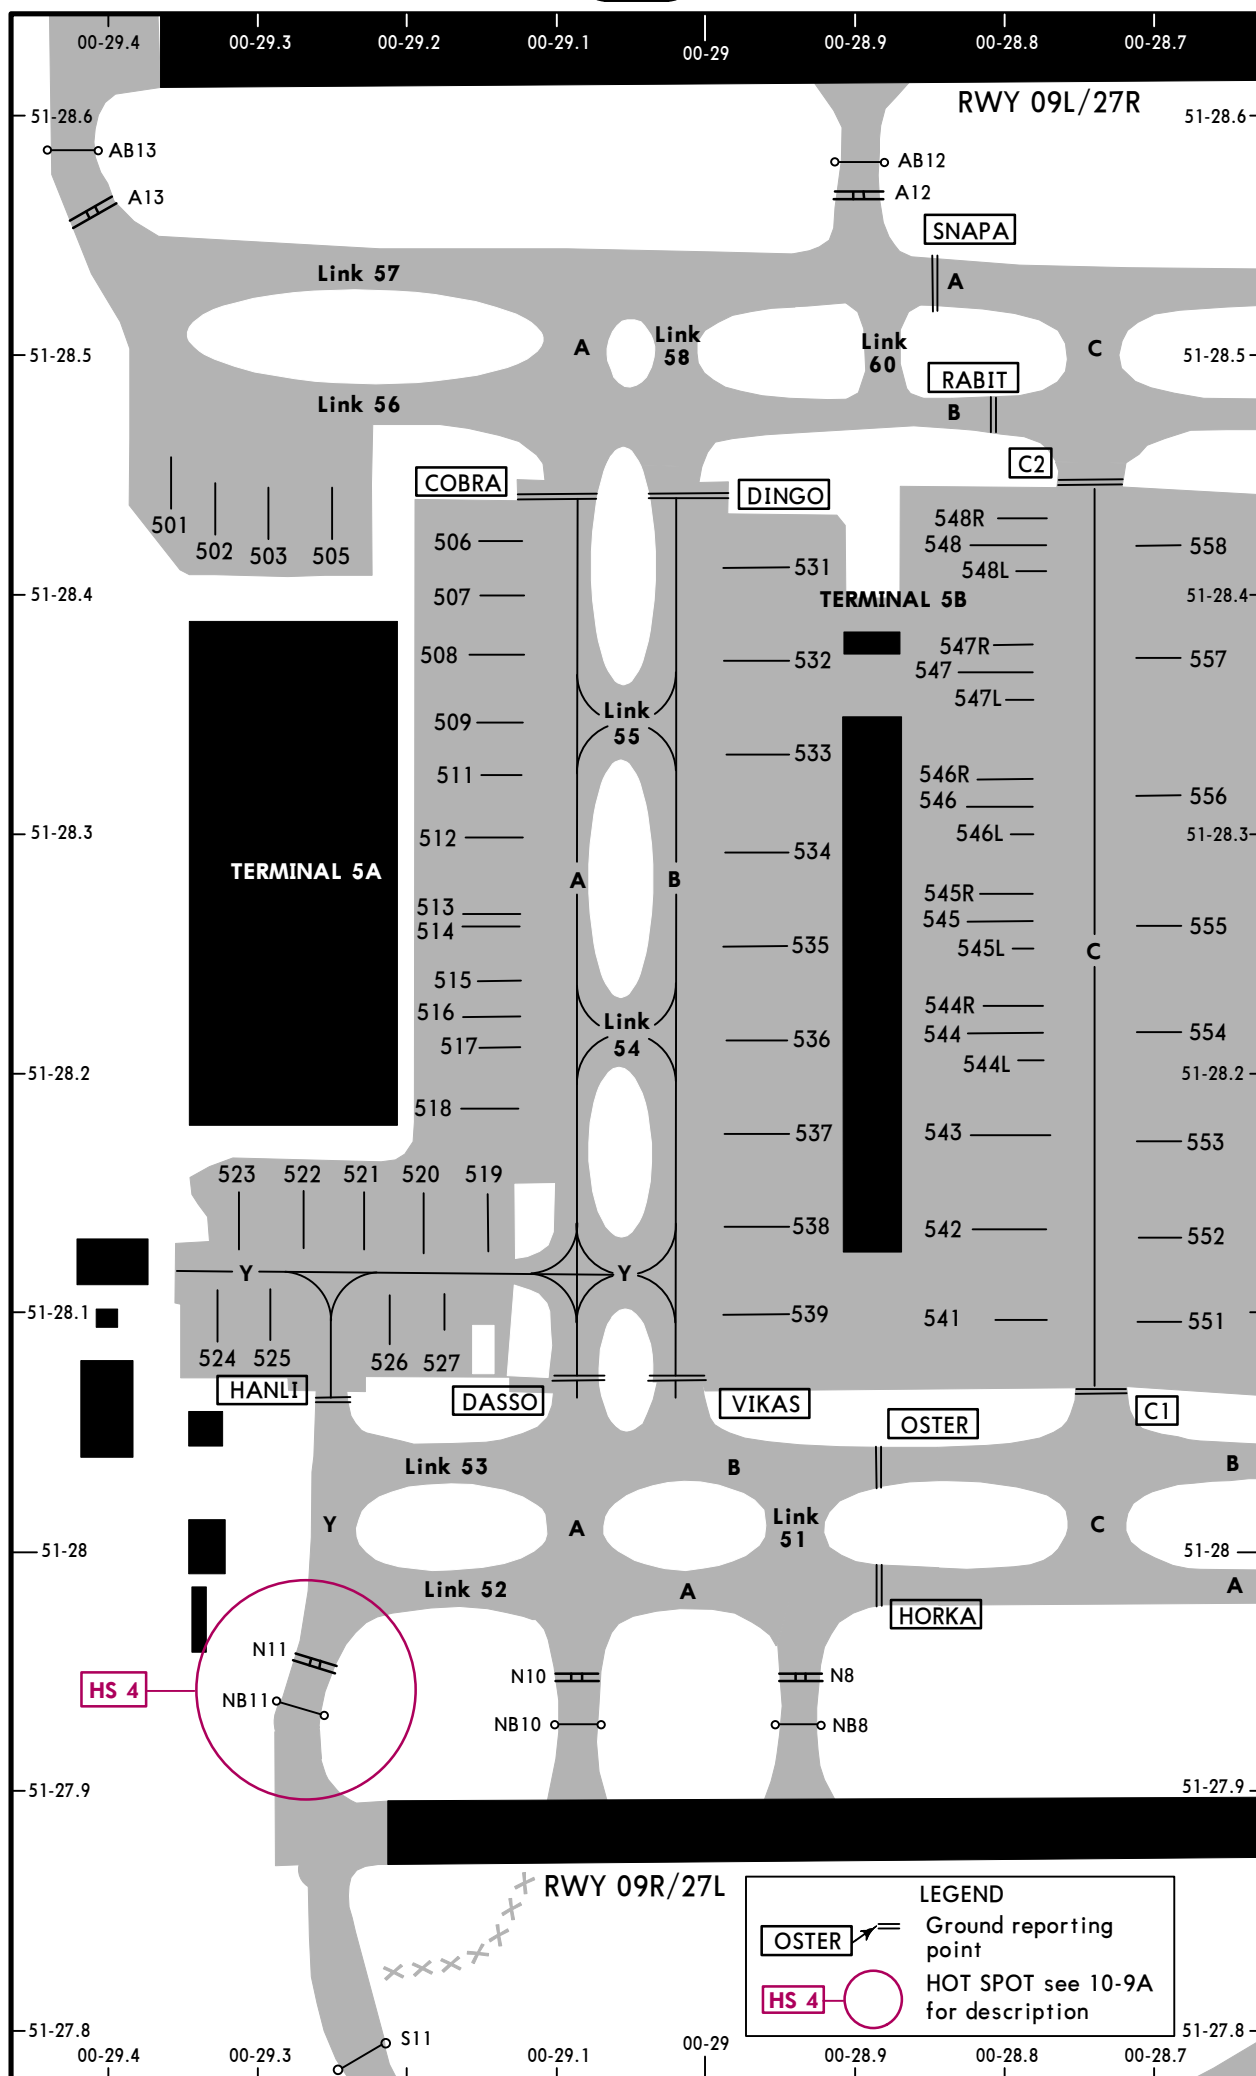

CHANGES: Closed taxiway withdrawn.

© JEPPESEN, 2008, 2024. ALL RIGHTS RESERVED.

EGLL/LHR

LONDON, UK
HEATHROW

INS COORDINATES			
STAND No.	COORDINATES	STAND No.	COORDINATES
209, 209R	N51 28.4 W000 27.0	305, 305L/R	N51 28.1 W000 27.4
209L	N51 28.5 W000 27.0	307	N51 28.1 W000 27.5
210, 210R	N51 28.4 W000 26.9	309	N51 28.1 W000 27.6
210L	N51 28.5 W000 26.9	311	N51 28.2 W000 27.6
211	N51 28.5 W000 26.9	313	N51 28.1 W000 27.7
212	N51 28.4 W000 26.9	316	N51 28.1 W000 27.8
212L/R	N51 28.4 W000 26.8	317, 318	N51 28.2 W000 27.8
213	N51 28.4 W000 26.9	319	N51 28.2 W000 27.9
213L	N51 28.3 W000 26.8	320	N51 28.2 W000 27.8
213R	N51 28.4 W000 26.8	321, 322	N51 28.2 W000 27.9
216 thru 218R	N51 28.2 W000 26.8	323	N51 28.2 W000 27.6
218L	N51 28.1 W000 26.8	325	N51 28.3 W000 27.7
219, 220	N51 28.1 W000 26.8	326	N51 28.4 W000 27.7
221, 221R	N51 28.1 W000 26.9	327	N51 28.3 W000 27.7
221L thru 224	N51 28.1 W000 27.0	328	N51 28.4 W000 27.7
225, 226	N51 28.1 W000 27.1	329	N51 28.3 W000 27.7
231 thru 233R	N51 28.4 W000 26.6	330 thru 335	N51 28.4 W000 27.8
235, 236	N51 28.3 W000 26.6	336, 340	N51 28.4 W000 27.9
237 thru 238	N51 28.2 W000 26.6	340L	N51 28.4 W000 28.0
239	N51 28.1 W000 26.6	340R, 342	N51 28.4 W000 27.9
241	N51 28.1 W000 26.5	351	N51 28.4 W000 27.5
242 thru 243R	N51 28.2 W000 26.5	353, 355	N51 28.5 W000 27.6
244 thru 246R	N51 28.3 W000 26.6	357	N51 28.4 W000 27.5
246L	N51 28.3 W000 26.5	357L, 357R	N51 28.5 W000 27.5
247, 247R	N51 28.4 W000 26.6	363 thru 365	N51 28.3 W000 27.9
247L	N51 28.3 W000 26.5		
248	N51 28.4 W000 26.5		
249	N51 28.4 W000 26.6		
251	N51 28.1 W000 26.3		
252 thru 253R	N51 28.2 W000 26.3		
254 thru 255R	N51 28.3 W000 26.3		
256 thru 258R	N51 28.4 W000 26.3		
258L	N51 28.5 W000 26.3		
301, 303, 303R	N51 28.1 W000 27.3		
303L	N51 28.1 W000 27.4		

EGLL/LHR


LONDON, UK
HEATHROW

INS COORDINATES			
STAND No.	COORDINATES	STAND No.	COORDINATES
401	N51 27.5 W000 26.9	541, 542	N51 28.1 W000 28.8
402 thru 406	N51 27.5 W000 27.0	543 thru 544R	N51 28.2 W000 28.8
407	N51 27.6 W000 27.0	545L thru 546	N51 28.3 W000 28.8
408, 409	N51 27.6 W000 26.9	546L	N51 28.4 W000 28.8
410 thru 411	N51 27.7 W000 26.8	546R	N51 28.3 W000 28.8
412	N51 27.7 W000 26.7	547L thru 548R	N51 28.4 W000 28.8
414	N51 27.8 W000 26.6	551	N51 28.1 W000 28.6
415 thru 420	N51 27.7 W000 26.7	552 thru 554	N51 28.2 W000 28.6
421	N51 27.6 W000 26.7	555, 556	N51 28.3 W000 28.6
422, 423	N51 27.6 W000 26.5	557, 558	N51 28.4 W000 28.6
424, 425	N51 27.7 W000 26.5	561, 562	N51 28.4 W000 28.5
429	N51 27.8 W000 26.5	563, 564	N51 28.3 W000 28.5
430	N51 27.7 W000 26.4	565, 566	N51 28.2 W000 28.5
431, 432	N51 27.7 W000 26.3	567, 568	N51 28.1 W000 28.5
440, 441	N51 27.7 W000 27.1	572	N51 28.4 W000 28.3
449 thru 452	N51 27.5 W000 27.3	573	N51 28.3 W000 28.3
453, 454	N51 27.6 W000 27.3	575, 576	N51 28.2 W000 28.3
455	N51 27.7 W000 27.3	581, 582	N51 28.1 W000 28.3
456 thru 457R	N51 27.7 W000 27.4	583	N51 28.1 W000 28.2
458	N51 27.8 W000 27.4	590 thru 592	N51 28.2 W000 28.2
461	N51 27.5 W000 27.1	594	N51 28.3 W000 28.2
501	N51 28.4 W000 29.4	595, 596	N51 28.4 W000 28.2
502 thru 505	N51 28.4 W000 29.3	601	N51 27.7 W000 27.5
506 thru 509	N51 28.4 W000 29.2	602, 603	N51 27.7 W000 27.6
511 thru 515	N51 28.3 W000 29.2	604	N51 27.7 W000 27.7
516 thru 518	N51 28.2 W000 29.2	605, 606	N51 27.7 W000 27.8
519	N51 28.2 W000 29.1	607	N51 27.7 W000 27.9
520, 521	N51 28.2 W000 29.2	608, 609	N51 27.7 W000 28.0
522, 523	N51 28.2 W000 29.3	611, 612	N51 27.7 W000 28.3
524, 525	N51 28.1 W000 29.3	613	N51 27.6 W000 28.3
526, 527	N51 28.1 W000 29.2	614	N51 27.6 W000 28.4
531, 532	N51 28.4 W000 28.9	615	N51 27.7 W000 28.5
533 thru 535	N51 28.3 W000 28.9	616	N51 27.7 W000 28.4
536, 537	N51 28.2 W000 28.9	701, 702	N51 28.4 W000 25.8
538, 539	N51 28.1 W000 28.9		

EGLL/LHR

JEPPESSEN
31 MAY 24 10-9G Eff 13 Jun

LONDON, UK
HEATHROW

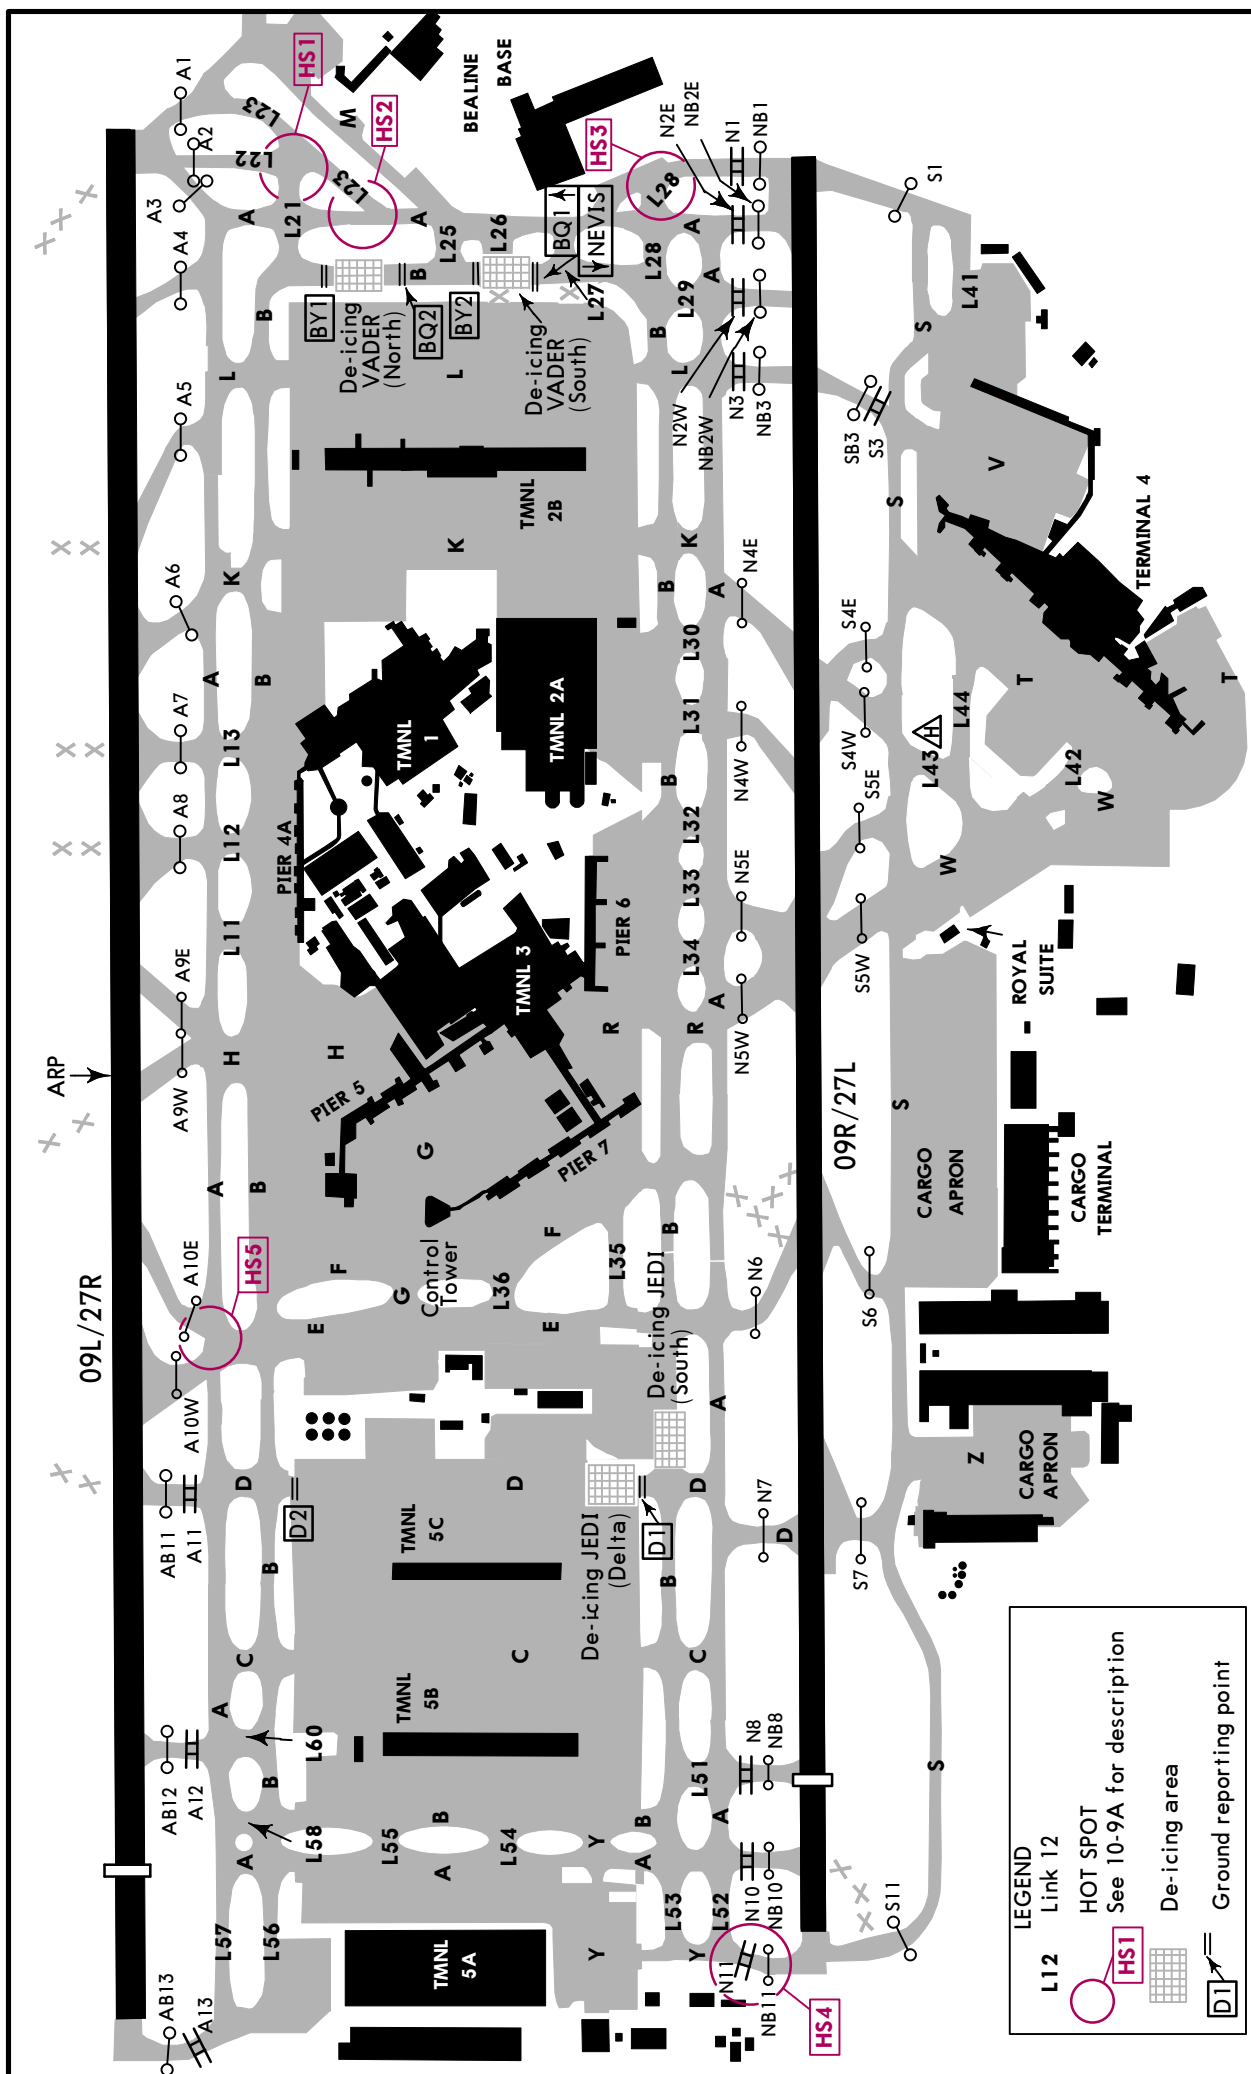

EGLL/LHR

JEPPESEN

26 NOV 21

10-9Y

Eff 2 Dec

EASA AIR OPS
LONDON, UK
HEATHROW

COPTER			
STRAIGHT-IN RWY		DA(H) / MDA(H)	RVR (ALS/ALS out)
09L	CAT 2 ILS DME	179' (100')	RA 100' - R300m
	ILS DME	279' (200')	R500m / R1000m
	LOC	480' (401')	R800m / R1000m
	RNP (LNAV/VNAV)	450' (371')	R750m / R1000m
	RNP (LNAV)	620' (541')	R1000m / R1000m
09R	CAT 2 ILS DME	175' (100')	RA 100' - R300m
	ILS DME	275' (200')	R500m / R1000m
	LOC	480' (405')	R800m / R1000m
	RNP (LNAV/VNAV)	400' (325')	R750m / R1000m
	RNP (LNAV)	620' (545')	R1000m / R1000m
27L	CAT 2 ILS DME	177' (100')	RA 102' - R300m
	ILS DME	277' (200')	R500m / R1000m
	LOC	640' (563')	R1000m / R1000m
	RNP (LNAV/VNAV)	380' (303')	R750m / R1000m
	RNP (LNAV)	640' (563')	R1000m / R1000m
27R	CAT 2 ILS DME	178' (100')	RA 102' - R300m
	ILS DME	278' (200')	R500m / R1000m
	LOC	640' (562')	R1000m / R1000m
	RNP (LNAV/VNAV)	380' (302')	R750m / R1000m
	RNP (LNAV)	640' (562')	R1000m / R1000m

CIRCLE-TO-LAND	MDA(H)	VIS
	770' (687')	V1000m

TAKE-OFF RWY 09L/R, 27L/R			
① LVP must be in Force			
RL or FATO lights & RCLM & RVR info	RL or FATO lights & RCLM	Nil Facilities DAY	Nil Facilities NIGHT
R150m	R200m	② R250m	R/V800m


- ① Without LVP R/V400m are stipulated.
- ② Or rejected take-off distance whichever is the greater.

EGLL/LHR
HEATHROW


JEPPESSEN
21 JUN 24 (11-1)

LONDON, UK
ILS DME or LOC DME Rwy 09L

*D-ATIS 113.750 117.0 128.080			HEATHROW Director (APP) 119.730		HEATHROW Tower 118.505 118.705		*Ground 121.905 121.705 121.855			
LOC IAA *110.3		Final Apch Crs 089°		D7.5 IAA 2500' (2421')		ILS DA(H) 279' (200')		Apt Elev 83' Rwy 79'		
MISSED APCH: Climb STRAIGHT AHEAD, when passing 1580' or D0.0 IAA inbound, whichever is later, climbing turn LEFT on track 036° to 3000', then as directed. In event of radio failure see 11-5.										
Alt Set: hPa		Rwy Elev: 3 hPa		Trans level: By ATC		Trans alt: 6000'		MSA LON VOR		

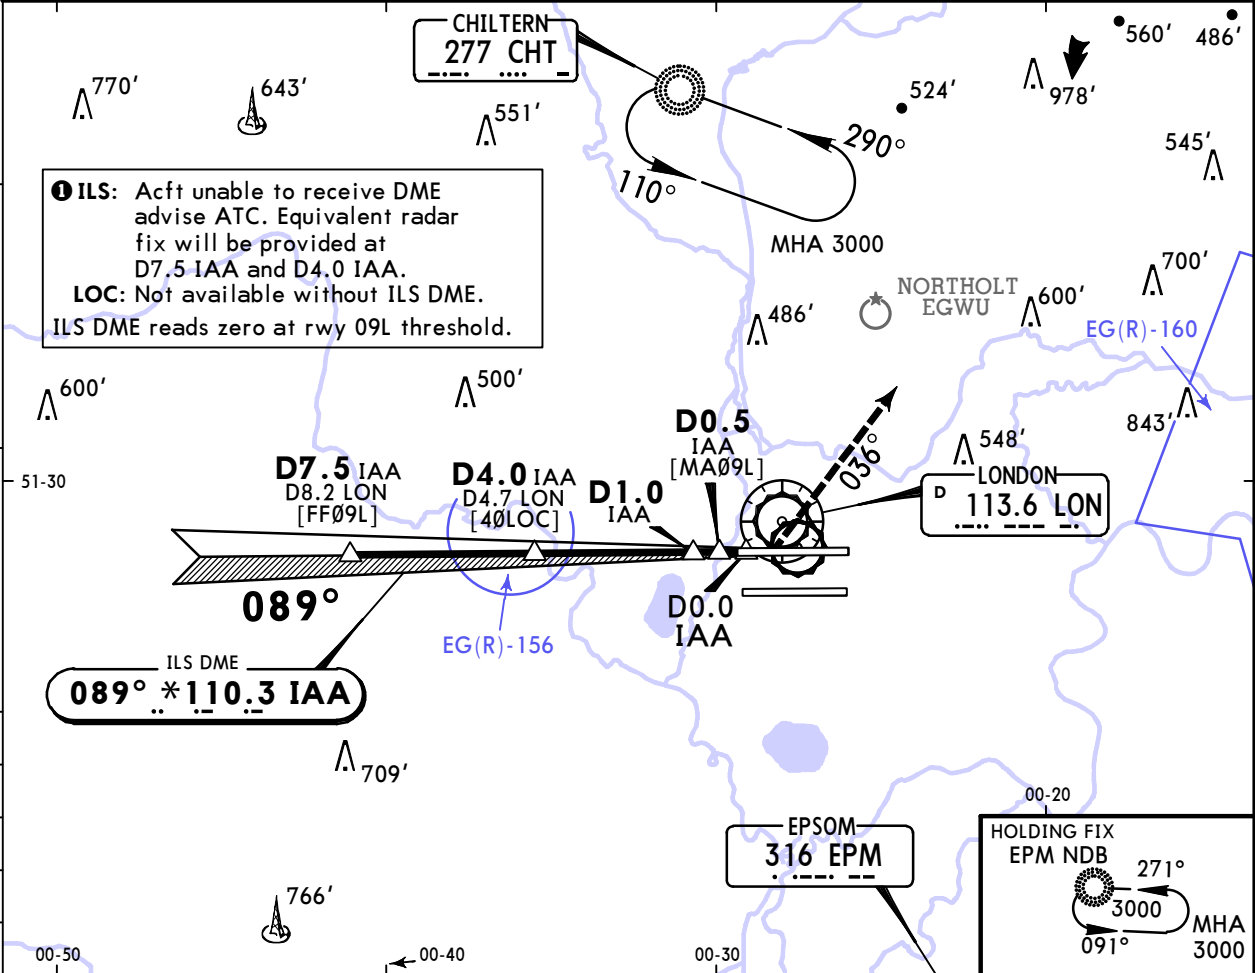

LOC 2 (GS out)	IAA DME	7.0	6.0	5.0	4.0	3.0	2.0
	ALTITUDE	2360'	2040'	1720'	1400'	1080'	770'

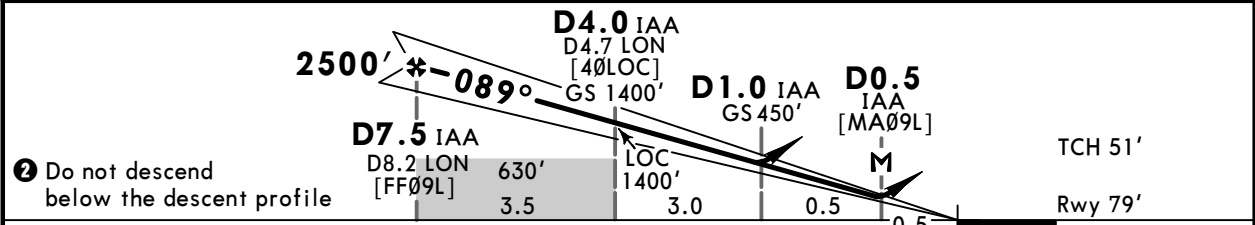

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II		1580' D0.0 IAA 036°	
GS	3.00°	372	478	531	637	743	849	PAPI	whichever later	LT
MAP at D0.5 IAA										

Std/State		STRAIGHT-IN LANDING		CIRCLE-TO-LAND	
ILS		LOC (GS out) CDFA			
DA(H) 279' (200')		DA/MDA(H) 480' (401')			
TDZ or CL out		ALS out		Max Kts	
A				100	770' (687') V1500m
B				135	770' (687') V1600m
C				180	940' (857') V2400m
D				205	940' (857') V3600m

1 R750m when a Flight Director or Autopilot or HUD to DA is not used.
2 VNAV DA(H) in lieu of MDA(H) depends on operator policy.