


[Monitoring - FE]Sentry

1. Sentry 접속

<https://sentry.io/welcome/>

깃헙 로그인 후 회원가입하기

2. Sentry 프로젝트 생성

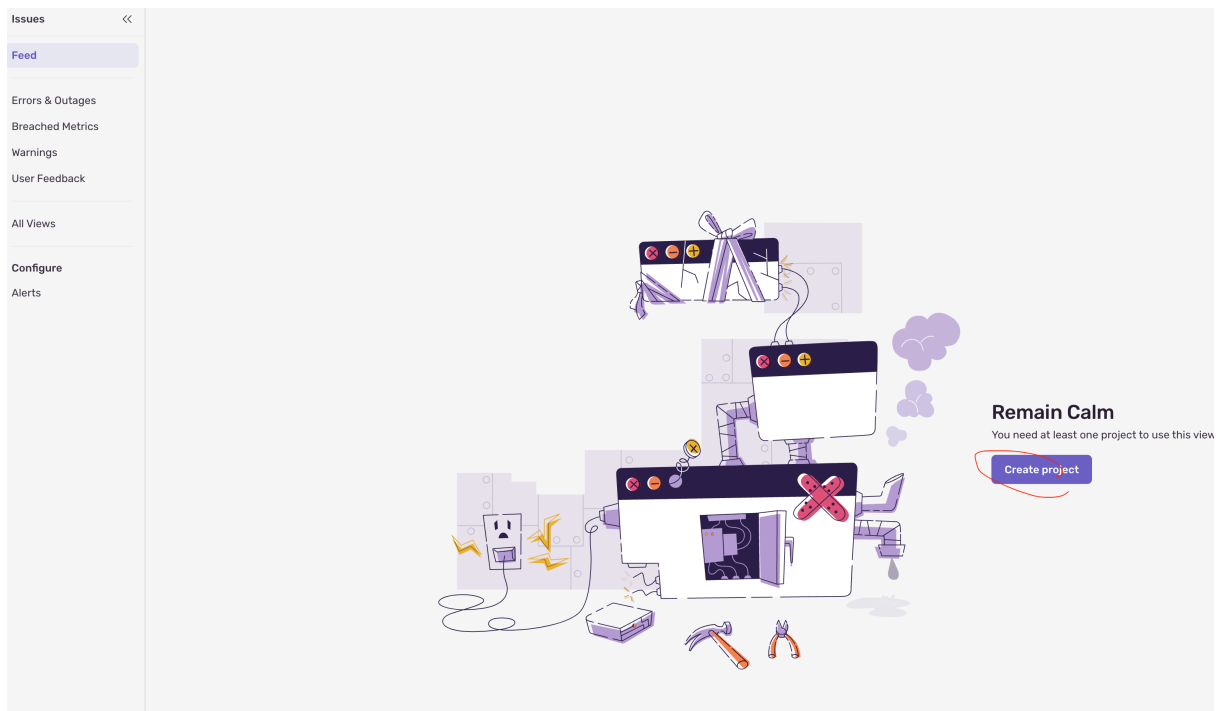

Create a new project in 3 steps

Set up a separate project for each part of your application (for example, your API server and frontend client), to quickly pinpoint which part of your application errors are coming from. [Read the docs.](#)

1 Choose your platform

Popular Browser Server Mobile Desktop Serverless Gaming All



NEXT.JS



REACT



REACT NATIVE



NODE.JS



LARAVEL



FASTAPI



FLUTTER



NEST.JS



FLASK



VUE



ASP.NET CORE



NUXT



.NET MAUI



ANGULAR

2 Set your alert frequency

☒ Alert me on high priority issues

☐ When there are more than occurrences of a unique error in

☐ I'll create my own alerts later

☒ Notify via email

Connect to messaging

3 Name your project and assign it a team

Project slug

javascript-vue

Team

#tomhoon

Create Project

Vue 프로젝트에 적용해보자

Configure Vue SDK

In this quick guide you'll use `npm`, `yarn`, or `pnpm` to set up:

☒ Error Monitoring ?

☐ Logs ?

☐ Session Replay ?

☐ Tracing ?

Vue 3

Vue 2

Install

Add the Sentry SDK as a dependency using `npm`, `yarn`, or `pnpm`:

```
npm yarn pnpm
npm install --save @sentry/vue
```

Configure SDK

Initialize Sentry as early as possible in your application's lifecycle, usually your Vue app's entry point (`main.ts/js`).

```
JavaScript
import { createApp } from "vue";
import { createRouter } from "vue-router";
import router from "./router";

import * as Sentry from "@sentry/vue";

const app = createApp({
  // ...
});

Sentry.init({
  app,
  dsn: "https://c33aa510470ad55a177e9578b2ea363c@o4510191970615296.ingest.us.sentry.io/4510191979134976",
  // Setting this option to true will send default PII data to Sentry.
  // For example, automatic IP address collection on events
  sendDefaultPii: true
});

app.use(router);
app.mount("#app");
```

3. Vue Project 적용

```
npm install --save @sentry/vue
```

[main.js]

```
src > JS main.js > ...
You, 1 second ago | 1 author (You)
1 import { createApp } from 'vue' 587k (gzipped: 187.4k)
2 import App from './App.vue'
3
4 import * as Sentry from "@sentry/vue"; 366.6k (gzipped: 120.2k)
5
6 Sentry.init({
7   App,
8   dsn: "https://c33aa510470ad55a177e9578b2ea363c@o4510191970615296.1",
9   // Setting this option to true will send default PII data to Sentry
10  // For example, automatic IP address collection on events
11  sendDefaultPii: true
12 });
13
14 createApp(App).mount('#app')
15
```


[App.vue]

```
<template>
  
  <HelloWorld msg="Welcome to Your Vue.js App"/>
</template>

<script>
import HelloWorld from './components/HelloWorld.vue'

export default {
  name: 'App',
  components: {
    HelloWorld
  },
  mounted() {
    throw new Error("Sentry 테스트 에러입니다!");
  }
}
```

```
}  
</script>
```

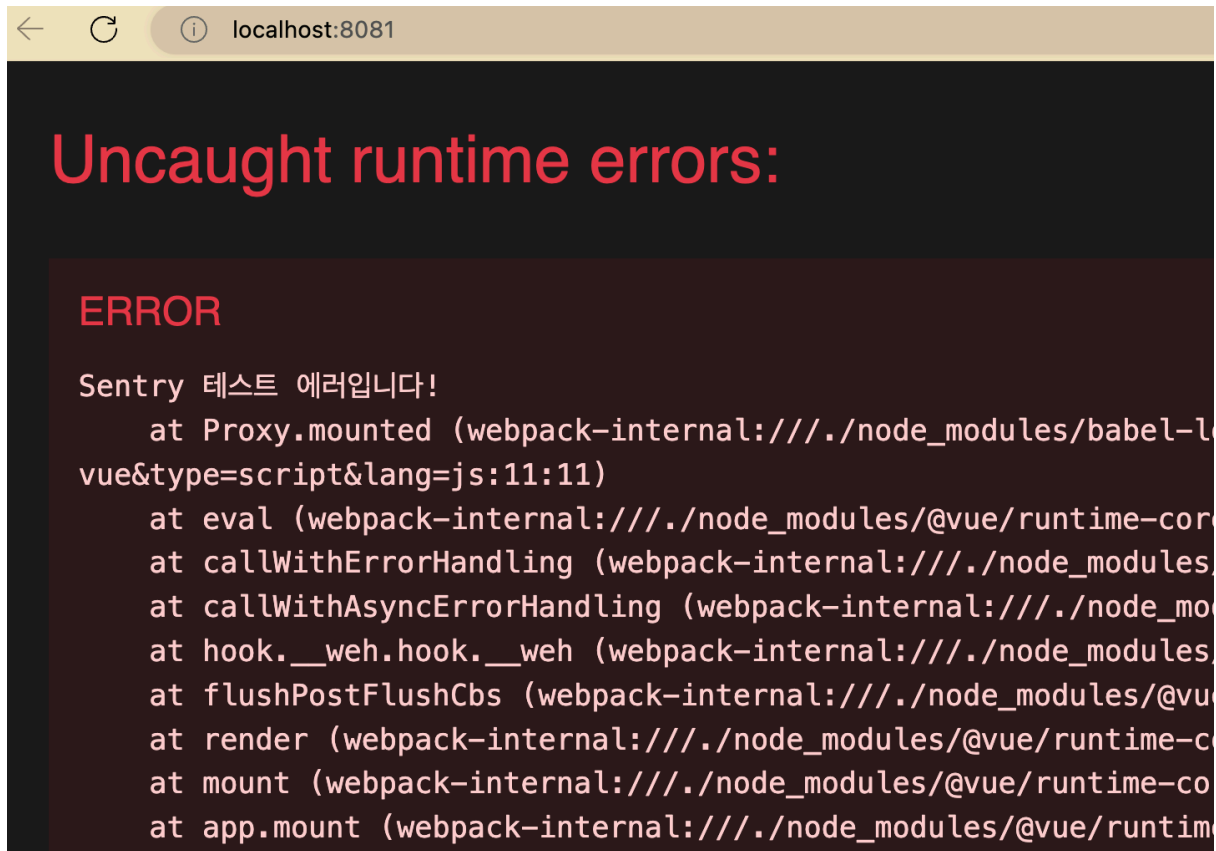

테스트 에러 발생시킨 후

Sentry 대시보드에서 확인해본다.

대시보드 결과값

