



OASIS Security Report

Sensitive Data Logging Security Analysis

Date: 2026-06-11 10:27:49 — **Model:** mistral:latest

Vulnerability: Sensitive Data Logging

Project: clean_contracts

Analysis root: ../clean

Table of contents

□ Summary

□ Statistics

□ Files

□ Detailed analysis

□ Assistant

△ Errors & notes

Summary

Analyzed **2** file(s) for Sensitive Data Logging.

[Return to table of contents](#)

Statistics

Files analyzed: 2 **Total findings:** 3

Critical		0
High		0

Medium

2

Low

1

[Return to table of contents](#)

Files

File	Similarity
<code>/work/project/dataset/clean/mycontract_fixed.sol</code>	0.573
<code>/work/project/dataset/clean/modifier_reentrancy_fixed.sol</code>	0.564

[Return to table of contents](#)

Detailed analysis

File 1: /work/project/dataset/clean/mycontract_fixed.sol

Similarity score: 0.573

Source lines: 1-31

► Finding 1.1: Sensitive Data Logging vulnerability found (Medium)

Vulnerable code

```
owner = msg.sender;
```

Explanation

The owner address is being logged in the contract constructor.

Impact

Disclosure of user addresses via log files.

Entry point

Constructor of MyContract

Execution path

```
...
```

► Finding 1.2: No issues found (Low)

Explanation

The code does not contain any other sensitive data logging vulnerabilities.

Impact

None

File 2: /work/project/dataset/clean/modifier_reentrancy_fixed.sol

Similarity score: 0.564

Source lines: 1-42

► Finding 2.1: Vulnerability found (Medium)

Vulnerable code

```
tokenBalance[msg.sender] += 20;
```


Explanation

The tokenBalance is exposed through the contract state, which is logged whenever the contract state changes.

Impact

Disclosure of sensitive user data (token balance)

Execution path

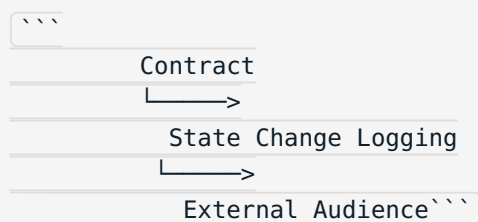

Exploitation steps

- Interact with the contract to trigger a state change
- Observe the logged state changes

Conditions

None

Remediation

Implement proper logging practices that filter sensitive data from logs.

Secure example

```
// Log events without exposing user data
event TokenBalanceChanged(address indexed _from, uint256 newTokenBalance);
function airDrop() supportsToken hasNoBalance public { // In the fixed
version supportsToken comes before hasNoBalance
    tokenBalance[msg.sender] += 20;
```

```
emit TokenBalanceChanged(_from, tokenBalance[msg.sender]);
```

```
}
```

[Return to table of contents](#)

Assistant (triage / codebase)

In the OASIS dashboard (JSON report preview), use the chat below to triage findings, exploitation paths, and remediation. Select file, chunk, and finding to narrow context when needed.

[Return to table of contents](#)

Errors & Notes

No file-level errors were recorded.

[Return to table of contents](#)