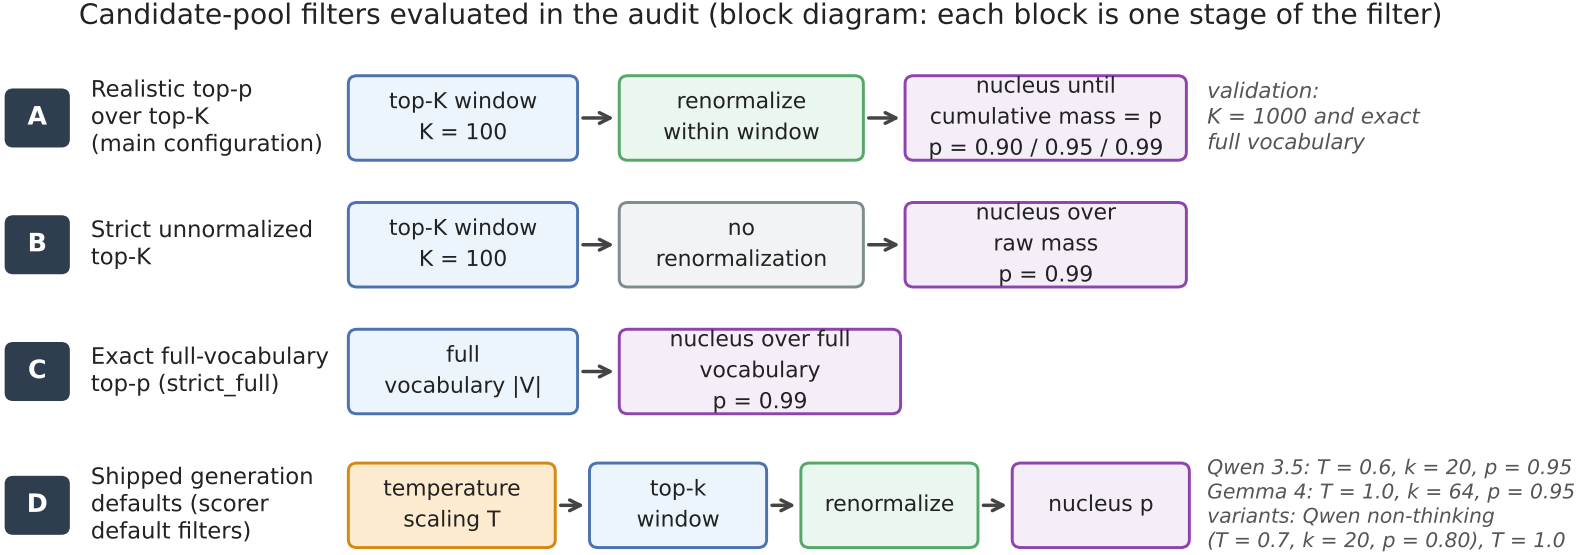
Candidate-pool filters evaluated in the audit (block diagram: each block is one stage of the filter)
A
Realistic top-p over top-K (main configuration)
top-K window K = 100
renormalize within window
nucleus until cumulative mass = p p = 0.90 / 0.95 / 0.99
validation: K = 1000 and exact full vocabulary
B
Strict unnormalized top-K
top-K window K = 100
no renormalization
nucleus over raw mass p = 0.99
C
Exact full-vocabulary top-p (strict_full)
full vocabulary |V|
nucleus over full vocabulary p = 0.99
D
Shipped generation defaults (scorer default filters)
temperature scaling T
top-k window
renormalize
nucleus p
Qwen 3.5: T = 0.6, k = 20, p = 0.95
Gemma 4: T = 1.0, k = 64, p = 0.95
variants: Qwen non-thinking (T = 0.7, k = 20, p = 0.80), T = 1.0