

Salesforce

Salesforce SFCC Testing guide

Version 21.1.0 January 2021



Contents

Summary	3
Test cases	
Test Data	3
Automation test suit for functional testing	4
Prerequisites	4
BM Configurations	4
Local setup	4
Configure and run automation testing	7
Integration testing	g
Automation test suit (CodeceptJs)	
Features	11
Scenarios	
Steps	
Unit testing	
Contact Us.	13



Summary

This guide helps you to write test cases for all Worldpay services on the SFCC platform that use the MobileFirst reference application. You can use them to ensure all the main functionality operates correctly.

The guide also includes references to automation test suites. These suites are for functional testing, integration testing and unit testing so you can verify your implementation. Finally, the guide includes instructions for using the *CodeceptJS* testing automation suite for acceptance testing.

Test cases

This cartridge has successfully passed through QA and UAT. The test cases below help you to implement the functional and integration test cases. See *Worldpay_TestCases_Suite.xlsx* at <*Workspce>Vlink_worldpay\test\testCases*.

Test Data

The test data can be found in Worldpay_TestData.xlsx at <Workspce>\link_worldpay\test\testData



Automation test suit for functional testing

Prerequisites

BM Configurations

Redirect credit card payments must be in page format. To do this:

1. Go to the *payment method* section and reset any configurations that are set to *iframe* or *light box* format.

You must do a site export. To do this:

1. Find the xml files you need. They are *customer-list*, *catalogs*, *pricebooks* and *promotions*, which are in *Business Manager* at *Administration/Site Development/Site Import and Export*. See the screenshot below:

Export		
Provide a name for the export archive, select the units you want to export, and click Export. By default, export files are saved in the local export directory and are Production, Sandbox, Development) save it in the global export directory using the respective check box. Fields with a red asterisk (*) are mandatory.		
Archive Name:*	☐ Save in Global Export Directory	
Data Units to Export		
Data*	Description	
⊕ □ Sites	All site data	
⊕ Libraries	All shared libraries	
⊞ Library Static Resources	All content images	
⊕ Catalogs	All catalogs	
⊕ Catalog Static Resources	All product images	
	All price books	
	All inventory lists All customer lists	
⊕ Global Data	All global data	
	· · · · · · · · · · · · · · · · · · ·	
Status		

- 2. Select the file you want to export (for example, Price Books)
- 3. Select *All Price Books*, then type a name into the *Archive Name* field and click the **Export** button. A success message appears.
- 4. To download the file, click the **Download** button.

Local setup

If you want to test WeChat Pay (direct mode), do the following:

- 1. Open the wechatDirectPaymentMethod.js file at test/functional/checkout/guestUser/singleShip.
- 2. Make this change at line no.22: (describe =>describe.skip).

To setup the Order Confirmation page, do the following:



- 1. Open the configuration file test/functional/mocks/customers.js.
- 2. For automation testing, create one new shopper with the zip (postal) code: 4304, country code: US and telephone number 3333333333 (a 10 digit telephone number)).
- 3. Save the Visa card number 491761000000000 for this test shopper.

To update the folder path:


1. Update the folder path and file name to the same value as the path given in the file functional/mocks/testDataMgr/main.js. For example, the Customer xml path is in the file like this:

```
files: [demoDataDir + '/customer-lists/customer.xml']
```

2. The same path should exist in the site export folder. If your site export folder contains this file path: C:\projects\WPSFCC\work\code\sfcc_worldpay\customer-lists\{siteid}.xml then you must rename the file to customer.xml and create this structure in your local workspace:

```
<Workspace>\sfcc worldpay\customer- lists\customer.xml.
```

3. Check the xml folder structure corresponds with the path in the file. The site export folder structure should look the screenshot below:

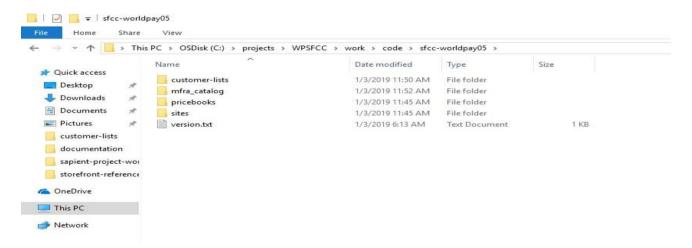

Sometimes there are problems parsing customer-lists. If this is the case do the following:

1. In the customer-lists/customer xml file, update the xml string customer-list to customers.

As an alternative, you can export all the customer files directly from Business Manager and replace the xml in the *customer-lists* folder. To do this:

- 1. Go to worldpay_main.js, test/mocks/testDataMgr and input the credentials. They are:
- loginUserEmail The shopper email (see Local setup above)
- loginPassword Your user password
- newUserPassword The new password for when the test user changes the password
- storefrontPath The absolute folder path to the site export
- ResourcePath The absolute folder path to the storefront reference architecture resource folder
- Three variant product IDs (like variantProduct1, variantProduct2, variantProduct3). Choose products that are easily available from the inventory



• Input all the credit card detail scenarios you want to test. For example, creditCardAmex, creditCardDiscover, creditCardVisa, creditCardError, creditCardRefused, creditCard3D. They should include the card name, card type, number, expiry date and CVV number

NOTE: Please make sure that the login user email is in the *customer list* xml file.

Check that dw.json is not in the root folder. If it is, do the following:

1. Create a root folder that contains the following:

```
"hostname": "worldpay03-tech-prtnr-eu04-dw.demandware.net",
"username": "USERNAME_OF_STOREFRONT",
"password": "PASSOWRD_OF_STOREFRONT",
"code-version": "CODE_VERSION"
}
```



Configure and run automation testing

Do the following:

- 1. Run the command npm install in the root folder.
- 2. Install the *Selenium-standalone* node package globally and use the commands below to start the Selenium server:

```
npm install selenium-standalone@latest -g
selenium-standalone install
selenium-standalone start
```

3. To run functional testing, run the command selenium-standalone start on one terminal and the command to run the test, npm run test:functional on another terminal. Functional automation testing starts, it runs each file individually in the folder test\functional\checkout\guestUser\singleShip for guest users and test\functional\checkout\registeredUser for registered users.

The test scenarios for payment methods are:

For guest users:

- Direct credit card: directcreditcardPaymentMethod.js
- Redirect credit card: redirectcreditcardPaymentMethod.js
- Wechat direct: wechatDirectPaymentMethod.js
- Paypal: paypalPaymentMethod.js
- Refused credit card: refusedCreditCardPaymentMethod.js

For registered users:

- Login and use saved cards (the user account should have saved cards enabled for this)
- Register the customer and direct credit card: newCustomerDirectCreditCardPayment.js
- SEPA payment method: sepaPaymentMethod.js
- Alipay payment method: alipayPaymentMethod.js
- 3D payment method: 3dPaymentMethod.js
- Registered customer and saved card: loginSavedCard.js
- Mister Cash payment method: mistercashPaymentMethod.js
- Error Credit Card: errorCreditCardPaymentMethod.js

To run a single scenario or file, change the specs line (line no. 88) in the file *wdio.conf.js* at *test/functional/webdriver*. For example, to test just the save-card functionality, change the line:

```
specs:[
specs
]
```



```
To:
specs:[
'test/functional/checkout/registeredUser/loginSavedCard.js'
]
```

In the console, you can see a count of the test cases passing, failing and being skipped.



Integration testing

To run integration testing:

- 1. Open the terminal and run the command npm run test:integration to run the test and integration files one by one. You can see the status (success or failure) of each test script in the console.
- 2. The test scenarios are:
- 3DCreditCardPaymentMethod
- alipayPaymentMethod
- errorCreditCardPaymentMethod
- loginDirectCreditCardPaymentMethod
- loginSavedCardPaymentMethod
- mistercashPaymentMethod
- paypalPaymentMethod
- redirectCreditCardPaymentMethod
- sepaPaymentMethod
- wechatPaymentMethod



Automation test suit (CodeceptJs)

To configure and run automated acceptance resting on Codeception, do the following:

1. Add *Codecept* and update the selenium standalone dependencies in *package.json* to version 5.8.0 or above as given below:

```
"@wdio/selenium-standalone-service": "^5.8.0", "codeceptjs": "^2.1.0"
```

NOTE: To run functional testing on Mocha and Chai, add Chai dependencies and update the version of selenium-standalone dependencies in *package.json*:

```
"wdio-selenium-standalone-service": "0.0.11",
```

Run npm install every time you change the version.

2. To run acceptance testing, go to < Workspace > \Link_worldpay\test\acceptance \Automation_info and read the SFCC_WPG_AUTOMATION_ReadMe.



Features

A feature describes the current test script as it executed. The convention is that every *.feature file consists of a single feature. Lines starting with the keyword Feature: start a feature. A feature usually contains a list of scenarios: For example, DirectAPM_Guest_Auth.feature

```
Feature: Guest Direct APMs - AchPay, Konbini, Sepa & Wechatpay

@Wechatpay Auth.

Scenario: Guest Shopper is able to place order via Wechatpay

Given shopper selects yes or no for tracking consent

Then Shopper searches for "Hammered Gold Earrings"

Then User add the product to cart and click to Checkout
```

Scenarios

A scenario describes the steps and expected outcome of a test case. Every scenario starts with the *Scenario:* keyword. Each feature can have one or more scenarios, and every scenario consists of one or more steps.

```
@Wechatpay Auth.
Scenario: Guest Shopper is able to place order via Wechatpay
Given shopper selects yes or no for tracking consent
Then Shopper searches for "Hammered Gold Earrings"

Then User add the product to cart and click to Checkout
Then User clicks on checkout as guest
And Apm Shopper fills shipping Address
|firstName|lastName|addressOne|addressTwo|country|state|city|zipCode|phone|
|Code|Auto|4014 Frederick Street|street|BE|AL|El Paso|12345|333333333|
And Apm Shopper fills email and phone number for wechatpay
|email|phone|
|code1auto1@yopmail.com|33333333333|
And Apm Print the Order Number
|Wechatpay Auth. Guest|
```

Steps

Features consist of steps, also known as Givens, Whens and Thens.

- Given: This specifies the context of the text to be executed
- When: This specifies the test action that must be done
- Then: This represents the expected outcome of the test

You can see the automation test suite at <Workspace>Vink worldpay\test\acceptance\Automation Suites.



Unit testing

Open the terminal and run the *command npm run test* to run the test/unit files.



Contact Us

Please contact your Worldpay Relationship Manager or Worldpay Support.

Tel: 0800 096 3997.