

Multi-Agent Path Finding Tutorial

Wolfgang Hönig*, Jiaoyang Li, Sven Koenig — University of Southern California

September 15, 2022

In this project, you will learn about Multi-Agent Path Finding (MAPF) and implement a single-agent solver, namely space-time A*, and parts of two MAPF solvers, namely prioritized planning and Conflict-Based Search (CBS).

0 Task 0: Preparing for the Project

0.1 Installing Python 3

This project requires a Python 3 installation with the `numpy` and `matplotlib` packages. On Ubuntu Linux, download python by using:

```
sudo apt install python3 python3-numpy python3-matplotlib
```

On Mac OS X, download Anaconda 2019.03 with Python 3.7 from <https://www.anaconda.com/distribution/#download-section> and follow the installer. You can verify your installation by using:

```
python3 --version
```

On Windows, download Anaconda 2019.03 with Python 3.7 from <https://www.anaconda.com/distribution/#download-section>.

On Ubuntu Linux and Mac OS X, use `python3` to run python. On Windows, use `python` instead.

You can use a plain text editor for the project. If you would like to use an IDE, we recommend that you download PyCharm from <https://www.jetbrains.com/pycharm/>. The free community edition suffices fully, but you can get the professional edition for free as well, see <https://www.jetbrains.com/student/> for details.

0.2 Installing the MAPF Software

Download the archive with the provided MAPF software and extract it on your computer.

0.3 Learning about MAPF

Read the provided textbook-style overview of MAPF.


*Now at California Institute of Technology

0.4 Understanding Independent Planning

Execute the independent MAPF solver by using:

```
python run_experiments.py --instance instances/exp0.txt --solver Independent
```

If you are successful, you should see an animation:

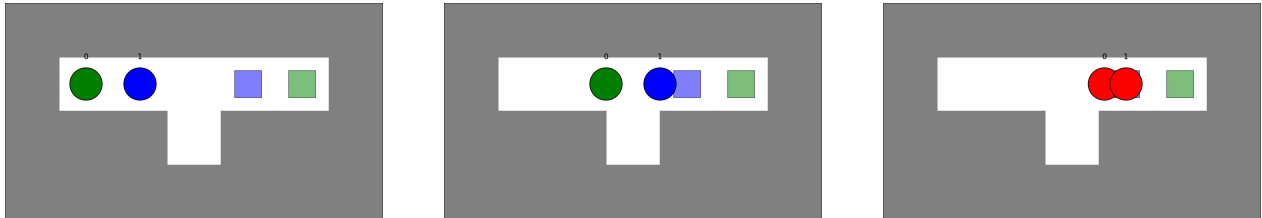

The independent MAPF solver plans for all agents independently. Their paths do not collide with the environment but are allowed to collide with the paths of the other agents. Thus, there is a collision when the blue agent 1 stays at its goal cell while the green agent 0 moves on top of it. In your animation, both agents turn red when this happens, and a warning is printed on the terminal notifying you about the details of the collision.

Try to understand the independent MAPF solver in `independent.py`. The first part defines the class `IndependentSolver` and its constructor:

```
class IndependentSolver(object):
    def __init__(self, my_map, starts, goals):
        # some parts are omitted here for brevity
        # compute heuristic values for the A* search
        self.heuristics = []
        for goal in self.goals:
            self.heuristics.append(compute_heuristics(my_map, goal))
```

The function `compute_heuristics` receives as input the representation of the environment and the goal cell of the agent and computes a look-up table with heuristic values (or, synonymously, h-values) for the A* search that finds a path for the agent, by executing a Dijkstra search starting at the goal cell.

The second part performs one A* search per agent:

```
def find_solution(self):
    for i in range(self.num_of_agents): # Find path for each agent
        path = a_star(self.my_map, self.starts[i], self.goals[i],
            ↪ self.heuristics[i], i, [])
        if path is None:
            raise BaseException('No solutions')
        result.append(path)
    return result
```

The function `a_star` receives as input the representation of the environment, the start cell of the agent, the goal cell of the agent, the heuristic values computed in the constructor, the unique agent id of the agent, and a list of constraints and performs an A* search to find a path for the agent. The independent MAPF solver does not use constraints.



1 Task 1: Implementing Space-Time A*

You now change the single agent solver to perform a space-time A* search that searches in cell-time space and returns a shortest path that satisfies a given set of constraints. Such constraints are essential for MAPF solvers such as prioritized planning and CBS.

1.1 Searching in the Space-Time Domain

The existing A* search in the function `a_star` in `single_agent_planner.py` only searches over cells. Since we want to support temporal constraints, we also need to search over time steps. Use the following steps to change the search dimension:

1. Your variables `root` and `child` are dictionaries with various key/value pairs such as the g-value, h-value, and cell. Add a new key/value pair for the time step. The time step of the root node is zero. The time step of each node is one larger than the one of its parent node.
2. The variable `closed_list` contains the processed (that is, expanded) nodes. Currently, this is a dictionary indexed by cells. Use tuples of (cell, time step) instead.
3. When generating child nodes, do not forget to add a child node where the agent waits in its current cell instead of moving to a neighboring cell.

You can test your code by using:

```
python run_experiments.py --instance instances/exp1.txt --solver Independent
```

and should observe identical behavior.

1.2 Handling Vertex Constraints

We first consider (negative) vertex constraints, that prohibit a given agent from being in a given cell at a given time step.

Each constraint is a Python dictionary. The following code creates a (negative) vertex constraint that prohibits agent 2 from occupying cell (3, 4) at time step 5:

```
{'agent': 2,  
 'loc': [(3,4)],  
 'timestep': 5}
```

In order to add support for constraints, change the code to check whether the new node satisfies the constraints passed to the `a_star` function and prune it if it does not.

An efficient way to check for constraint violations is to create, in a pre-processing step, a constraint table, which indexes the constraints by their time steps. At runtime, a lookup in the table is used to verify whether a constraint is violated. Example function headers for the functions `build_constraint_table` and `is_constrained` are already provided. You can call `build_constraint_table` before generating the root node in the `a_star` function.

You can test your code by adding a constraint in `prioritized.py` that prohibits agent 0 from being at its goal cell (1, 5) at time step 4 and then using:

```
python run_experiments.py --instance instances/exp1.txt --solver Prioritized
```

Agent 0 should wait for one time step (but when and where it waits depends on the tie-breaking).

1.3 Adding Edge Constraints

We now consider (negative) edge constraints, that prohibit a given agent from moving from a given cell to another given cell at a given time step.

The following code creates a (negative) edge constraint that prohibits agent 2 from moving from cell (1, 1) to cell (1, 2) from time step 4 to time step 5:

```
{'agent': 2,  
 'loc': [(1,1), (1,2)],  
 'timestep': 5}
```

Implement constraint handling for edge constraints in the function `is_constrained`.

You can test your code by adding a constraint in `prioritized.py` that prohibits agent 1 from moving from its start cell (1, 2) to the neighboring cell (1, 3) from time step 0 to time step 1.

1.4 Handling Goal Constraints

Run your code with a constraint that prohibits agent 0 from being at its goal cell (1, 5) at time step 10. Where is agent 0 at time step 10 in your solution? To make the algorithm work properly, you might have to change the goal test condition. Explain what changes you made to the goal test condition. (The solution of both agents could have collisions.)

1.5 Optional: Designing Constraints

Design a set of constraints by hand that allows your algorithm to find collision-free paths with a minimal sum of path lengths. Run your code with the set of constraints. Document this set of constraints, the solution, and the sum of path lengths.

2 Task 2: Implementing Prioritized Planning


The independent MAPF solver finds paths for all agents, simultaneously or one after the other, that do not collide with the environment but are allowed to collide with the paths of the other agents. The prioritized MAPF solver finds paths for all agents, one after the other, that do not collide with the environment or the already planned paths of the other agents. To ensure that the path of an agent does not collide with the already planned paths of the other agents, the function `a_star` receives as input a list of (negative) constraints compiled from their paths.

2.1 Adding Vertex Constraints

Add code to `prioritized.py` that adds all necessary vertex constraints. You need two loops, namely one to iterate over the path of the current agent and one to add vertex constraints for all future agents (since constraints apply only to the specified agent). You can test your code by using:

```
python run_experiments.py --instance instances/exp2_1.txt --solver Prioritized
```

Now, the blue agent 2 does not stay at its goal cell when it reaches that cell for the first time:

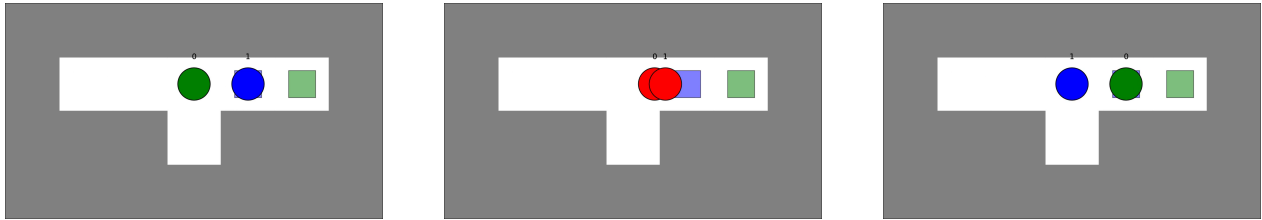

Unfortunately, there is still a collision because both agents move to the cell of the other agent at the same time step. We thus need to add (negative) edge constraints as well.

2.2 Adding Edge Constraints

Add code to `prioritized.py` that adds all necessary edge constraints, and test your code as before. There are no more collisions.

2.3 Optional: Adding Additional Constraints

Your code does not prevent all collisions yet since agents can still move on top of other agents that have already reached their goal locations. You can verify this issue by using the MAPF instance `exp2_2.txt` and assuming that agent 0 has the highest priority. You can address this issue by adding code that adds additional constraints that apply not only to the time step when agents reach their goal locations but also to all future time steps.

2.4 Optional: Addressing Failures

In the MAPF instance `exp2_3.txt`, the priorities between agents 0 and 1 and are switched compared to `exp2_2.txt`. Rerun the experiment on instance `exp2_3.txt`. Did your solver terminate properly and report “no solutions”? If not, describe what happened and change your code to address the issue. Hint: You can address this issue by limiting the time horizon of the search. The shortest path of an agent cannot be infinitely long. So you can calculate an upper bound on the path length for an agent based on the path lengths of all agents with higher priorities and the size of the environment.

3 Task 3: Implementing Conflict-Based Search (CBS)

Conflict-Based Search (CBS) is slower than prioritized planning but complete and optimal.

3.1 Detecting Collisions

Write code that detects collisions (or, synonymously, conflicts) among agents, namely vertex collisions where two agents are in the same cell at the same time step and edge collisions where two agents move to the cell of the other agent at the same time step.

Add code to `cbs.py` that implements the two functions `detect_collision` and `detect_collisions`. You should use `get_location(path, t)` to obtain the cell of an agent at time step t . You can test your code by using:

```
python run_experiments.py --instance instances/exp3_1.txt --solver CBS
```

You receive output similar to

```
[{'a1': 0, 'a2': 1, 'loc': [(1, 4)], 'timestep': 3}]
```

3.2 Converting Collisions to Constraints

The high level of CBS searches the constraint tree. Once it has chosen a node of the constraint tree for expansion and picked a collision of the paths of two agents in that node, it transforms this collision into two new (negative) constraints, one for each new child node of the chosen node. The first constraint prohibits the first agent from executing the colliding action, and the second constraint prohibits the second agent from executing the colliding action. For the vertex collision between agents 1 and 2 in cell (1,4) at time step 3, the set of new vertex constraints is:

```
[{'agent': 0, 'loc': [(1, 4)], 'timestep': 3},  
 {'agent': 1, 'loc': [(1, 4)], 'timestep': 3}]
```

Add code to `cbs.py` that implements the function `standard_splitting` and test your code as above. Hint: You need to reverse the direction of the edge for the second agent to obtain the second edge constraint for an edge collision.

3.3 Implementing the High-Level Search

Algorithm 1 shows the pseudo code of the high-level search of CBS. Add code to `cbs.py` that finalizes the high-level search of CBS in the function `find_solution`, where we have already provided the implementation of lines 1 to 5. To manage the OPEN list, you can use the helper functions `push_node` and `pop_node`. Add print statements that list the expanded nodes (for debugging), and test your code as before.

3.4 Testing your Implementation

You can test your implementation by running it on our test instances:

```
python run_experiments.py --instance "instances/test_*" --solver CBS --batch
```

(This may take a while depending on your computer.) The batch command creates an output file `results.csv`, which you can compare to the one provided in `instances/min-sum-of-cost.csv`.

Algorithm 1: High-level search of CBS.

Input: Representation of the environment, start cells, and goal cells

Result: optimal collision-free solution

```
1 R.constraints  $\leftarrow \emptyset$ 
2 R.paths  $\leftarrow$  find independent paths for all agents using a_star()
3 R.collisions  $\leftarrow$  detect_collisions(R.paths)
4 R.cost  $\leftarrow$  get_sum_of_cost(R.paths)
5 insert R into OPEN
6 while OPEN is not empty do
7    $P \leftarrow$  node from OPEN with the smallest cost
8   if P.collisions =  $\emptyset$  then
9     return P.paths // P is a goal node
10  collision  $\leftarrow$  one collision in P.collisions
11  constraints  $\leftarrow$  standard_splitting(collision)
12  for constraint in constraints do
13    Q  $\leftarrow$  new node
14    Q.constraints  $\leftarrow$  P.constraints  $\cup$  {constraint}
15    Q.paths  $\leftarrow$  P.paths
16     $a_i \leftarrow$  the agent in constraint
17    path  $\leftarrow$  a_star( $a_i$ , Q.constraints)
18    if path is not empty then
19      Replace the path of agent  $a_i$  in Q.paths by path
20      Q.collisions  $\leftarrow$  detect_collisions(Q.paths)
21      Q.cost  $\leftarrow$  get_sum_of_cost(Q.paths)
22      Insert Q into OPEN
23 return 'No solutions'
```
