



Phase-flip code: average logical fidelity by protocol


12 iter, $T_1 = 280\ \mu\text{s}$, $T_2 = 100\ \mu\text{s}$

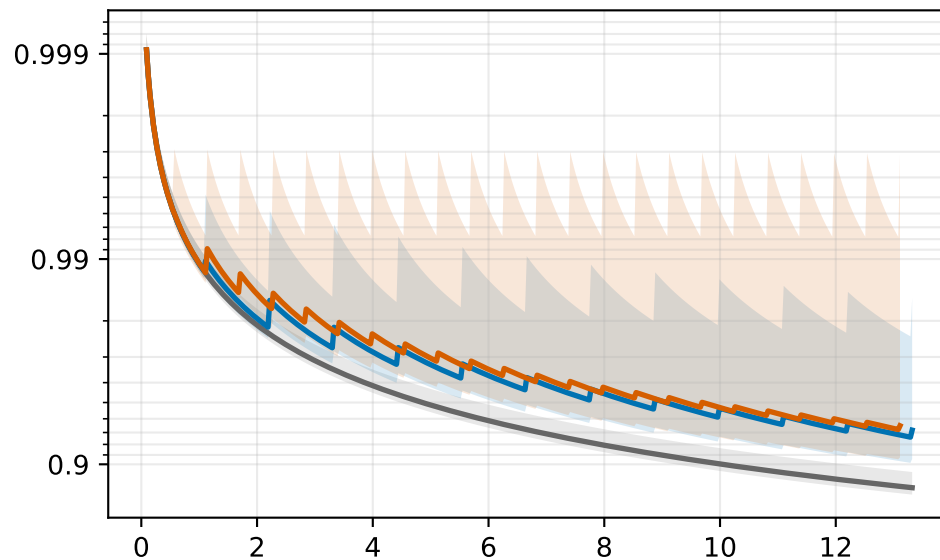

12 iter, $T_1 = 280\ \mu\text{s}$, $T_2 = 330\ \mu\text{s}$

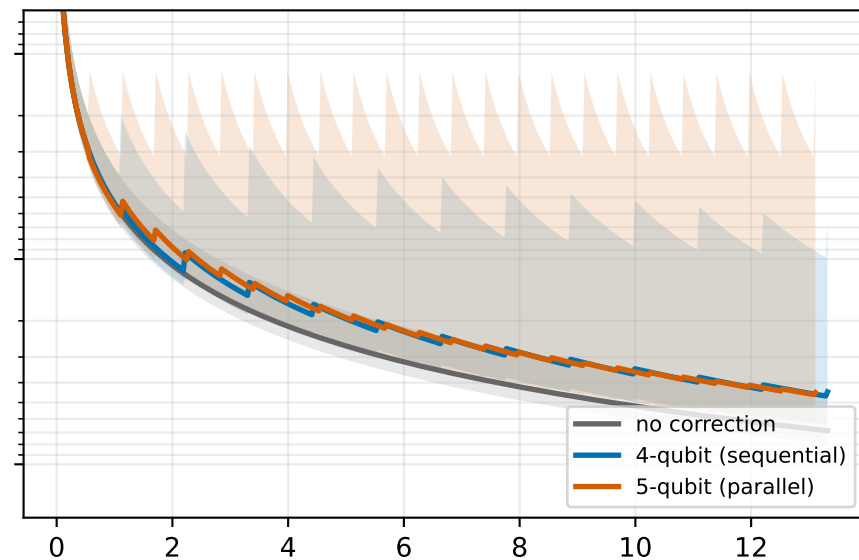

600 iter, $T_1 = 280\ \mu\text{s}$, $T_2 = 100\ \mu\text{s}$

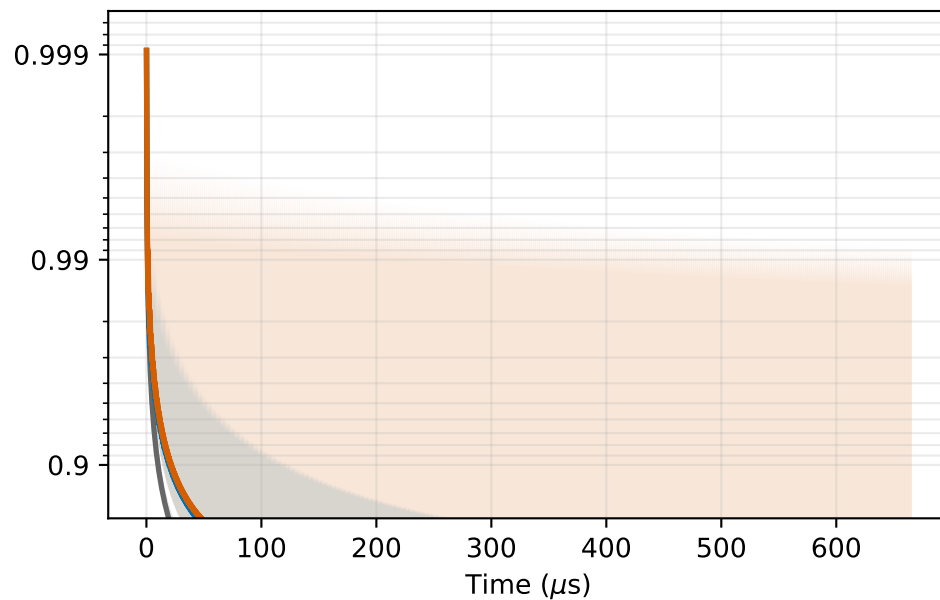

600 iter, $T_1 = 280\ \mu\text{s}$, $T_2 = 330\ \mu\text{s}$

