


Interaction landscape — 1Gate4.2SNAIL.json
 $t_g=138.9$ ns, peak $|\eta|=1.00$

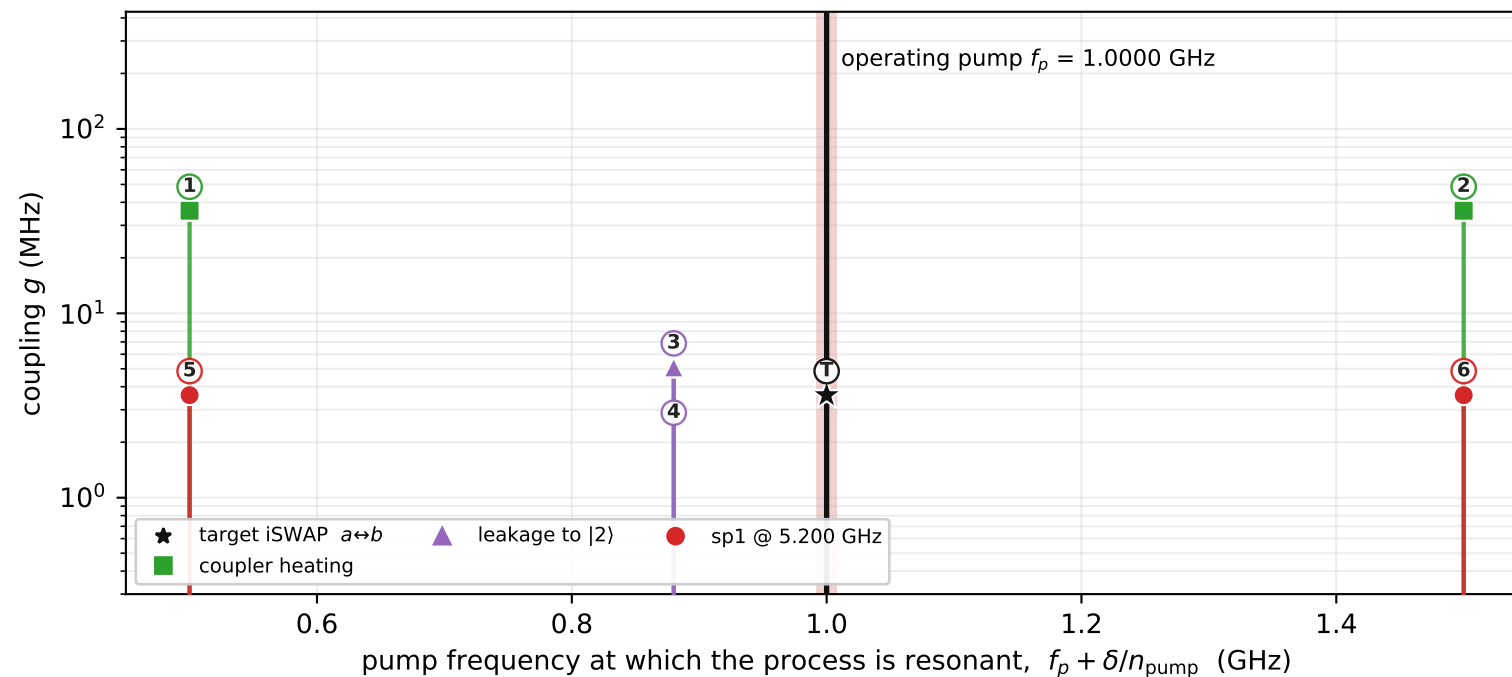

MODE INVENTORY

a	4.700 GHz	qubit a (target)
b	5.700 GHz	qubit b (target)
s	4.200 GHz	SNAIL coupler
sp1	5.200 GHz	spectator 1
pump	1.000 GHz	2w_p = 2.000 GHz
1/t_g	7.2 MHz	pulse bandwidth

INTERACTIONS

#	process	g (MHz)	det (MHz)	DRAG
T	target iSWAP (A-B exchange)	3.60	-0.0	--
1	A-SNAIL spectator	36.00	-500.0	22.9dB
2	B-SNAIL spectator	36.00	+500.0	22.9dB
3	A $ 2\rangle$ leakage (via B)	5.09	-120.0	27.4dB
4	B $ 2\rangle$ leakage (via A)	5.09	-120.0	27.4dB
5	B-SP1 spectator	3.60	-500.0	42.9dB
6	A-SP1 spectator	3.60	+500.0	42.9dB

DRAG column = suppression of that channel,
 $\sim g/|\text{det}|$ (blank = cannot help).

Which parasites DRAG can suppress

