AIP HONG KONG 28 NOV 24


STANDARD DEPARTURE CHART-INSTRUMENT (SID) - ICAO

Transition Altitude 9 000 ft

Hong Kong Tower 118.4
Hong Kong Departure 122.0

HONG KONG / Intl (VHHH) RNAV (GNSS) BEKOL 5A SID RWY 07R

- 1. In the event that PBN performance ceases to comply with the requirements for RNP 1 after departure, pilots must notify ATC as soon as possible. ATC assistance would be provided as necessary.
- 2. Only specific categories of flights (e.g. SAR) as stated in GEN 1.5 para 3.5.3.5 are exempted from the RNP 1 requirement. These flights shall fly the contingency procedures as detailed in VHHH AD 2.22 para 2.2.3.5.
- 3. PORPA is a FLY-OVER waypoint. All other waypoints are fly-by.

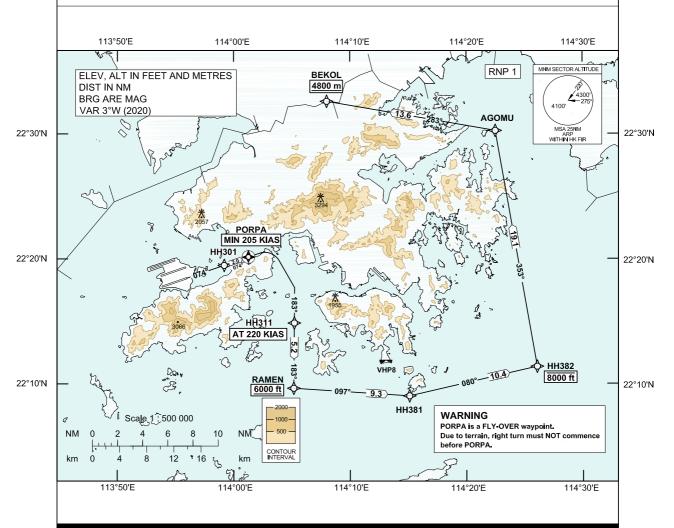

### **BEKOL 5A SID RWY 07R**

#### **CLIMB REQUIREMENT**

Initial climb to 5 000 ft. Expect further climb when instructed by ATC. Comply with all the published altitude restrictions. If unable to comply with the vertical profile, pilot shall inform ATC prior to start-up.

#### **TERRAIN CLEARANCE**

Minimum climb gradient of 4.8% (292 ft/NM) until passing 1 200 ft is required.

#### SPEED RESTRICTION

Speed restriction of 205 KIAS or greater at PORPA and 220 KIAS until HH311.

AD 2-VHHH-SID-BEKOL-A V01 240522Ir

CHANGE: New

# FMC Database Coding Reference for Hong Kong RNAV<sub>(GNSS)</sub> SID

## **TABULAR DESCRIPTION: BEKOL 5A RWY 07R**

Serial Number	Path Descriptor	Waypoint Identifier	Fly- over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed (KIAS)	Navigation Specification
01	CF	HH301	-	074 (071)	+3.0	-	-	-	-	RNP 1
02	TF	PORPA	Υ	074 (071)	+3.0	2.0	-	-	+205	RNP 1
03	CF	HH311	-	183 (180)	+3.0	-	R	-	@220	RNP 1
04	TF	RAMEN	-	183 (180)	+3.0	5.2	-	+6000	-	RNP 1
05	TF	HH381	-	097 (094)	+3.0	9.3	-	-	-	RNP 1
06	TF	HH382	-	080 (077)	+3.0	10.4	-	-8000	-	RNP 1
07	TF	AGOMU	1	353 (350)	+3.0	19.1	-	-	-	RNP 1
08	TF	BEKOL	1	283 (280)	+3.0	13.6	-	+4800m	-	RNP 1

## **WAYPOINT LIST**

BEKOL 5A RWY 07R									
Waypoint Identifier	Coordinates (WGS-84)								
HH301	22 19 29.01N	113 59 11.61E							
PORPA	22 20 09.10N	114 01 16.30E							
HH311	22 14 52.34N	114 05 12.73E							
RAMEN	22 09 39.22N	114 05 09.89E							
HH381	22 09 02.10N	114 15 06.66E							
HH382	22 11 23.06N	114 26 04.39E							
AGOMU	22 30 15.17N	114 22 29.86E							
BEKOL	22 32 36.00N	114 08 00.00E							